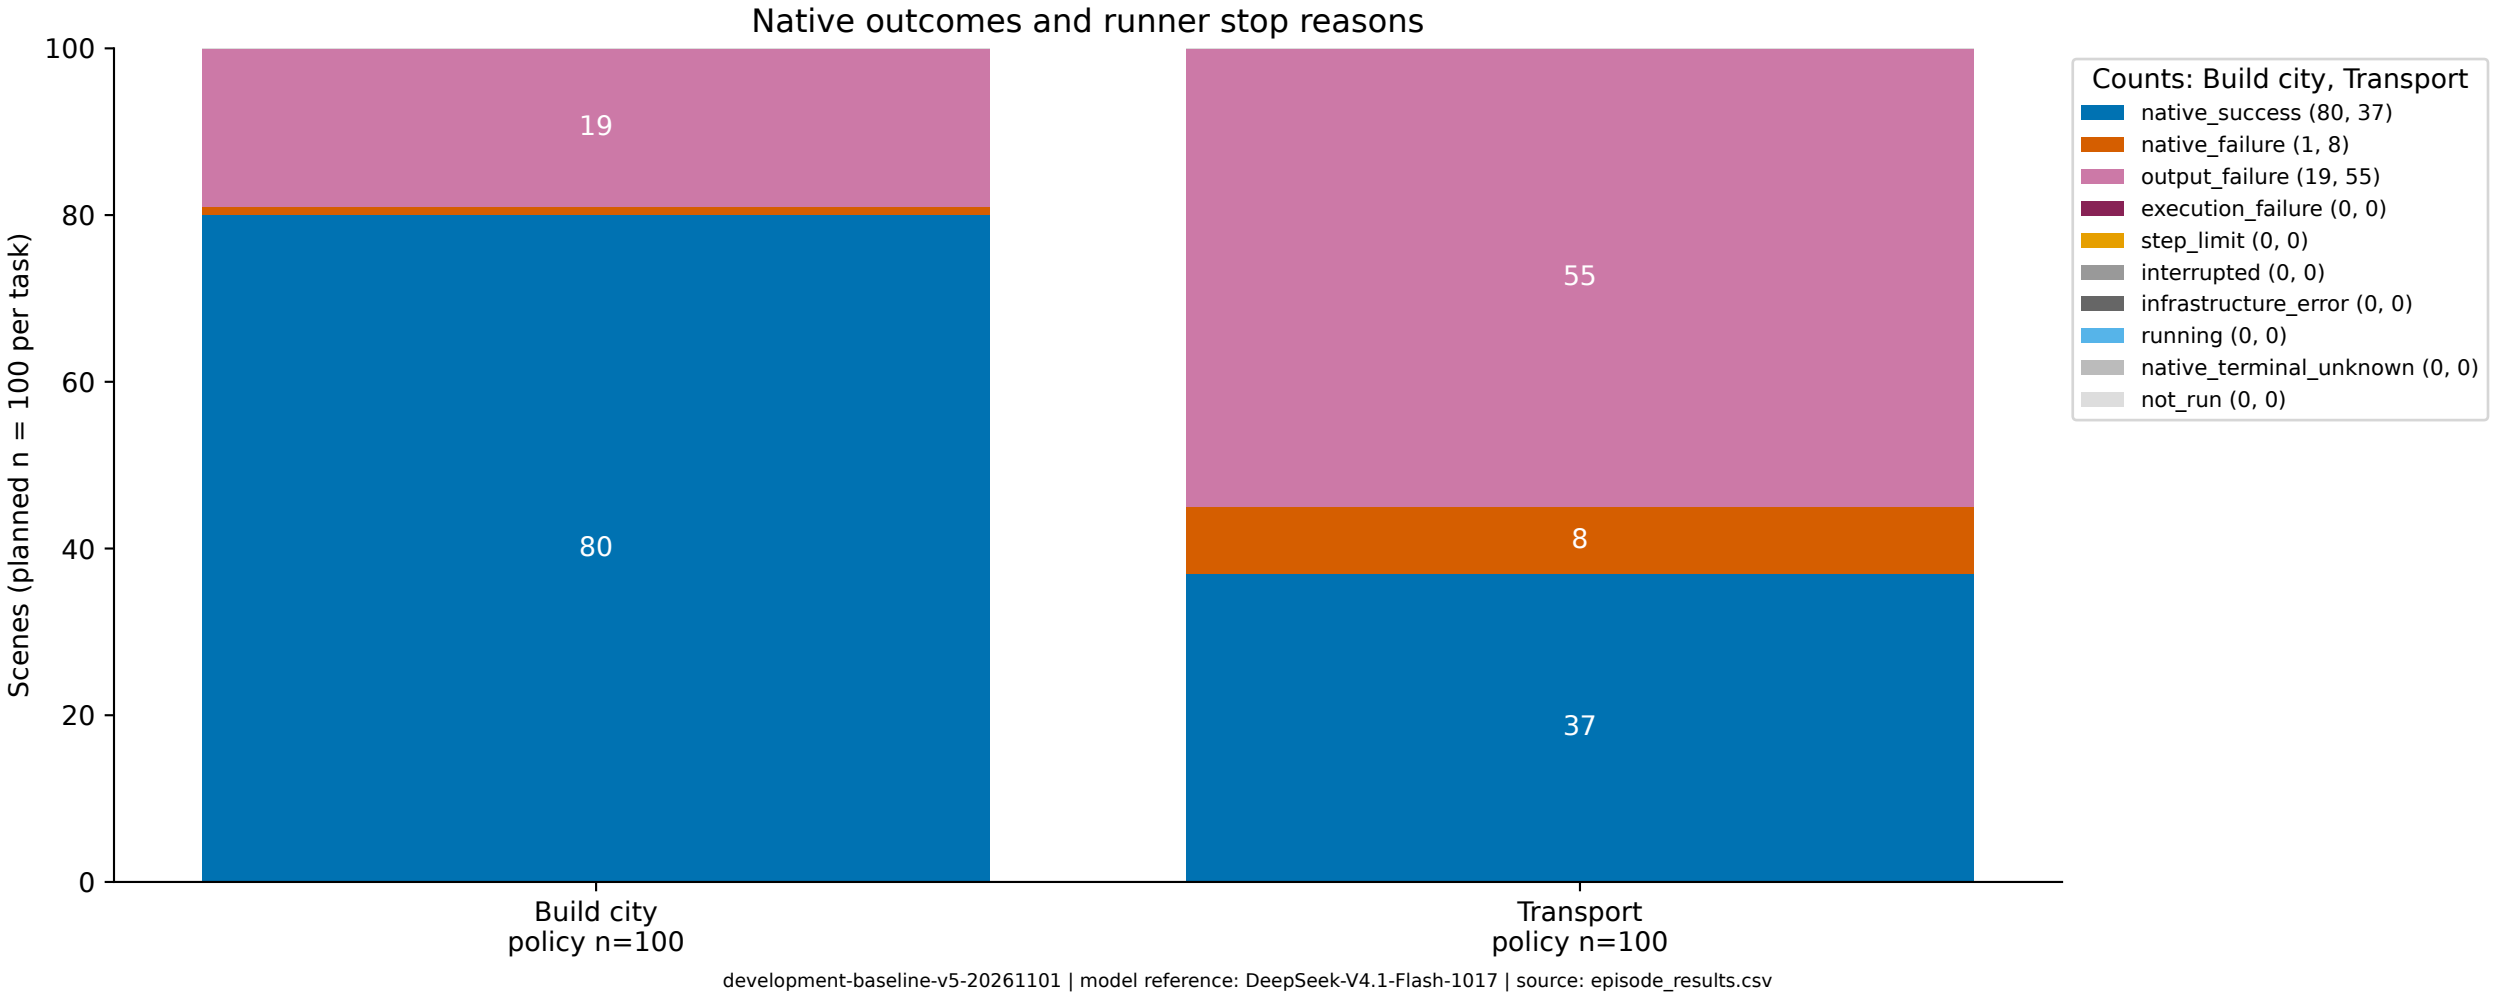
Native outcomes and runner stop reasons
Scenes (planned n = 100 per task)
100
80
60
40
20
0
19
80
55
8
37
Build city
policy n=100
Transport
policy n=100
Counts: Build city, Transport
native_success (80, 37)
native_failure (1, 8)
output_failure (19, 55)
execution_failure (0, 0)
step_limit (0, 0)
interrupted (0, 0)
infrastructure_error (0, 0)
running (0, 0)
native_terminal_unknown (0, 0)
not_run (0, 0)
development-baseline-v5-20261101 | model reference: DeepSeek-V4.1-Flash-1017 | source: episode_results.csv