
AIStorm ThreatTrace Troubleshooting Guide

Preparation

Gather diagnostic logs

System Management - Device Management - Diagnostic Log.

Export System Log or Dump Log as instructed by R&D.

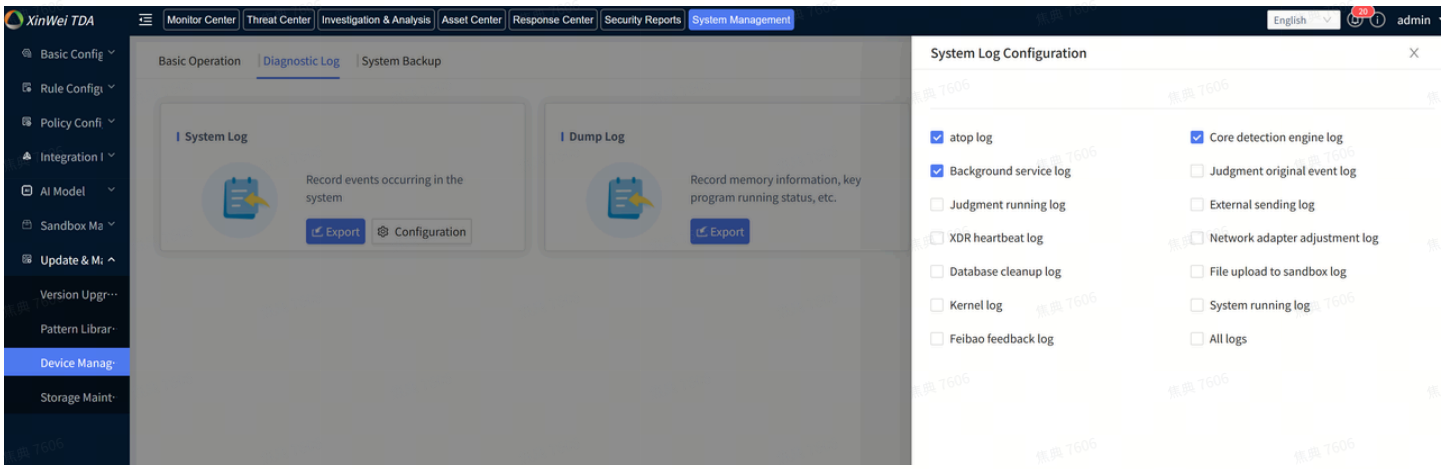


Log in to the command line interface (CLI)

1. SSH login to the command line terminal

System Management - Network Settings - Interface Settings.


Click the Management Port edit button and check SSH login.

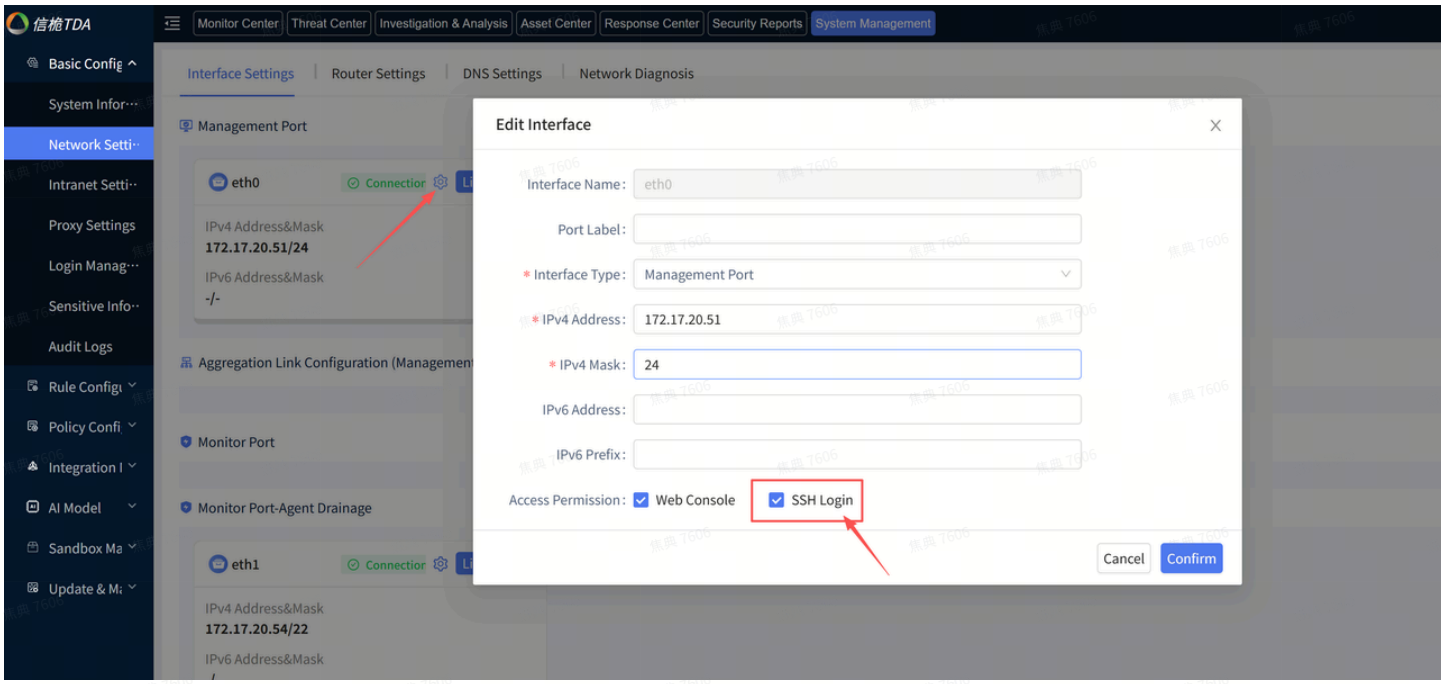


Login via Terminal Client (Example: MobaXTerm, PuTTY，SecureCRT)

Take using MobaXterm as an example.

Private key needed. Contact support.

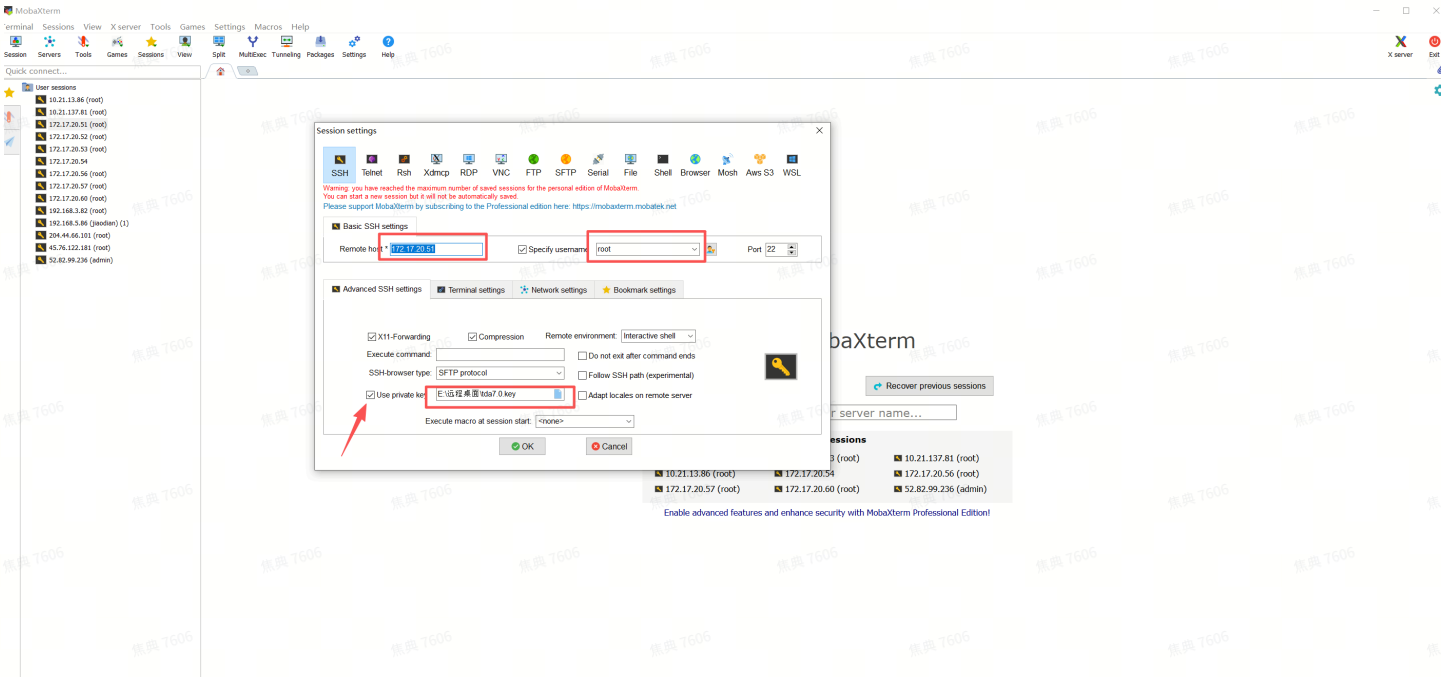

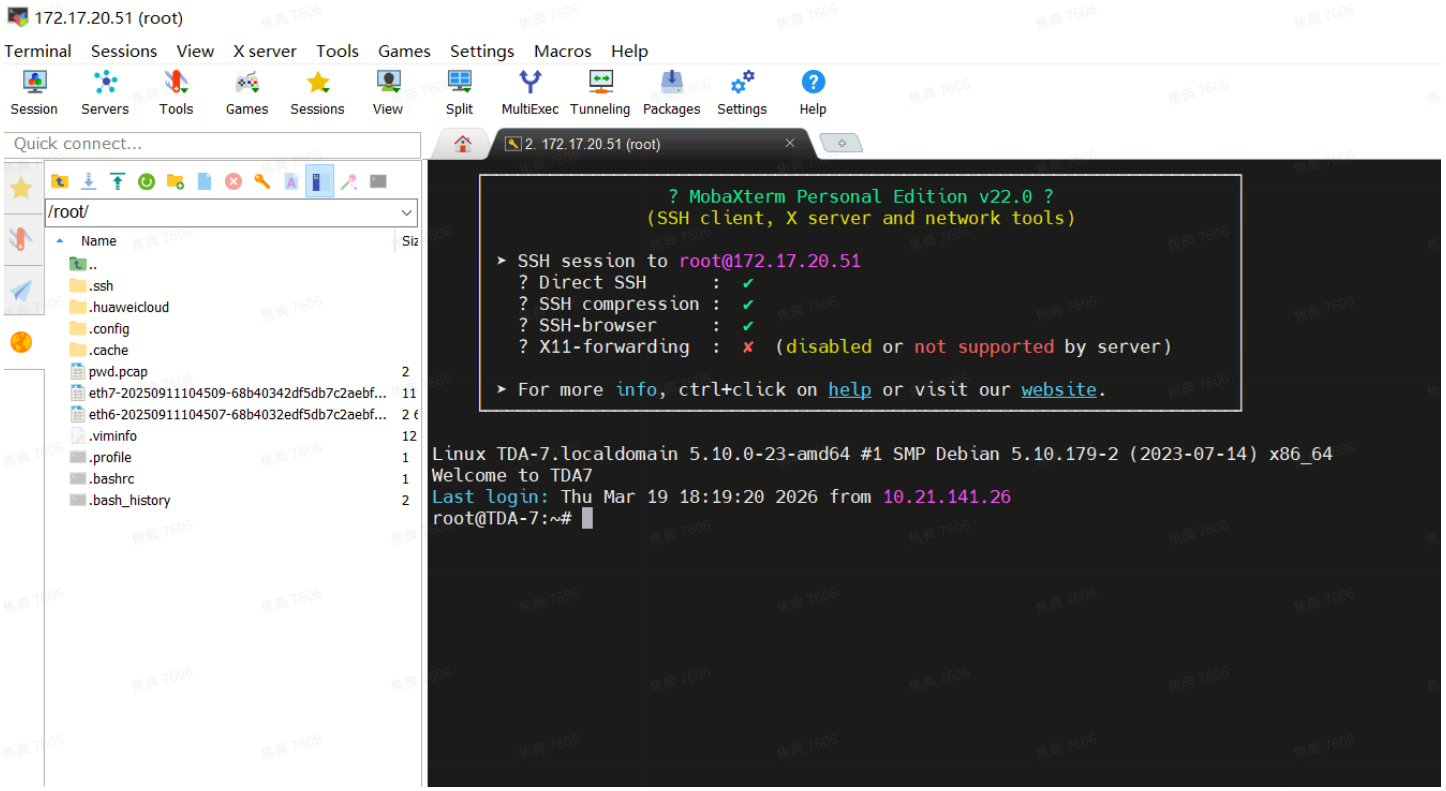


2. Directly connect a monitor to the device.

Log in using the root account.

- Login: root
- Password: Tda@2021

1.Unable to log in

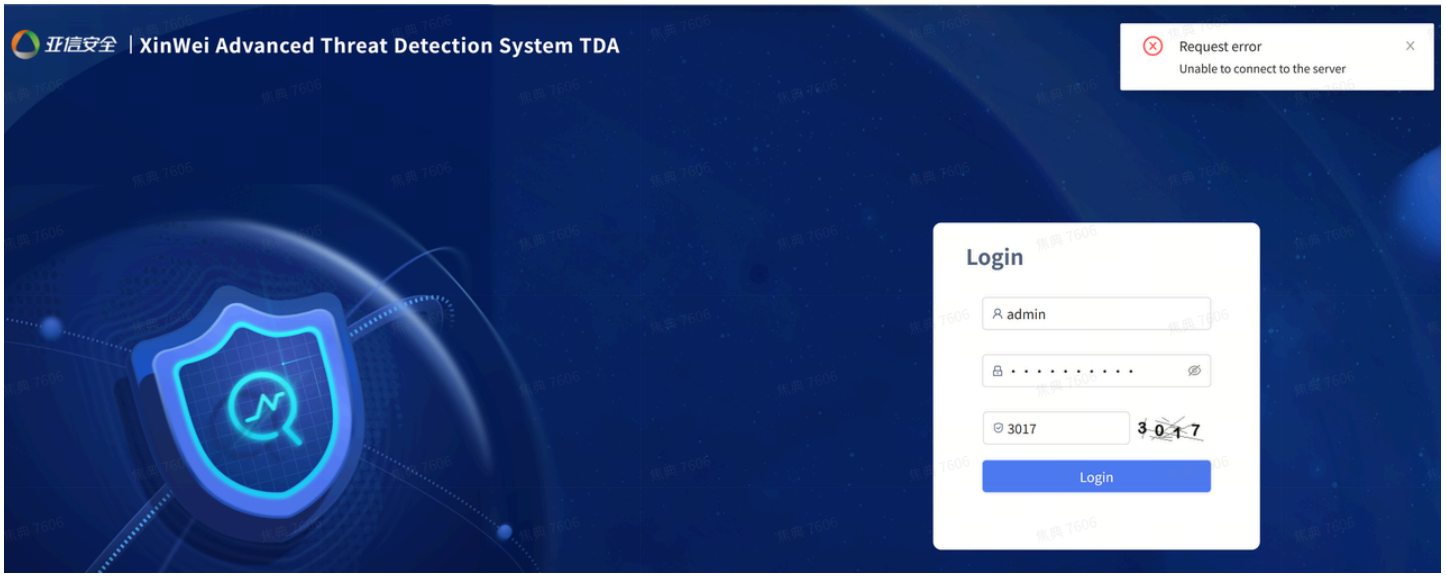


Troubleshooting steps:

- Log in to the command line interface (CLI)
- After entering the command line console, run "systemctl status flask" to check the status of the web process.

代码块

```
systemctl status flask
```


- As shown in the figure below, the web process status shows red text (code=exited, status=1 (a non-zero number)/FAILURE). Execute the command "/usr/vtm/NGTDA-Python-venv/bin/python /usr/vtm/backend/src/apply.pyc" , take a screenshot of the result, and contact the R&D team.

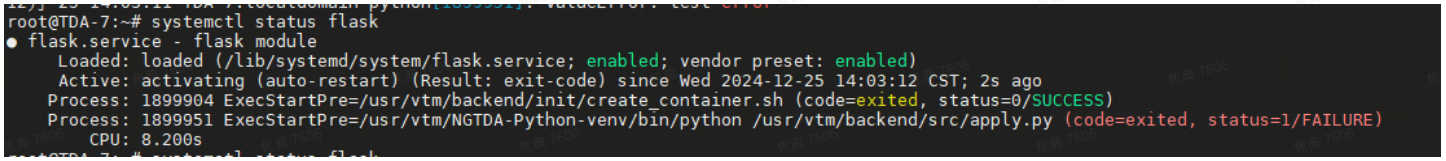

代码块

```
/usr/vtm/NGTDA-Python-venv/bin/python /usr/vtm/backend/src/apply.pyc
```

💡 As shown in the figure, the status check does not show any error and it is in the loaded state. You can wait a few more seconds and continue checking the web process status until you see the error shown in the previous figure or until the startup is complete.

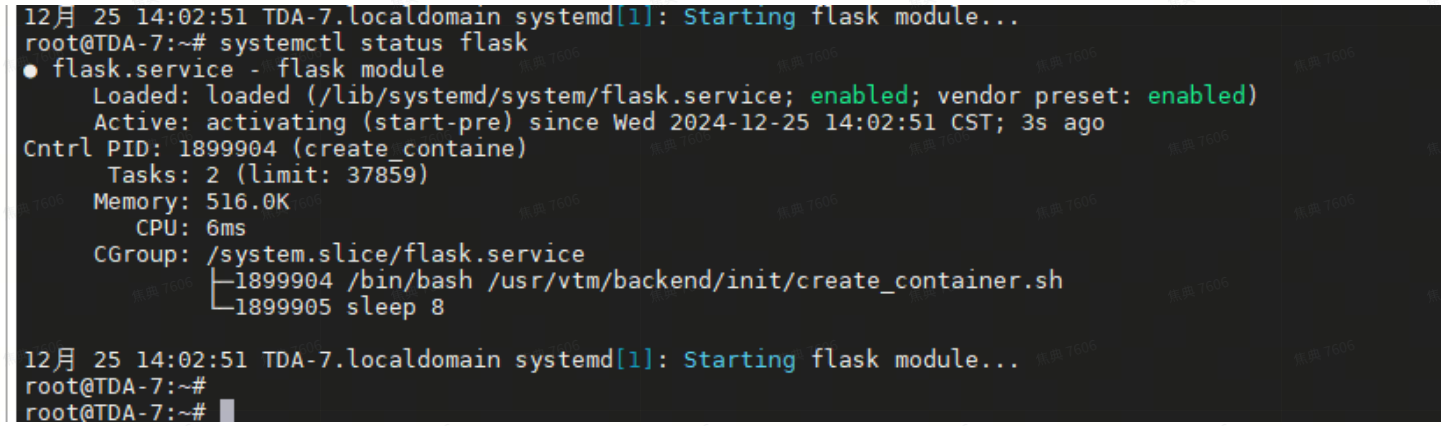

2.Syslog log forwarding failed

System Management - Integration Management - Syslog Export


Syslog forwarding is configured, but the remote server did not receive the logs.

Use Dynamic Packet Capture to analyze the packets and verify if the logs are being sent out.

Troubleshooting steps：


System Management - Policy Configuration - Dynamic Packet Capture.

- Set up packet capture on the management interface, enter the peer IP and port to create a task, and check whether packets sent to the peer are captured.
- If packets destined for the peer are captured, proceed to check network connectivity to the peer and ensure that no firewall rules on the network device are blocking the connection.
- If packets sent to the peer are not captured, please contact R&D for further assistance.

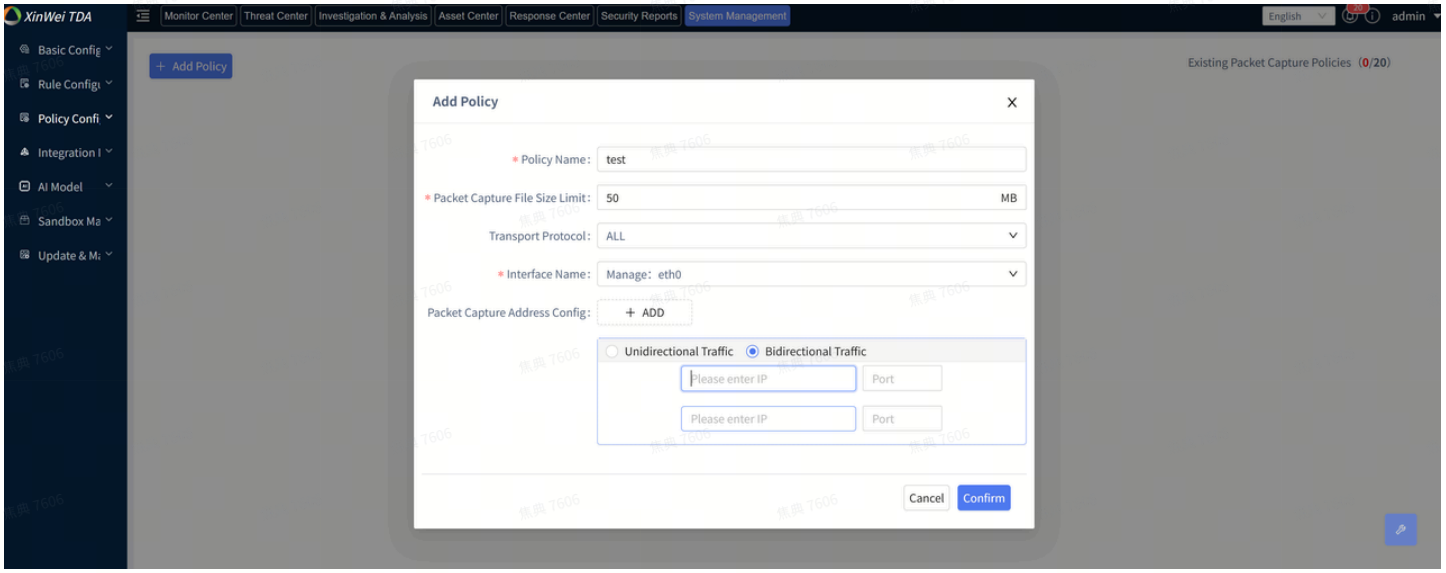

3.Boot failure after system restart

With a monitor directly connected to the device, the following screen is displayed.

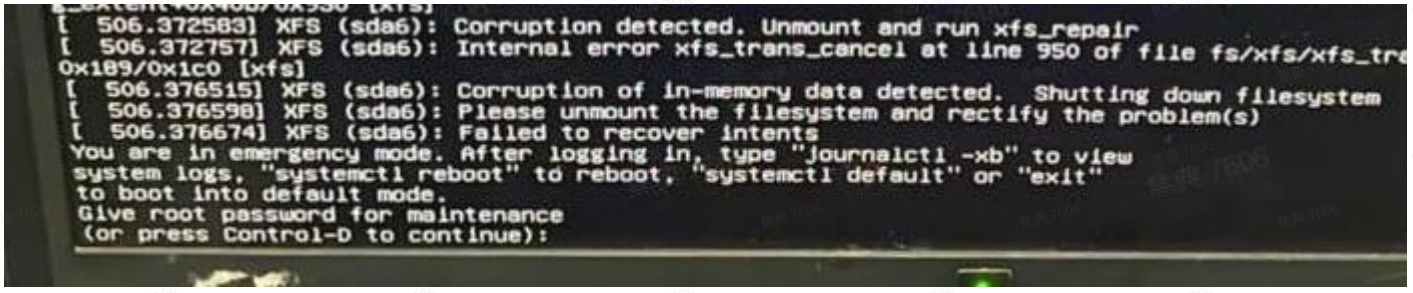


Troubleshooting steps：

- Modify the partition mounted at startup

代码块

```
# Edit fstab to comment out the xfs mount for /var.
vim /etc/fstab

# Reboot after applying the changes.
reboot
```

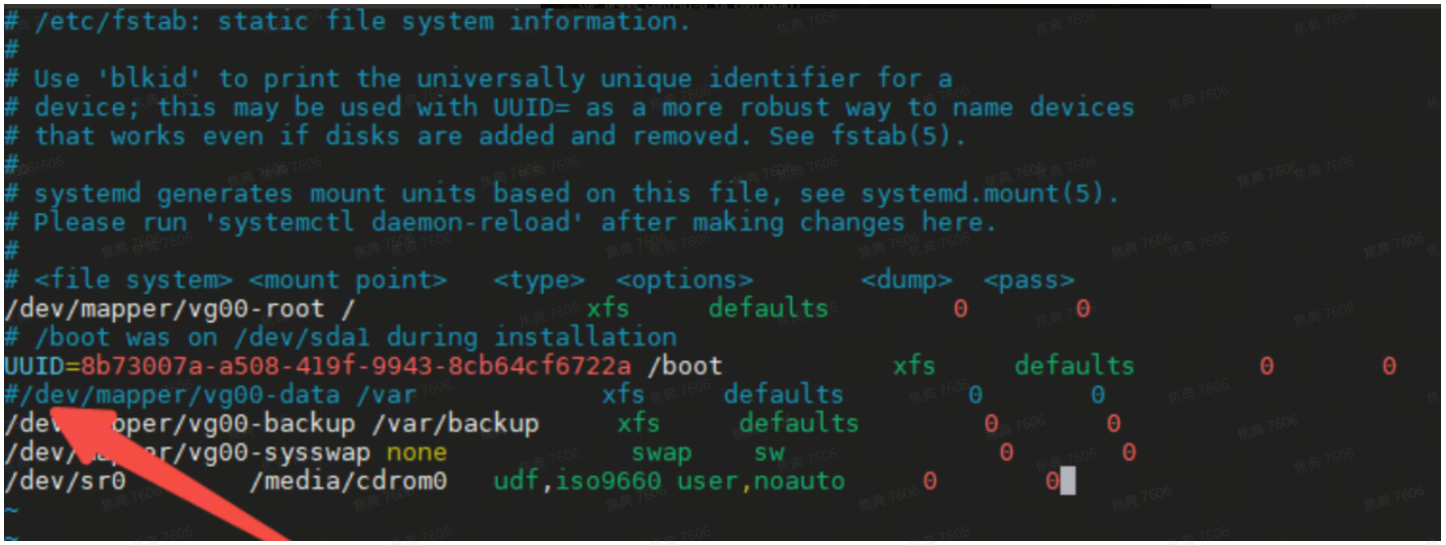

- After the reboot, run the command to repair the file system

代码块

```
xfs_repair -L /dev/mapper/vg00-data
```

- Remount the file system


Uncomment the entry in /etc/fstab, then reboot.

4.ClickHouse startup failed.

ClickHouse is stuck in a restart loop with a startup time of less than 2 minutes, as shown in the output of `docker ps -a`.

代码块

```
docker ps -a
```

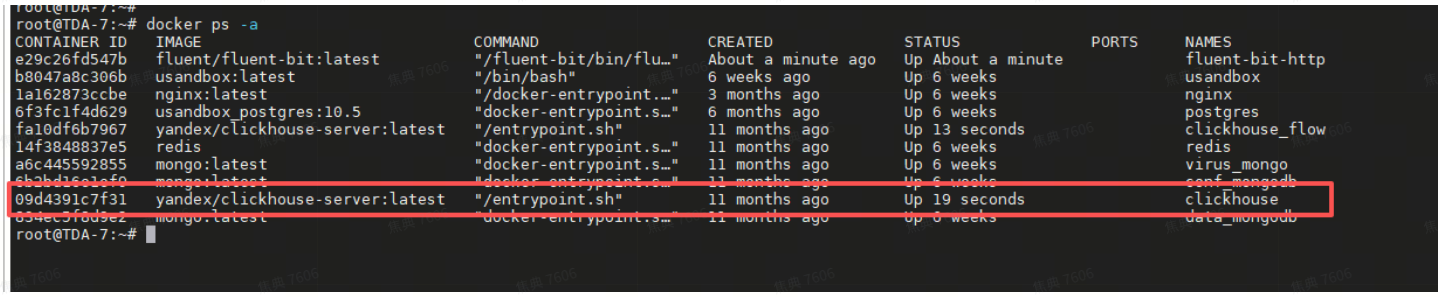

Troubleshooting steps:

- Modify the startup script: `vi /usr/vtm/backend/init/create_container.sh` (add the red-highlighted section)

代码块

```
docker run -d --restart=always --name=clickhouse --network=host --ulimit nofile=262144:262144 \
        --cap-add=NET_ADMIN --cap-add=IPC_LOCK --cap-add=SYS_NICE --add-host=asset.tdalite.ck:127.0.0.1 \
        --env CK_ADMIN_USER=tdalite_asset_ck --env CK_ADMIN_PASS=tGehs2Y68DH30k2 \
        -e CLICKHOUSE_DO_NOT_CHOWN=1 \
        -v /usr/vtm/$BACKEND_NAME/init/timezone:/etc/timezone:ro \
        -v /usr/vtm/$BACKEND_NAME/init/localtime:/etc/localtime:ro \
        -v /usr/vtm/$BACKEND_NAME/init/clickhouse/certs:/etc/certs:ro \
        -v /usr/vtm/$BACKEND_NAME/init/clickhouse/metrika.xml:/etc/metrika.xml:ro \
        -v /usr/vtm/$BACKEND_NAME/init/clickhouse/clickhouse-server:/etc/clickhouse-server:ro \
        -v /usr/vtm/$BACKEND_NAME/init/clickhouse/clickhouse-client/conf.d:/etc/clickhouse-client/conf.d:ro \
        -v /var/ck_log:/opt/log \
        -v /var/vtm/data/ck_data/:/opt/data   $image_name
```

- Rebuild the ClickHouse Docker container.

代码块

```
docker rm -f clickhouse
/usr/vtm/backend/init/create_container.sh
```

- Wait for ClickHouse to start .If startup is successful, the ClickHouse listening port can be viewed using `netstat -ntlp` .

```
root@TDA-7:~# netstat -ntlp
Active Internet connections (only servers)
Proto Recv-Q Send-Q Local Address           Foreign Address         State       PID/Program name
tcp        0      0 127.0.0.1:8443          0.0.0.0:*               LISTEN      1710348/clickhouse-
tcp        0      0 127.0.0.1:8123          0.0.0.0:*               LISTEN      1710348/clickhouse-
tcp        0      0 0.0.0.0:443             0.0.0.0:*               LISTEN      1416/nginx: master
tcp        0      0 127.0.0.1:3998          0.0.0.0:*               LISTEN      3833/python3
tcp        0      0 127.0.0.1:9440          0.0.0.0:*               LISTEN      1710348/clickhouse-
tcp        0      0 0.0.0.0:19009           0.0.0.0:*               LISTEN      1710464/clickhouse-
tcp        0      0 127.0.0.1:9090          0.0.0.0:*               LISTEN      3704/staticana
tcp        0      0 1.1.1.1:4935            0.0.0.0:*               LISTEN      97104/./liteserver
tcp        0      0 0.0.0.0:199             0.0.0.0:*               LISTEN      713/snmpd
tcp        0      0 127.0.0.1:9000          0.0.0.0:*               LISTEN      1710348/clickhouse-
tcp        0      0 1.1.1.1:4936            0.0.0.0:*               LISTEN      97104/./liteserver
tcp        0      0 1.1.1.1:4937            0.0.0.0:*               LISTEN      97104/./liteserver
tcp        0      0 127.0.0.1:27017         0.0.0.0:*               LISTEN      1477/mongod
tcp        0      0 127.0.0.1:6250          0.0.0.0:*               LISTEN      97250/python
tcp        0      0 1.1.1.1:4938            0.0.0.0:*               LISTEN      97104/./liteserver
tcp        0      0 127.0.0.1:27018         0.0.0.0:*               LISTEN      1465/mongod
tcp        0      0 0.0.0.0:18443           0.0.0.0:*               LISTEN      1710464/clickhouse-
tcp        0      0 0.0.0.0:18123           0.0.0.0:*               LISTEN      1710464/clickhouse-
tcp        0      0 127.0.0.1:6251          0.0.0.0:*               LISTEN      95392/python
tcp        0      0 127.0.0.1:5100          0.0.0.0:*               LISTEN      119927/python3
tcp        0      0 127.0.0.1:6252          0.0.0.0:*               LISTEN      4223/python
tcp        0      0 127.0.0.1:6253          0.0.0.0:*               LISTEN      97149/python
tcp        0      0 127.0.0.1:8686          0.0.0.0:*               LISTEN      3935/python3
tcp        0      0 127.0.0.1:6255          0.0.0.0:*               LISTEN      97765/python
tcp        0      0 0.0.0.0:19440           0.0.0.0:*               LISTEN      1710464/clickhouse-
tcp        0      0 127.0.0.1:80            0.0.0.0:*               LISTEN      119565/python
tcp        0      0 127.0.0.1:6256          0.0.0.0:*               LISTEN      97205/python
tcp        0      0 127.0.0.1:9009          0.0.0.0:*               LISTEN      1710348/clickhouse-
tcp        0      0 127.0.0.1:81            0.0.0.0:*               LISTEN      621/python3
tcp        0      0 127.0.0.1:5555          0.0.0.0:*               LISTEN      119063/python3
tcp        0      0 127.0.0.1:5172          0.0.0.0:*               LISTEN      1708372/fluent-bit
tcp        0      0 0.0.0.0:22              0.0.0.0:*               LISTEN      782/sshd: /usr/sbin
tcp        0      0 127.0.0.1:34263         0.0.0.0:*               LISTEN      710/containerd
tcp        0      0 0.0.0.0:19000           0.0.0.0:*               LISTEN      1710464/clickhouse-
tcp        0      0 0.0.0.0:5432            0.0.0.0:*               LISTEN      1461/postgres
tcp6       0      0 :::443                  :::*                    LISTEN      1416/nginx: master
tcp6       0      0 ::1:5900                :::*                    LISTEN      95543/qemu-system-x
tcp6       0      0 ::1:5901                :::*                    LISTEN      1717976/qemu-system
tcp6       0      0 :::19090                :::*                    LISTEN      3480/java
tcp6       0      0 :::22                   :::*                    LISTEN      782/sshd: /usr/sbin
```