L1a pilot: useful encoder features, weak low-dimensional outputs

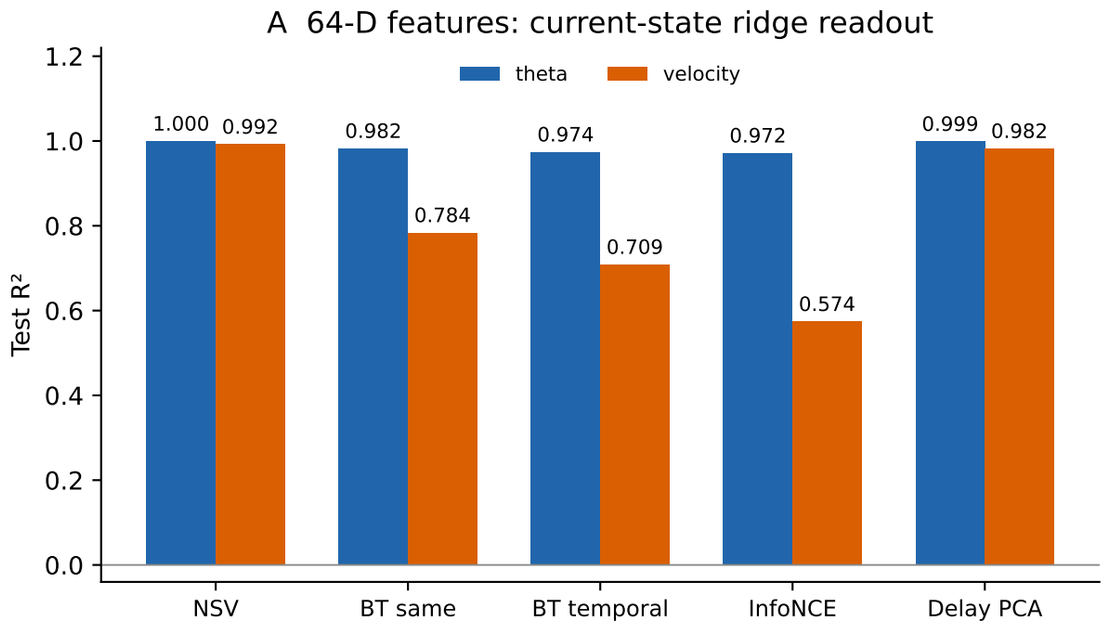

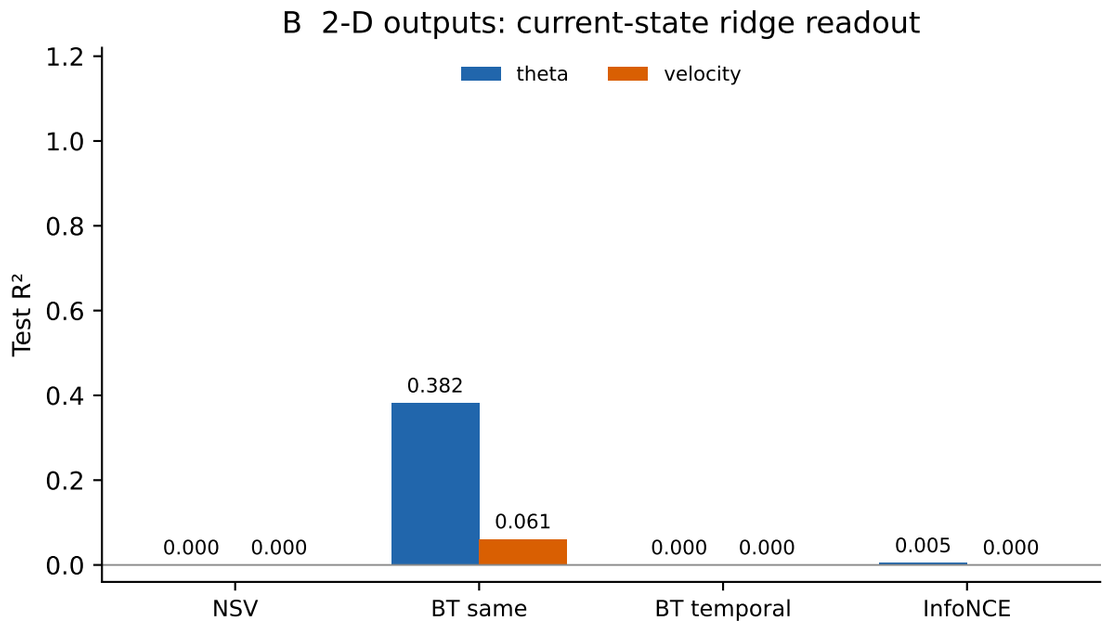

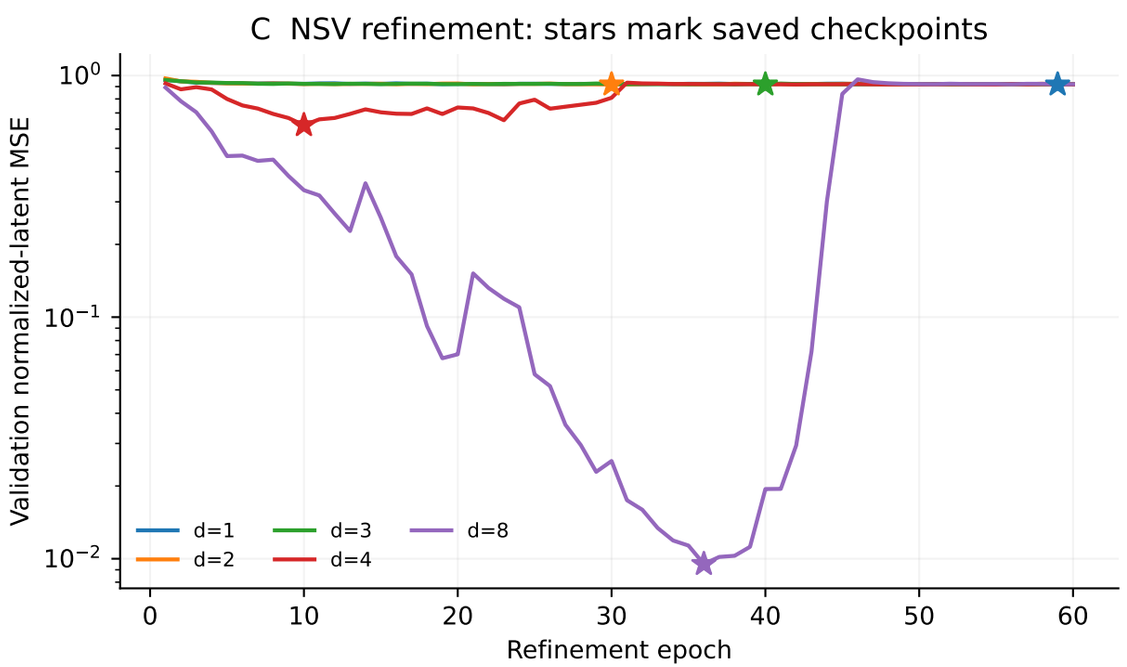

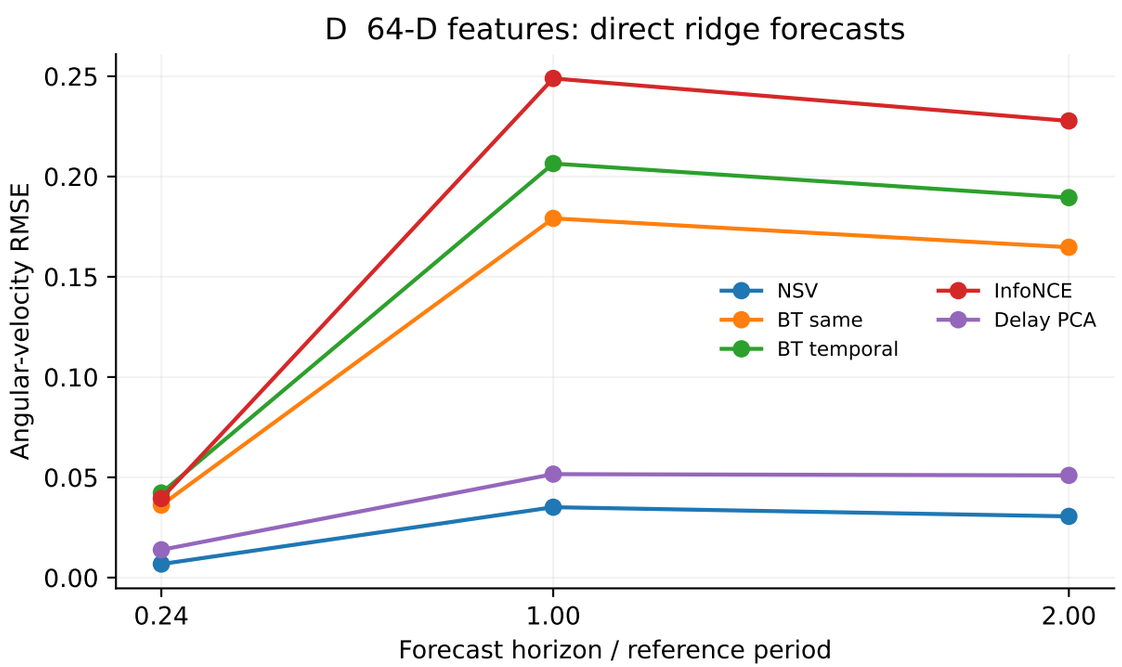

One training seed (42); 20 held-out trajectories / 1,500 windows. Point estimates shown; see CSV for group-bootstrap intervals. No autonomous rollout.