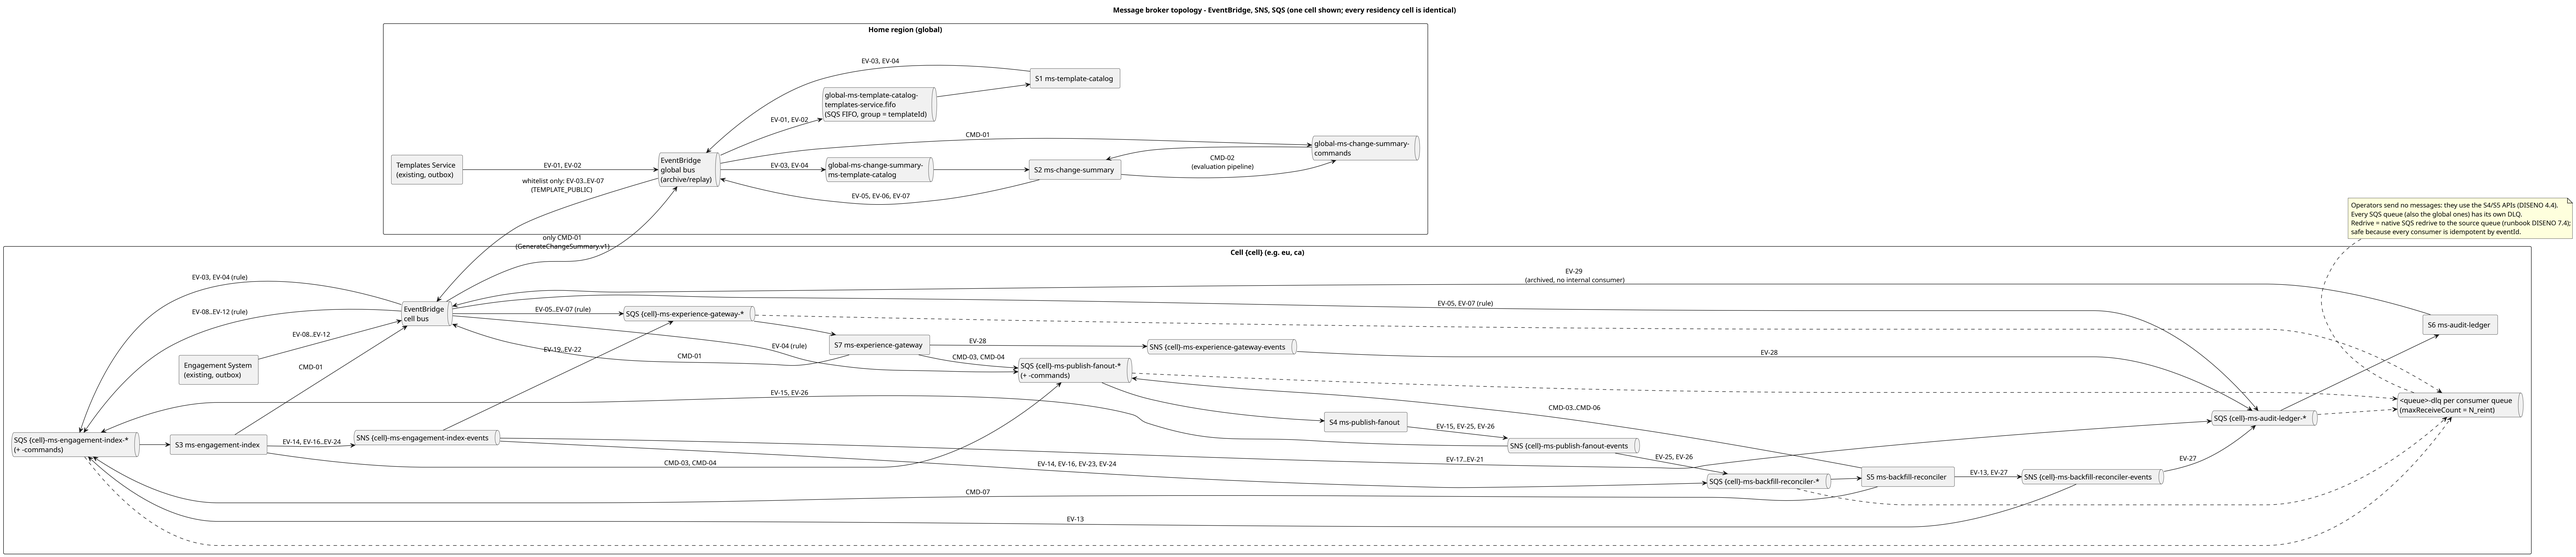
Message broker topology - EventBridge, SNS, SQS (one cell shown; every residency cell is identical)
Home region (global)
Templates Service (existing, outbox)
EV-01, EV-02
EventBridge global bus (archive/replay)
whitelist only: EV-03..EV-07 (TEMPLATE_PUBLIC)
only CMD-01 (GenerateChangeSummary.v1)
EV-03, EV-04
S1 ms-template-catalog
global-ms-template-catalog-templates-service.fifo (SQS FIFO, group = templateId)
EV-01, EV-02
CMD-01
global-ms-change-summary-commands
EV-03, EV-04
global-ms-change-summary-ms-template-catalog
S2 ms-change-summary
CMD-02 (evaluation pipeline)
EV-05, EV-06, EV-07
Cell (cell) (e.g. eu, ca)
EV-03, EV-04 (rule)
EV-08..EV-12 (rule)
EventBridge cell bus
EV-29 (archived, no internal consumer)
EV-05..EV-07 (rule)
SQS {cell}-ms-experience-gateway-*
S6 ms-audit-ledger
Engagement System (existing, outbox)
EV-08..EV-12
CMD-01
EV-15, EV-22
EV-04 (rule)
S7 ms-experience-gateway
EV-28
SNS {cell}-ms-experience-gateway-events
CMD-03, CMD-04
SQS {cell}-ms-publish-fanout-* (+ -commands)
EV-28
EV-15, EV-26
CMD-03..CMD-06
S4 ms-publish-fanout
EV-15, EV-25, EV-26
SNS {cell}-ms-publish-fanout-events
SQS {cell}-ms-audit-ledger-*
SQS {cell}-ms-engagement-index-* (+ -commands)
S3 ms-engagement-index
EV-14, EV-16, EV-24
SNS {cell}-ms-engagement-index-events
CMD-03, CMD-04
EV-14, EV-16, EV-23, EV-24
EV-17..EV-21
EV-25, EV-26
SQS {cell}-ms-backfill-reconciler-*
S5 ms-backfill-reconciler
EV-13, EV-27
SNS {cell}-ms-backfill-reconciler-events
EV-27
CMD-07
EV-13
Operators send no messages: they use the S4/S5 APIs (DISENO 4.4). Every SQS queue (also the global ones) has its own DLQ. Redrive = native SQS redrive to the source queue (runbook DISENO 7.4); safe because every consumer is idempotent by eventId.
<queue>-dlq per consumer queue (maxReceiveCount = N_reint)