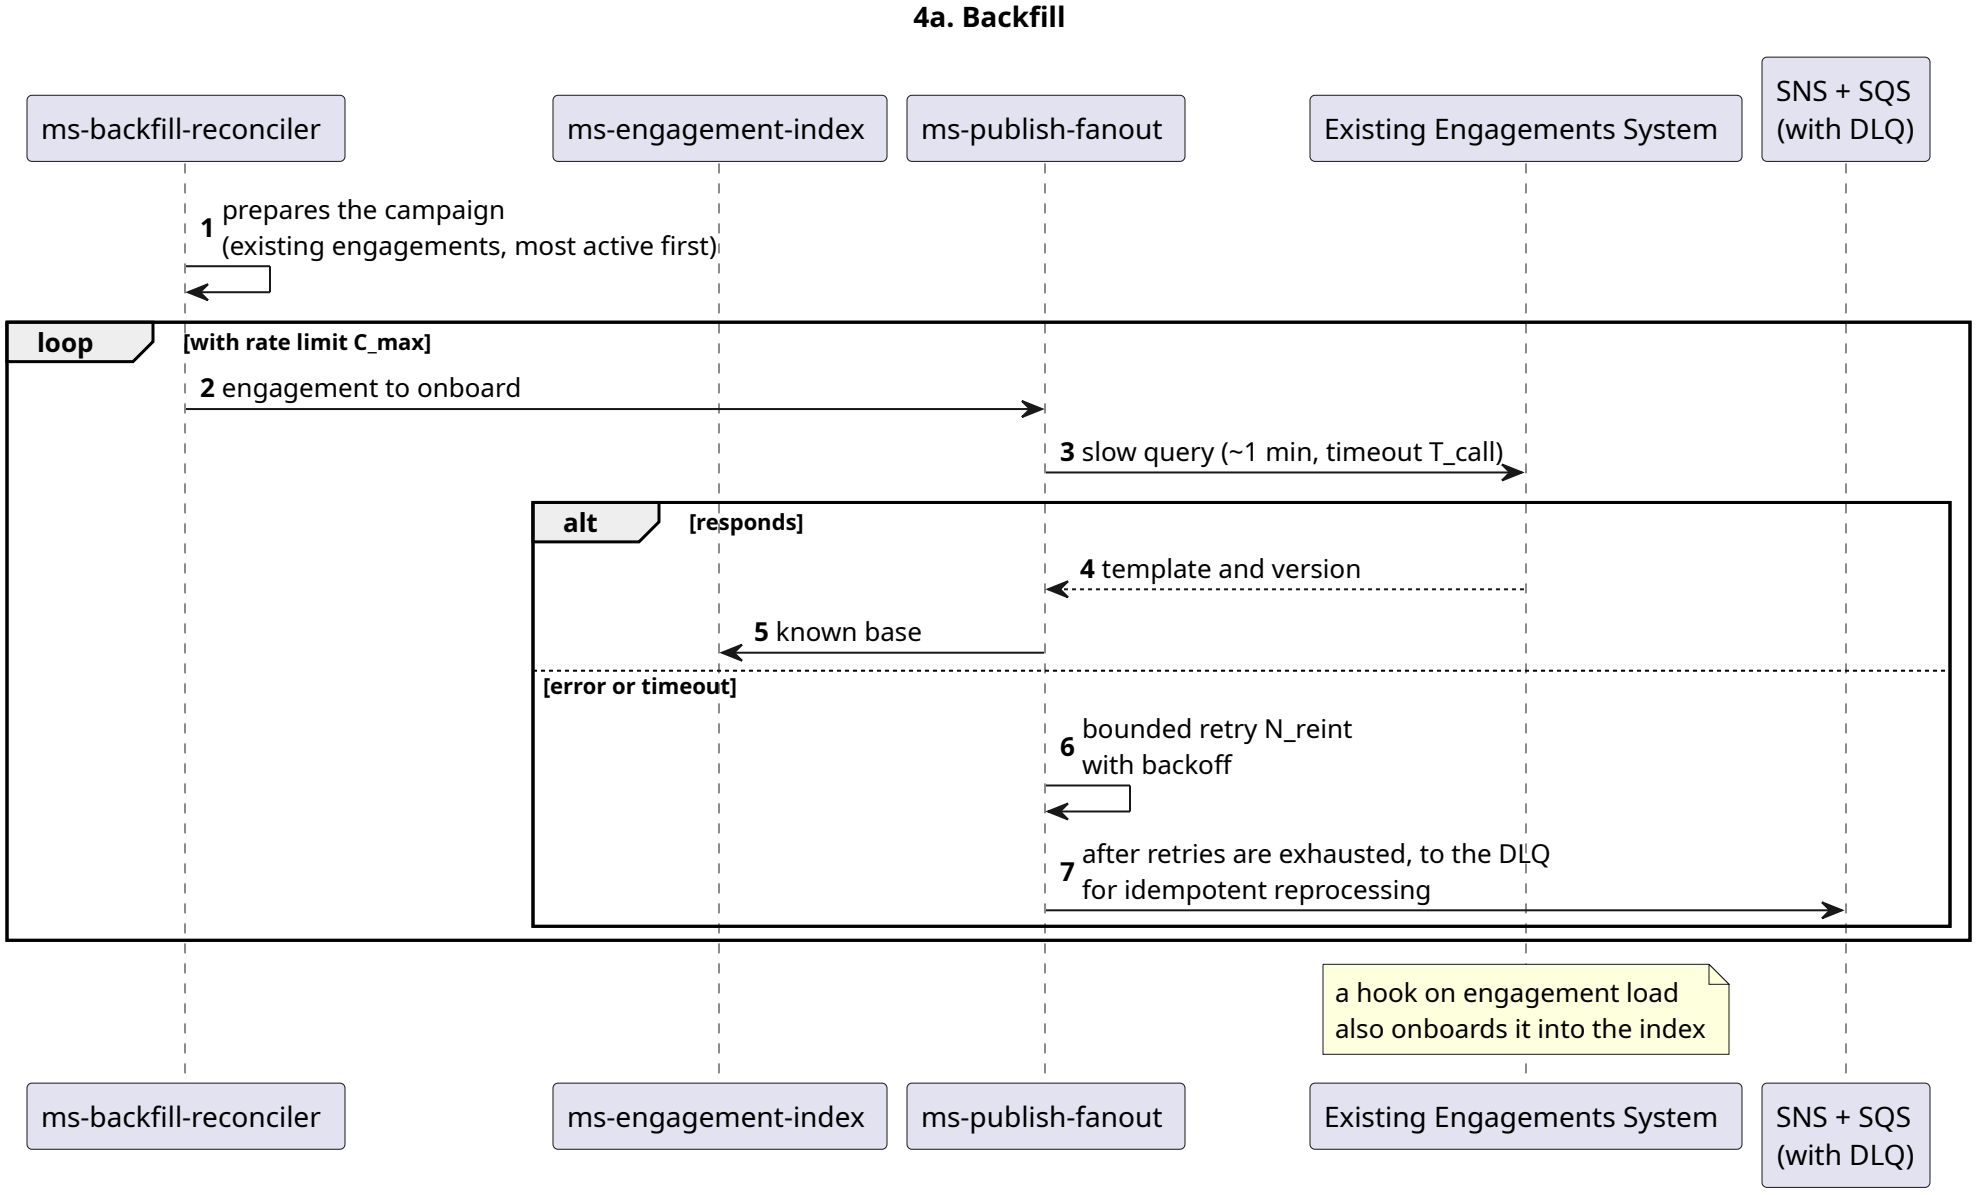
4a. Backfill
ms-backfill-reconciler
ms-engagement-index
ms-publish-fanout
Existing Engagements System
SNS + SQS
(with DLQ)
1 prepares the campaign
(existing engagements, most active first)
loop
[with rate limit C_max]
2 engagement to onboard
3 slow query (~1 min, timeout T_call)
alt
[responds]
4 template and version
5 known base
[error or timeout]
6 bounded retry N_reint
with backoff
7 after retries are exhausted, to the DLQ
for idempotent reprocessing
a hook on engagement load
also onboards it into the index
ms-backfill-reconciler
ms-engagement-index
ms-publish-fanout
Existing Engagements System
SNS + SQS
(with DLQ)