



**KTH Computer Science
and Communication**

SimpleGraphPlotter v1.6

Programkonstruktion för F, DD1342
Laboration 4A

JIM HOLMSTRÖM
JIMHO@KTH.SE

Teacher: Ann Bengtson

Contents

1	Introduction	1
1.1	Requirements	1
1.2	Scope	1
1.3	Assistance	2
2	Structure	3
2.1	Parser	3
2.1.1	interface iparser	3
2.1.2	class parser	4
2.1.3	interface iexpression	5
2.1.4	class constant	5
2.1.5	class variable	6
2.1.6	class unary_operation	6
2.1.7	class binary_operation	7
2.2	Plotter	7
2.2.1	class function	8
2.2.2	class plot_drawingarea	8
2.2.3	class function_list_controller	8
3	Results and Discussion	13
3.1	Results	13
3.2	Discussion	13

Chapter 1

Introduction

In the following part firstly the problem will be explained and secondly the requirements for a basic plotter will be enlisted. A plotter is a program that can plot functions from strings which defines the functions by ordinary math syntax. This project uses `C++` programming language and the `gtkmm`¹ wrapper for the `GTK+`² toolkit to generate the graphical user interface. It is compiled with the `GNU gcc` compiler.

1.1 Requirements

A few basic things is needed to have a functioning math plotter:

1. Define a function given ordinary math syntax.
2. Parse the inputed function and plot it accordingly.
3. Add/Remove functions from plotarea.
4. Plotarea should be scrollable both vertical and horizontal.
5. Range should be fixed to the unit-cube.³
6. Display axis of the plot.
7. Parser must be properly tested.

1.2 Scope

The amount of functionality that is possible to put in a system like this is almost endless so a few delimitations has to be made in order to complete the project. The

¹Documentation, binaries and source can be found at: www.gtkmm.org

²Documentation, binaries and source can be found at: www.gtk.org

³This restriction will be handled in section 1.2

currently biggest restriction to the plotter is the lack of ability to zoom or change the range from the unit-cube. No support for neither parametric nor complex functions.
⁴

1.3 Assistance

Besides the reference manuals for `gtkmm` and `C++` no external help for this project was received.

⁴ Since no native support in `C++` for complex numbers which means all the basic math functions would have to be rewritten in order for this to work.

Chapter 2

Structure

An basic overview of the structure can be seen in figure 2.1, all public non-self-explanatory parts will then be enlisted and explained in a `javadoc` like manner. In the actual code the definition and implementation was separated into `.h` and `.cpp`-files respectively as long as possible,¹ in a `C++` manner and it mostly follows Google's style guide for `C++`.² The main goal of the structure for this project is to have as flexible code as possible.

2.1 Parser

The parser code can be divided into two parts, algorithm and the data structure in the form of a parse tree.

2.1.1 interface iparser

An *abstract base class* (ABC) that defines the *interface* for what a parser needs to have to be considered as a parser, in case for example we want to compare different parser implementations.

public parse(expr : std::string) Virtual method that should be overloaded so that it will parse the string `expr` to generate a parse tree that represents the math expression in `expr`.

Parameters:

`expr` - The string to be parsed.

Returns:

A pointer to the root of the parse tree.

¹Some small trivial methods were left out from this distinction as well as a few things that is hard or impossible to separate in `C++`.

²The style guide can be found at: google-styleguide.googlecode.com

2.1.2 class parser

The parser is an implementation of a *recursive descent parser*. Two types of methods are used in the parsing, `is-a`³ and `read-it`⁴. The `is-a` is used for look-ahead to determine which type of expression that lays ahead, while `read-it` is used to do the actual syntactic information gathering from the expression fragment.

»»»»TODO, note about the static things««««

The EBNF syntax for the parsing made by this algorithm is as follows:

```
plots = term-(-1),[';',expression-(-1)],'\n' (* no support for ';' this
implementation *)
(* -1 is the lowest order expression *) \\
expression-i = [unary-i],expression-(i+1),[op-(i+1),expression-i] \\
term-n = var | num | [function],(,term-(-1),) \\
(* n is the number of the highest order operator *) \\

op-0 = '>' | '<'
op-1 = '+' | '-'
op-2 = '*' | '/' | '%'
op-3 = '^'
unary-3 = '+' | '-' | '*'
num = ? all numbers ?
var = 'x'
function = cos | sin | tan | acos | asin | atan | cosh \\
| sinh | tanh | exp | log | log10 | sqrt | ceil | abs \\
| floor | pi | e (* where pi and e are constant
functions *)
```

5

public parse(expr : std::string) Parses the string `expr` to generate a parse tree that represents the math expression in `expr`.

Parameters:

`expr` - The string to be parsed.

Returns:

A pointer to the root of the parse tree.

³Starts with `is_`

⁴Starts with `read_`

⁵Either `unary-(i+1)` or `op-(i+1)`, unary (since on the left) has higher priority

2.1. PARSER

2.1.3 interface iexpression

Acts as abstract base class (ABC) for a node in the parse tree, as in for example the nodes in figure 2.2. The `iexpression` is a *functor* since it has overloaded the `operator` and can thus be called in the same way as any other function. The `operator` can be both *recursively* implemented, as in `unary`⁶ and `binary`⁷, or *explicitly* implemented, as in `constant`⁸ and `variable`⁹. The operator function is generally defined by:

$$\begin{aligned} \text{expression} : \mathbb{R} &\rightarrow \mathbb{R} \\ x &\mapsto \text{operator}(x). \end{aligned} \tag{2.1}$$

public operator(x : double) double const Virtual definition of the *evaluation* function for expressions. Since the operator is going to act as an mathematical function one must be certain that it behaves like one, that is it does not modifies the functor when called.¹⁰ Therefore the `const` keyword has been added to prevent this from accidentally happening in the *realizations*.

Parameters:

`x` - Input value for the expression.

Returns:

The output value of this expression given the parameter `x`.

2.1.4 class constant

An *realization* of `iexpression` 2.1.3 which represents a constant. To keep constancy with the `iexpression` this is implemented as a constant-function:

$$\begin{aligned} \text{constant} : \mathbb{R} &\rightarrow \mathbb{R} \\ x &\mapsto c. \end{aligned} \tag{2.2}$$

public constant(c : double) Constructor that constructs the function in the equation 2.2.

Parameters:

`c` - The value of the constant in the expression.

public operator(x : double) double const Explicit realization of `iexpression.operator` returning a constant.

⁶As can be seen in equation 2.4.

⁷As can be seen in equation 2.5.

⁸As can be seen in equation 2.2.

⁹As can be seen in equation 2.3.

¹⁰In contrast to a method where that behaviour is allowed.

Parameters:

x - Input value of the expression, does not matter only there for compatibility reasons.

Returns:

The output value of the expression.

2.1.5 class variable

An realization of `iexpression` 2.1.3 which represents a variable. A variable can simply be seen as a unit-function:

$$\begin{aligned} \text{variable} : \mathbb{R} &\rightarrow \mathbb{R} \\ x &\mapsto x. \end{aligned} \tag{2.3}$$

public unary_operation(op : unary_op, left : iexpression*) Constructor that constructs the function in the equation 2.3.

parameters:

op - the unary operation performed, which is an `unary_op`¹¹ .
left - the inner expression on which to perform the operation on.

public operator(x : double) double const Explicit realization of `iexpression.operator` returning the value of the input.

Parameters:

x - Input value of the expression.

Returns:

The output value of the expression.

2.1.6 class unary_operation

An realization of `iexpression` 2.1.3 which represents a unary operation, a function constructed with `op left`:

$$\begin{aligned} \text{unary} : \mathbb{R} &\rightarrow \mathbb{R} \\ x &\mapsto \text{op}(\text{left}(x)). \end{aligned} \tag{2.4}$$

public unary_operation(op : unary_op, left : iexpression*) Constructor that constructs the function in the equation 2.4.

Parameters:

op - The unary operation performed, which is an `unary_op`¹² .
left - The inner expression on which to perform the operation on.

¹¹typedefined to be a function pointer: `*unary_op(double):double`.

¹²Typedefined to be a function pointer: `*unary_op(double):double`.

2.2. PLOTTER

public operator(x : double) double const Recursive realization of `iexpression.operator` returning the returned value of `left` through `op`, as in equation 2.4.

Parameters:

`x` - Input value for the `left` expression.

Returns:

The returned value from the equation 2.4.

2.1.7 class binary_operation

An realization of `iexpression` 2.1.3 which represents a binary operation, that is a function constructed with `op` and `left/right`:

$$\begin{aligned} \text{binary} : \mathbb{R} &\rightarrow \mathbb{R} \\ x &\mapsto \text{op}(\text{left}(x), \text{right}(x)). \end{aligned} \quad (2.5)$$

public binary_operation(op : binary_op, left : iexpression*, right : iexpression*)

Constructor that constructs the function in the equation 2.5.

Parameters:

`op` - The unary operation performed, which is an `binary_op`¹³.

`left` - The left expression on which to perform the operation on.

`right` - The right expression on which to perform the operation on.

public operator(x : double) double const Recursive realization of `iexpression.operator` returning the returned values of `left` and `right` through `op`, as in equation 2.5.

Parameters:

`x` - Input value for the expression.

Returns:

The returned value from the equation 2.5.

2.2 Plotter

The GUI code for the plotter is separated

MVC ? V = `plotdrawingarea` C = `functionlistcontroller` M = what? (combined with something?)

>images with the different parts highlighted with a red border, that is the parts being described at the moment> >especially point out the inheritance in the custom widgets. >almost all layout is separetally defined in a `.ui` file¹⁴ and loaded by the `gtk builder` at startup. >all signal connections are defined in `main` at generation. (`main.cc`)

¹³Typedefined to be a function pointer: `*binary_op(double,double):double`.

¹⁴Follows XML standard.

2.2.1 class function

Acts as a model of a function which is used by `plot_drawingarea` TODO look how it is used, is it a model used by the view=`plotdrawingarea...`

It has the *signature* for `iexpression` but it has not got the same intended usage and should therefore not be a realization of `iexpression`.

public function(expr : const std::string) Constructor that constructs the function from the string `expr`.

Parameters:

`expr` - The expression to use as a function.

2.2.2 class plot_drawingarea

TODO

public plot_drawingarea(store : Glib::RefPtr<Gtk::ListStore>) Constructor that constructs `plot_drawingarea`.

Parameters:

`store` - Reference to the liststore that contains the functions to be rendered. Must be, or in the same format as `function_store` defined in the `.ui`-file.

2.2.3 class function_list_controller

A *controller* that handles the functions. The protected methods starting with `on_` is *action listeners* and can be overridden in a new child class to change the functionality on them without the need to reimplement basecode.¹⁵

```
public function_list_controller(
listview : Gtk::TreeView&,
plot : plot_drawingarea&,
store : Glib::RefPtr<Gtk::ListStore>,
show_cellrenderer : Glib::RefPtr<Gtk::CellRendererText>,
add_button : Gtk::Button&,
remove_button : Gtk::Button&
)
```

Constructor for `function_list_controller`.

Parameters:

`listview` - Reference to the view in the list.

`plot` - Reference to the view of the actual plot of the functions.

`store` - Reference to the liststore that handles the functions.

¹⁵One should always avoid duplicating code.

2.2. PLOTTER

`show_cellrenderer` -

`add_button` - A reference to the button that controls adding new functions into the `store`.

`remove_button` - A reference to the button that controls removing functions from the `store`.

protected on__...

Parameters:

None

CHAPTER 2. STRUCTURE

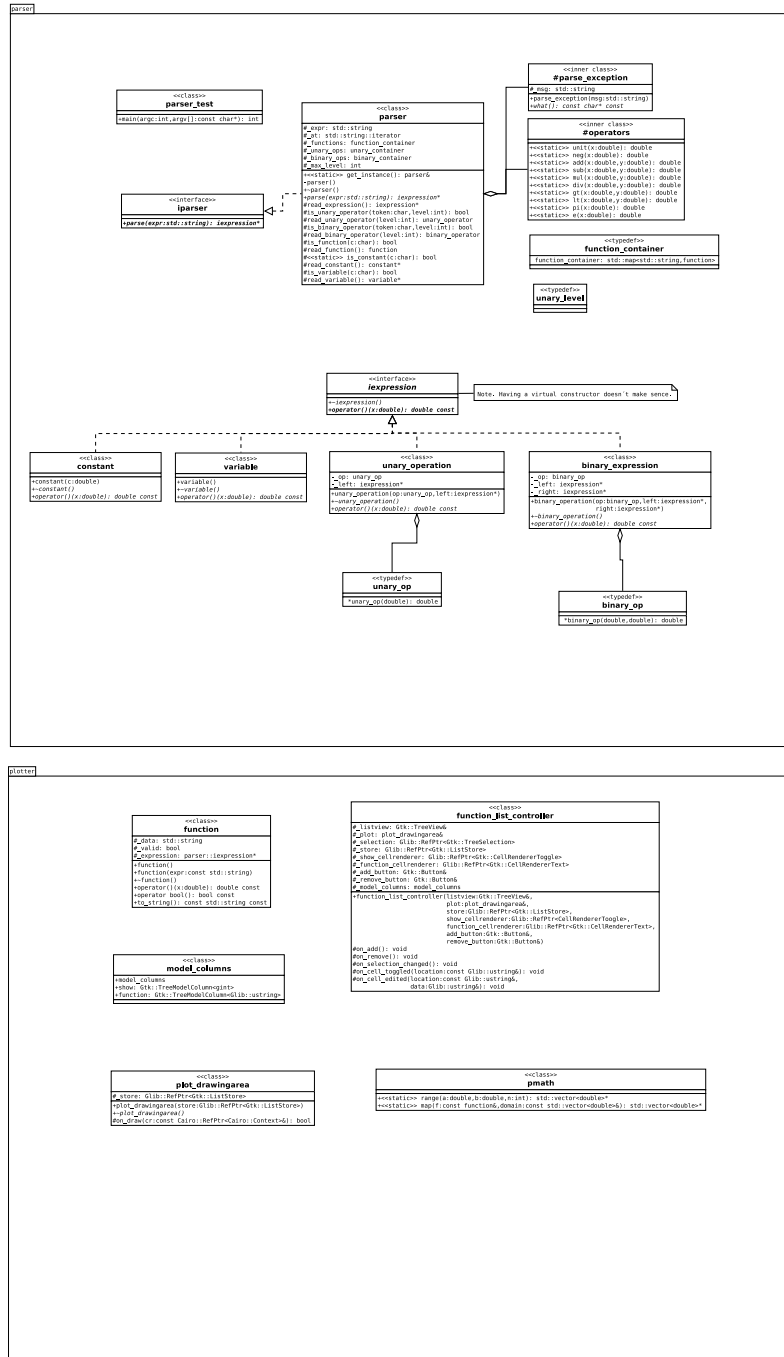


Figure 2.1. An UML showing the structure and the enclosure.

2.2. PLOTTER

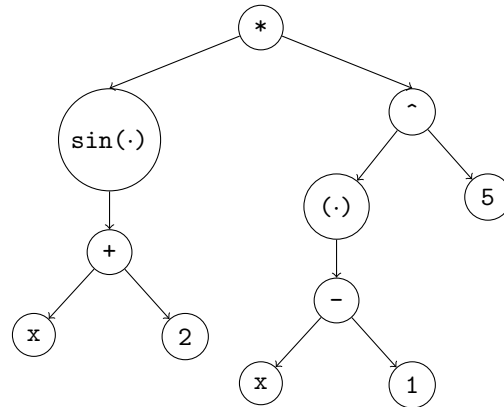


Figure 2.2. An example of the parse tree for the expression $\sin(x+2)*(x-1)^5$. Trivial nodes from the generated by the actual implementation where here left out.

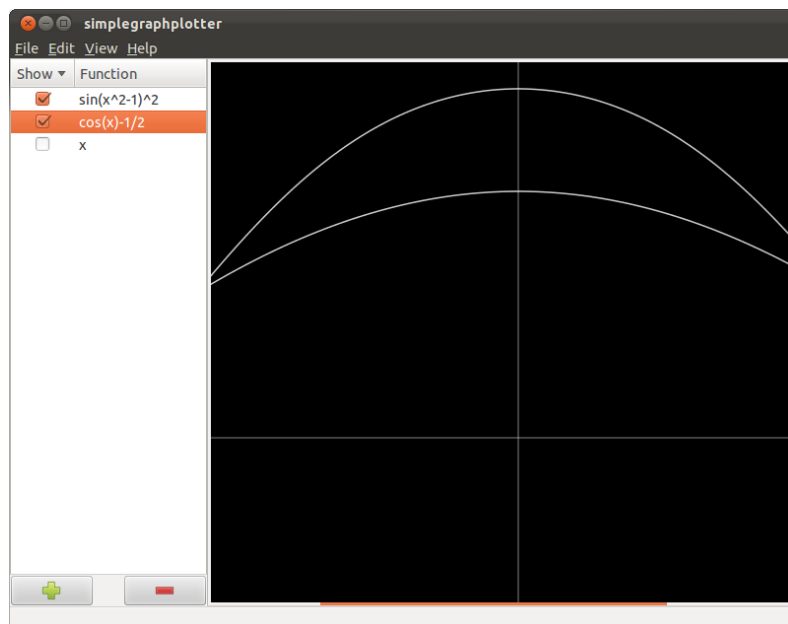


Figure 2.3. A screenshot of the program under normal operation.

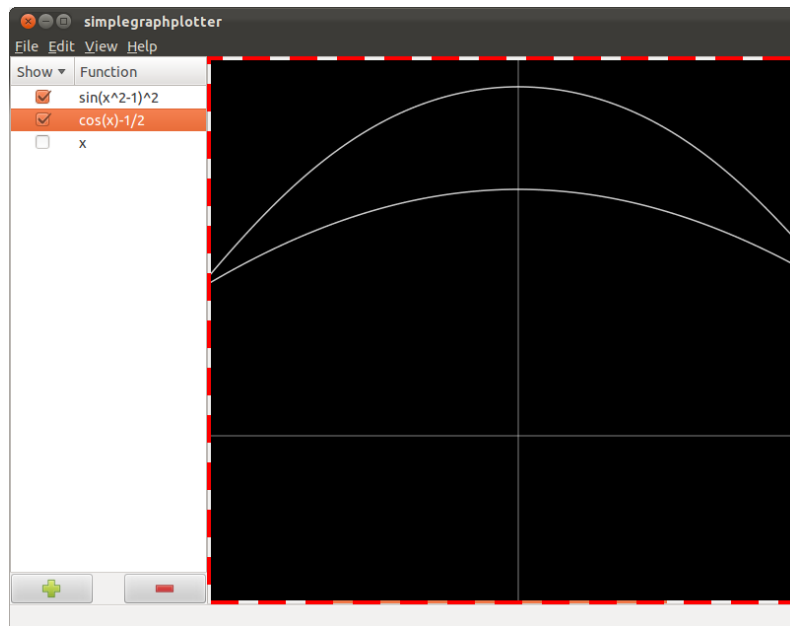


Figure 2.4. A screenshot of the program under normal operation, with the plotarea highlighted.

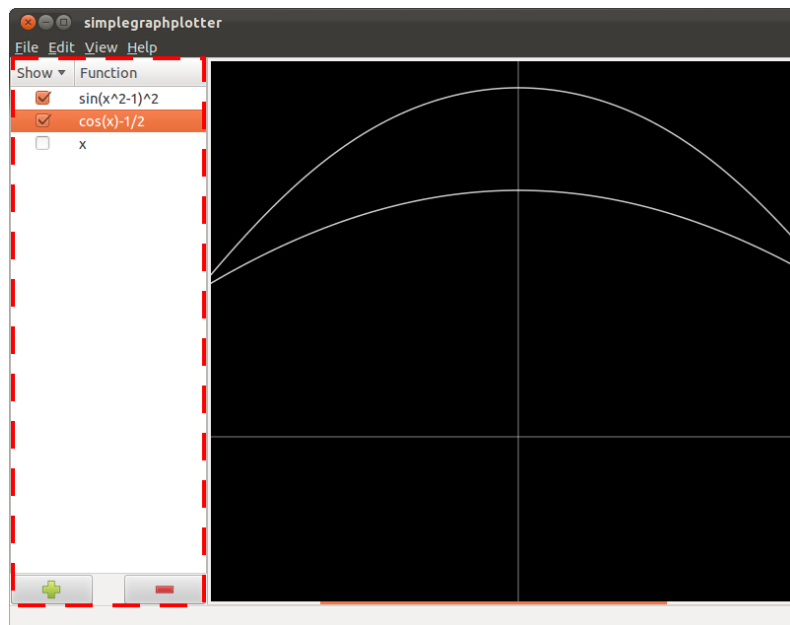


Figure 2.5. A screenshot of the program under normal operation, with the view of the `function_list_controller` highlighted.

Chapter 3

Results and Discussion

3.1 Results

«screenshots» Runned trough valgrind, results?.

3.2 Discussion

= Problems with the unofficial C++wrapper `gtkmm`, only used it to avoid missing out inheritance, polymorphism and to get it compatible with the standard C++Library. Many normal things easily became hacky. = Easy to miss combinations in the parser and have bugs.