Lab assignment 3: CloudFormation and Template

Objectives

In this practice, you will experiment with the manual services deployment and configuration using CloudFormation template for automatic service deployment.

The following resources to be deployed and interconnected

- · Launch EC2 instances
- · Deploy a web server on EC2 instance
- · Create a RDS server
- Create a Snapshot for a backup
- Create Elastic Load Balancer

Learning materials and learning platform

This assignment is based on the AWS Academy course Cloud Computing Foundation Lab 3 EC2, Lab 5 RDS and Lab 6 Scale & Load Balance your Architecture with additional tasks to experiment with CloudFormation functionality.

- This lab will use your knowledge and experienced gained from Modules 4-8 and 10 and previous practices 2 and 3.
- You need to re-visit Module 10 Auto Scaling and Monitoring and Lab 6 in places where CloudFormation is used. Read and learn how to setup SSH client for connecting to EC2 instance and tunnel to connect to RDS Database server.

Note. Guidelines how to setup SSH client and connect to EC2 with SSH is provided on Canvas.

Block 1. Manual creation and configuration of the LAMP Webserver

Part A. Launch EC2 instance

Launch an EC2 instance with "Amazon Linux 2 AMI (HVM)" (e.g. selecting t2.micro).

(Note. You can choose any other OS instances, if you are comfortable.)

Make sure if your Security Group policies are open for HTTP (port 80). In case it is not open, edit Security Group policy and add HTTP - TCP rule for your specific IP for testing or 0.0.0.0/0 for everyone to access. (This helps only when you have something running. Wait until Part B - step d, to test it)

Part B. Create a web server (LAMP server)

- a) Connect to ec2 instance through ssh (So, all commands below are for the deployed EC2 instance)
- b) Install Apache webserver with PHP (for testing)

```
sudo yum update -y
sudo yum install -y httpd.x86 64
sudo amazon-linux-extras install -y php7.2
```

c) Start the HTTP server

sudo service httpd start

- d) Open web browser to check if server is running, if HTTP port is closed nothing will come, else it will show some test page for HTTP server.
- → http://xxxxxxxx.compute-1.amazonaws.com (replace xx with appropriate path for ec2 instance)
- e) Auto start the webserver server with each restart of the instance

sudo chkconfig httpd on

f) Setting permissions for the Apache web server

```
sudo groupadd www
sudo usermod -a -G www ec2-user
sudo chown -R root:www /var/www
sudo chmod 2775 /Var/www
find /var/www -type d -exec sudo chmod 2775 {} +
find /var/www -type f -exec sudo chmod 0664 {} +
```

Part C. Create an RDS instance


Use the following steps to setup a MySQL database using AWS RDS service (RDS - Relational Database Service)

a) Go to RDS console https://console.aws.amazon.com/rds/ and select MySQL and select RDS Free Tier (as alternative to Production and Dev/Test). Note: Be aware not requesting creation AuroraDB: It is very expensive because it is large scale relational database

Investigate DB price options for different templates: check at the bottom "Estimated monthly costs"

b) Step 2: Specify DB details -> You can choose DB engine version. In Settings fill the following details:

- DB instance identifier:
- Master username: (remember these details)
- Master password: (remember these details)
- c) Step 3: Connectivity: chose "Connect to an EC2 compute resource" and select the instance launched in Part A.
- d) Step 4: Additional configuration
 - · Database options: choose an "Initial database name" and write it down
 - Backup: No preference (change to 0/1 days to reduce the charges for logs)
 - Log exports tab: select General log
 - Maintenance tab: select "Enable auto minor version upgrade" and "No preference"
 - Deletion protection; you can choose to protect database or leave it. As this just for testing, you can uncheck so that Database can be deleted.
- e) Create database will take some time. Check the status in RDS \rightarrow Databases \rightarrow You_Database_name

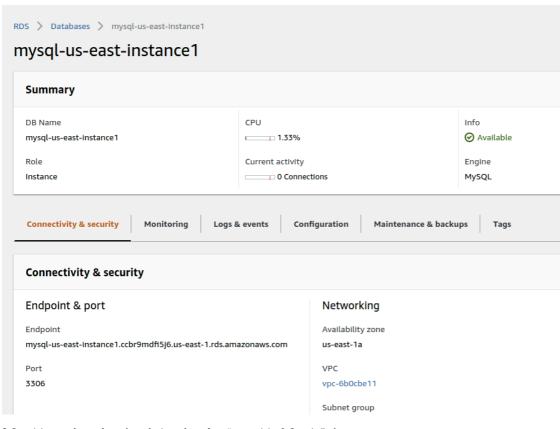

f) Once it is created, note down the endpoint and port from "connectivity & Security" tab

Part D. Connect RDS DB instance to Web Server

Follow the steps to create a page on EC2 instance

```
cd /var/www
sudo mkdir inc
cd inc
```

<?php

a) Create a file with your DB credentials to connect dbinfo.inc on EC2 instance at the following path /var/www/inc/dbinfo.inc.Change endpoint with endpoint noted in Part C-e and Master username, Master password and Initial database name with the info from Part C-b and d.

```
define('DB_SERVER', 'endpoint');
define('DB_USERNAME', 'Master username');
define('DB_PASSWORD', 'Master password');
define('DB_DATABASE', 'Initial database name');
b) Create a new file in the html SampleLAMPPage.php, in the following path
/var/www/html/SampleLAMPPage.php with sample content below:
<?php include "../inc/dbinfo.inc"; ?>
<html>
<body>
<h1>Sample page</h1>
<?php
    ^{\prime *} Connect to MySQL and select the database. ^{*\prime}
   $connection = mysqli_connect(DB_SERVER, DB_USERNAME, DB_PASSWORD);
   if (mysqli_connect_errno()) echo "Failed to connect to MySQL: " . mysqli_connect_error();
   $database = mysqli select db($connection, DB DATABASE);
    ^{\primest} Ensure that the Employees table exists. ^{st}
   VerifyEmployeesTable($connection, DB_DATABASE);
  /* If input fields are populated, add a row to the Employees table. */
$employee_name = htmlentities($_POST['Name']);
$employee_address = htmlentities($_POST['Address']);
     f (strlen($employee_name) || strlen($employee_address)) {
AddEmployee($connection, $employee_name, $employee_address);
<!-- Input form --> <form action="<?PHP echo $_SERVER['SCRIPT_NAME'] ?>" method="POST">
   Name

Address

      <input type="text" name="Name" maxlength="45" size="30" />
```


```
<input type="submit" value="Add Data" />
                 </form>
<!-- Display table data. -->

ID
           Name
             Address
      <?php
$result = mysqli_query($connection, "SELECT * FROM Employees");
while($query_data = mysqli_fetch_row($result)) {
     echo "'';
echo ""<jaylin | letter |
<!-- Clean up. -->
     mysqli_free_result($result);
mysqli_close($connection);
</body>
<?php
    * Add an employee to the table. */
function AddEmployee($connection, $name, $address) {
    sn = mysqli_real_escape_string($connection, $name);
    $a = mysqli_real_escape_string($connection, $address);
         $query = "INSERT INTO `Employees` (`Name`, `Address`) VALUES ('$n', '$a');";
         if(!mysqli_query($connection, $query)) echo("Error adding employee data.");
}
 /* Check whether the table exists and, if not, create it. */
function VerifyEmployeesTable($connection, $dbName) {
    if(!TableExists("Employees", $connection, $dbName))
             $query = "CREATE TABLE `Employees` (
   `ID` int(11) NOT NULL AUTO_INCREMENT,
   `Name` varchar(45) DEFAULT NULL,
   `Address` varchar(90) DEFAULT NULL,
   PRIMARY KEY (`ID`),
   UNIQUE KEY `ID_UNIQUE` (`ID`)
) ENGINE=InnoDB AUTO_INCREMENT=1 DEFAULT CHARSET=latin1";
              if(!mysqli_query($connection, $query)) echo("Error creating table.");
     }
/* Check for the existence of a table. */
function TableExists($tableName, $connection, $dbName) {
      $t = mysqli_real_escape_string($connection, $tableName);
$d = mysqli_real_escape_string($connection, $dbName);
     if(mysqli_num_rows($checktable) > 0) return true;
      return false;
}
?>
```

- c) Check the website you just created, by following the path: http://xxxxxxxx.compute-1.amazonaws.com/SampleLAMPPage.php
- d) If everything is configured correctly, data entered in this sample page will be saved in the MySQL DB on AWS.

Part E. Create a Snapshot for a backup for RDS

- a) Go to RDS console \rightarrow Databases \rightarrow then select You_Database_name check box
- b) From "Actions" on top right drop-down menu select "Take snapshot" to save the database to Snapshots

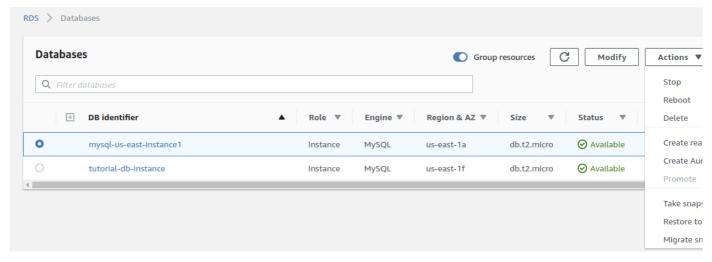

- c) Give a name to the snapshot and save it. (it will take some time depending on the size of database)
- d) "You can not restore the database to the same name if the database already exists in your AWS account"
 - To restore the database from snapshot. Go to RDS console \rightarrow snapshots
 - 1. Select appropriate snapshot --> on top right "Actions" \rightarrow "Restore snapshot"
 - 2. Remember to double to check the all the parameters:
 - Change "DB Instance Class": appropriate size (In real time scenarios it might be not a good option to change, just to make sure you will not be charged anything for creating large DB instance)
 - Choose other parameters appropriately to restore the database.
- e) %% Did not find anything to save snapshots to S3
- f) ## This works to shit the existing database to Amazon services, "You can not restore the database to same name"
 - select "Restore from S3"
 - 1. Select engine Select MySQL (As we have created MySQL RDS server)
 - 2. Specify source backup details:
 - Choose sql version, S3 bucket from which backup needs to be restored. IAM role: NO

Part F. Create Elastic Load Balancer

- a) Create another EC2 instance as you did in $\boldsymbol{Part}\;\boldsymbol{A}$
- b) LAMP webserver installation as you did in $\boldsymbol{Part}\,\boldsymbol{B}$
- c) Connect RDS DB instance to Web Server as you did in ${\bf Part}\ {\bf D}$
- d) Then follow the Elastic Load Balancer steps from Lab assignment 2 Block 2

Block 2. Using CloudFormation for creation and configuration of the Sample Webserver

Part G. Using CloudFormation with the Template for Webserver

G.1. Create a Webserver using CloudFormation template

a) Go to CloudFormation → Create new Stack

If you want to design own template you can go to Design template and start working. But for this exercise go with second option:

"Choose a template" \rightarrow "Upload a template to Amazon S3" \rightarrow Choose file "practice04_cloudformation-sample.json" to upload (File practice04_cloudformation-sample.json). If you select this option new S3 bucket will be created to store your template. Be aware of the extra charges.

Note: If you choose to upload file, CloudFormation still creates S3 bucket to put file there.

b) Specify Details Tab: Choose the appropriate details for Database

- Stack name % To identify Stack Created
- DBName % Name of the DB to access or store
- DBPassword % Password to connect to DB
- DBRootPassword % root password for DB
- DBUser % DB user debuser
- InstanceType % Choose required resources for EC2 instance
- KeyName % used to connect to EC2 instance created
- c) Next → Create
- d) At the CloudFormation Stacks wait/refresh table
 - If CREATE_COMPLETE, go to console and start using resource
 - If ROLLBACK_COMPLETE, start from the beginning and possibly change template or instance size or location (be aware about costs).
- e) Check CloudFormation output for Webserver URL: put webserver URL into browser and display frontpage

G.2. Experiment with template modification

a) Make changes to template, e.g. (i) modify Welcome page by changing text and adding image; or (ii) add creation of SamplelaMPPage.php in the template like in Part D (b).

Part H. Compare manual services deployment and configuration and using CloudFormation template

Describe your experience in the report.

Self-study questions

Note: To answer self-study questions, you may use the lecture as a starting point for further study, however additional research and readings will be required.

- 1. How is section Parameters is used in the CloudFormation template? Do you need to put passwords in the template? Is it secure?
- 2. What operations the CloudFormation executes automatically and what instruction you need to define yourself? How do you do this?
- 3. Why and for what purpose you need to specify SSH key? How do you do this? Why CloudFormation require an existing key?

A. You need to create a fleet of webservers and other resources. What is the structure of CloudFormation template for this case? What are solutions for this with using CloudFormation and/or other cloud automation tools? Provide an example what functionalities available in Ansible (e.g. modules and/or tasks).

B. Which CloudFormation functions can be done in Ansible and which cannot? Provide example of both. How do Ansible and CloudFormation interact during the deployment process?

Reporting

Prepare your report and include the following information:

- 1. Document your experiments in Parts B-F, including the configuration of your instances and services and few screenshots demonstrating webserver access via Internet.
- 2. The same for Part G Webserver deployment with the CloudFormation template.
- 3. Compare two approaches: manual and with the CloudFormation.
- 4. Provide a summary of experience and observations
- $5. \ Answer \ at \ least \ 3 \ Self-study \ questions \ including \ at \ least \ one \ question \ from \ groups \ \{1,2,3\} \ and \ \{A,B\}$

Submit your practice report to Canvas Assignment 4 link by the end of Monday in week 5.

For reference: List of AWS Academy class Modules and Labs

Modules

- Module 1 Cloud Concepts Overview
- Module 2 Cloud Economics and Billing
- · Module 3 AWS Global Infrastructure Overview
- Module 4 AWS Cloud Security
- Module 5 Networking and Content Delivery
- Module 5 Networkin
 Module 6 Compute
- Module 7 Storage
- Module 8 Databases
- Module 9 Cloud Architecture
- Module 10 Auto Scaling and Monitoring

Labs

- Lab 1 Introduction to AWS IAM
- Lab 2 Build your VPC and Launch a Web Server
- Lab 3 Introduction to Amazon EC2
- Lab 4 Working with EBS
- Lab 5 Build a Database Server
- Lab 6 Scale & Load Balance your Architecture