# Unit Key

SKU:U144


















## Description

**Unit Key** is a **single-key input** unit **with built-in RGB light**. It uses a tactile mechanical **blue switch** with strong tactile feedback, and the keycap is replaceable, providing excellent mechanical feel and rebound. It features a built-in **SK6812 programmable full-color RGB LED** that supports **256 levels of brightness display**. The unit exposes two digital IO interfaces for key state acquisition and light control. It is suitable for DIY projects requiring button input interaction.

## Features

- Blue switch (strong tactile feedback)
- SK6812 programmable full-color RGB LED

## Includes

- 1 x Unit Key
- 1 x HY2.0-4P Grove Cable (20cm)

## Applications


- Human-machine interaction design

## Specifications

| Specification | Parameter |
| --- | --- |
| Supply Voltage | DC 5V |
| Button Output Logic Signal | DC 3.3V |
| Standby Current | DC 5V@2mA |
| Operating Current | DC 5V@13mA |
| Product Size | 40.0 x 24.0 x 22.6mm |
| Product Weight | 7.6g |
| Package Size | 138.0 x 93.0 x 18.0mm |
| Gross Weight | 13.1g |

## Schematics

- Unit Key Schematics PDF

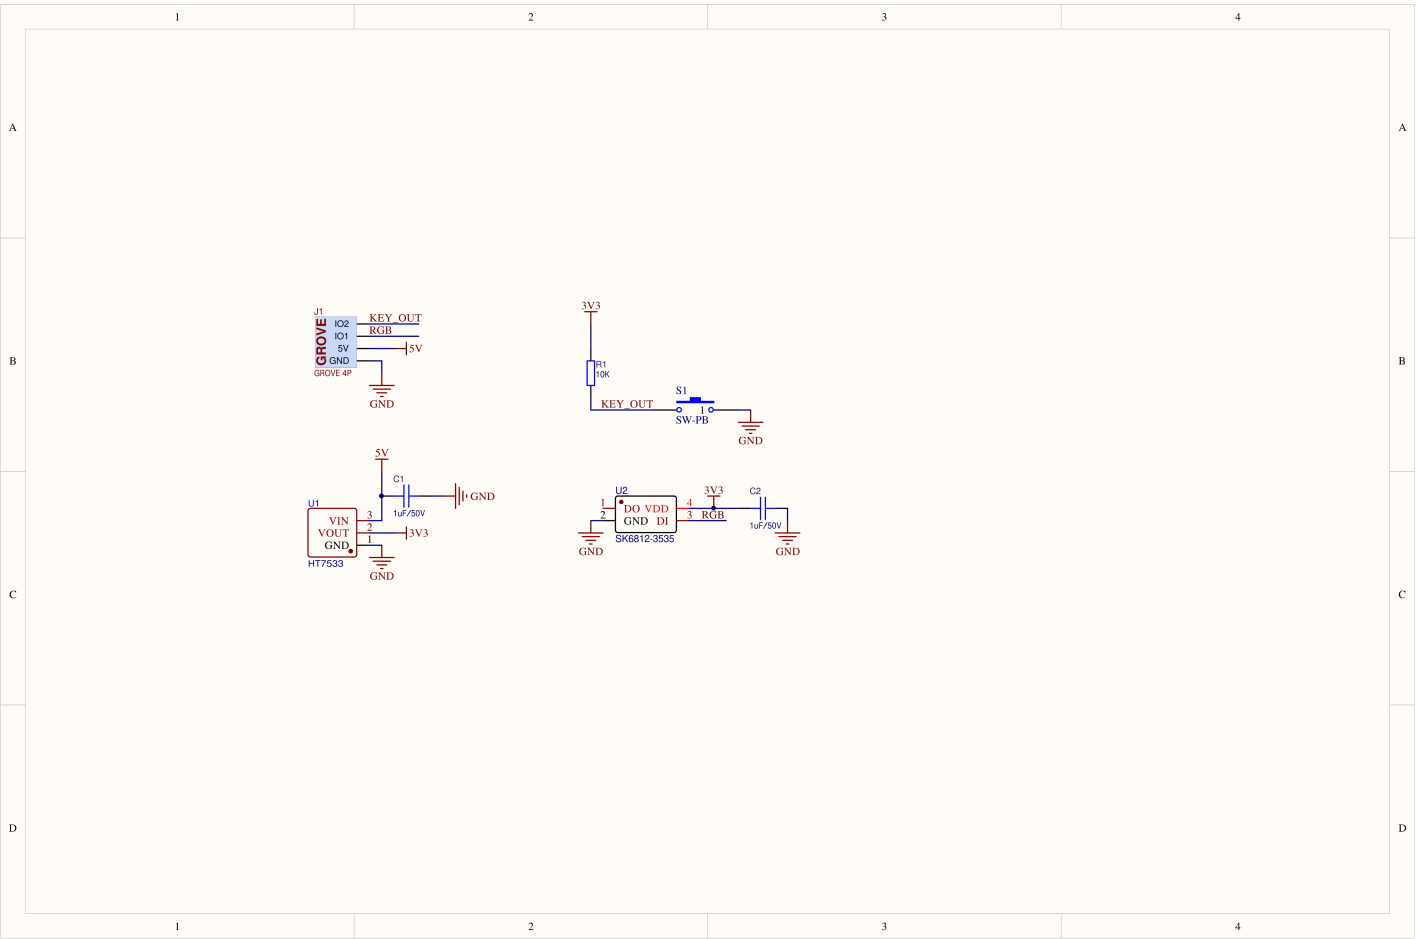



# PinMap

## Unit Key

| HY2.0-4P | Black | Red | Yellow | White |
|---|---|---|---|---|
| PORT.B | GND | 5V | LED Signal | DIN |

# Model Size

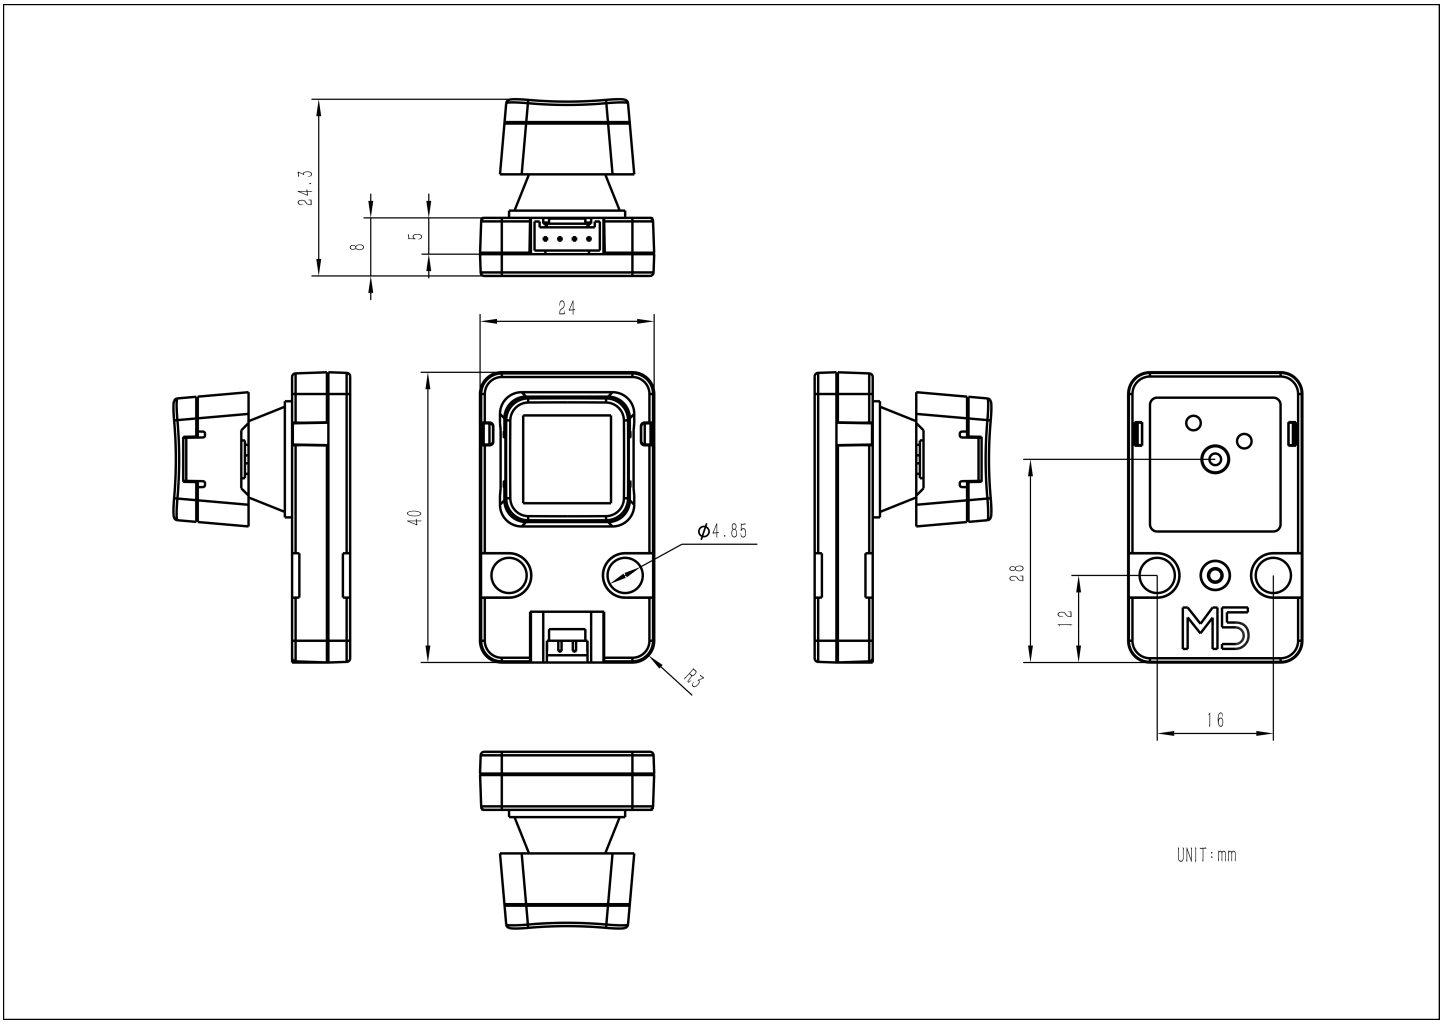


## Structure

- Unit Key Structure Files

## Softwares

### Arduino

- Unit Key Test Program
- FastLED Arduino Driver Library

### UiFlow1

- Unit Key UiFlow1 Docs

### UiFlow2

- Unit Key UiFlow2 Docs