

Module13.2 4Relay v1.1

SKU:M121-V11







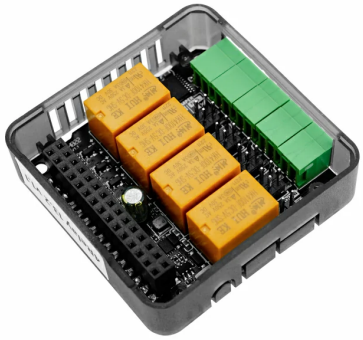


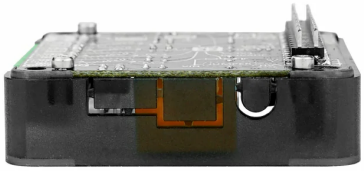




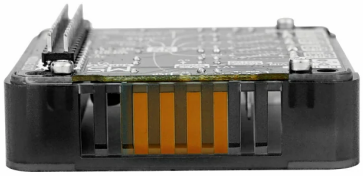

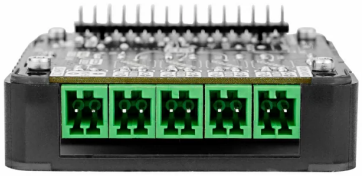





Description

Module13.2 4Relay v1.1 is a relay module with 4 mechanical relay control channels (NO, COM) onboard. The module uses the I2C communication protocol for control, effectively saving IO resources. The jumper cap design allows switching between active and passive working modes to meet different circuit requirements. This relay module only supports DC circuit switching, with a maximum load capacity of 24W (DC 24V @ 1A) per channel. It includes external power supply voltage detection and a DC-DC circuit to power the host. It is suitable for controlling the switching of small load circuits.

Features

- STM32G030F6
- I2C communication (addr: 0x26)
- 4 relay control channels, maximum load capacity 24W (DC 24V@1A)
- Supports two working modes (active and passive)
- Voltage detection
- Compatible with Arduino, UIFlow, and other programming platforms

Includes

- 1 x Module13.2 4Relay v1.1
- 5 x KF2EDGK-2.54-2P terminal blocks (green)
- 10 x jumper caps
- 1 x wiring manual

Applications

- Solenoid valve control
- DC circuit switching

Specifications


Specification	Parameter
MCU	STM32F030F4P6
Communication Interface	I2C Communication @0x26
Supported Working Modes	Active Control / Passive Control
Relay Channels	4x (COM, NO interface)
Power Input Interface	DC5521 female jack 5.5 x 2.1mm@5-24V (inner positive, outer negative)
Load Capacity	Maximum load capacity 24W (DC 24V@1A) per channel
Relay Terminal Block	KF2EDGR-2.54-2P
Single Relay Power Consumption	5V@40mA
Coil Activation Time	6ms
Coil Release Time	4ms
Product Size	54.0 x 54.0 x 19.7mm
Product Weight	38.0g
Package Size	134.0 x 95.0 x 20.0mm
Gross Weight	58.1g

Datasheets

- Relay Datasheet

Schematics

- Module13.2 4Relay v1.1 Schematics PDF

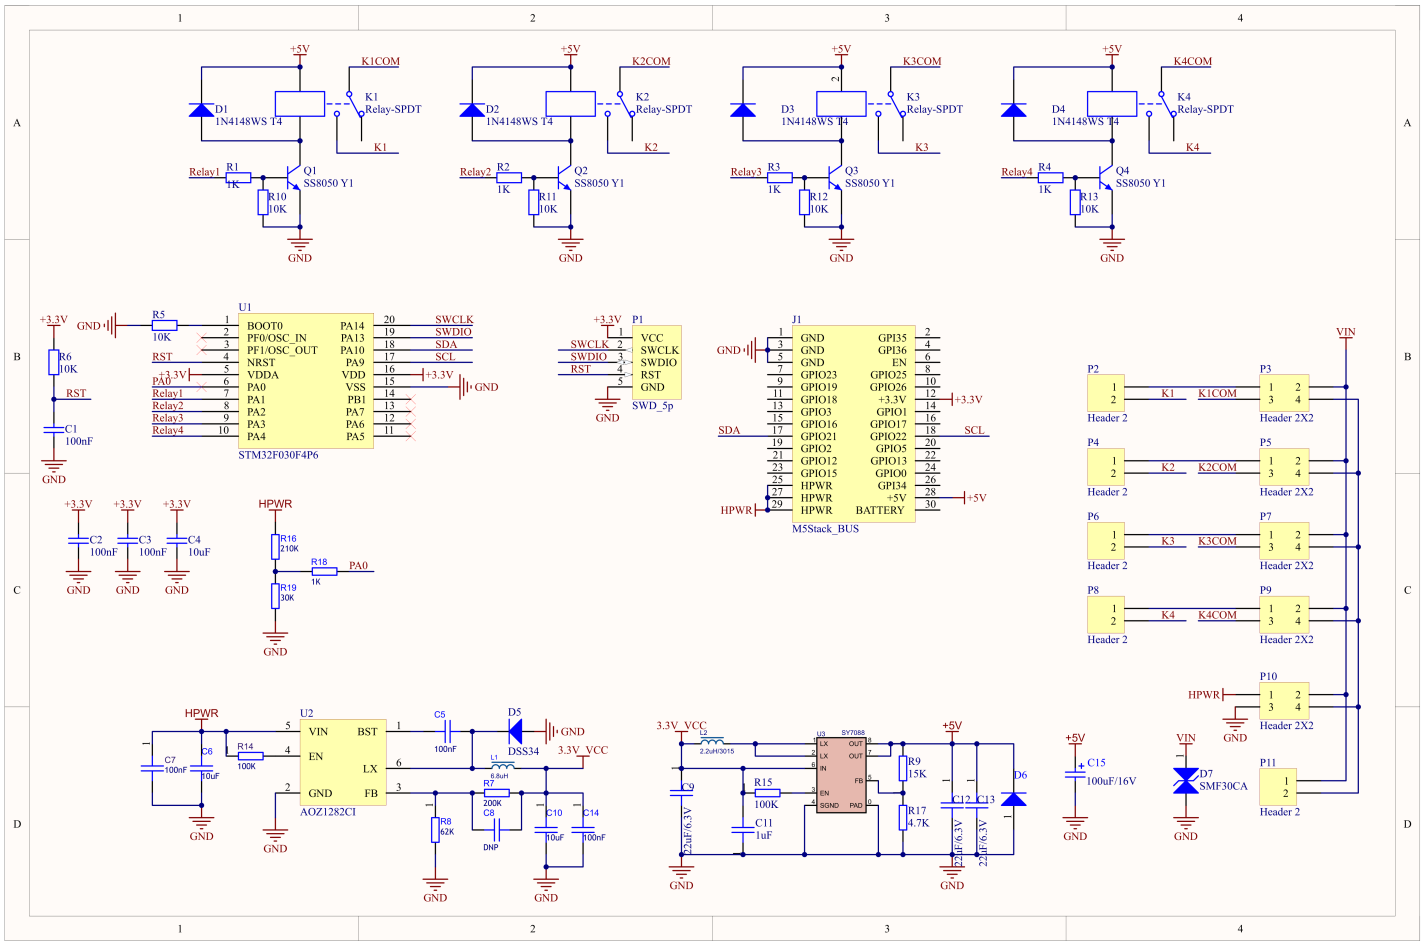


PinMap

M5Core	G22	G21	5V	GND
Module13.2 4Relay v1.1	SCL	SDA	VCC	GND

M5-Bus

PIN	LEFT	RIGHT	PIN
GND	1	2	
GND	3	4	
GND	5	6	
	7	8	
	9	10	
	11	12	3V3
	13	14	
	15	16	
SDA	17	18	SCL
	19	20	
	21	22	
	23	24	
HPWR	25	26	
HPWR	27	28	5V
HPWR	29	30	

Model Size

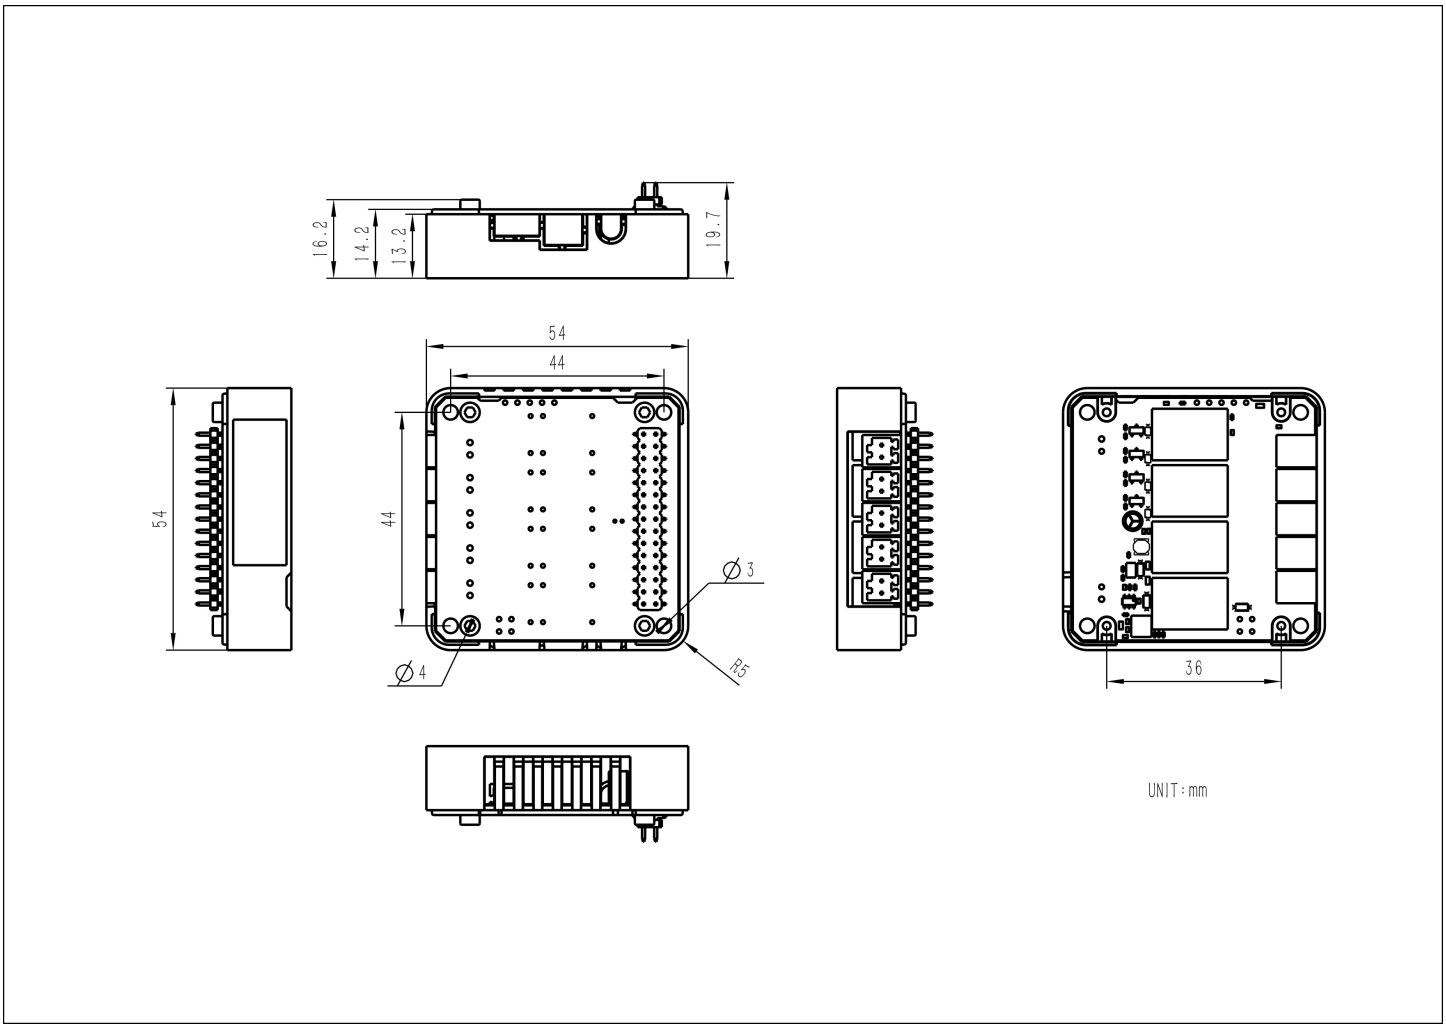

Softwares

Arduino

- Module13.2 4Relay v1.1 Arduino Library
- Module13.2 4Relay v1.1 Arduino Tutorial

Internal Firmware

- Module13.2 4Relay v1.1 Internal Firmware

Protocol

M5Stack Module 4Relay 13.2 I2C Protocol																	V:0xFF (FW Version) 2023/1/4
REG MAP (Addr:0x26)		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	note
Counter Value	0x10 R/W	Relay Control																**bit 0:** Relay 1 status; **bit 1**: Relay 2 status; **bit 2**: Relay 3 status; **bit 3**: Relay 4 status;
ADC 8Bits	0x20 R	ADC 8Bits																0~255
ADC 12Bits	0x30 R	ADC 12Bits-L	ADC 12Bits-															0~4095
Firmware Version	0xF0 R															Version		**Version:** firmware version number
I2C Address	0xF0 R/W																Address	**Address:** 1~127

Video