


Focus on designing a chat app like Facebook messenger, it should be able to do

- 1-1 chat
- Group chat
- Online presence
- Multiple device support (can be logged into multiple accounts at the same time)
- Push notification

Backgrounds:

1. Client does not communicate directly with each other. One thing to keep in mind is that each client connects to a chat service, which supports all the features mentioned above.
  - A. Receive messages from other clients
  - B. Find the right recipients, relay the message to the recipients
  - C. If a recipients is not online, hold the message for that recipient on the server until the person is online

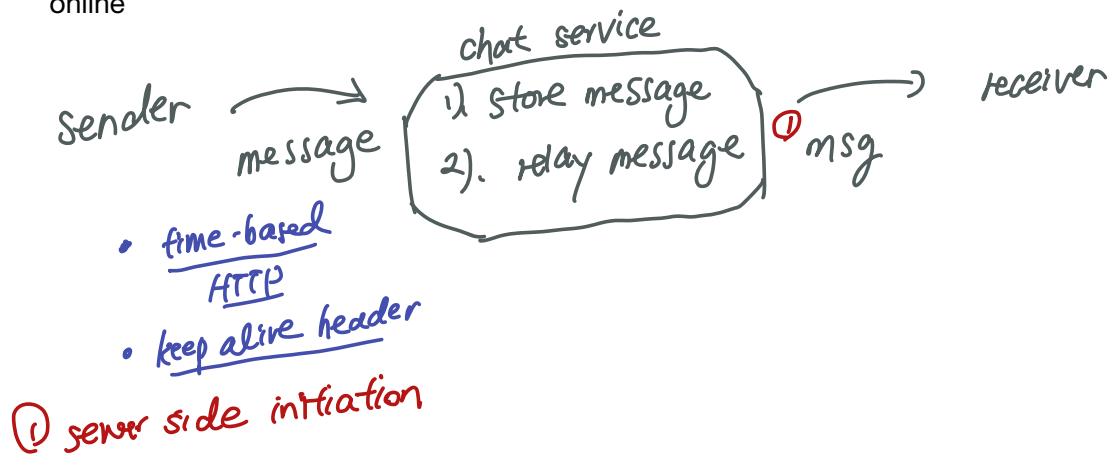


Polling

- The client periodically asks the server if there a message available. Depending on polling frequency, this can be very, very costly.
- Think about it, you don't wanna ask a question too many times. It would be very costly to the server answer time

Long Polling

- Client asks once, server returns only if there's a message; and then client asks again

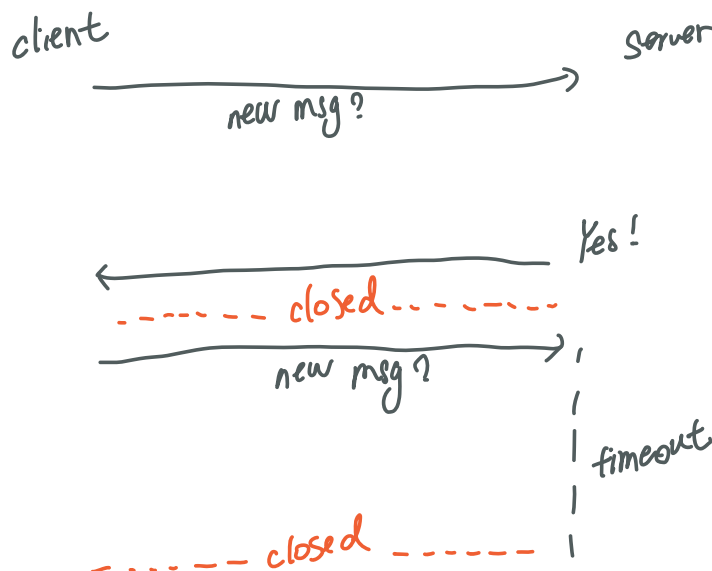

new msg?


Long Polling has some issues:

- Sender and receiver may not connect to the same chat server. HTTP based servers are usually stateless. If you use round robin for load balancing, the server that receives the message might not have a long-polling connection with the client who receives the message. (Basically you might just hit a different chat server at the end)
- **(New font!)**
- **It's still very inefficient, because the user is inactive, it still wastes a lot of resource.**

WebSocket

- The most common solution; The connection is initiated by the client, it's bi-directional and persistent. It starts its life as a HTTP connection and could be up graded via some well-defined handshake to a WebSocket connection. Though this persistent connection, a server could send updates to a client.
- The primary interface for connecting to a WebSocket server and then receiving data on the connection
- Allows web browser and web server with lower overhead than half-duplex alternatives such as HTTP polling, facilitating real-time data transfer from and to the server. This is made possible by providing a standardized way for the server to sending content to the client without being first requested by the client, and allowing messages to be passed back and forth while keeping the connection open

Now on the high level:

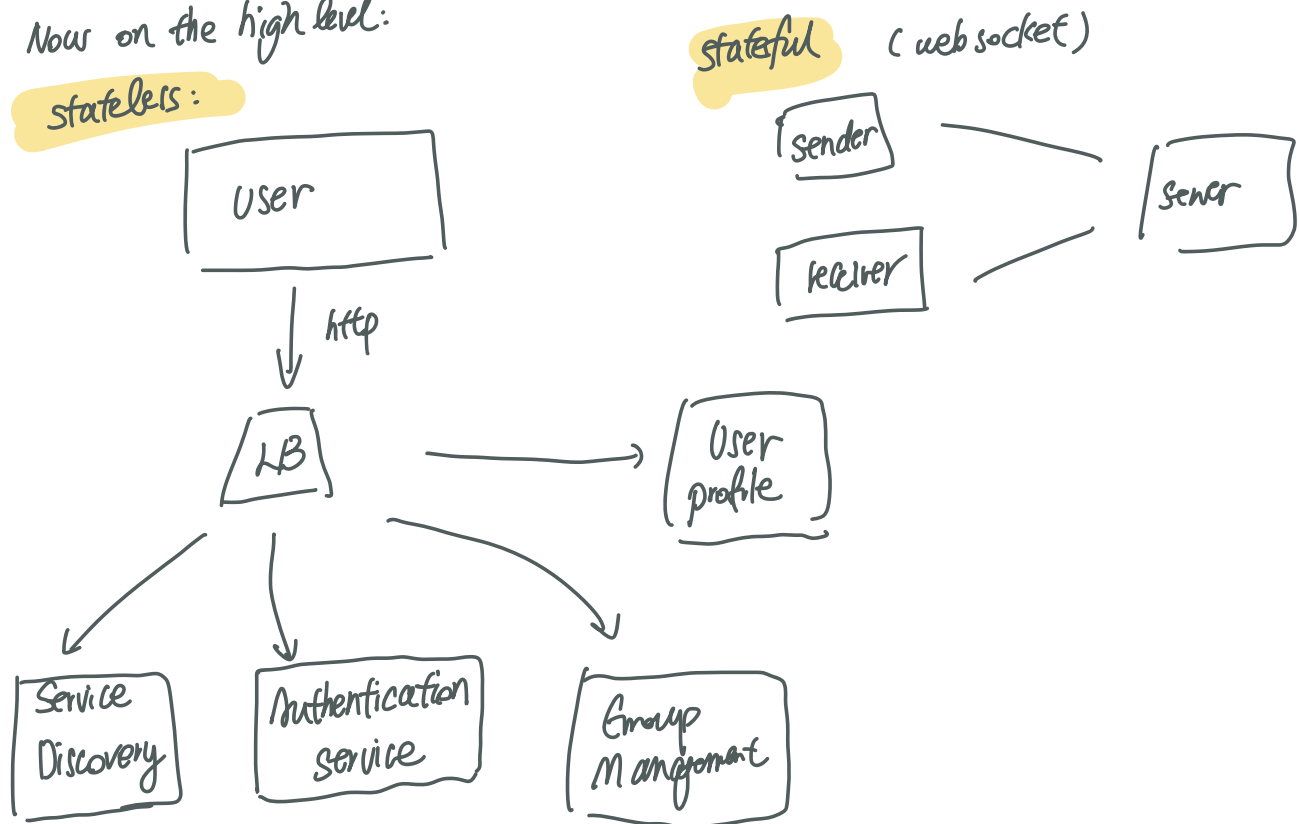

## Storage/Data Layer

- Deep down the technical stack is the data layer. Data layer usually requires some effort to get it correct. An important decision we must make is to decide on the right type of database to use. Relational or NoSQL?
- Two types of data exist in a typical chat
  - Chat history data: the amount of data is enormous for chat systems. A previous study reveals that Facebook messenger and WhatsApp provide 60 billion messages a day. **Only recent data** is used extensively; however, user will **jump to specific messages**, like how I usually search for stuffs. (The read to write is about 1:1 For 1 on 1 chat apps. (1:1 - ?))
  - User data info: profile, setting, general information. These can be saved in a relational database

## Service Discovery

The primary role of service discovery is to recommend the best chat service for a client based on the criteria like geographical location, server capacity, etc. **Apache Zookeeper** is a popular open-source solution for service discovery. It registers all the available chat servers and picks the best chat server for a client based a predefined criteria.

- 可以理解在load balancing以后, API Server决定将user的chat request发给具体的chat server

