FairCKD: Fairness Audit Report

Fairness-aware machine learning for automated chronic kidney disease diagnosis
fairckd.streamlit.app · Built by Jimil Jingar · PIET, Parul University

18 (US CDC)
s (17 features, no kidney-function tests)
Non-Hispanic Asian, 60+ Non-Hispanic Black, 60+ Non-Hispanic White, 60+ Other/Multi-racial, <60 Hispanic, <60 Non-Hispanic Asian, <60 Non-Hispanic Black, <60 No
revalence
epeats (baseline), 5 repeats (mitigation)


Key findings

• Best baseline model: **Random Forest** (accuracy 0.738, balanced accuracy 0.736, AUC 0.807).
• Bias detection: in **3 of 7** models, CKD is detected least often in the **<60 Non-Hispanic White** group (Equal Opportunity gap 0.460–0.685).
• Even a perfect classifier has DP diff = 0.328 and DI = 0.208 here, because CKD prevalence differs between groups; error-rate metrics (Equal Opportunity, Equalized Odds) are the clinically meaningful fairness criteria.
• Logistic Regression: best mitigation (balanced accuracy loss ≤ 3 points) = **Reject Option**, Equalized Odds gap 0.622 → 0.388, balanced accuracy 0.736 → 0.708.
• XGBoost: best mitigation (balanced accuracy loss ≤ 3 points) = **Reject Option**, Equalized Odds gap 0.627 → 0.386, balanced accuracy 0.734 → 0.710.
• **FairCKD-Select** (proposed, nested CV): Equalized Odds gap 0.615 → **0.367** compared with accuracy-driven model selection, balanced accuracy 0.734 → 0.713.
• Statistical significance: 14 of 15 mitigation results reduce the Equalized Odds gap significantly (paired bootstrap, $p < 0.05$).
• Proxy audit: the patient's group can be recovered from without age (unawareness) with AUC **0.76** (0.5 = no group information), so dropping the sensitive attribute alone cannot remove group information.
• External validation (NHANES 2015–16): baseline balanced accuracy 0.740–0.749, Equalized Odds gap 0.638–0.679; best mitigated gap 0.317.
• Monitoring: 4 of 15 pipelines keep their Equalized Odds gap within 0.05 on the 2015–16 cohort; 14 feature(s) shift at least moderately within a group (PSI > 0.1).

1. Dataset and groups

Group	Patients	Share (%)	CKD cases	CKD prevalence (%)	Missing values / patient
60+ Hispanic	372	7.3	103	27.7	0.160
60+ Non-Hispanic Asian	199	3.9	49	24.6	0.140
60+ Non-Hispanic Black	423	8.4	175	41.4	0.120
60+ Non-Hispanic White	763	15.1	275	36	0.130
60+ Other/Multi-racial	70	1.4	24	34.3	0.140
<60 Hispanic	832	16.4	79	9.5	0.210
<60 Non-Hispanic Asian	510	10.1	49	9.6	0.180
<60 Non-Hispanic Black	698	13.8	76	10.9	0.150
<60 Non-Hispanic White	999	19.7	86	8.6	0.130


Group	Patients	Share (%)	CKD cases	CKD prevalence (%)	Missing values / patient
<60 Other/Multi-racial	197	3.9	23	11.7	0.090
All	5063	100	939	18.5	0.150

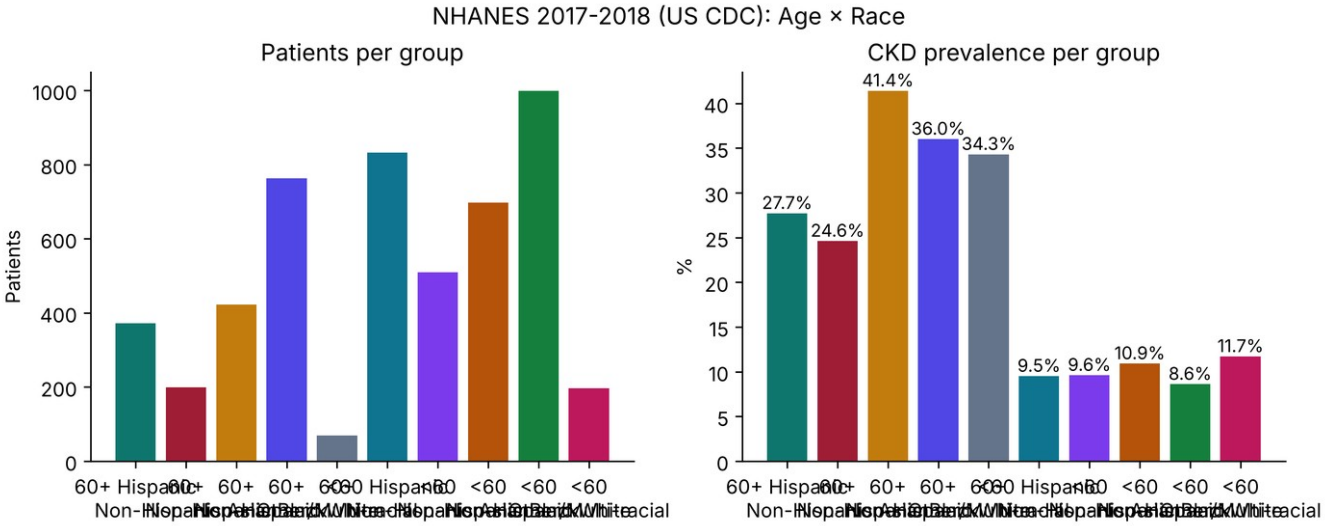

1b. Proxy-feature audit


How much group information do the clinical features carry? A classifier is trained to recover the patient's group from the model inputs (5-fold cross-validated AUC; 0.5 = no information). A high AUC without the sensitive column means that simply dropping it ('unawareness') cannot make the model blind to the group.

Feature set	Features	AUC (Logistic Regression)	AUC (XGBoost)
All model features	17	0.850	0.857
Without age (unawareness)	16	0.760	0.748

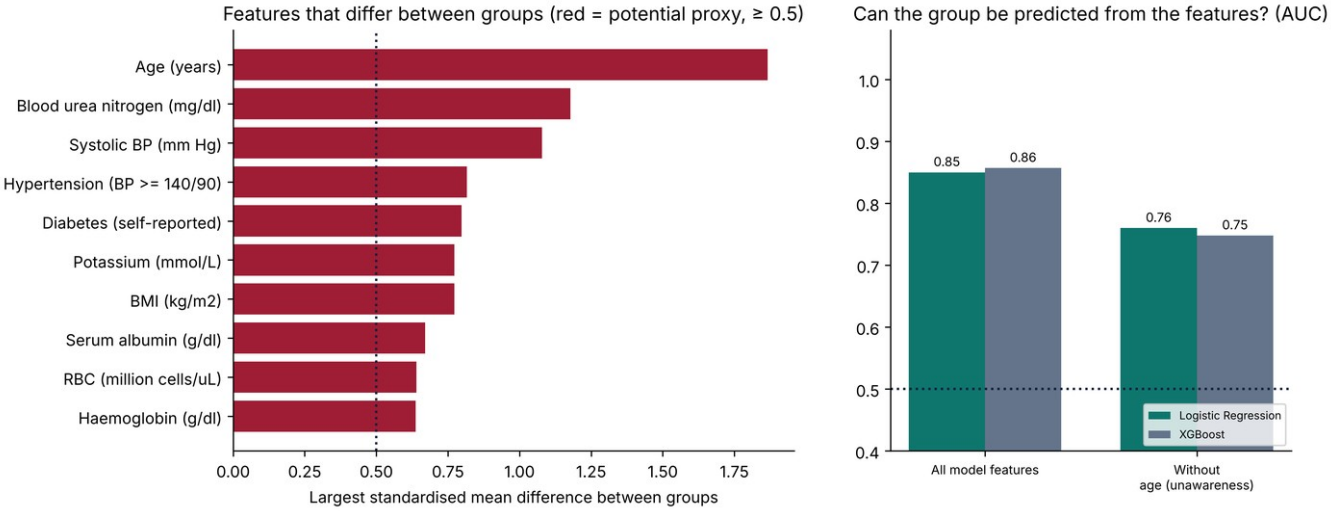


2. Baseline model performance


	Accuracy	Precision	Recall	F1	AUC	Balanced acc.
Logistic Regression	0.751 ± 0.002	0.403 ± 0.002	0.712 ± 0.004	0.514 ± 0.002	0.799 ± 0.000	0.736 ± 0.001
Decision Tree	0.751 ± 0.012	0.394 ± 0.013	0.628 ± 0.022	0.484 ± 0.009	0.753 ± 0.007	0.704 ± 0.007
Random Forest	0.738 ± 0.003	0.391 ± 0.004	0.732 ± 0.006	0.509 ± 0.005	0.807 ± 0.002	0.736 ± 0.004
SVM	0.818 ± 0.001	0.508 ± 0.003	0.556 ± 0.004	0.531 ± 0.003	0.764 ± 0.003	0.717 ± 0.002
KNN	0.772 ± 0.003	0.415 ± 0.005	0.567 ± 0.003	0.479 ± 0.003	0.742 ± 0.004	0.693 ± 0.002
Naive Bayes	0.811 ± 0.001	0.492 ± 0.003	0.588 ± 0.003	0.536 ± 0.002	0.795 ± 0.001	0.725 ± 0.002
XGBoost	0.774 ± 0.002	0.430 ± 0.003	0.669 ± 0.005	0.524 ± 0.003	0.802 ± 0.003	0.734 ± 0.002

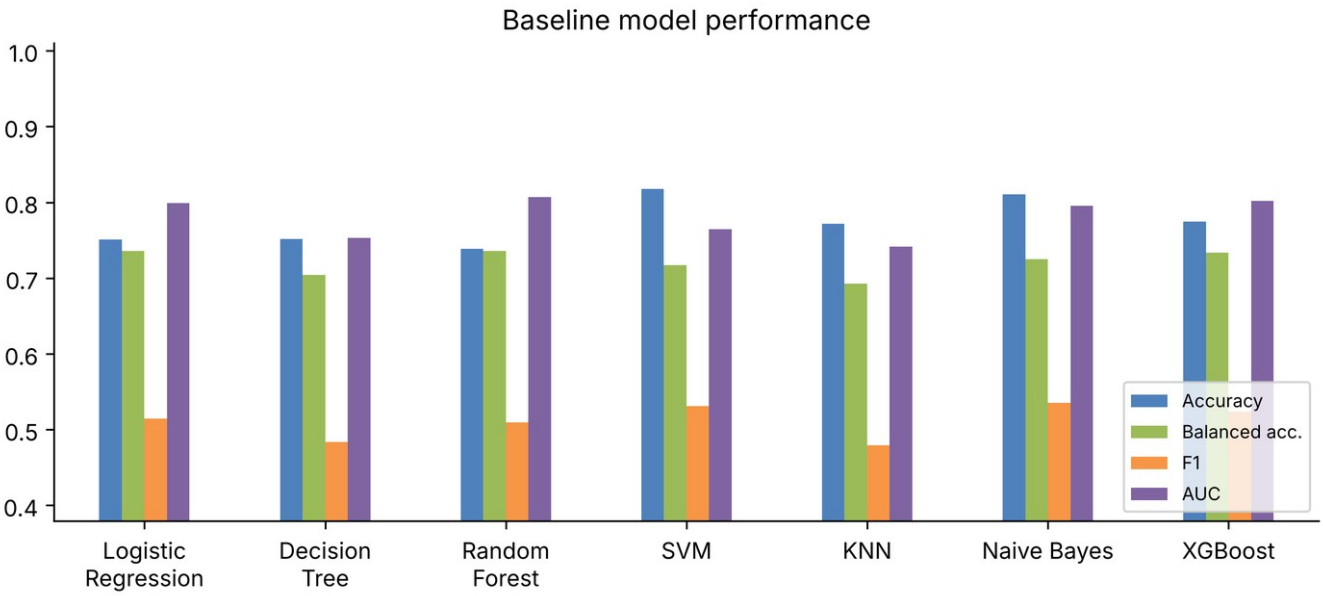

3. Bias detection and fairness evaluation

	DP diff	DI ratio	EOpp diff	EOdds diff	PP diff	Acc. gap
Logistic Regression	0.626 ± 0.007	0.137 ± 0.007	0.622 ± 0.006	0.622 ± 0.006	0.278 ± 0.011	0.386 ± 0.009
Decision Tree	0.671 ± 0.045	0.100 ± 0.010	0.685 ± 0.043	0.686 ± 0.042	0.326 ± 0.020	0.409 ± 0.031
Random Forest	0.618 ± 0.004	0.176 ± 0.005	0.592 ± 0.024	0.592 ± 0.024	0.326 ± 0.012	0.346 ± 0.015
SVM	0.422 ± 0.006	0.122 ± 0.008	0.529 ± 0.020	0.529 ± 0.020	0.367 ± 0.020	0.227 ± 0.010
KNN	0.431 ± 0.012	0.194 ± 0.014	0.460 ± 0.021	0.460 ± 0.021	0.364 ± 0.031	0.274 ± 0.014
Naive Bayes	0.424 ± 0.015	0.148 ± 0.005	0.470 ± 0.010	0.470 ± 0.010	0.323 ± 0.016	0.256 ± 0.017
XGBoost	0.592 ± 0.011	0.121 ± 0.008	0.627 ± 0.018	0.627 ± 0.018	0.354 ± 0.018	0.327 ± 0.024
Perfect classifier (reference)	0.328	0.208	0.000	0.000	0.000	0.000

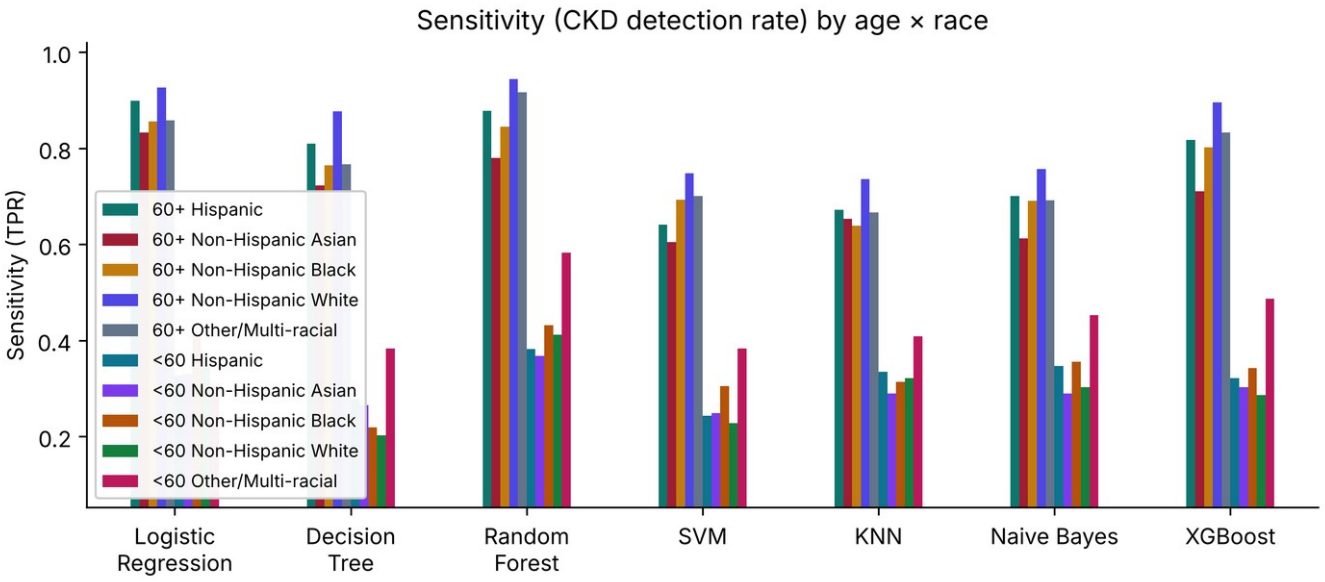
Sensitivity (CKD detection rate) by age × race
Sensitivity (TPR)
1.0
0.8
0.6
0.4
0.2
60+ Hispanic
60+ Non-Hispanic Asian
60+ Non-Hispanic Black
60+ Non-Hispanic White
60+ Other/Multi-racial
<60 Hispanic
<60 Non-Hispanic Asian
<60 Non-Hispanic Black
<60 Non-Hispanic White
<60 Other/Multi-racial
Logistic Regression
Decision Tree
Random Forest
SVM
KNN
Naive Bayes
XGBoost

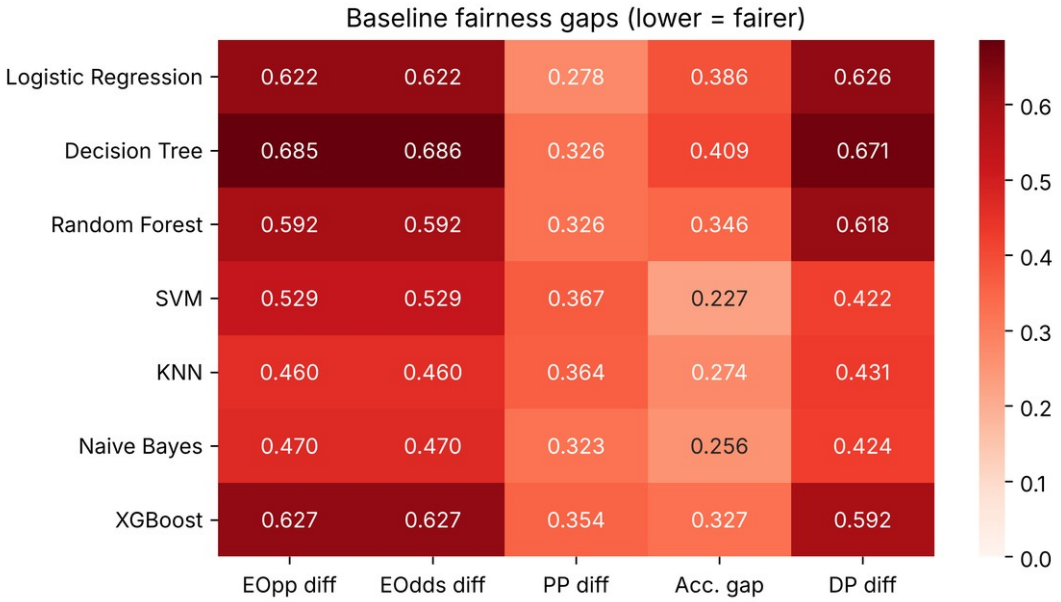
Baseline fairness gaps (lower = fairer)
Logistic Regression 0.622 0.622 0.278 0.386 0.626
Decision Tree 0.685 0.686 0.326 0.409 0.671
Random Forest 0.592 0.592 0.326 0.346 0.618
SVM 0.529 0.529 0.367 0.227 0.422
KNN 0.460 0.460 0.364 0.274 0.431
Naive Bayes 0.470 0.470 0.323 0.256 0.424
XGBoost 0.627 0.627 0.354 0.327 0.592
EOpp diff
EOdds diff
PP diff
Acc. gap
DP diff
0.6
0.5
0.4
0.3
0.2
0.1
0.0


4. Bias mitigation

a) Performance (mean ± SD over CV repeats)

Model	Method	Accuracy	Balanced acc.	Recall	F1
Logistic Regression	Baseline	0.751 ± 0.002	0.736 ± 0.001	0.712 ± 0.004	0.514 ± 0.002
Logistic Regression	Unawareness	0.761 ± 0.001	0.730 ± 0.001	0.682 ± 0.003	0.514 ± 0.001
Logistic Regression	Reweighing	0.722 ± 0.001	0.698 ± 0.001	0.658 ± 0.003	0.468 ± 0.001
Logistic Regression	SMOTE	0.710 ± 0.002	0.690 ± 0.002	0.659 ± 0.004	0.457 ± 0.003
Logistic Regression	Exp. Gradient	0.677 ± 0.008	0.641 ± 0.008	0.585 ± 0.009	0.402 ± 0.009
Logistic Regression	Adversarial	0.698 ± 0.017	0.624 ± 0.023	0.508 ± 0.041	0.384 ± 0.029
Logistic Regression	Threshold Opt.	0.733 ± 0.013	0.623 ± 0.007	0.447 ± 0.029	0.383 ± 0.010
Logistic Regression	Reject Option	0.719 ± 0.006	0.708 ± 0.004	0.691 ± 0.004	0.477 ± 0.006
Logistic Regression	RW + TO (hybrid)	0.672 ± 0.026	0.620 ± 0.007	0.536 ± 0.050	0.378 ± 0.008
XGBoost	Baseline	0.774 ± 0.002	0.734 ± 0.002	0.669 ± 0.005	0.524 ± 0.003
XGBoost	Unawareness	0.771 ± 0.002	0.722 ± 0.002	0.645 ± 0.005	0.511 ± 0.003
XGBoost	Reweighing	0.748 ± 0.007	0.695 ± 0.007	0.611 ± 0.010	0.473 ± 0.010
XGBoost	SMOTE	0.819 ± 0.004	0.680 ± 0.008	0.459 ± 0.013	0.484 ± 0.013
XGBoost	Exp. Gradient	0.781 ± 0.002	0.695 ± 0.007	0.559 ± 0.014	0.487 ± 0.009
XGBoost	Threshold Opt.	0.702 ± 0.025	0.615 ± 0.011	0.476 ± 0.053	0.372 ± 0.013
XGBoost	Reject Option	0.740 ± 0.007	0.710 ± 0.005	0.663 ± 0.006	0.486 ± 0.007
XGBoost	RW + TO (hybrid)	0.694 ± 0.045	0.608 ± 0.004	0.470 ± 0.065	0.363 ± 0.004

b) Fairness gaps (lower = fairer; DI ratio: 1 = fair)

Model	Method	EOpp diff	EOdds diff	PP diff	DP diff	DI ratio	Acc. gap
Logistic Regression	Baseline	0.622 ± 0.006	0.622 ± 0.006	0.278 ± 0.011	0.626 ± 0.007	0.137 ± 0.007	0.386 ± 0.009
Logistic Regression	Unawareness	0.541 ± 0.018	0.541 ± 0.018	0.330 ± 0.010	0.503 ± 0.007	0.196 ± 0.002	0.310 ± 0.006
Logistic Regression	Reweighing	0.293 ± 0.012	0.293 ± 0.012	0.392 ± 0.009	0.314 ± 0.003	0.402 ± 0.004	0.188 ± 0.012
Logistic Regression	SMOTE	0.317 ± 0.020	0.317 ± 0.020	0.417 ± 0.015	0.259 ± 0.008	0.485 ± 0.011	0.142 ± 0.017
Logistic Regression	Exp. Gradient	0.147 ± 0.027	0.155 ± 0.021	0.464 ± 0.016	0.097 ± 0.027	0.767 ± 0.058	0.080 ± 0.015
Logistic Regression	Adversarial	0.179 ± 0.040	0.180 ± 0.037	0.446 ± 0.039	0.115 ± 0.046	0.694 ± 0.093	0.095 ± 0.024
Logistic Regression	Threshold Opt.	0.212 ± 0.058	0.212 ± 0.058	0.449 ± 0.018	0.104 ± 0.020	0.672 ± 0.034	0.142 ± 0.027
Logistic Regression	Reject Option	0.388 ± 0.026	0.388 ± 0.026	0.431 ± 0.010	0.354 ± 0.009	0.387 ± 0.012	0.175 ± 0.015
Logistic Regression	RW + TO (hybrid)	0.171 ± 0.038	0.171 ± 0.038	0.417 ± 0.003	0.116 ± 0.021	0.718 ± 0.049	0.084 ± 0.039
XGBoost	Baseline	0.627 ± 0.018	0.627 ± 0.018	0.354 ± 0.018	0.592 ± 0.011	0.121 ± 0.008	0.327 ± 0.024
XGBoost	Unawareness	0.473 ± 0.020	0.473 ± 0.020	0.400 ± 0.011	0.444 ± 0.023	0.215 ± 0.013	0.275 ± 0.017
XGBoost	Reweighing	0.299 ± 0.026	0.299 ± 0.026	0.508 ± 0.018	0.260 ± 0.012	0.430 ± 0.020	0.143 ± 0.021
XGBoost	SMOTE	0.392 ± 0.022	0.392 ± 0.022	0.538 ± 0.022	0.284 ± 0.007	0.224 ± 0.009	0.162 ± 0.016
XGBoost	Exp. Gradient	0.337 ± 0.040	0.337 ± 0.040	0.511 ± 0.015	0.261 ± 0.008	0.350 ± 0.013	0.187 ± 0.026
XGBoost	Threshold Opt.	0.164 ± 0.056	0.164 ± 0.056	0.428 ± 0.020	0.098 ± 0.017	0.718 ± 0.041	0.129 ± 0.020
XGBoost	Reject Option	0.386 ± 0.030	0.386 ± 0.030	0.498 ± 0.017	0.337 ± 0.030	0.377 ± 0.040	0.178 ± 0.043
XGBoost	RW + TO (hybrid)	0.234 ± 0.084	0.234 ± 0.084	0.430 ± 0.041	0.098 ± 0.017	0.715 ± 0.068	0.136 ± 0.044

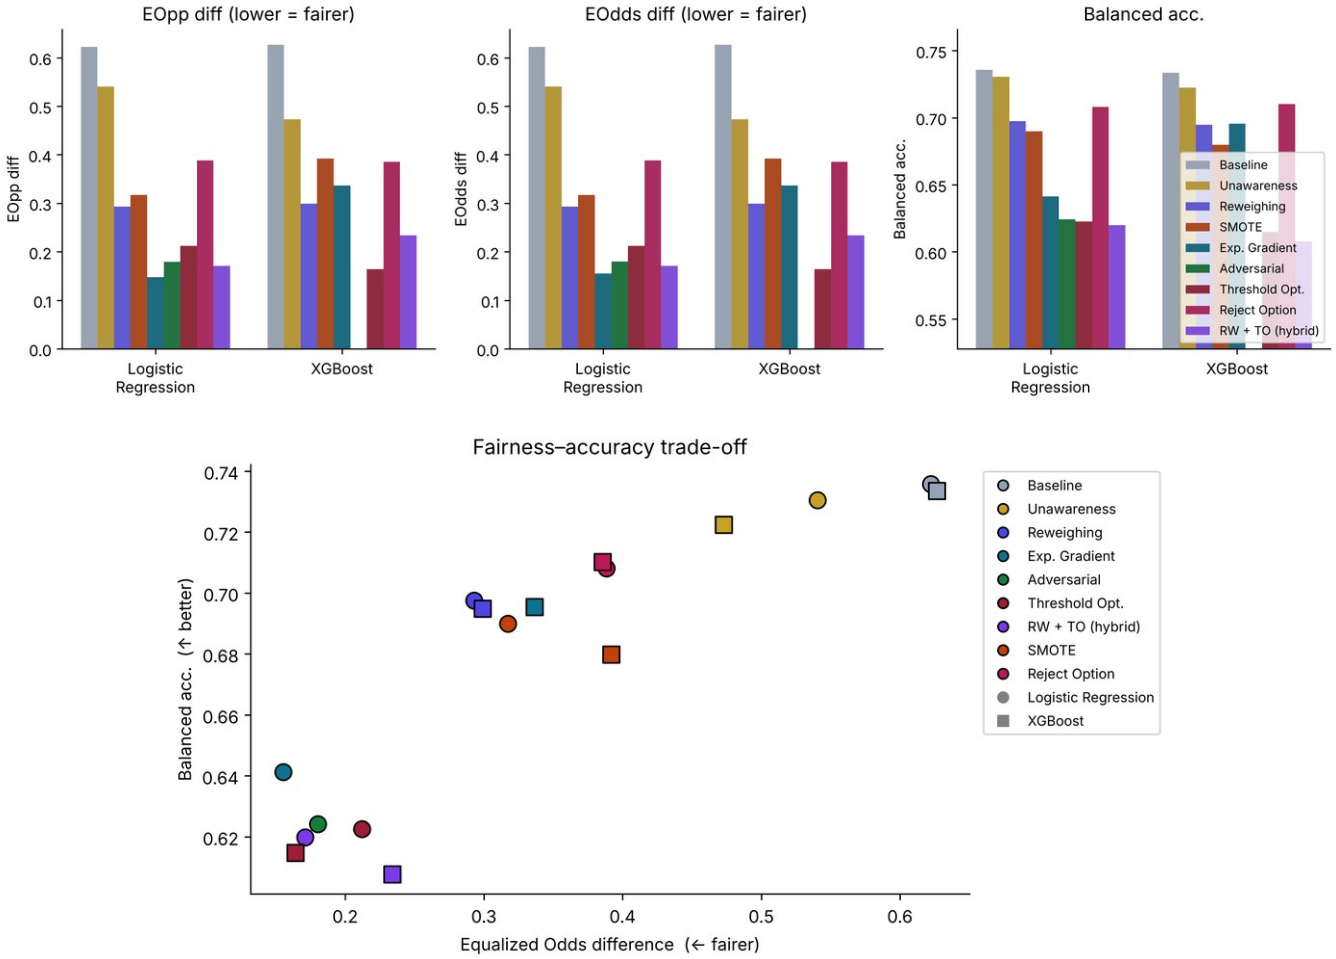

c) Statistical significance (paired bootstrap vs. baseline, 1000 resamples; Δ = method – baseline)

Model	Method	Δ EOdds gap	95% CI (EOdds)	p (EOdds)	Δ Balanced acc.	95% CI (Bal. acc.)	p (Bal. acc.)
Logistic Regression	Unawareness	-0.099	[-0.213, -0.019]	0.030	-0.008	[-0.016, 0.000]	0.066
Logistic Regression	Reweighing	-0.314	[-0.467, -0.185]	0.000	-0.040	[-0.055, -0.026]	0.000
Logistic Regression	SMOTE	-0.308	[-0.462, -0.170]	0.000	-0.044	[-0.059, -0.030]	0.000
Logistic Regression	Exp. Gradient	-0.442	[-0.604, -0.286]	0.000	-0.087	[-0.106, -0.069]	0.000
Logistic Regression	Adversarial	-0.398	[-0.599, -0.188]	0.000	-0.098	[-0.117, -0.078]	0.000
Logistic Regression	Threshold Opt.	-0.440	[-0.625, -0.229]	0.002	-0.104	[-0.123, -0.086]	0.000
Logistic Regression	Reject Option	-0.250	[-0.390, -0.143]	0.000	-0.034	[-0.046, -0.021]	0.000
Logistic Regression	RW + TO (hybrid)	-0.441	[-0.618, -0.261]	0.000	-0.111	[-0.129, -0.093]	0.000
XGBoost	Unawareness	-0.113	[-0.220, 0.004]	0.060	-0.010	[-0.022, 0.002]	0.092
XGBoost	Reweighing	-0.318	[-0.447, -0.174]	0.000	-0.042	[-0.055, -0.028]	0.000
XGBoost	SMOTE	-0.255	[-0.381, -0.138]	0.000	-0.054	[-0.070, -0.039]	0.000
XGBoost	Exp. Gradient	-0.312	[-0.443, -0.193]	0.000	-0.045	[-0.060, -0.030]	0.000
XGBoost	Threshold Opt.	-0.402	[-0.578, -0.219]	0.000	-0.118	[-0.135, -0.100]	0.000
XGBoost	Reject Option	-0.240	[-0.353, -0.139]	0.000	-0.023	[-0.035, -0.011]	0.000
XGBoost	RW + TO (hybrid)	-0.400	[-0.583, -0.204]	0.000	-0.121	[-0.140, -0.103]	0.000


4b. FairCKD-Select (proposed method)

FairCKD-Select chooses, inside each training fold, the classifier and mitigation method with the smallest Equalized Odds gap among those whose balanced accuracy is within 3 points of the best unmitigated model (nested cross-validation). It is compared with conventional accuracy-driven selection.

Strategy	Accuracy	Balanced acc.	Recall	EOpp diff	EOdds diff	DP diff
FairCKD-Select	0.736 ± 0.004	0.713 ± 0.004	0.677 ± 0.005	0.367 ± 0.002	0.367 ± 0.002	0.362 ± 0.025
Accuracy-driven selection	0.761 ± 0.002	0.734 ± 0.004	0.692 ± 0.006	0.615 ± 0.010	0.615 ± 0.010	0.614 ± 0.011

Pipelines chosen by FairCKD-Select across outer folds


Model	Method	Times selected
Logistic Regression	Adversarial	1
Logistic Regression	Reject Option	3
XGBoost	Reject Option	6

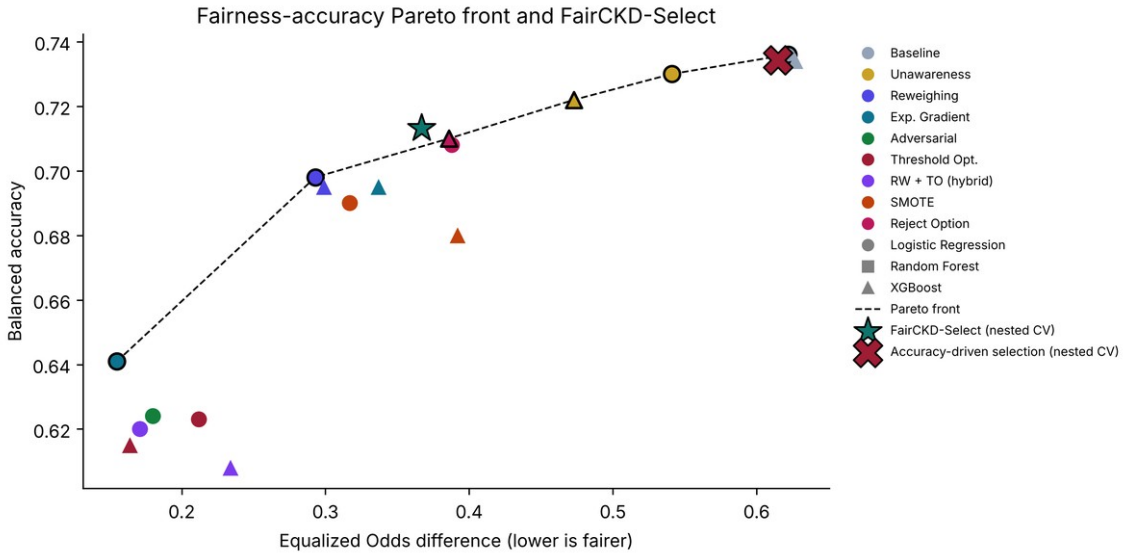

4c. Calibration by group

Group	Patients	Observed CKD (%)	Mean predicted (%)	Calibration-in-the-large (pp)	ECE	Brier	Model
60+ Hispanic	372	27.688	32.099	4.411	0.055	0.147	Logistic Regression
60+ Non-Hispanic Asian	199	24.623	30.937	6.314	0.081	0.168	Logistic Regression
60+ Non-Hispanic Black	423	41.371	34.068	-7.303	0.073	0.185	Logistic Regression
60+ Non-Hispanic White	763	36.042	35.806	-0.236	0.025	0.171	Logistic Regression
60+ Other/Multi-racial	70	34.286	31.084	-3.202	0.089	0.189	Logistic Regression
<60 Hispanic	832	9.495	9.303	-0.192	0.013	0.080	Logistic Regression
<60 Non-Hispanic Asian	510	9.608	10.63	1.023	0.038	0.076	Logistic Regression
<60 Non-Hispanic Black	698	10.888	10.981	0.092	0.038	0.089	Logistic Regression
<60 Non-Hispanic White	999	8.609	9.345	0.737	0.010	0.073	Logistic Regression
<60 Other/Multi-racial	197	11.675	9.915	-1.76	0.038	0.087	Logistic Regression
60+ Hispanic	372	27.688	30.668	2.98	0.062	0.151	XGBoost
60+ Non-Hispanic Asian	199	24.623	27.511	2.888	0.088	0.173	XGBoost
60+ Non-Hispanic Black	423	41.371	34.065	-7.306	0.097	0.184	XGBoost
60+ Non-Hispanic White	763	36.042	37.048	1.006	0.046	0.175	XGBoost

Group	Patients	Observed CKD (%)	Mean predicted (%)	Calibration-in-the-large (pp)	ECE	Brier	Model
60+ Other/Multi-racial	70	34.286	30.741	-3.545	0.116	0.212	XGBoost
<60 Hispanic	832	9.495	9.475	-0.020	0.026	0.078	XGBoost
<60 Non-Hispanic Asian	510	9.608	9.285	-0.323	0.023	0.077	XGBoost
<60 Non-Hispanic Black	698	10.888	11.126	0.238	0.046	0.091	XGBoost
<60 Non-Hispanic White	999	8.609	8.991	0.382	0.016	0.074	XGBoost
<60 Other/Multi-racial	197	11.675	9.766	-1.909	0.019	0.082	XGBoost

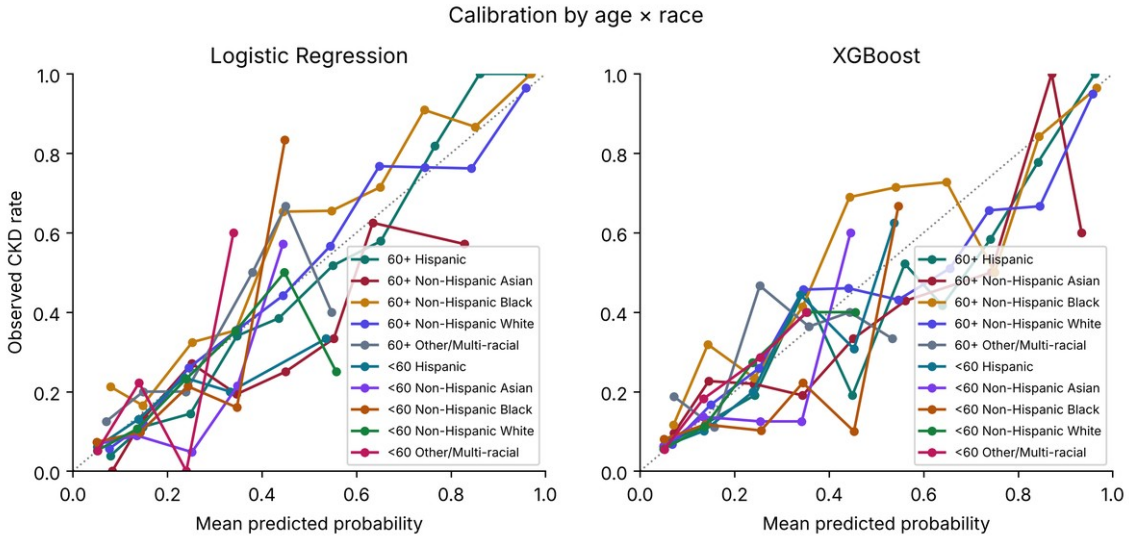



4d. Population-weighted estimates (NHANES survey weights)

ispanic]	W TPR [60+ Non-Hispanic Asian]	W TPR [60+ Non-Hispanic Black]	W TPR [60+ Non-Hispanic White]	W TPR [60+ Other/Multi-racial]	W TPR [<60 Hispanic]	W TPR [<60 Non-His
	0.834	0.871	0.919	0.891	0.276	0.306
	0.767	0.777	0.824	0.809	0.260	0.254
	0.807	0.858	0.907	0.951	0.356	0.364
	0.609	0.703	0.687	0.742	0.207	0.240
	0.666	0.665	0.684	0.745	0.325	0.259
	0.605	0.699	0.690	0.719	0.321	0.274
	0.743	0.815	0.846	0.863	0.291	0.293

4e. External validation (trained on NHANES 2017–18, tested on NHANES 2015–16)

Model	Method	Accuracy	Balanced acc.	Recall	AUC	EOpp diff	EOdds diff
Logistic Regression	Baseline	0.784	0.749	0.696	0.807	0.679	0.679
Logistic Regression	Reweighing	0.743	0.707	0.655	0.755	0.488	0.488
Logistic Regression	SMOTE	0.728	0.699	0.656	0.752	0.554	0.554
Logistic Regression	Exp. Gradient	0.686	0.654	0.608	0.708	0.387	0.387
Logistic Regression	Adversarial	0.788	0.633	0.403	0.671	0.442	0.442
Logistic Regression	Threshold Opt.	0.809	0.644	0.400		0.350	0.350
Logistic Regression	Reject Option	0.743	0.718	0.681	0.807	0.525	0.525
Logistic Regression	RW + TO (hybrid)	0.676	0.641	0.589		0.421	0.421
XGBoost	Baseline	0.791	0.740	0.666	0.814	0.638	0.638
XGBoost	Reweighing	0.746	0.693	0.614	0.754	0.329	0.329
XGBoost	SMOTE	0.837	0.682	0.451	0.727	0.362	0.362
XGBoost	Exp. Gradient	0.800	0.698	0.547	0.731	0.317	0.317
XGBoost	Threshold Opt.	0.706	0.634	0.527		0.332	0.332
XGBoost	Reject Option	0.743	0.709	0.658	0.814	0.474	0.474
XGBoost	RW + TO (hybrid)	0.651	0.620	0.575		0.341	0.341

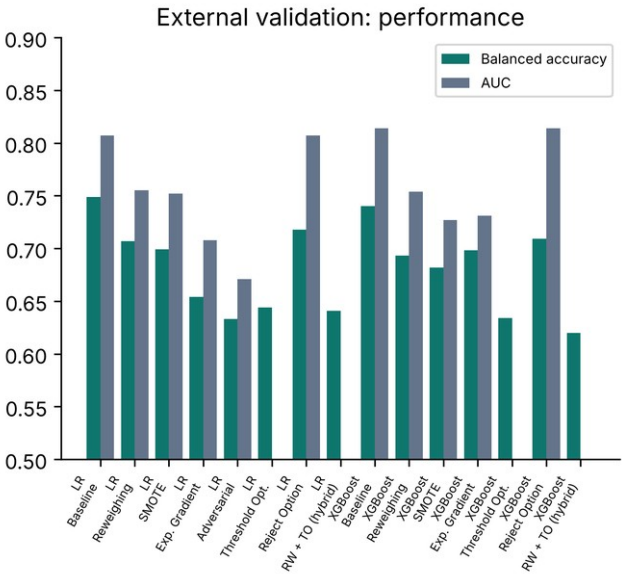

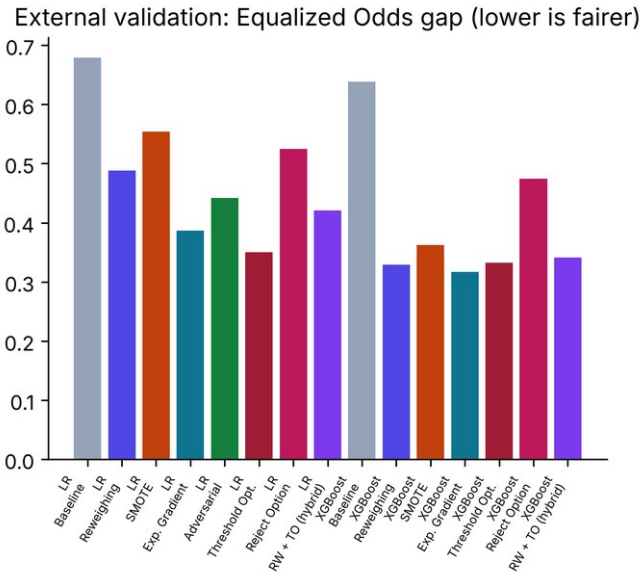


4f. Monitoring: data and fairness drift (development 2017–18 vs. 2015–16)


Population Stability Index (PSI) per feature and group (< 0.1 stable, 0.1–0.2 moderate, > 0.2 significant), CKD prevalence per group in both cohorts, and the change of each pipeline's Equalized Odds gap between the internal estimate and the external cohort.


Group	Patients (development)	CKD % (development)	Patients (external)	CKD % (external)	Change (pp)
60+ Hispanic	372	27.69	535	26.73	-0.960
60+ Non-Hispanic Asian	199	24.62	127	23.62	-1
60+ Non-Hispanic Black	423	41.37	306	39.22	-2.16
60+ Non-Hispanic White	763	36.04	647	36.48	0.430
60+ Other/Multi-racial	70	34.29	43	37.21	2.92
<60 Hispanic	832	9.5	1141	8.68	-0.820
<60 Non-Hispanic Asian	510	9.61	499	6.41	-3.2
<60 Non-Hispanic Black	698	10.89	787	12.2	1.31
<60 Non-Hispanic White	999	8.61	1068	7.3	-1.31
<60 Other/Multi-racial	197	11.68	156	8.33	-3.34

Model	Method	Balanced acc. (internal)	EOdds diff (internal)	Balanced acc. (external)	EOdds diff (external)	Δ EOdds gap	Δ Balanced acc.
Logistic Regression	Baseline	0.736	0.622	0.749	0.679	0.057	0.013
Logistic Regression	Reweighing	0.698	0.293	0.707	0.488	0.195	0.009
Logistic Regression	SMOTE	0.690	0.317	0.699	0.554	0.237	0.009
Logistic Regression	Exp. Gradient	0.641	0.155	0.654	0.387	0.232	0.013
Logistic Regression	Adversarial	0.624	0.180	0.633	0.442	0.262	0.009
Logistic Regression	Threshold Opt.	0.623	0.212	0.644	0.350	0.138	0.021
Logistic Regression	Reject Option	0.708	0.388	0.718	0.525	0.137	0.010
Logistic Regression	RW + TO (hybrid)	0.620	0.171	0.641	0.421	0.250	0.021
XGBoost	Baseline	0.734	0.627	0.740	0.638	0.011	0.006
XGBoost	Reweighing	0.695	0.299	0.693	0.329	0.030	-0.002
XGBoost	SMOTE	0.680	0.392	0.682	0.362	-0.030	0.002
XGBoost	Exp. Gradient	0.695	0.337	0.698	0.317	-0.020	0.003
XGBoost	Threshold Opt.	0.615	0.164	0.634	0.332	0.168	0.019
XGBoost	Reject Option	0.710	0.386	0.709	0.474	0.088	-0.001
XGBoost	RW + TO (hybrid)	0.608	0.234	0.620	0.341	0.107	0.012

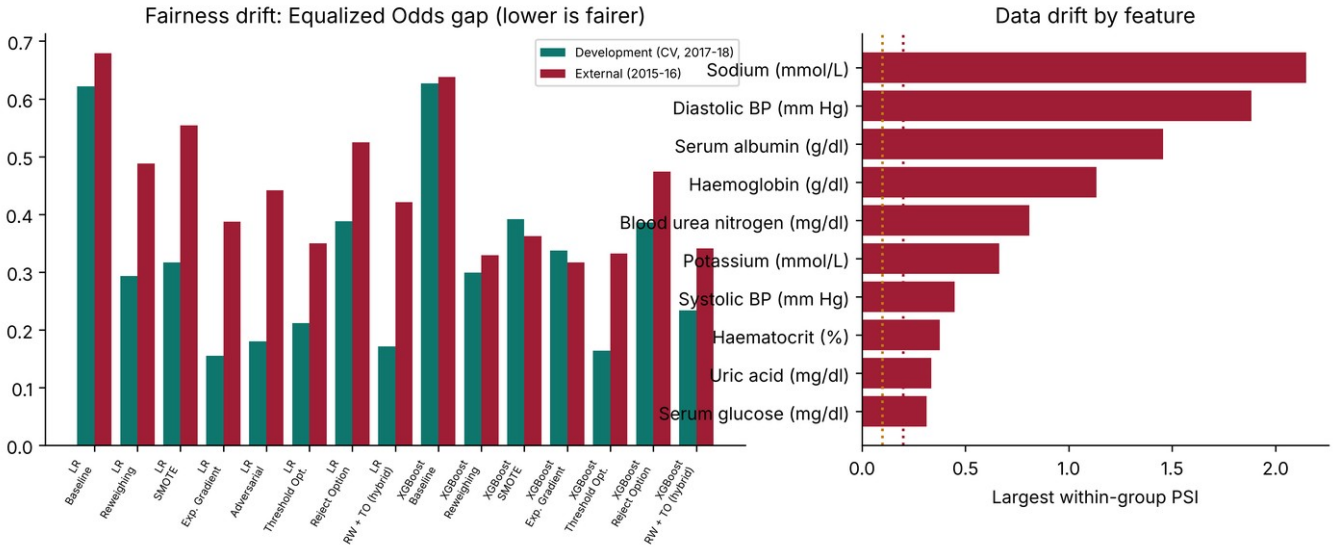
Fairness drift: Equalized Odds gap (lower is fairer)
Development (CV, 2017-18)
External (2015-16)
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
LR Baseline
LR Reweighing
LR SMOTE
LR Exp. Gradient
LR Adversarial
LR Threshold Opt.
LR Reject Option
LR RW + TO (hybrid)
XGBoost Baseline
XGBoost Reweighing
XGBoost SMOTE
XGBoost Exp. Gradient
XGBoost Threshold Opt.
XGBoost Reject Option
XGBoost RW + TO (hybrid)
Data drift by feature
Sodium (mmol/L)
Diastolic BP (mm Hg)
Serum albumin (g/dl)
Haemoglobin (g/dl)
Blood urea nitrogen (mg/dl)
Potassium (mmol/L)
Systolic BP (mm Hg)
Haematocrit (%)
Uric acid (mg/dl)
Serum glucose (mg/dl)
0.0
0.5
1.0
1.5
2.0
Largest within-group PSI

6. Explainability (SHAP and LIME)

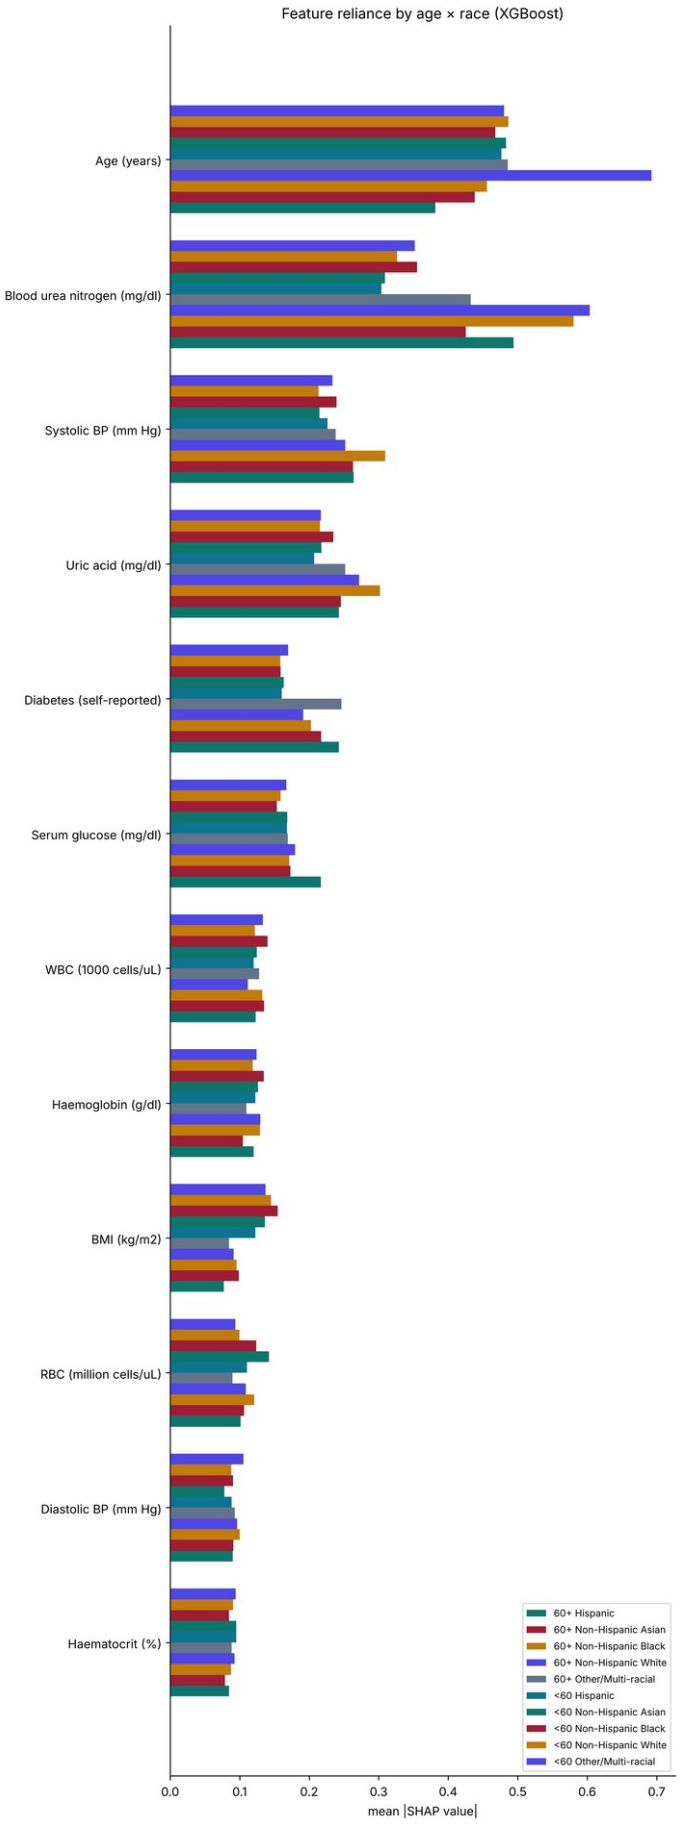


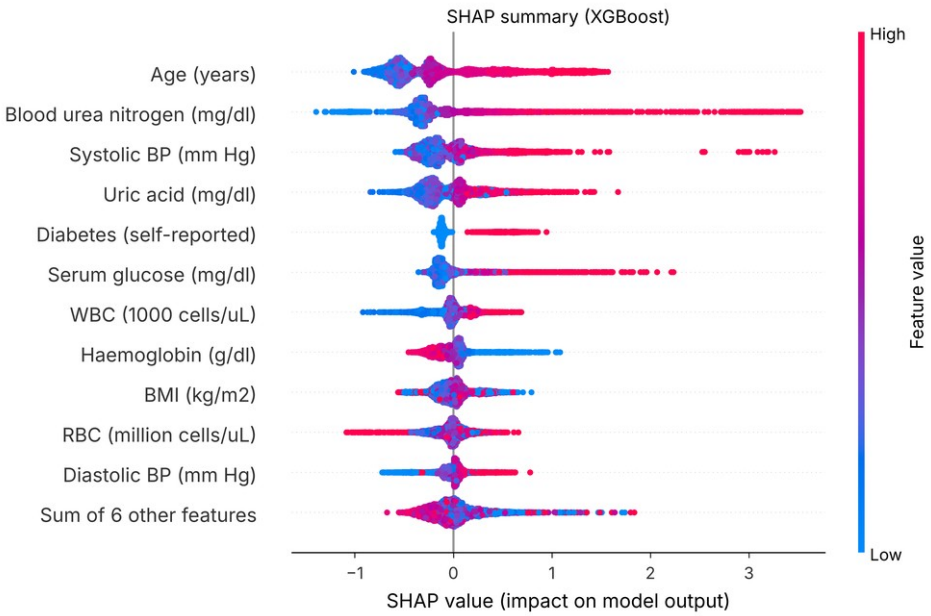

SHAP vs. LIME agreement: for a sample of patients per group, how many of the 5 most important SHAP features LIME also ranks in its top 5 (XGBoost). High overlap means the two explanation methods tell the same story.

Group	Patients	Mean top-5 overlap (of 5)	Mean LIME local R2
60+ Hispanic	25	2.88	0.490
60+ Non-Hispanic Asian	25	3.16	0.500
60+ Non-Hispanic Black	25	3.08	0.520
60+ Non-Hispanic White	25	3.4	0.530
60+ Other/Multi-racial	25	3.36	0.500
<60 Hispanic	25	3.08	0.460
<60 Non-Hispanic Asian	25	3.12	0.460
<60 Non-Hispanic Black	25	3.12	0.460
<60 Non-Hispanic White	25	3.04	0.450
<60 Other/Multi-racial	25	2.96	0.470
All	250	3.12	0.490

Partial dependence by group (top 3 SHAP features, XGBoost): the coloured lines show the average predicted risk in each group when the feature is set to the same value for everyone; grey lines are individual patients (ICE).

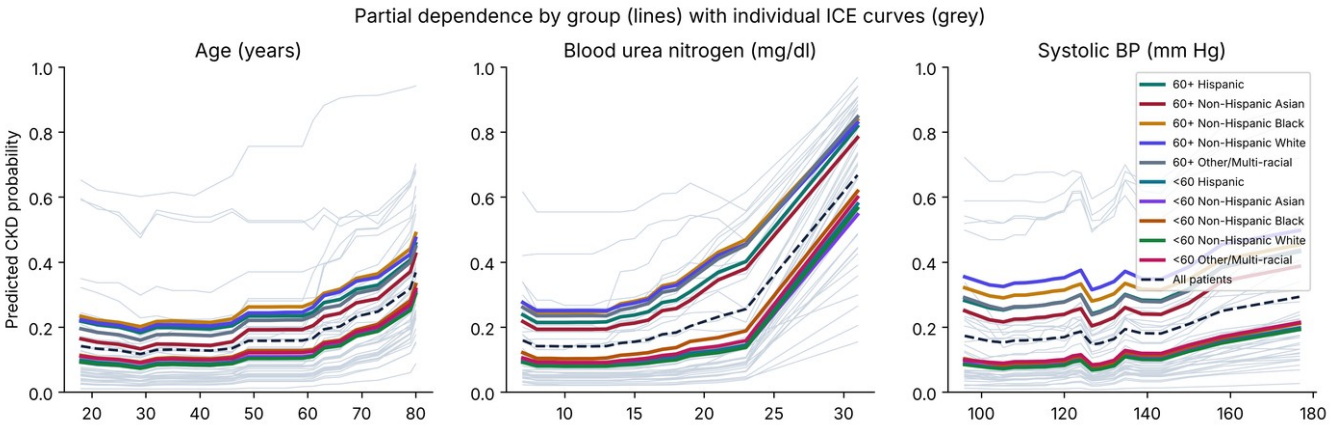

Protocol: repeated stratified 5-fold cross-validation (stratified on label × group); preprocessing and mitigation fitted on training folds only; mean ± SD over repeats. This system is a research prototype and not a medical device.