


Shell script

☰ Tags	Coding
⚙️ Property	Not started

ex3-0.sh

```
echo "hello world"
```

ex3-0.sh

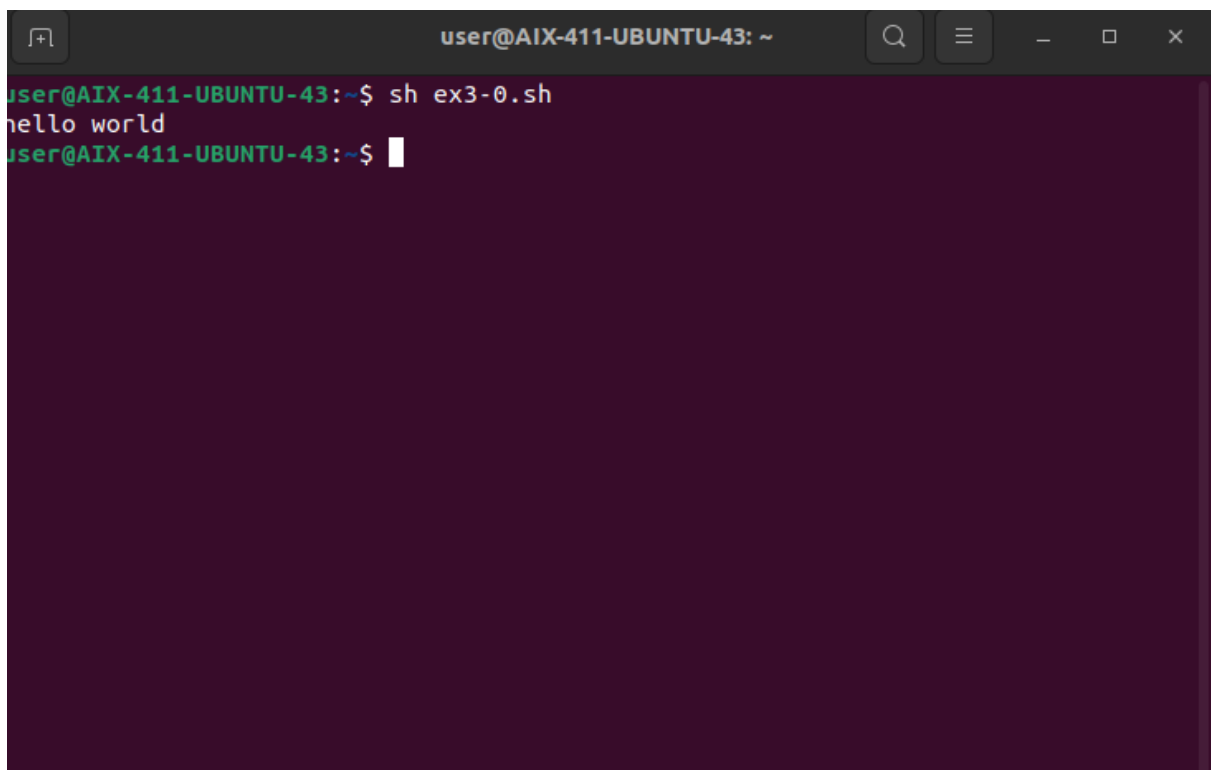A terminal window titled 'user@AIX-411-UBUNTU-43: ~' with search, menu, and window control icons. The terminal shows the command 'sh ex3-0.sh' being executed, which outputs 'hello world'. The prompt returns to 'user@AIX-411-UBUNTU-43:~\$' with a cursor.

```
user@AIX-411-UBUNTU-43:~$ sh ex3-0.sh
hello world
user@AIX-411-UBUNTU-43:~$
```


ex3-1.sh

```
#!/bin/bash

echo "enter number"
read number

for ((i =0; i<$number;i++)); do
    echo "hello world"
done
```

ex3-1.sh

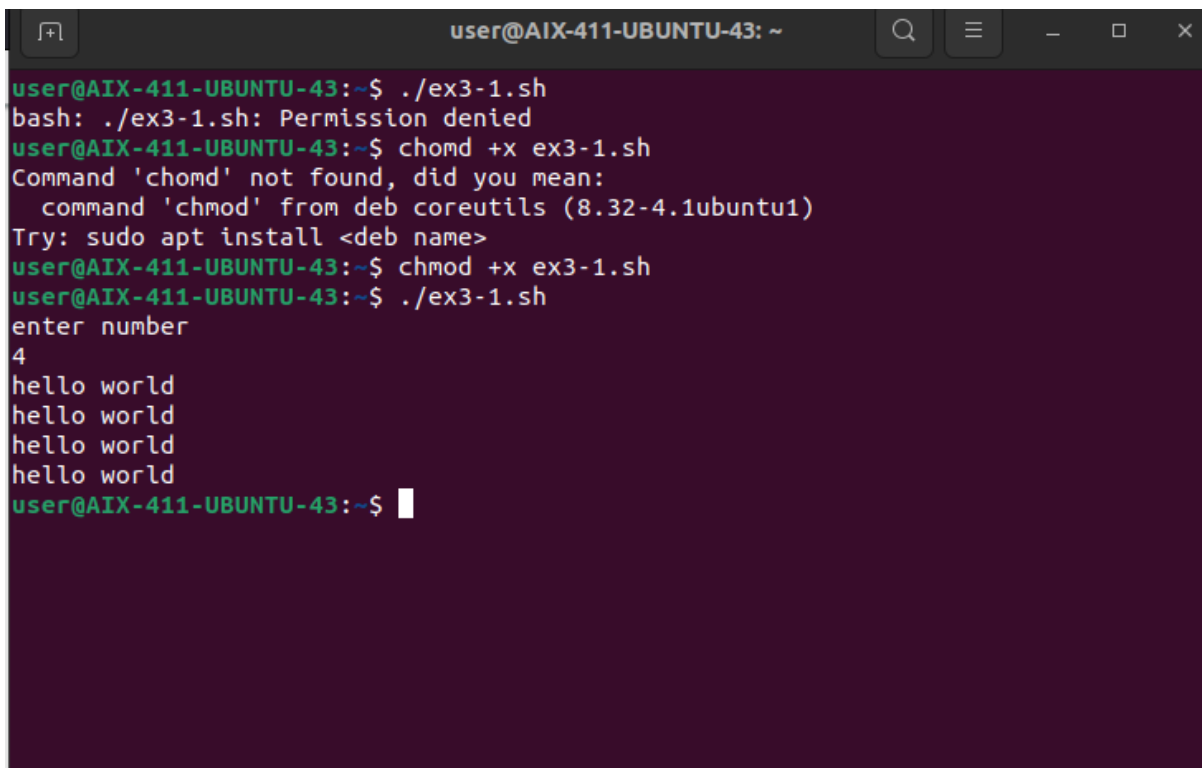

```
user@AIX-411-UBUNTU-43: ~
user@AIX-411-UBUNTU-43:~$ ./ex3-1.sh
bash: ./ex3-1.sh: Permission denied
user@AIX-411-UBUNTU-43:~$ chmod +x ex3-1.sh
Command 'chmod' not found, did you mean:
  command 'chmod' from deb coreutils (8.32-4.1ubuntu1)
Try: sudo apt install <deb name>
user@AIX-411-UBUNTU-43:~$ chmod +x ex3-1.sh
user@AIX-411-UBUNTU-43:~$ ./ex3-1.sh
enter number
4
hello world
hello world
hello world
hello world
user@AIX-411-UBUNTU-43:~$
```

ex3-2.sh

```
#!/bin/bash
read num1
read num2
result = `expr \($num1 \+ $num2\)`
echo $result
```

ex3-3.sh

ex3-4.sh

ex3-5.sh

ex3-6.sh

ex3-7.sh

ex3-8.sh

ex3-9.sh