


Higher surface efficiency, lower reconstruction gain


S versus G/O: area rate +10.55% | F1 gain -0.291 percentage points

Fixed choices from sealed scores • 2 development parents / 4 paired histories • no confidence intervals

Uniform new visible surface / action

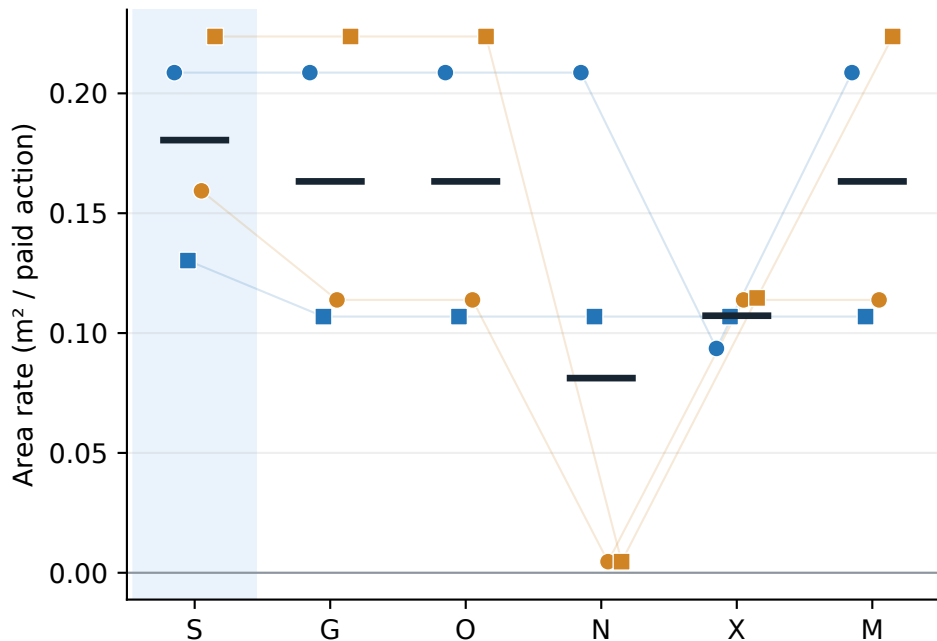

Reconstruction F1@5cm gain

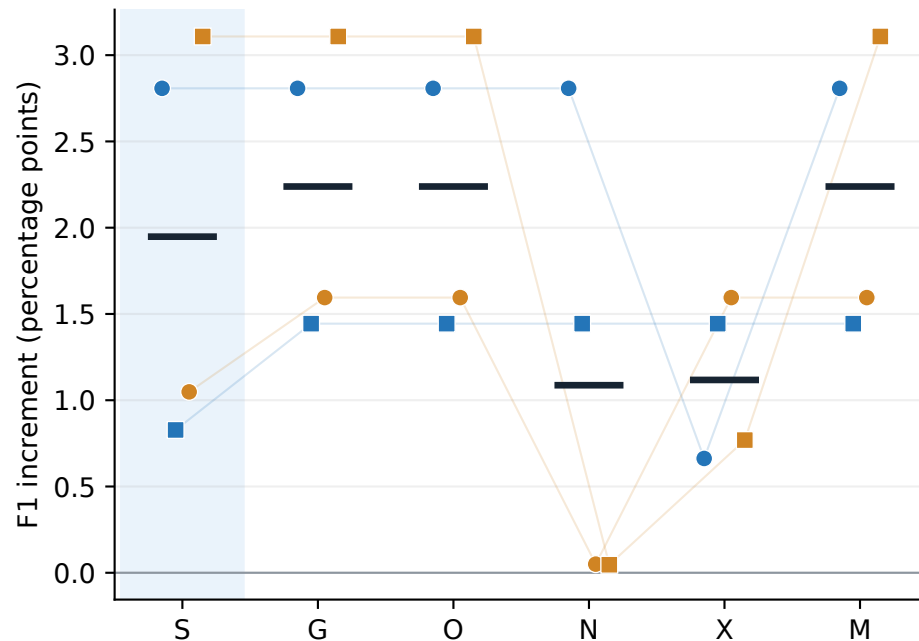

● P0: shelf west ■ P0: shelf east ● P1: shelf west ■ P1: shelf east — Equal-history mean

S: correct class prior G: geometry O: objectness N: measured-only X: swapped classes M: missing classes

The predeclared F1 guard fails (allowed $S - G/O \geq -0.100$ percentage points).

Perfect pose • prefix C = 1 • hand-declared S prior • late-stage refinement in an artificial asset-marker world.

Not a full ANS evaluation, natural-semantic validation, or evidence of superiority over mainstream methods.