


How to make your computer behave as both a client and a server


1. Install ‘XAMPP’
   1) Visit the following website:
   https://www.apachefriends.org/download.html
   2) Press the button and start downloading the ‘XAMPP’.
   3) You can start to install the software by pressing the next button in the following figure.

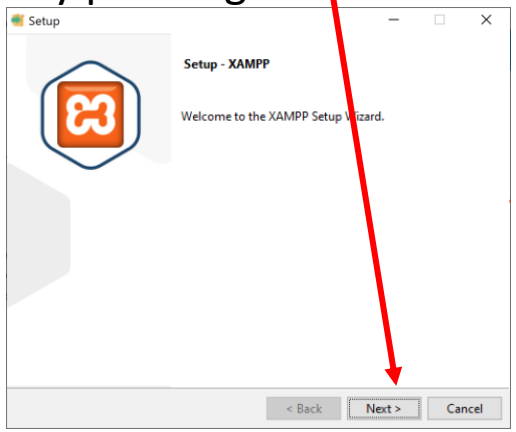

4) Please choose an appropriate folder in the following window, where you want to install XAMPP

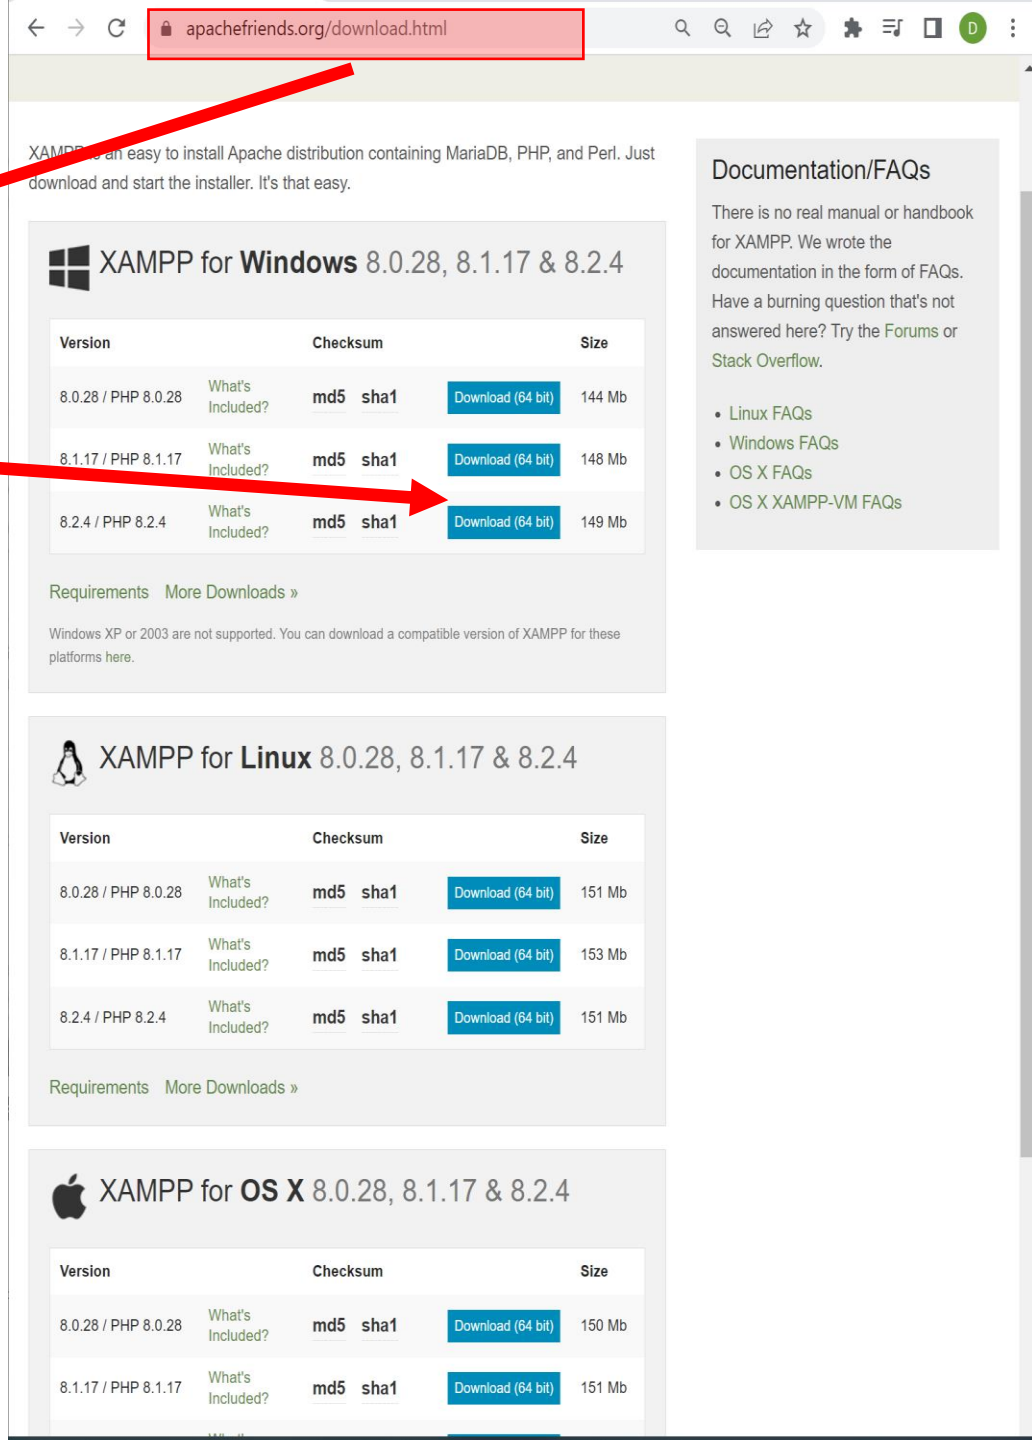


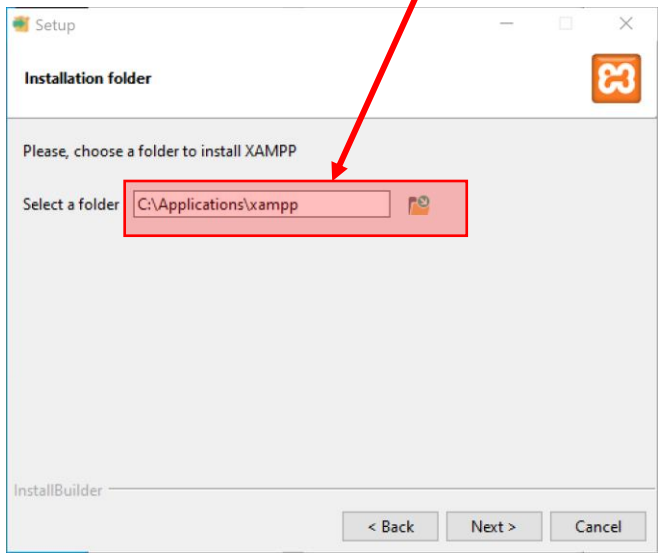


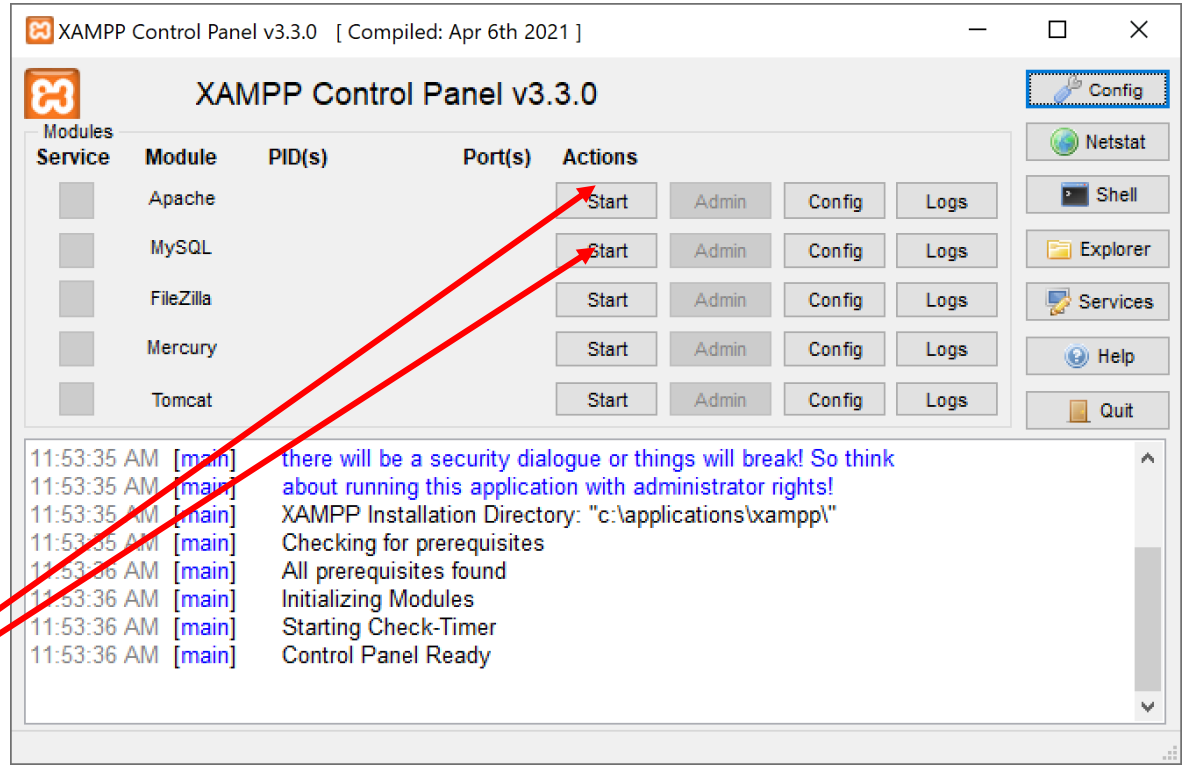

5) When you finalize to install the software, you will see a window as the image on the right side


6) Now please press these two button to start ‘Apache’ & ‘MySQL’

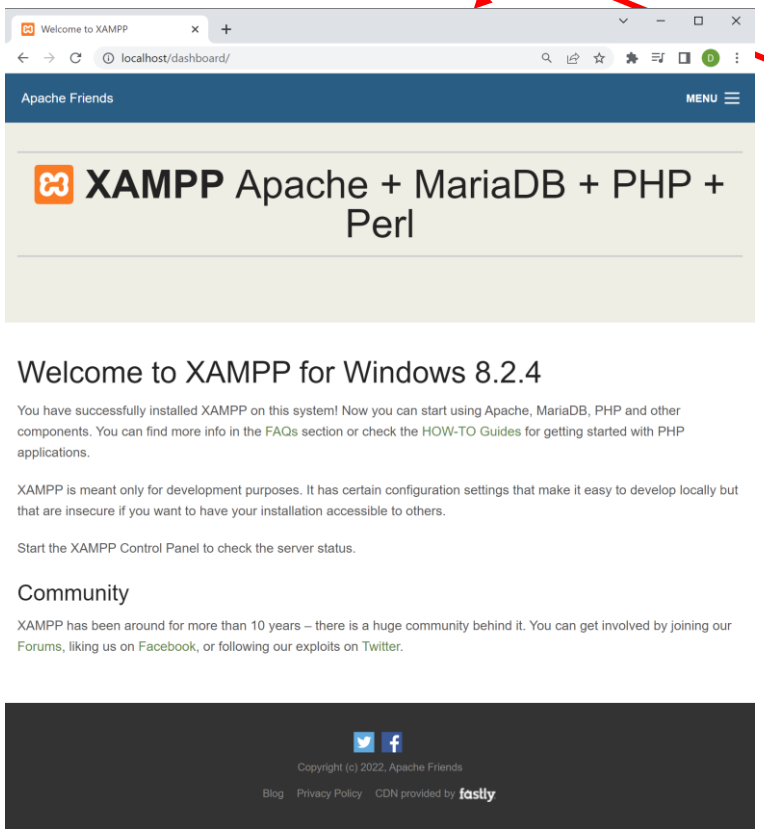7) When you type ‘localhost’ on your browser, the following screen will be shown on your web browser.
The screen actually comes from the ‘index.html’ which exist in the directory ‘dashboard’ as shown in this figure. The ‘htdocs’ is the home directory of your computer as a server which contains the ‘index.html’. If you want to execute your PHP code you need put your PHP documents in this directory.

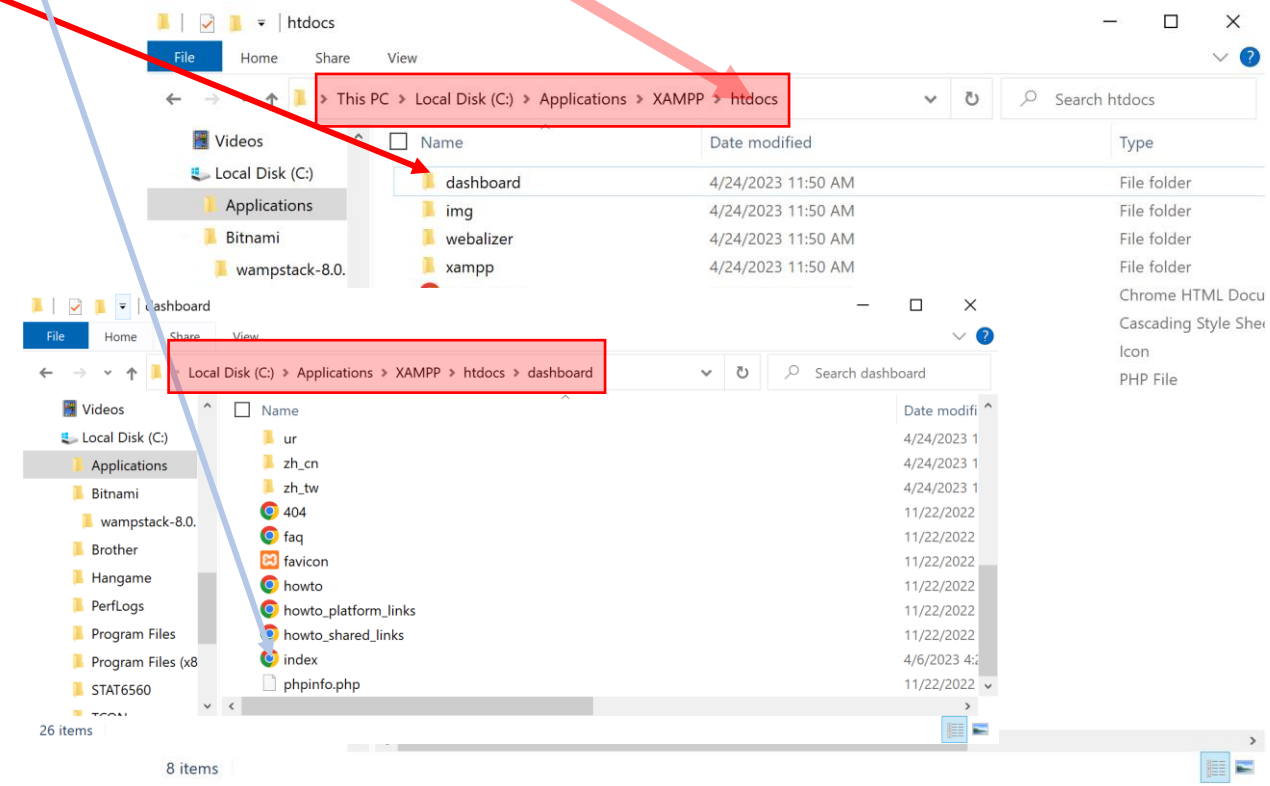

8) The ‘htdocs’ is the home directory of your computer as a server which contains the ‘index.html’.
If you want to execute your PHP code you need put your PHP documents in this directory.

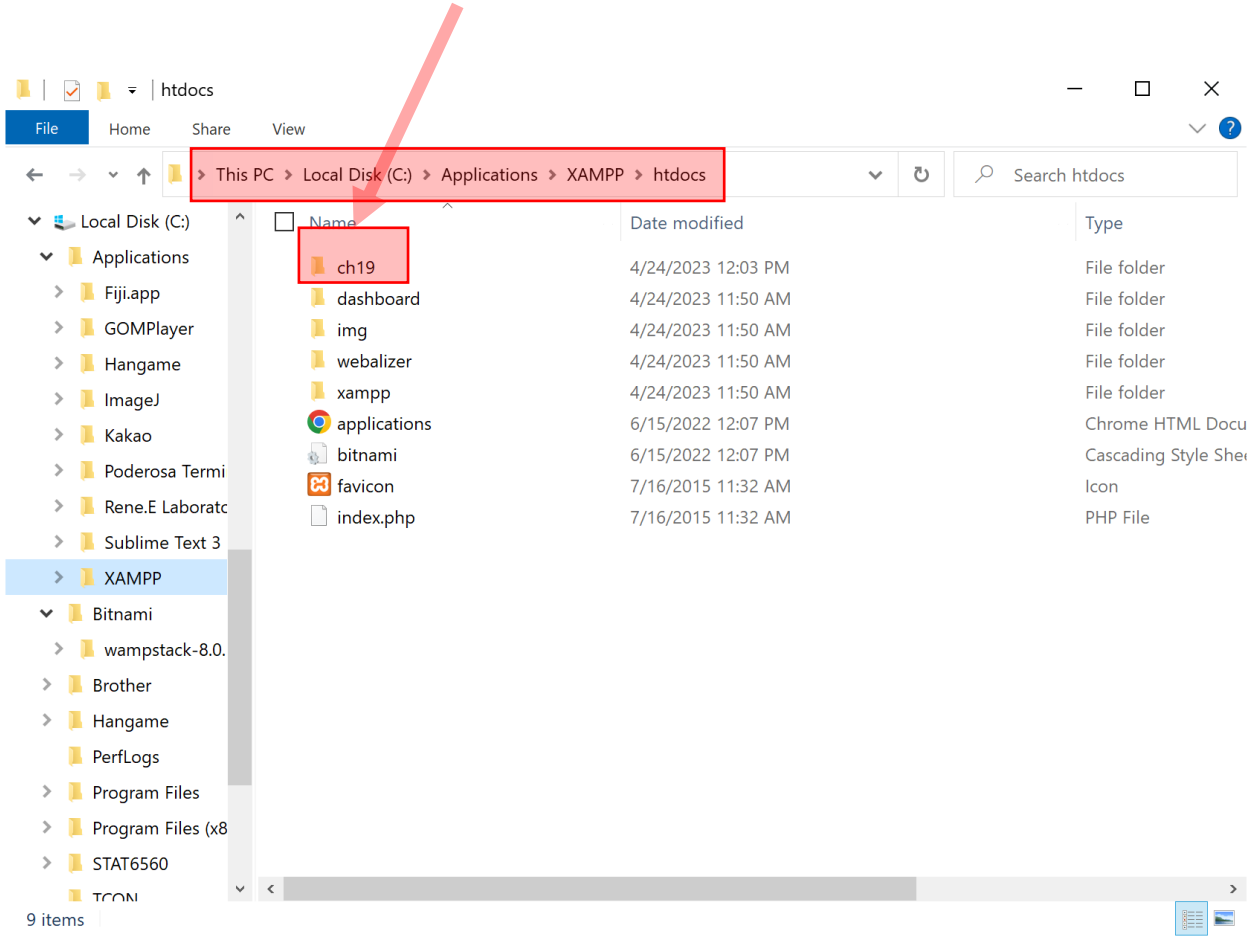

9) You can open the ‘index.html’ by typing localhost, or http://127.0.0.1/index.html on the address bar in a web browser.


10) Or by typing the IP address assigned to your computer.


The IP address of your computer can be identified by clicking this in the Network and Sharing Center as the following figure.


When you click it, ‘Wi-Fi Status’ window will be opened. Then now click the ‘details…’ button.

Then ‘Network Connection Details’ window appears.

This is the IP address of your computer.

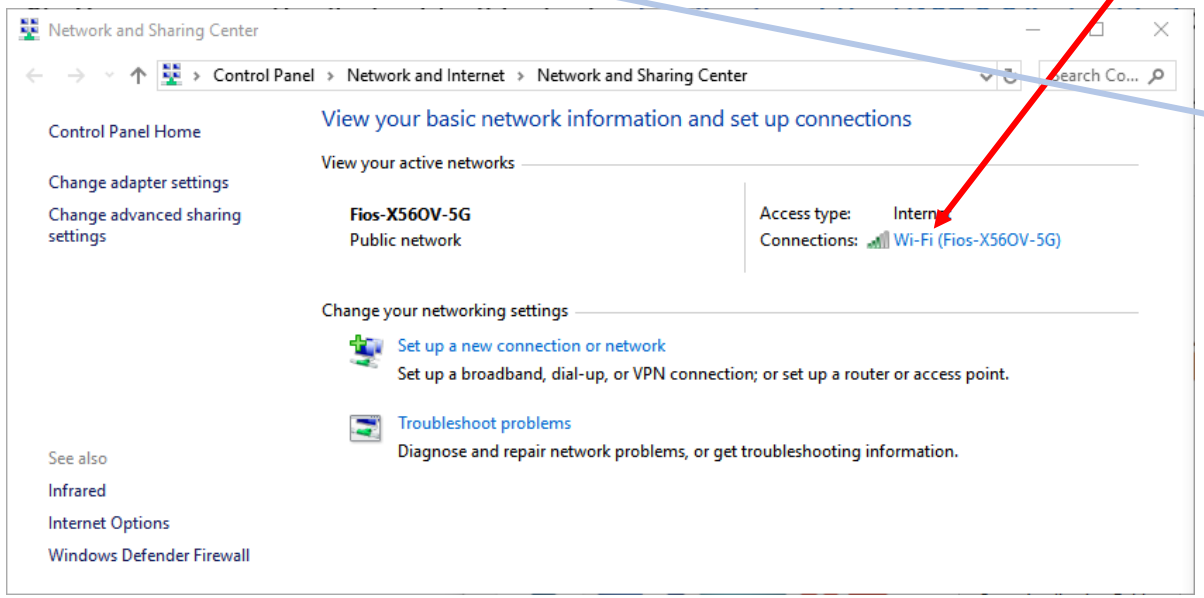


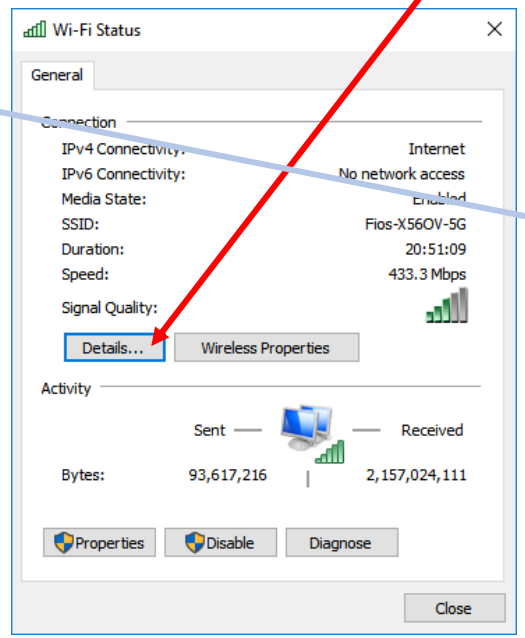


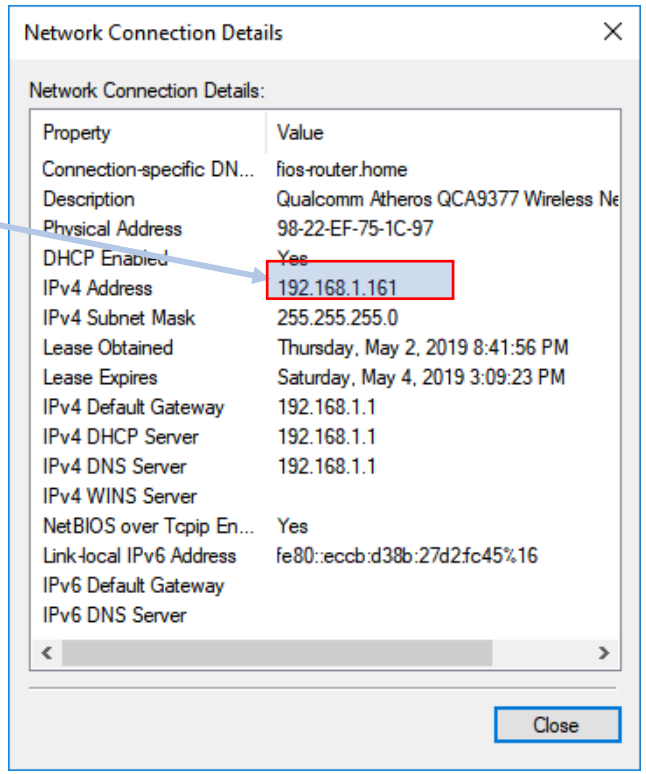
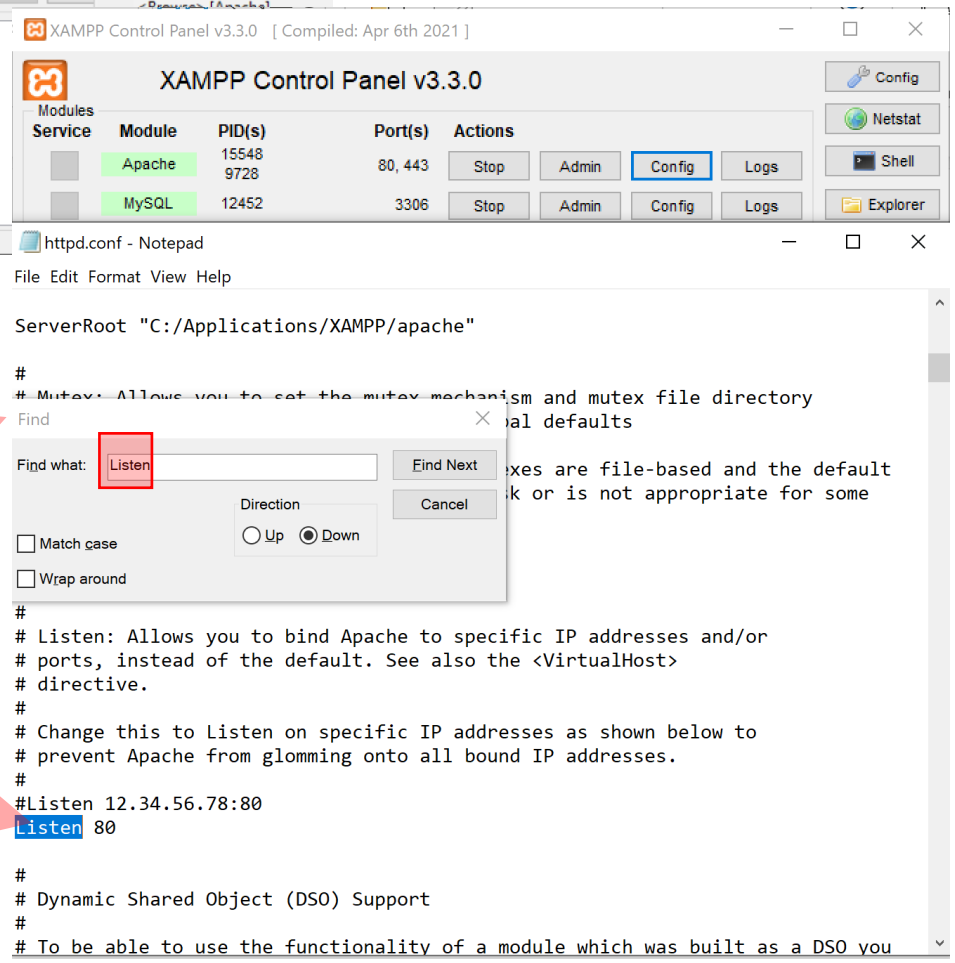




11) By using the IP address, you can open the ‘index.html’ from any computer.

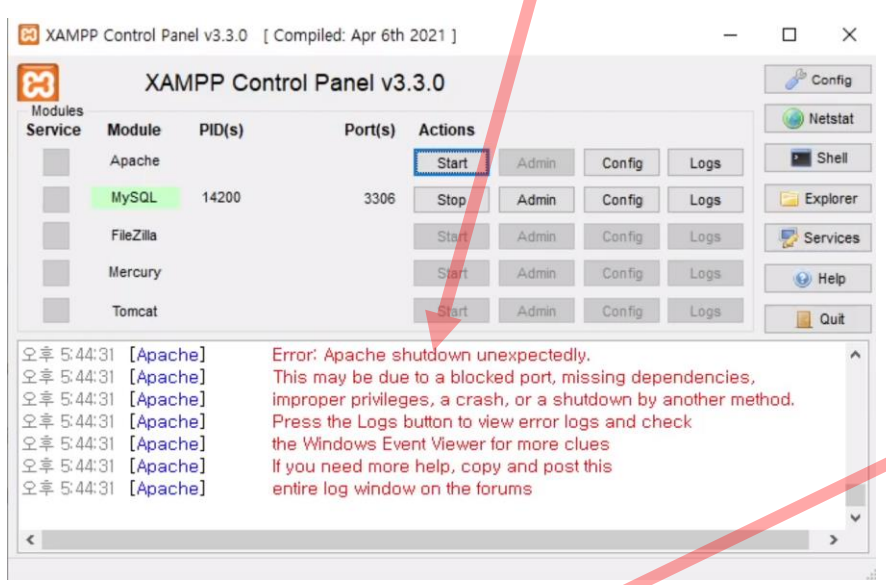In case that you have an error message on starting Apache like the following figure.

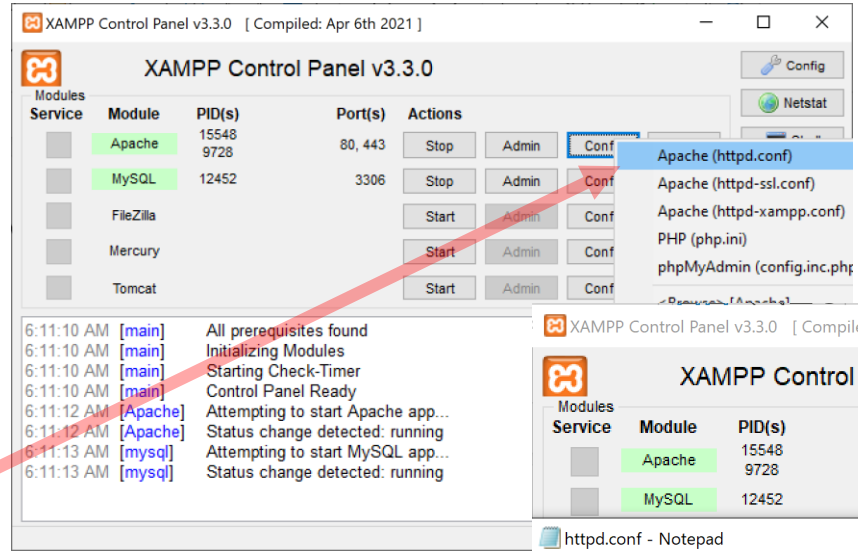



1. Please click config button in order to change port number
2. Please select httpd.config under the config button
3. Then, you will see the 'httpd.config' file on a Notepad.
4. Please find 'Listen' in the 'httpd.config' file as the left figure.
5. Finally, please find this line and change the number to another number.
   (For example, you may change the number 80 to 8088)

In case that you have an error message on starting MySQL like the following figure.





1. Please watch the following Youtube Video.
   https://www.youtube.com/watch?v=gVWVTsTPxRk

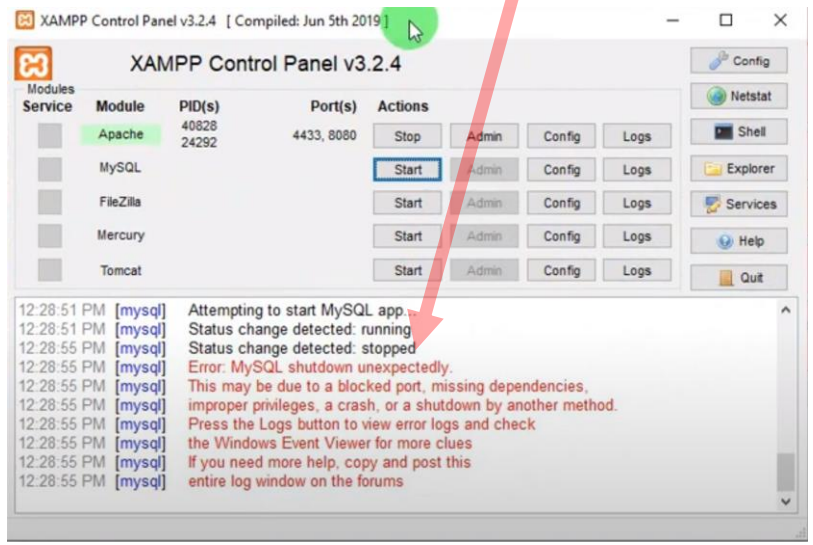2. Or watch the following Youtube Video.
   https://www.youtube.com/watch?v=84IOtc05TuA

How to create a database on the server.

0. Reset the MySQL / MariaDB Root Password
   see: http://localhost/dashboard/docs/reset-mysql-password.html
   (please set your password to ‘111111’ as the following figure.

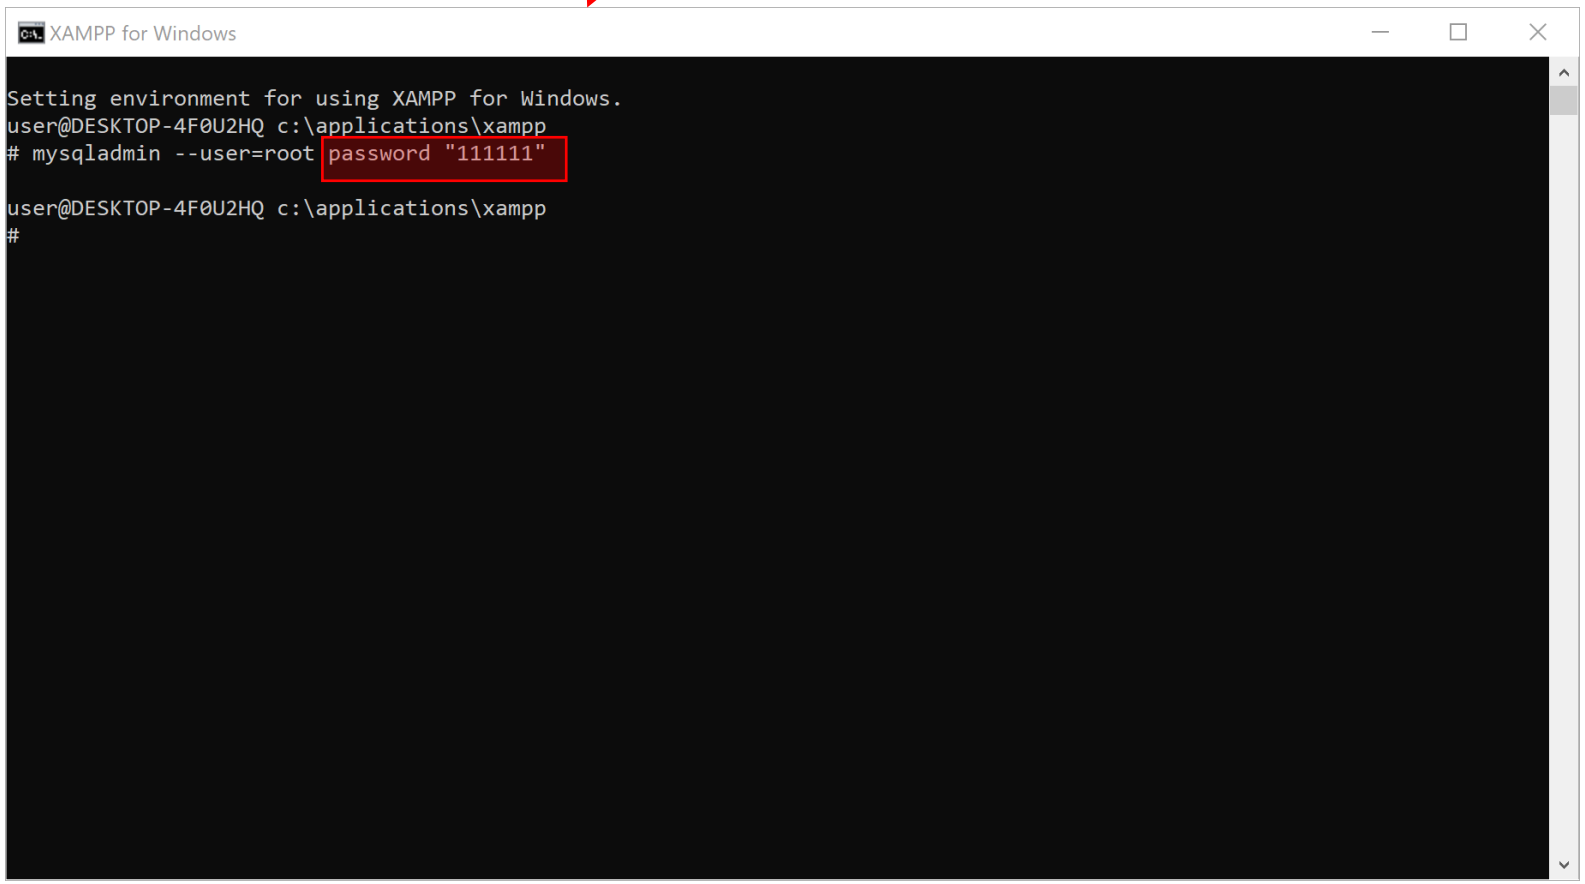

How to create a database on the server.

1. Here is the dbscript for the database ‘products’ which will be used for the exercise ‘fig 19_15-16’ in Chatper 19.


```
DROP DATABASE IF EXISTS products;


CREATE DATABASE products;

USE products;

CREATE TABLE books
(
   ID int NOT NULL AUTO_INCREMENT PRIMARY KEY,
   Title varchar(60),
   Category varchar(32),
   ISBN varchar(20)
);

INSERT INTO books (Title,Category,ISBN) VALUES ('Visual Basic 2010 How to Program','Programming','0132152134');
INSERT INTO books (Title,Category,ISBN) VALUES ('Visual C# 2010 How to Program','Programming','0132151421');
INSERT INTO books (Title,Category,ISBN) VALUES ('Java How to Program','Programming','0132575663');
INSERT INTO books (Title,Category,ISBN) VALUES ('C++ How to Program','Programming','0132662361');
INSERT INTO books (Title,Category,ISBN) VALUES ('C How to Program','Programming','0136123562');
INSERT INTO books (Title,Category,ISBN) VALUES ('Internet & World Wide Web How to Program','Programming','0132151006');
INSERT INTO books (Title,Category,ISBN) VALUES ('Operating Systems','Operating Systems','0131828274');
```

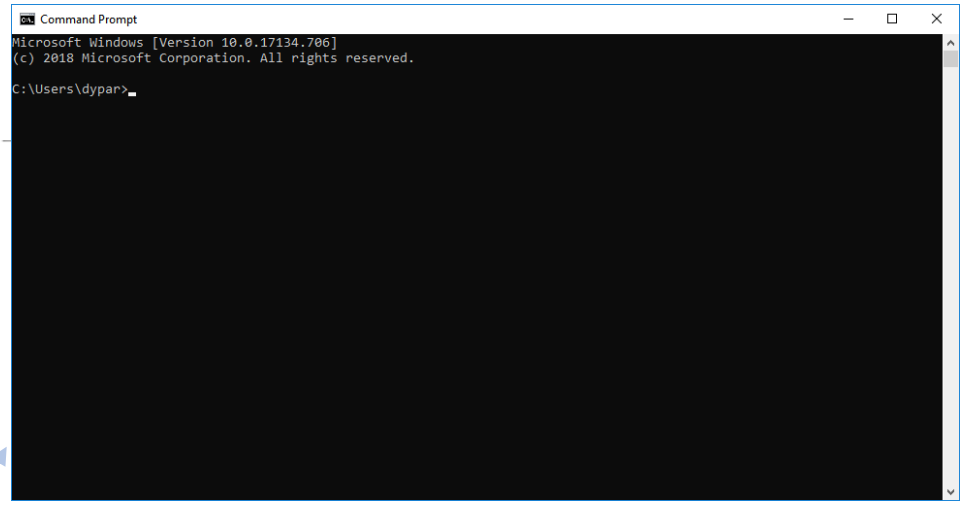


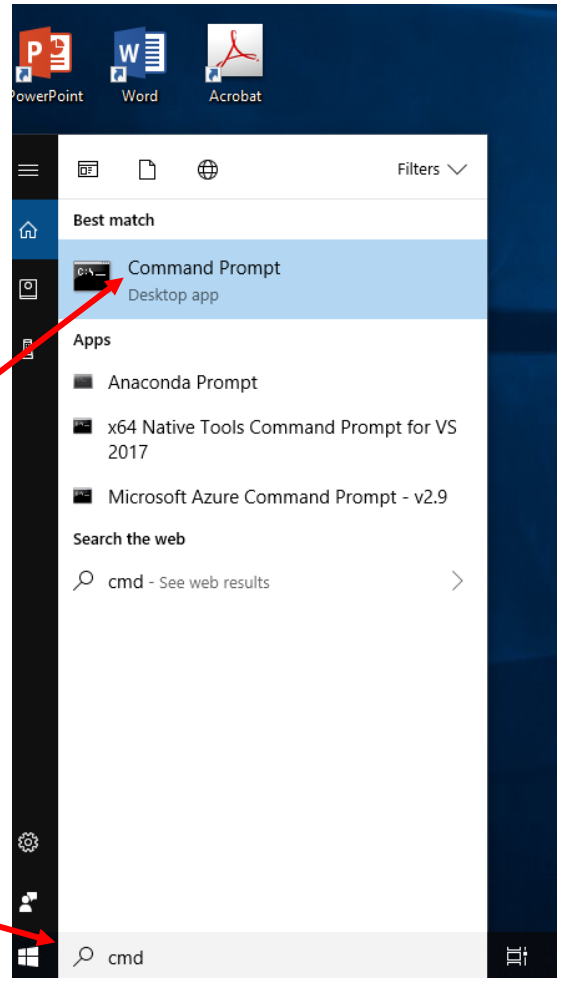




2. In order to create the database, please open ‘Command Prompt’ window by typing cmd.
3. Then the ‘Command Prompt’ window will be opened as the above.

How to create a database on the server.

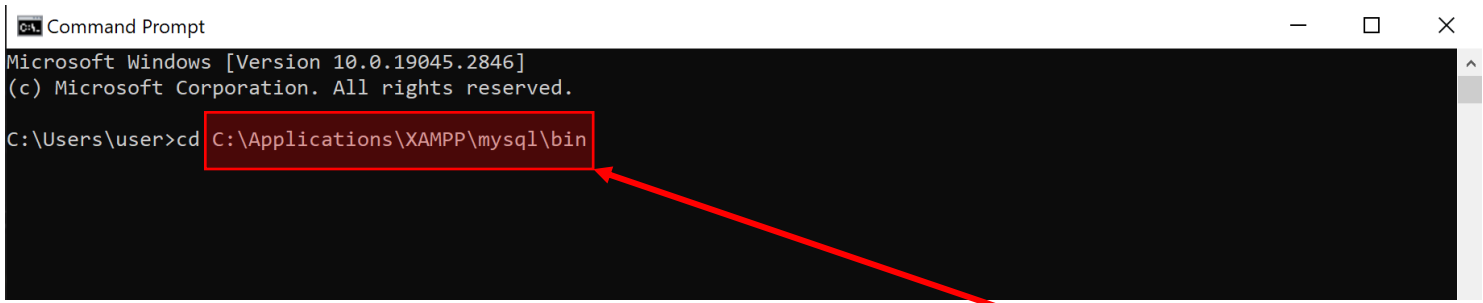
4. We need to change the directory information on the ‘Command Prompt’ window.
5. We should go to the directory containing MySQL under the location of ‘XAMPP’.

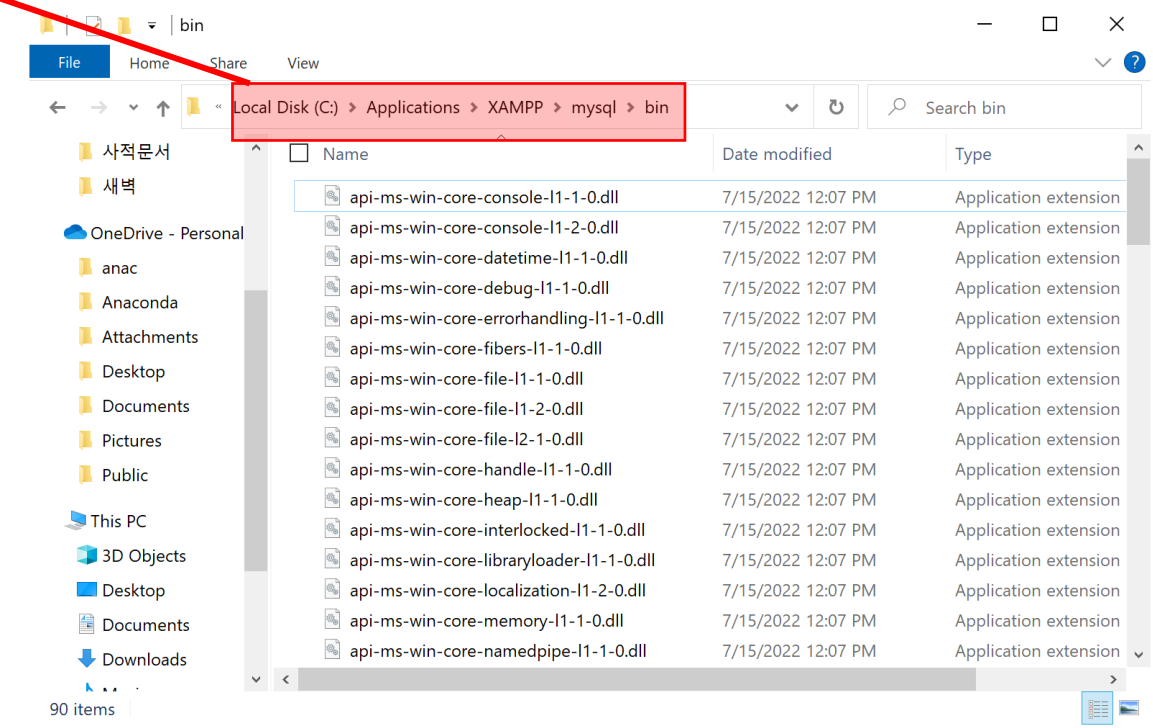






How to create a database on the server.

6. After moving to the directory containing ‘MySQL’ on the ‘Command Prompt’ window. please type following command as below.
   In this command, *-u* means *username*, *-p* means *password*, *-h* means *host computer*.
   The username and the password are the ones we defined in the step 0 here.

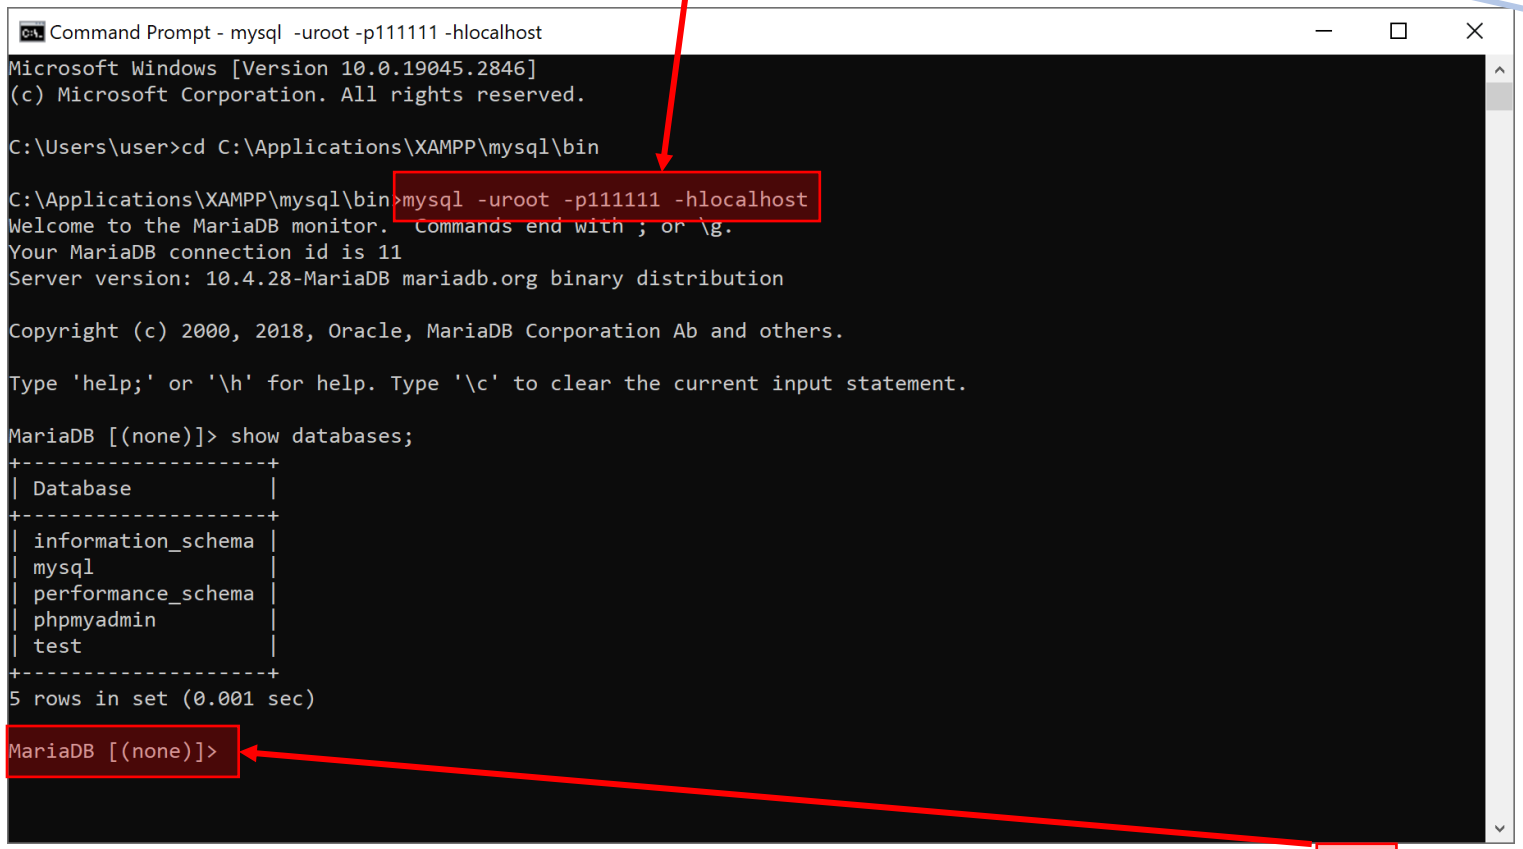

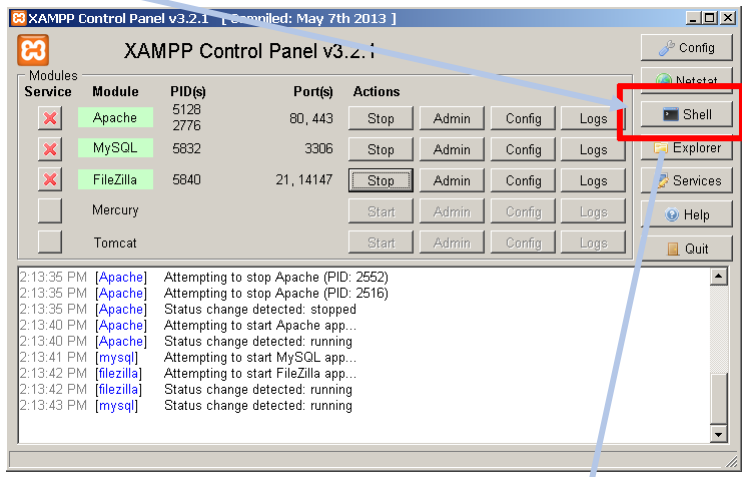


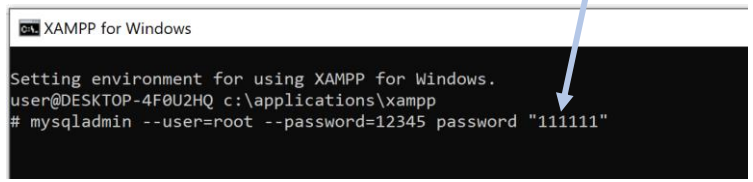

7. Then you are able to check that the command prompt is changed like this.

How to create a database on the server.

8. So now you can copy the dbscript for the database product after the prompt MariaDB> as below.

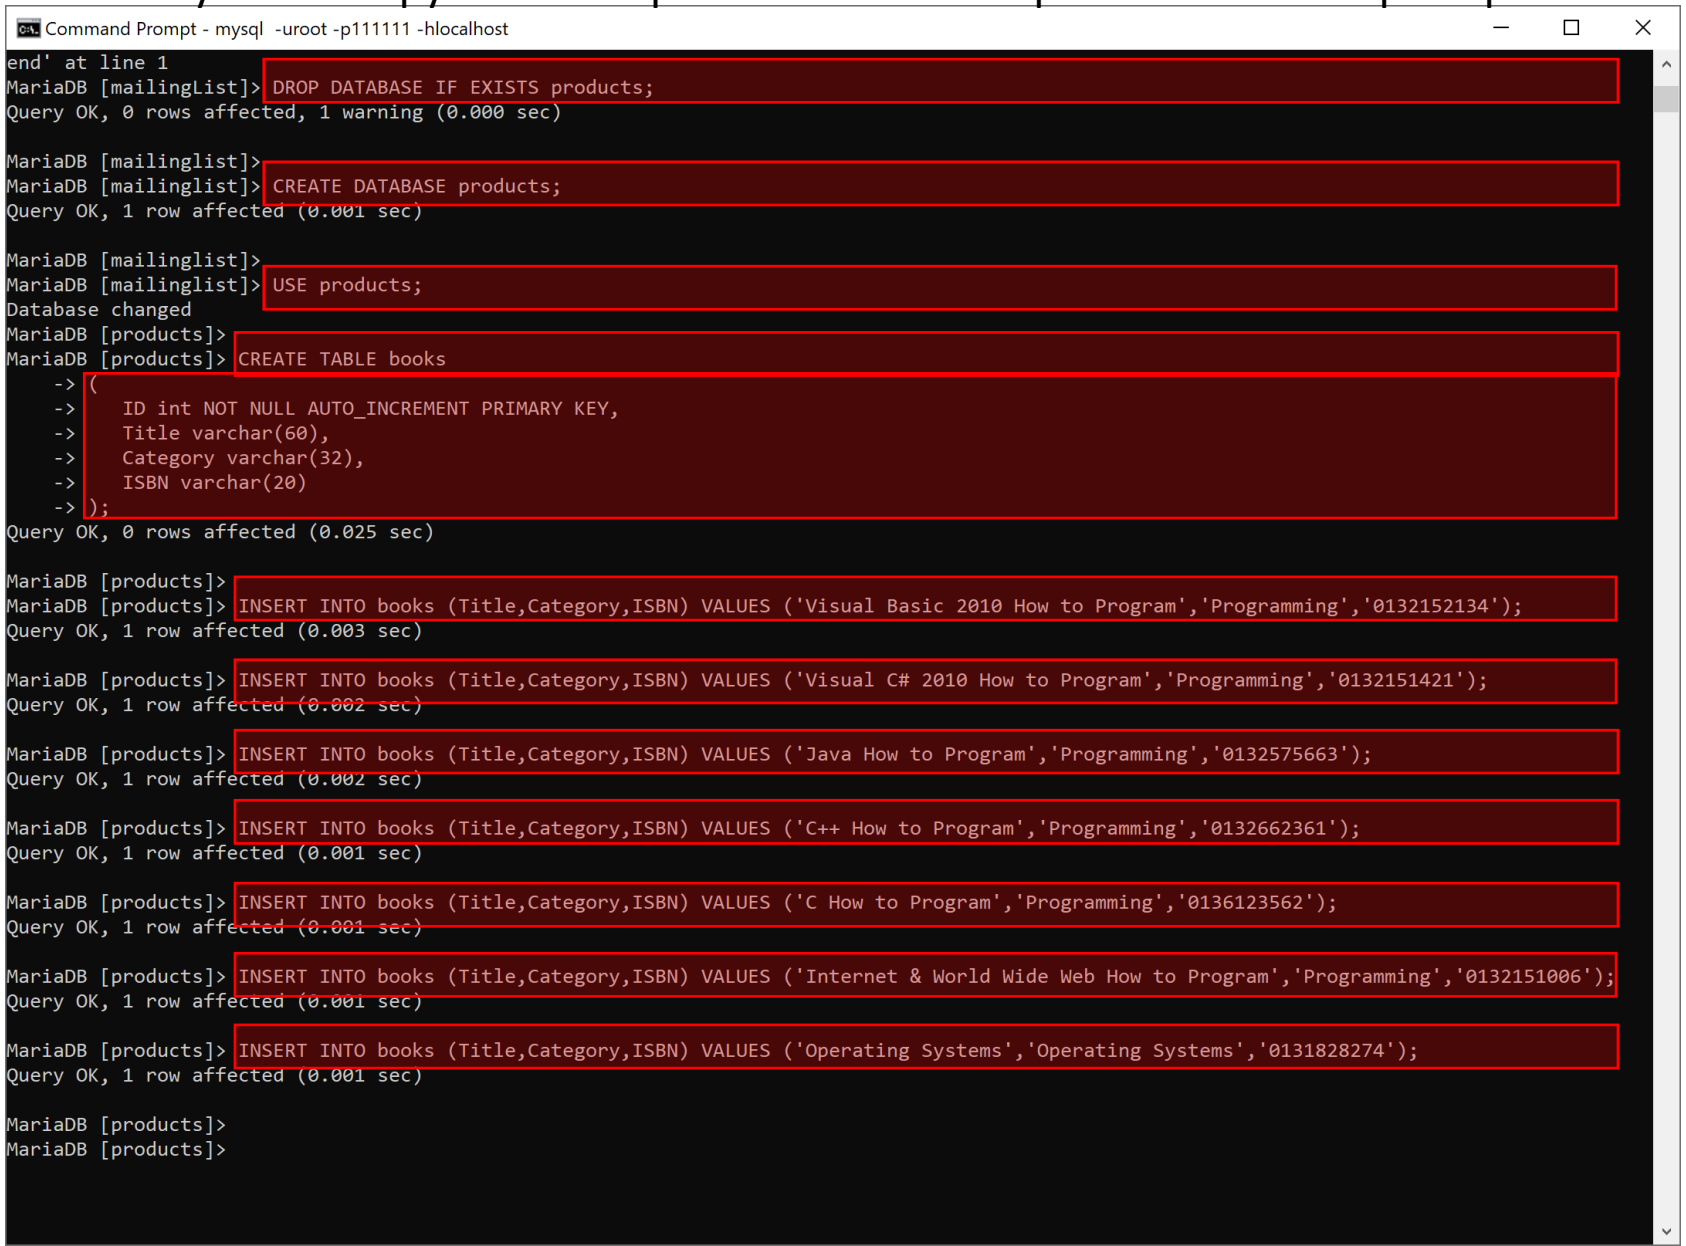

How to create a database on the server.

8. You can check now that the database is created on the server as follows.

