


(a) p-bit inference — one decision = T Bernoulli samples



(b) reservoir processing — column-shared, time-multiplexed read-out

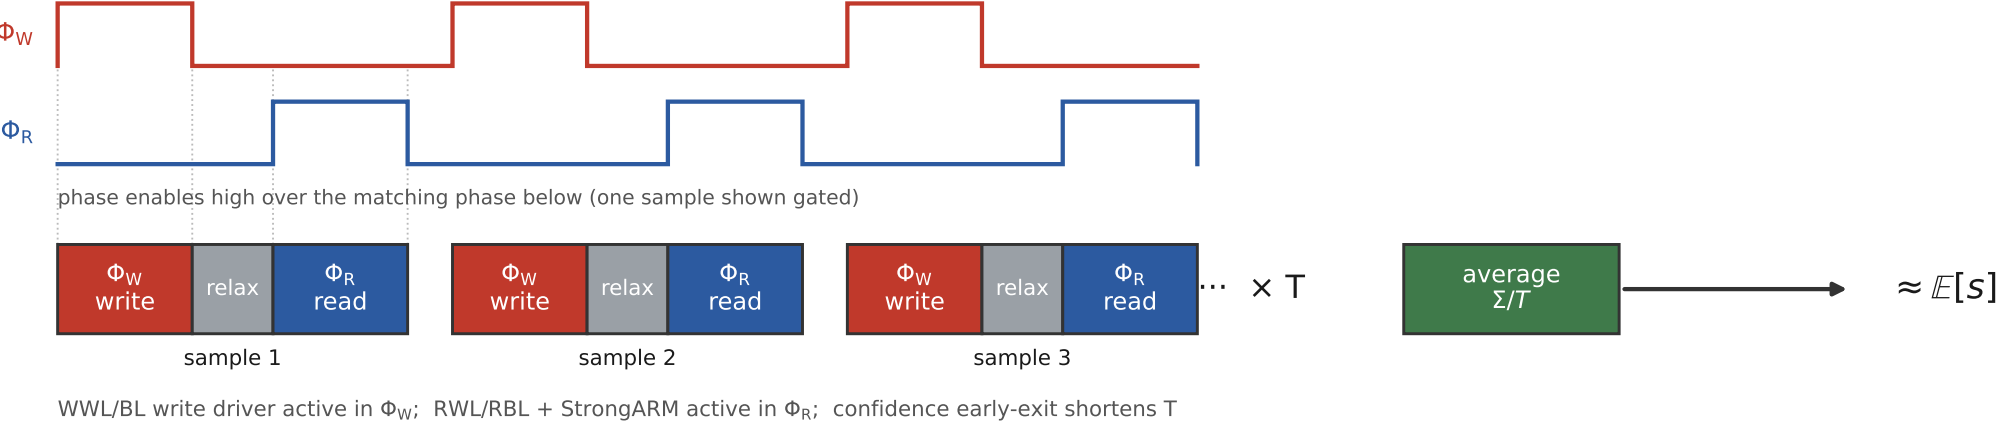