


CLK




(a) p-bit inference — one decision = T Bernoulli samples

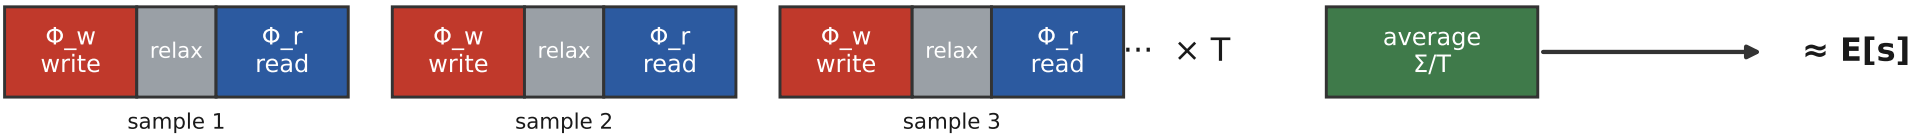

WWL/BL write driver active in Φ_w ; RWL/RBL + StrongARM active in Φ_r ; confidence early-exit shortens T

(b) reservoir processing — column-shared, time-multiplexed read-out

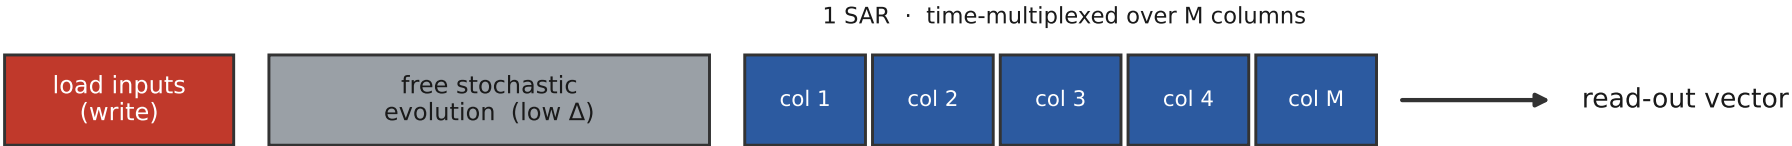

low Δ raises C2C noise for rich dynamics; conflicts with p-bit write-retention → modes are time-exclusive on one array

