



p-bit inference — one decision = T Bernoulli samples

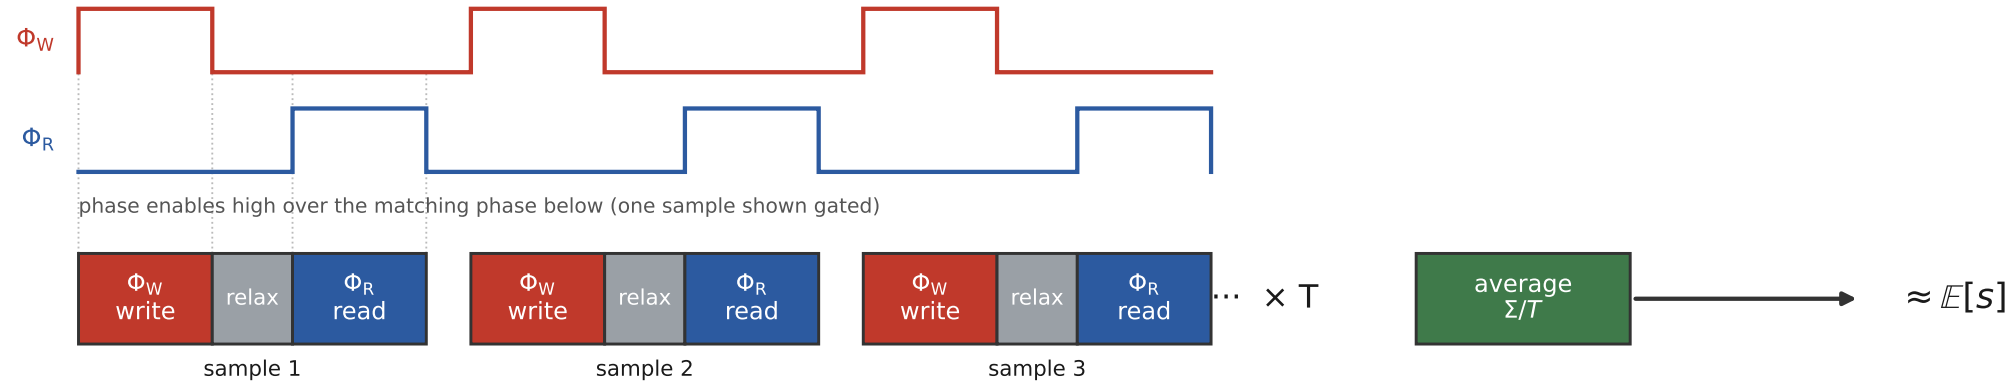

WWL/BL write driver active in Φ_W ; RWL/RBL + StrongARM active in Φ_R ; confidence early-exit shortens T

reservoir processing — column-shared, time-multiplexed read-out

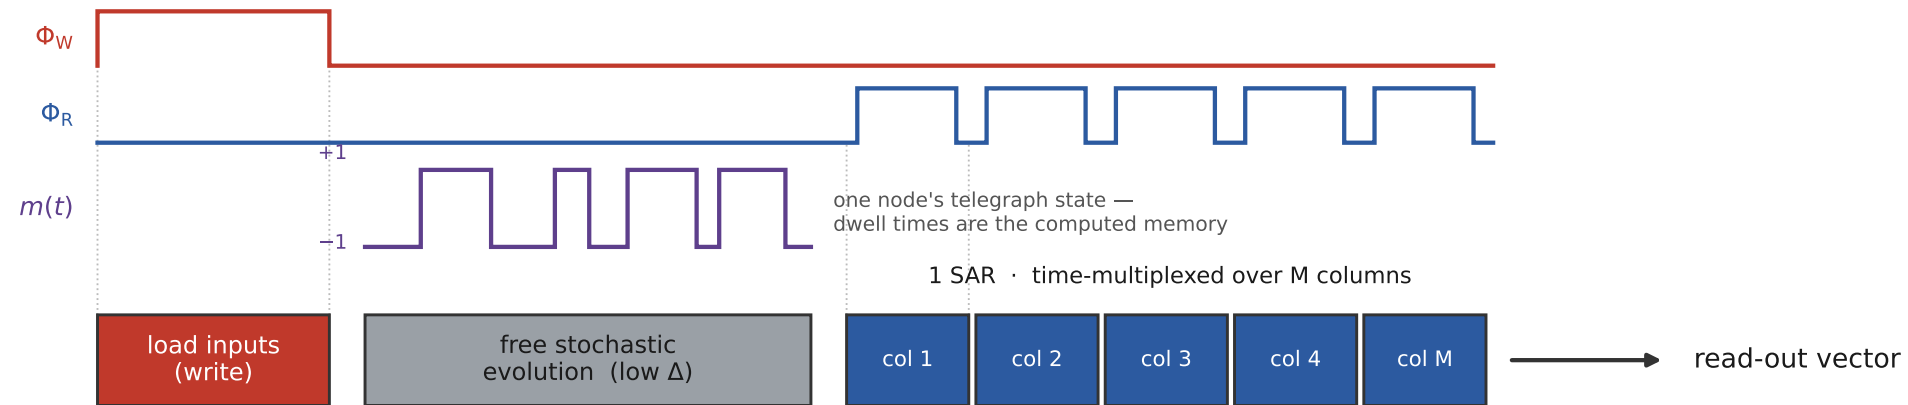

low Δ raises C2C noise for rich dynamics; conflicts with p-bit write-retention $\rightarrow$ modes are time-exclusive on one array

Φ_W write / load

settle / evolve

Φ_R read

accumulate / average