

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)


Borehole ID : CBH-15

Sample Type & Sample Depth from top : UDS & 1.50 m

FLOW CURVE

$$y = -20.59 \log_{10}(x) + 61.98$$
$$R^2 = 0.88$$

Liquid Limit (w_l) at 25 blows
= 33.20 %

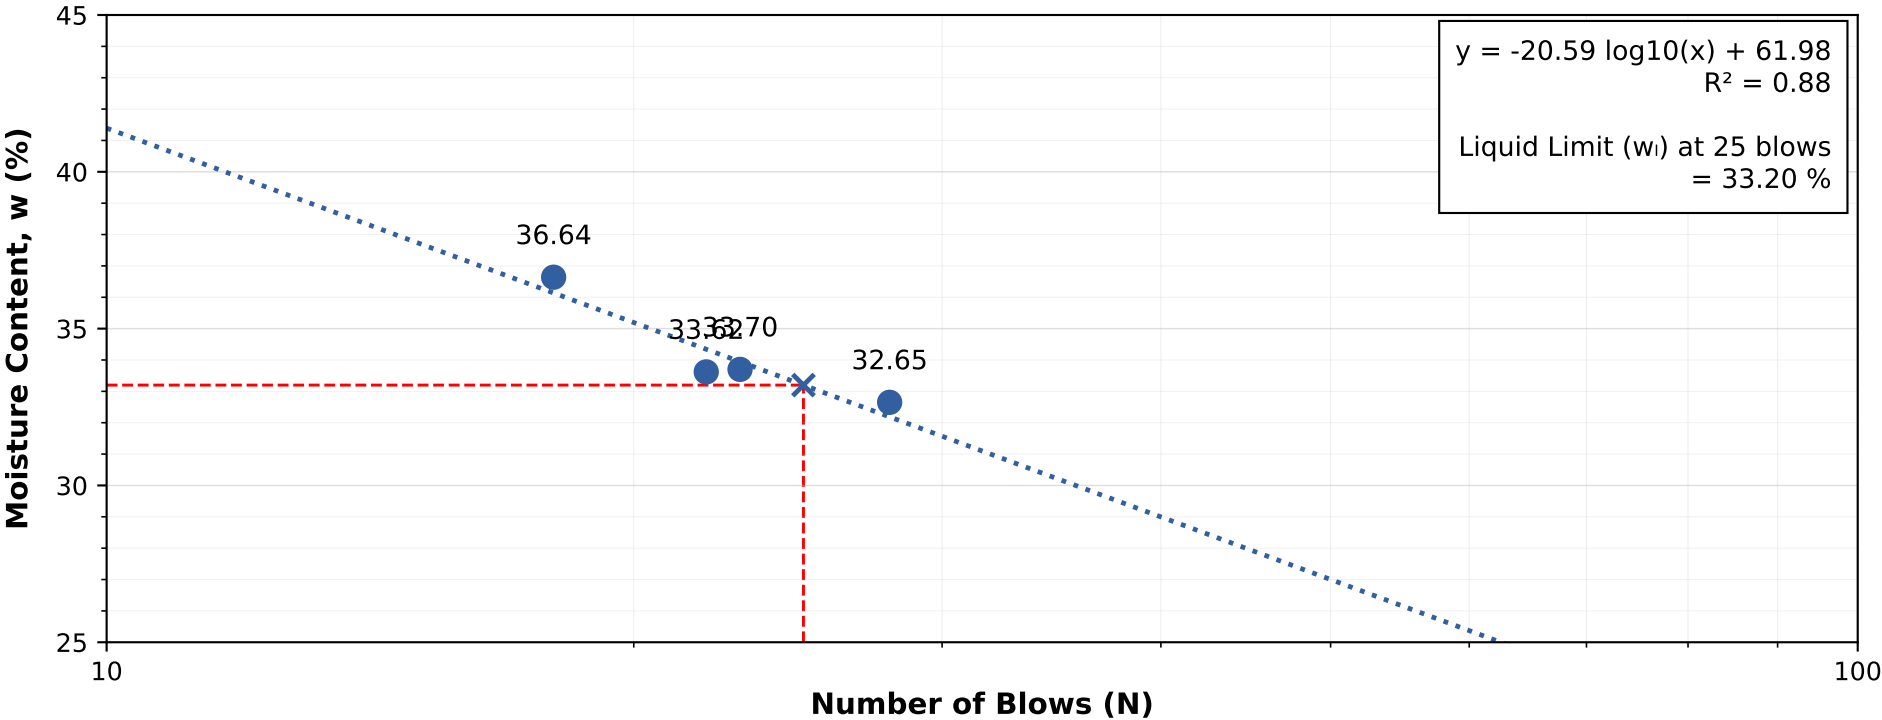

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	36.64
2	22	33.62
3	23	33.70
4	28	32.65

TEST RESULTS

Liquid Limit (w_l)	: 33.20 %
Plastic Limit (w_p)	: 16.10 %
Plasticity Index (PI)	: 17.10 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-15

Sample Type & Sample Depth from top : UDS & 4.50 m

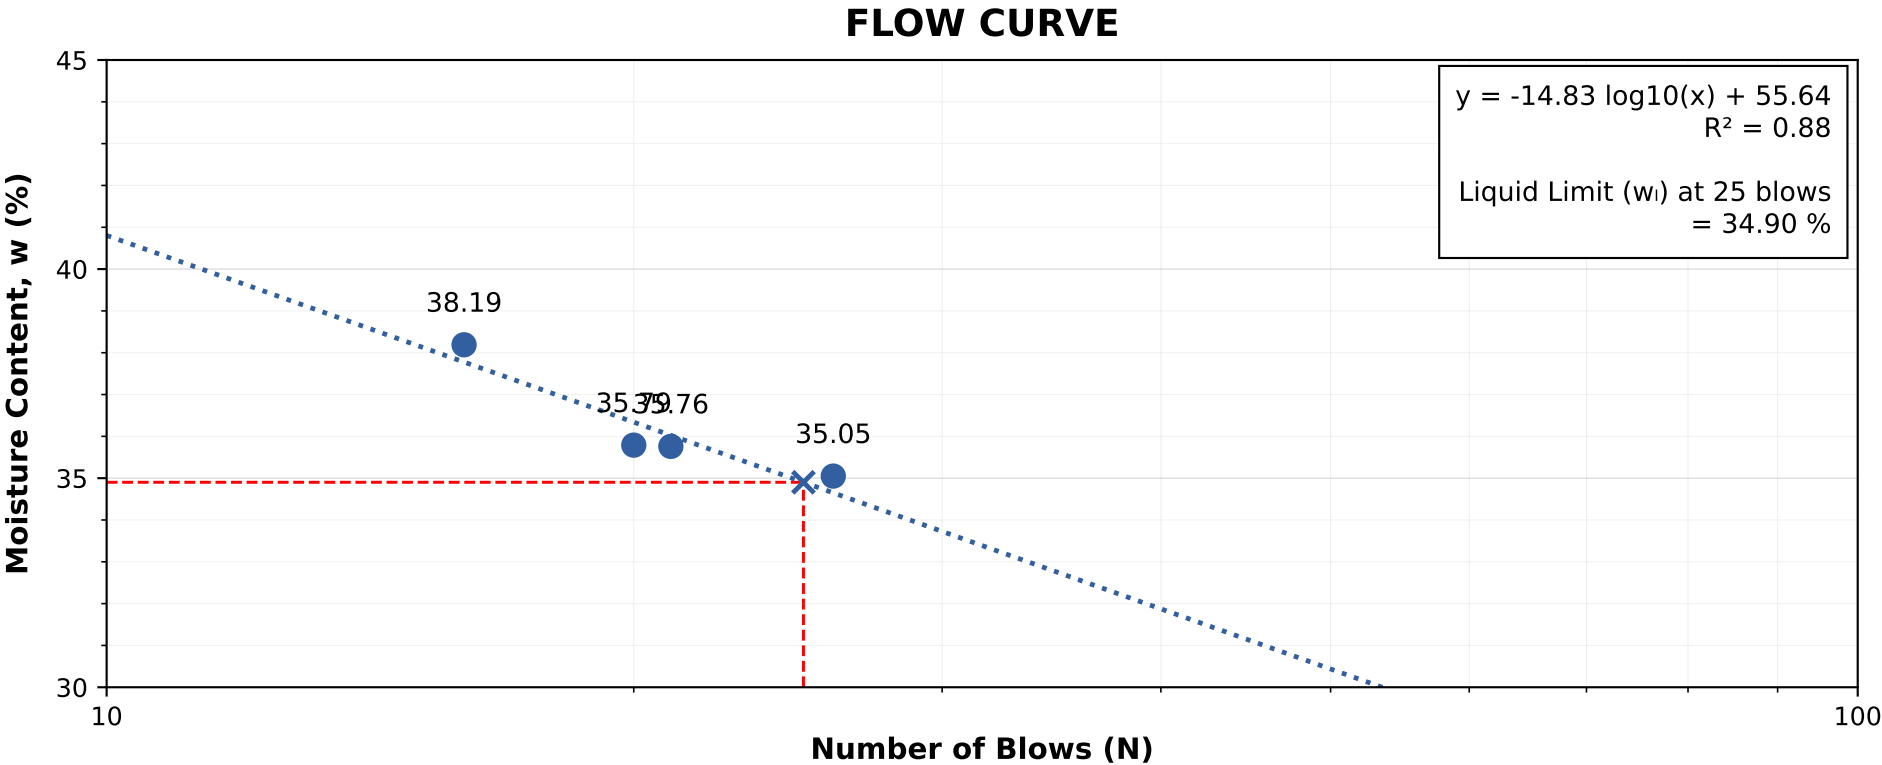

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	38.19
2	20	35.79
3	21	35.76
4	26	35.05

TEST RESULTS

Liquid Limit (w_L)	: 34.90 %
Plastic Limit (w_P)	: 16.60 %
Plasticity Index (PI)	: 18.30 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-15

Sample Type & Sample Depth from top : SPT & 6.50 m

FLOW CURVE

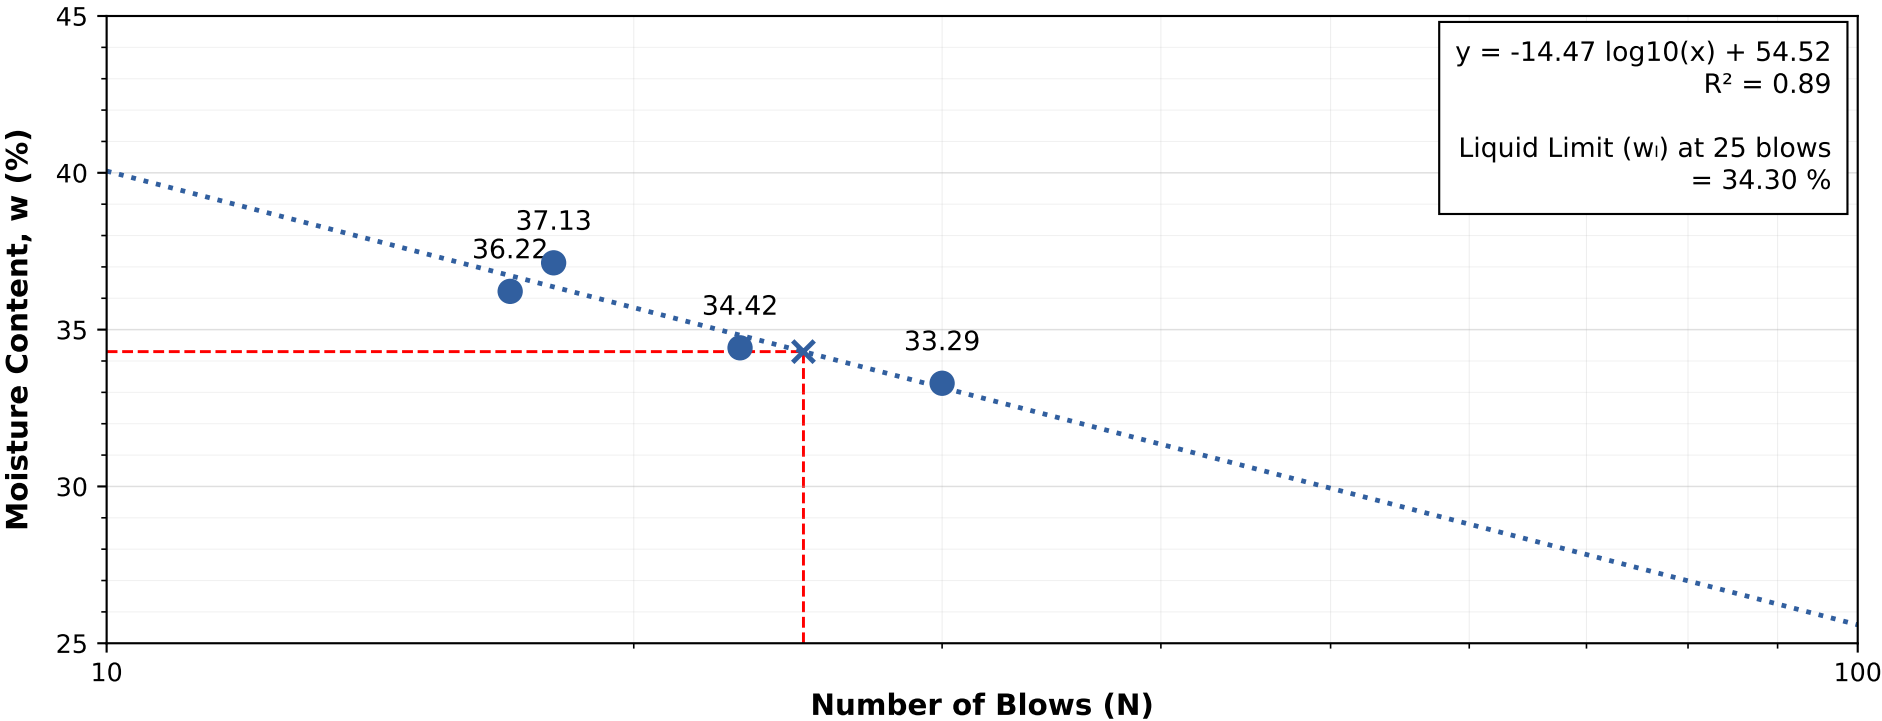

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	36.22
2	18	37.13
3	23	34.42
4	30	33.29

TEST RESULTS

Liquid Limit (w _l)	: 34.30 %
Plastic Limit (w _p)	: 15.40 %
Plasticity Index (PI)	: 18.90 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-15

Sample Type & Sample Depth from top : SPT & 7.50 m

FLOW CURVE

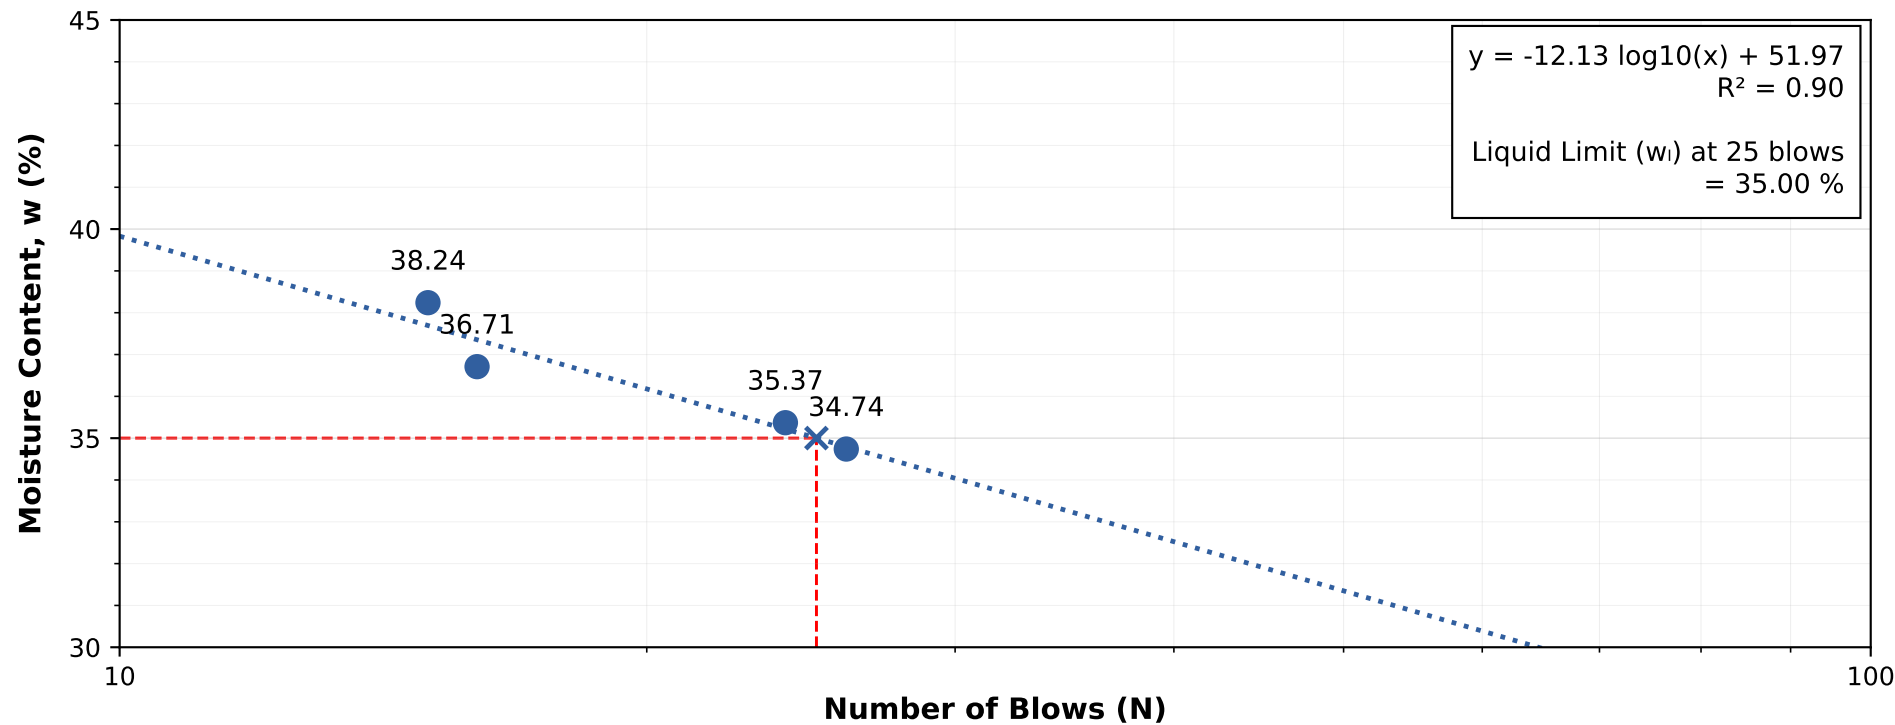

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	38.24
2	16	36.71
3	24	35.37
4	26	34.74

TEST RESULTS

Liquid Limit (w_L)	: 35.00 %
Plastic Limit (w_P)	: 16.50 %
Plasticity Index (PI)	: 18.50 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-15

Sample Type & Sample Depth from top : SPT & 10.50 m

FLOW CURVE

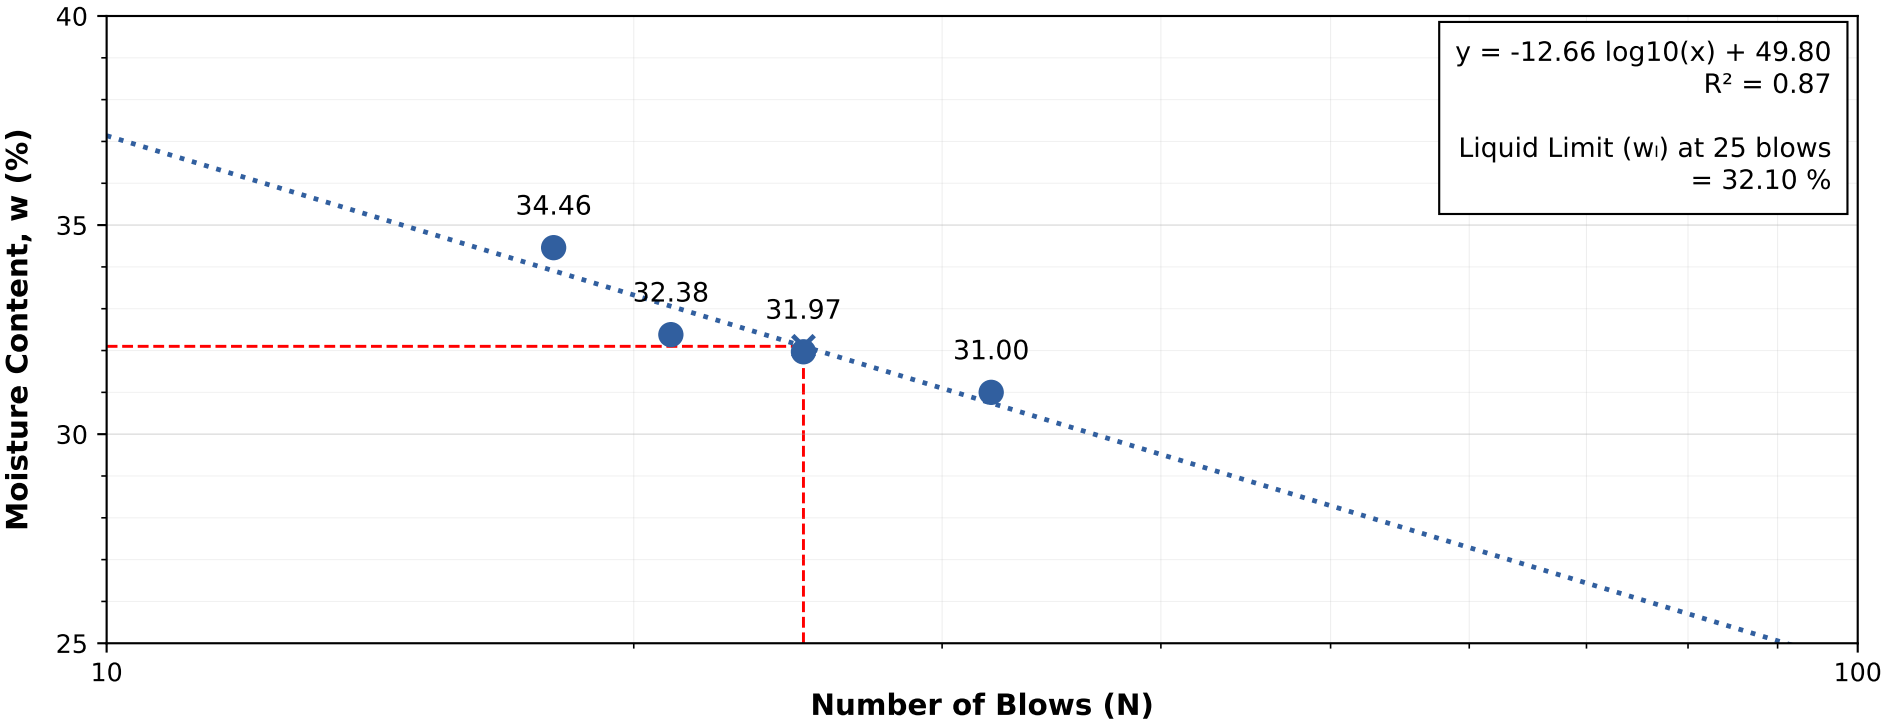

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	18	34.46
2	21	32.38
3	25	31.97
4	32	31.00

TEST RESULTS

Liquid Limit (w_L)	: 32.10 %
Plastic Limit (w_P)	: 15.90 %
Plasticity Index (PI)	: 16.20 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-15

Sample Type & Sample Depth from top : SPT & 13.50 m

FLOW CURVE

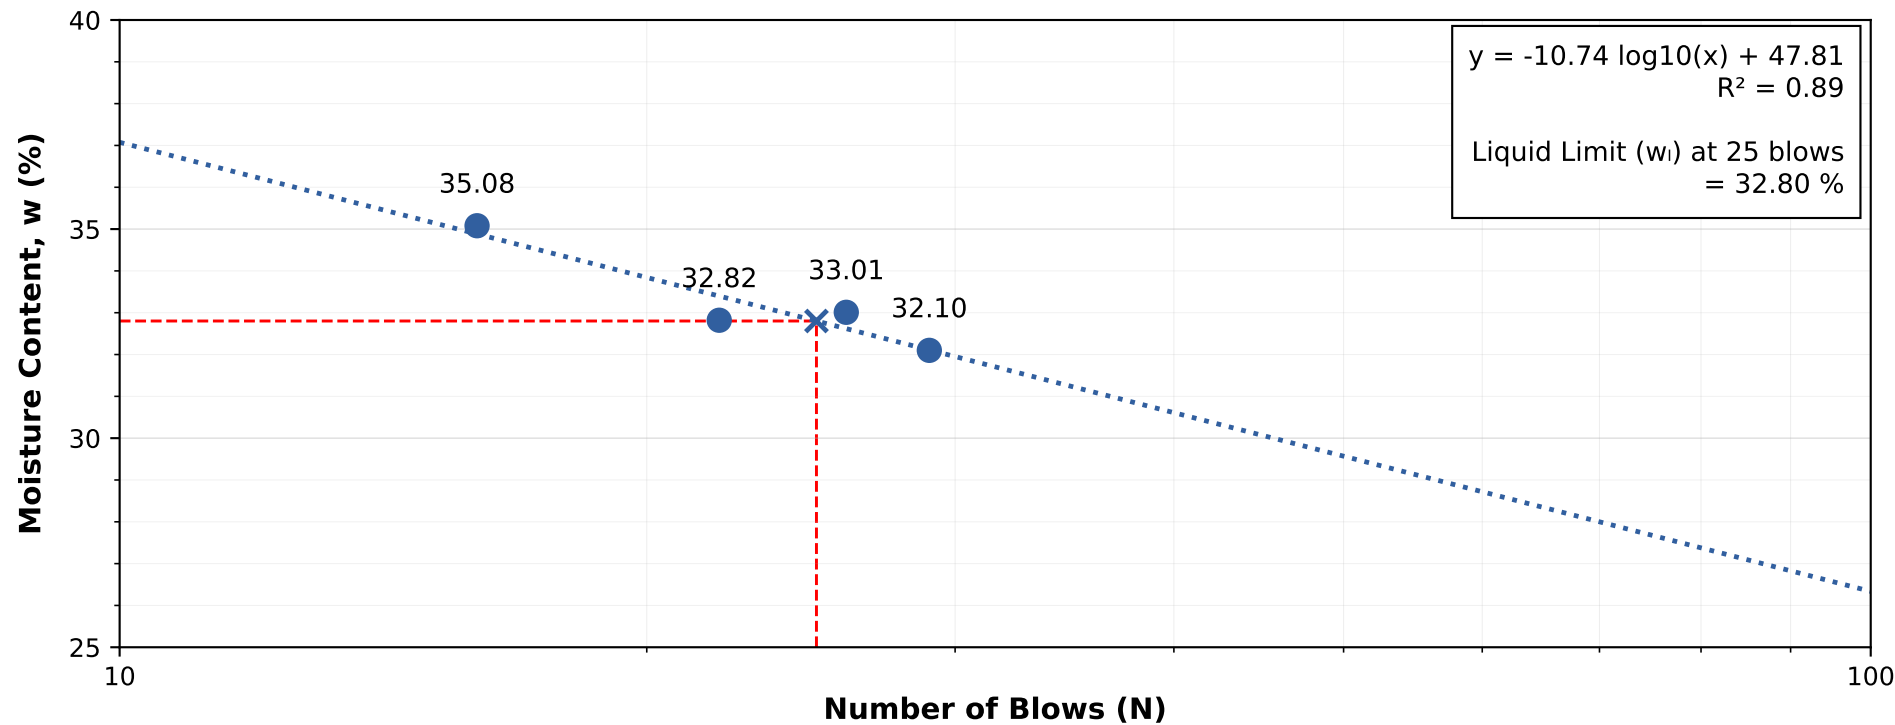

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	35.08
2	22	32.82
3	26	33.01
4	29	32.10

TEST RESULTS

Liquid Limit (w_L)	: 32.80 %
Plastic Limit (w_P)	: 14.90 %
Plasticity Index (PI)	: 17.90 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.