


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-16

Sample Type & Sample Depth from top : SPT & 1.50 m

FLOW CURVE

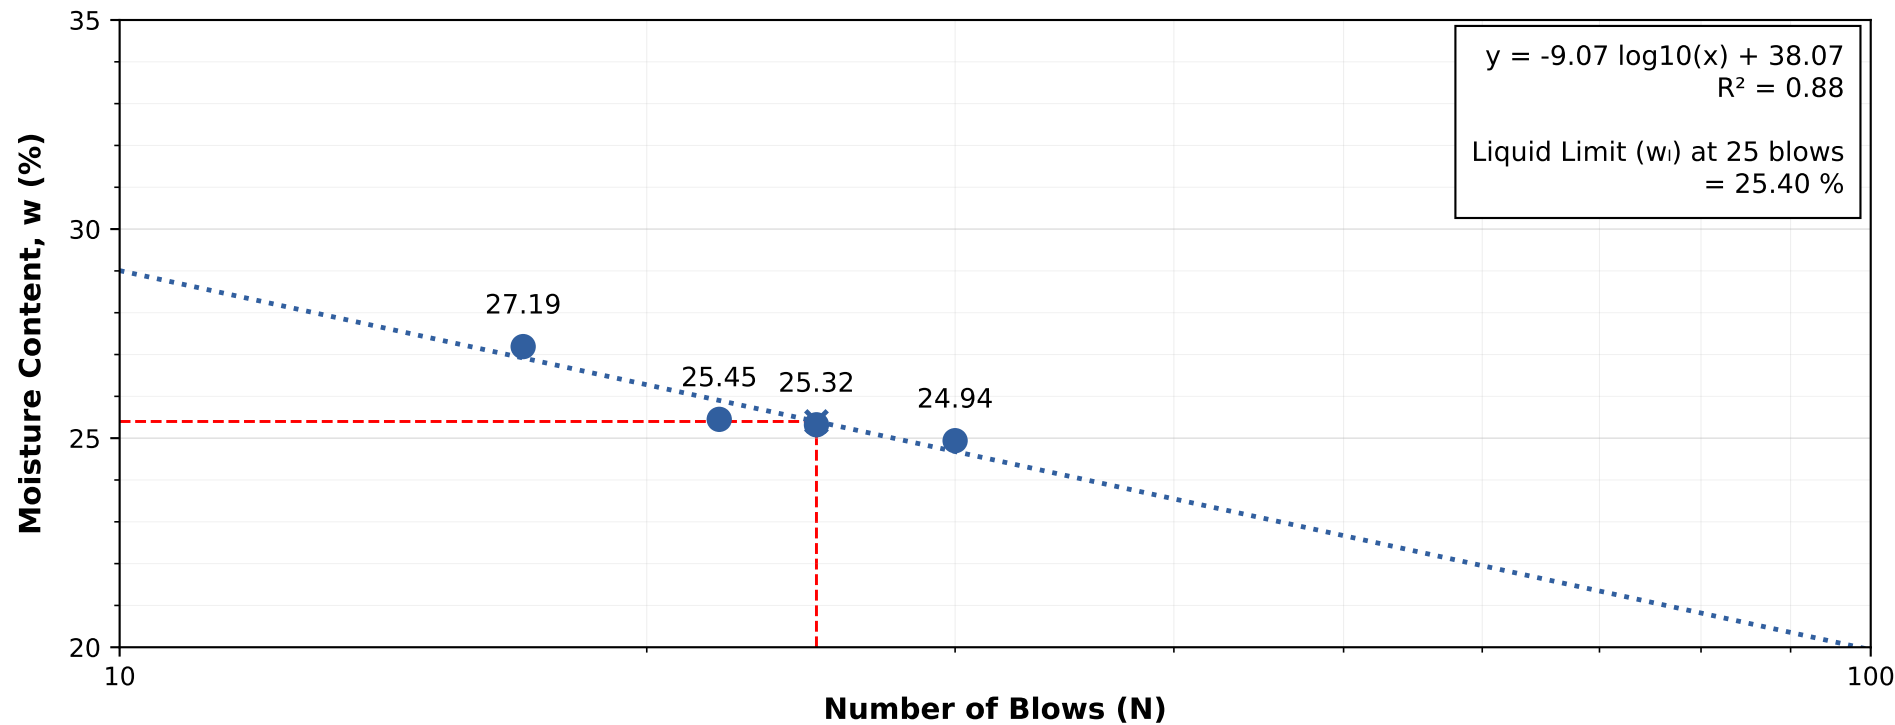

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	27.19
2	22	25.45
3	25	25.32
4	30	24.94

TEST RESULTS

Liquid Limit (w_l)	: 25.40 %
Plastic Limit (w_p)	: —
Plasticity Index (PI)	: —

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-16

Sample Type & Sample Depth from top : SPT & 4.50 m

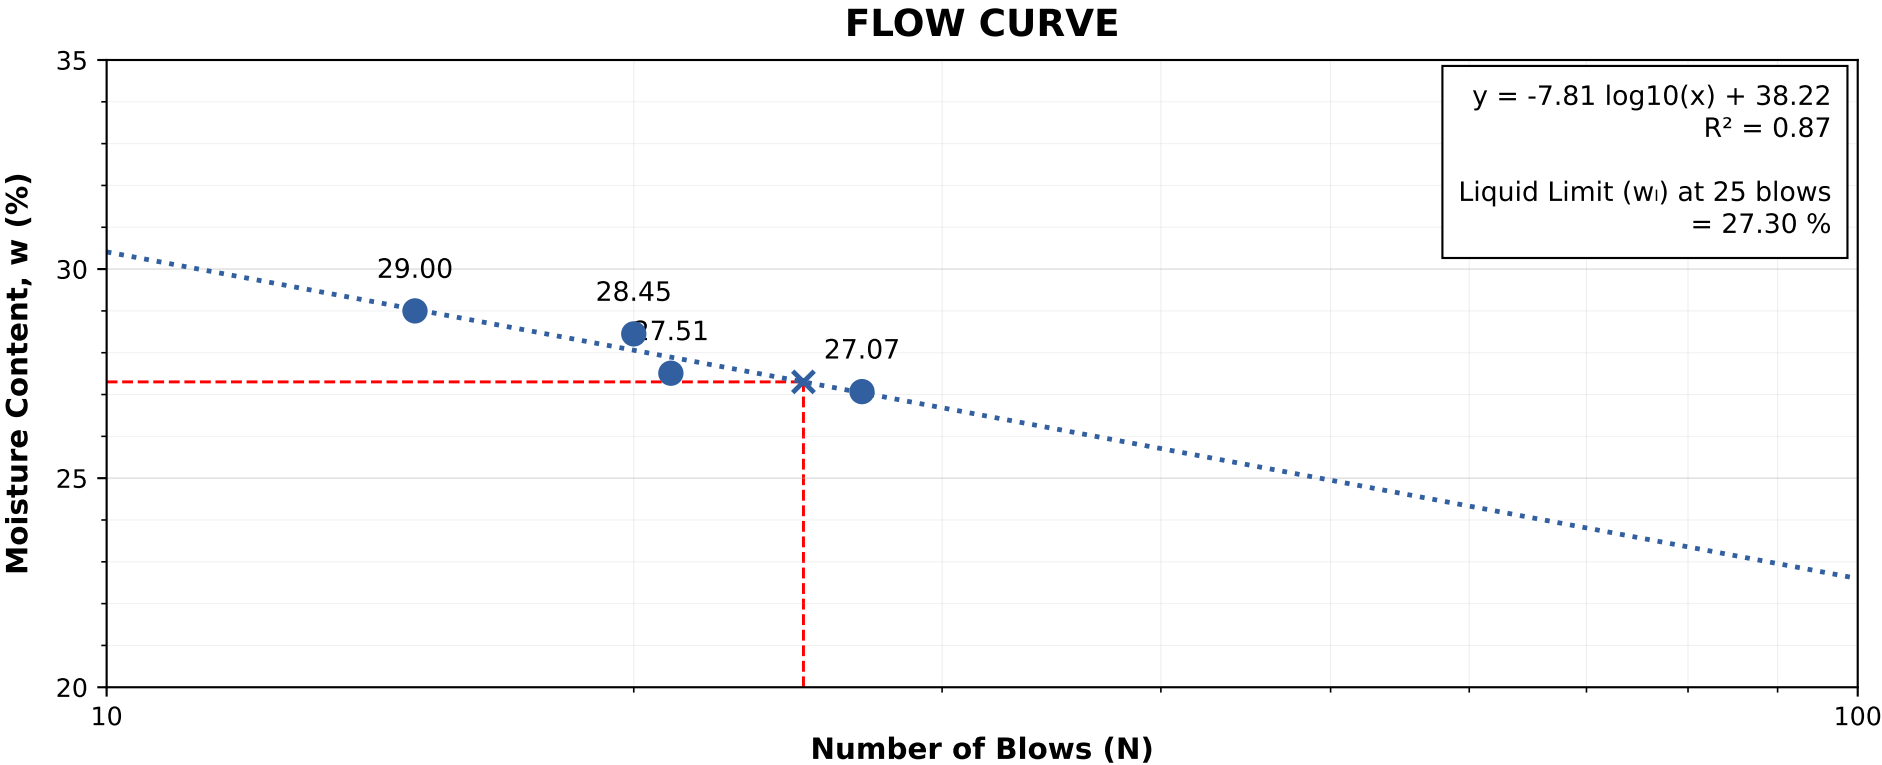

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	29.00
2	20	28.45
3	21	27.51
4	27	27.07

TEST RESULTS

Liquid Limit (w_L)	: 27.30 %
Plastic Limit (w_P)	: —
Plasticity Index (PI)	: —

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-16

Sample Type & Sample Depth from top : SPT & 7.50 m

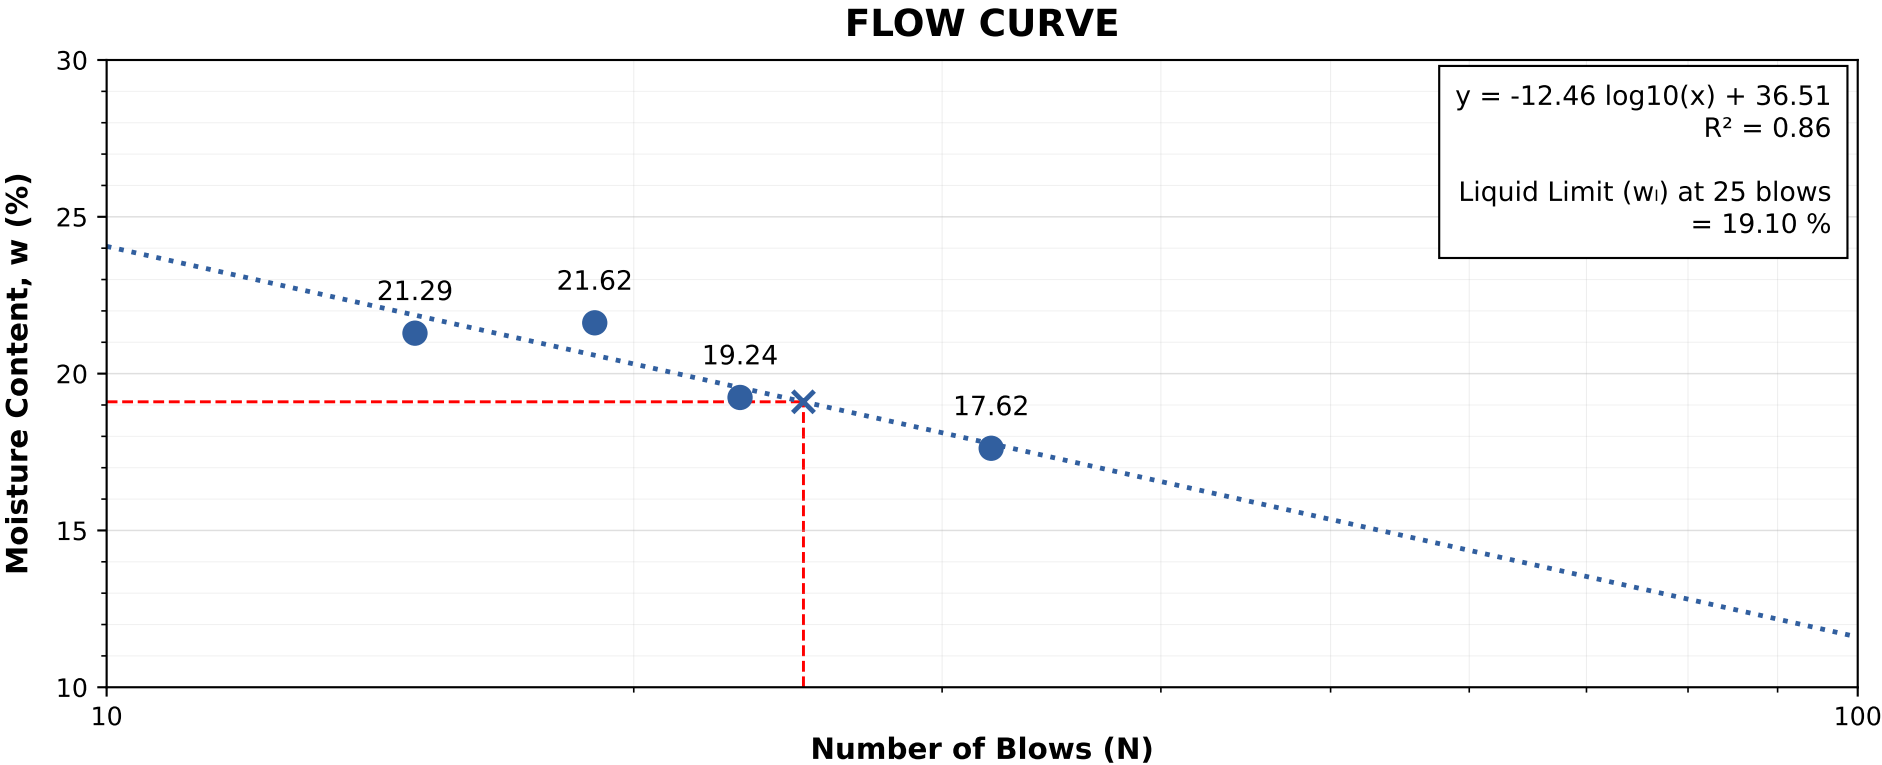

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	21.29
2	19	21.62
3	23	19.24
4	32	17.62

TEST RESULTS

Liquid Limit (w_L)	: 19.10 %
Plastic Limit (w_P)	: —
Plasticity Index (PI)	: —

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-16

Sample Type & Sample Depth from top : SPT & 10.50 m

FLOW CURVE

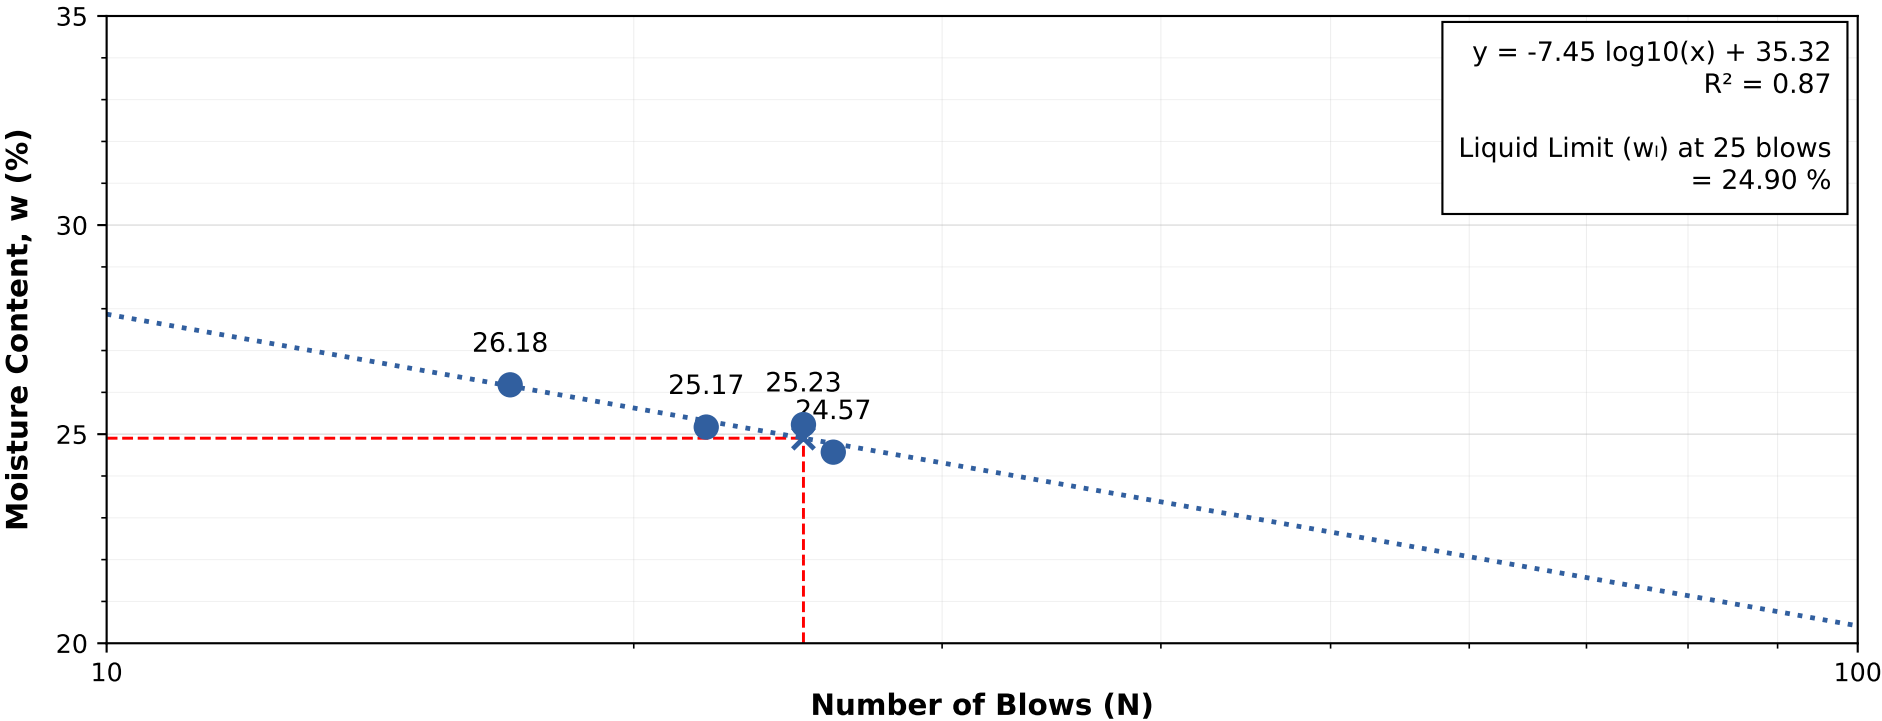

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	26.18
2	22	25.17
3	25	25.23
4	26	24.57

TEST RESULTS

Liquid Limit (w_L)	: 24.90 %
Plastic Limit (w_P)	: —
Plasticity Index (PI)	: —

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.