


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-8

Sample Type & Sample Depth from top : UDS & 1.50 m

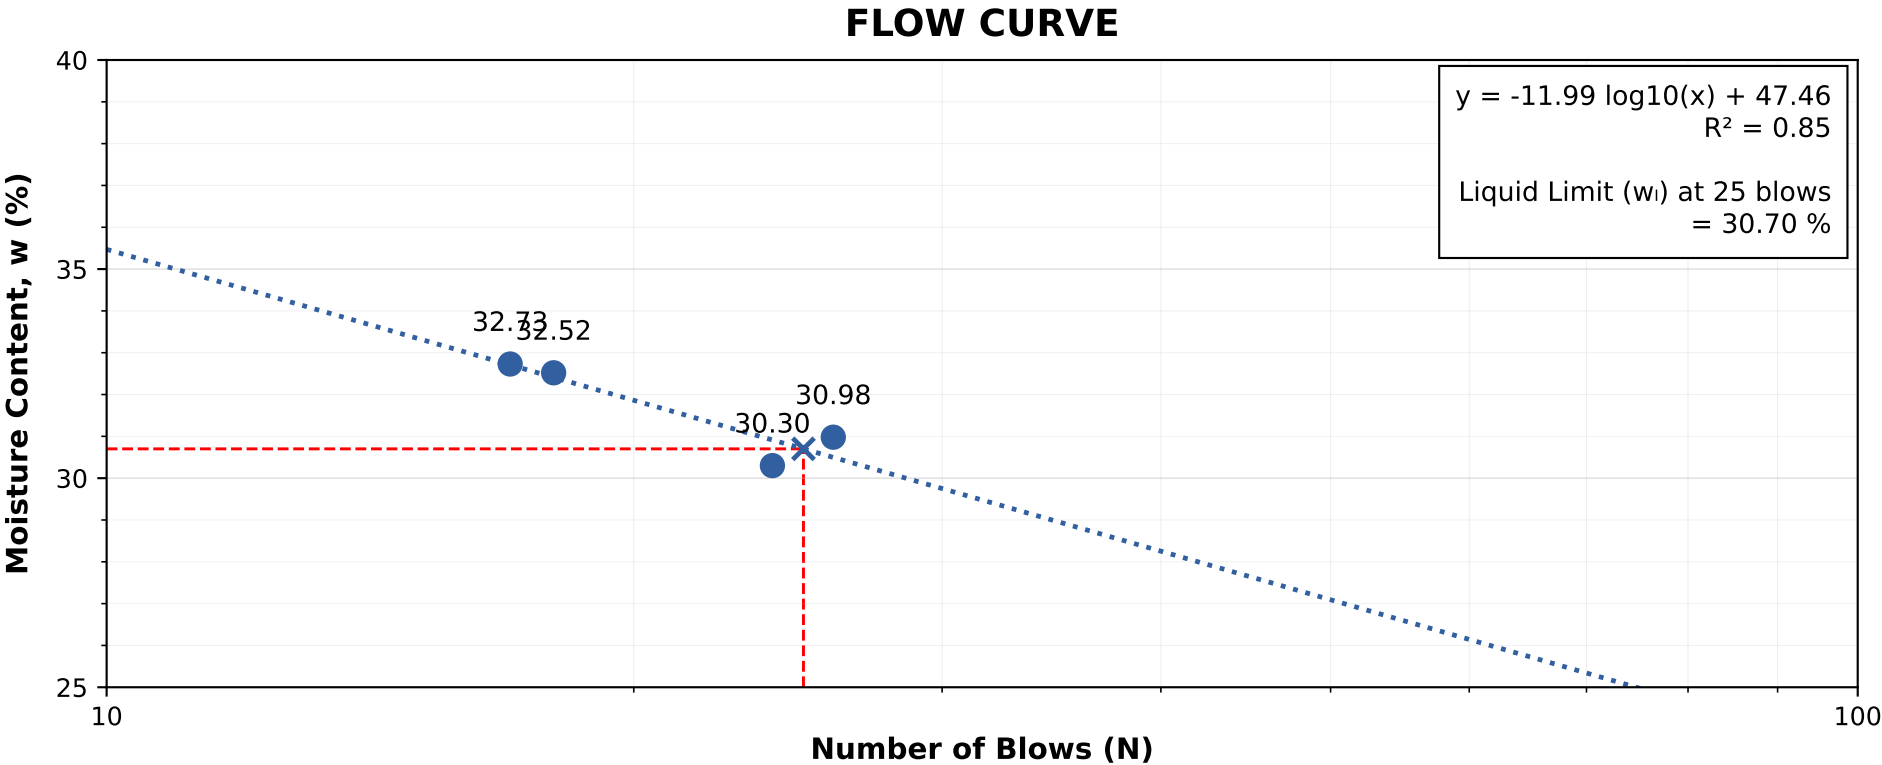

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	32.73
2	18	32.52
3	24	30.30
4	26	30.98

TEST RESULTS

Liquid Limit (w_l)	: 30.70 %
Plastic Limit (w_p)	: 16.10 %
Plasticity Index (PI)	: 14.60 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-8

Sample Type & Sample Depth from top : UDS & 4.50 m

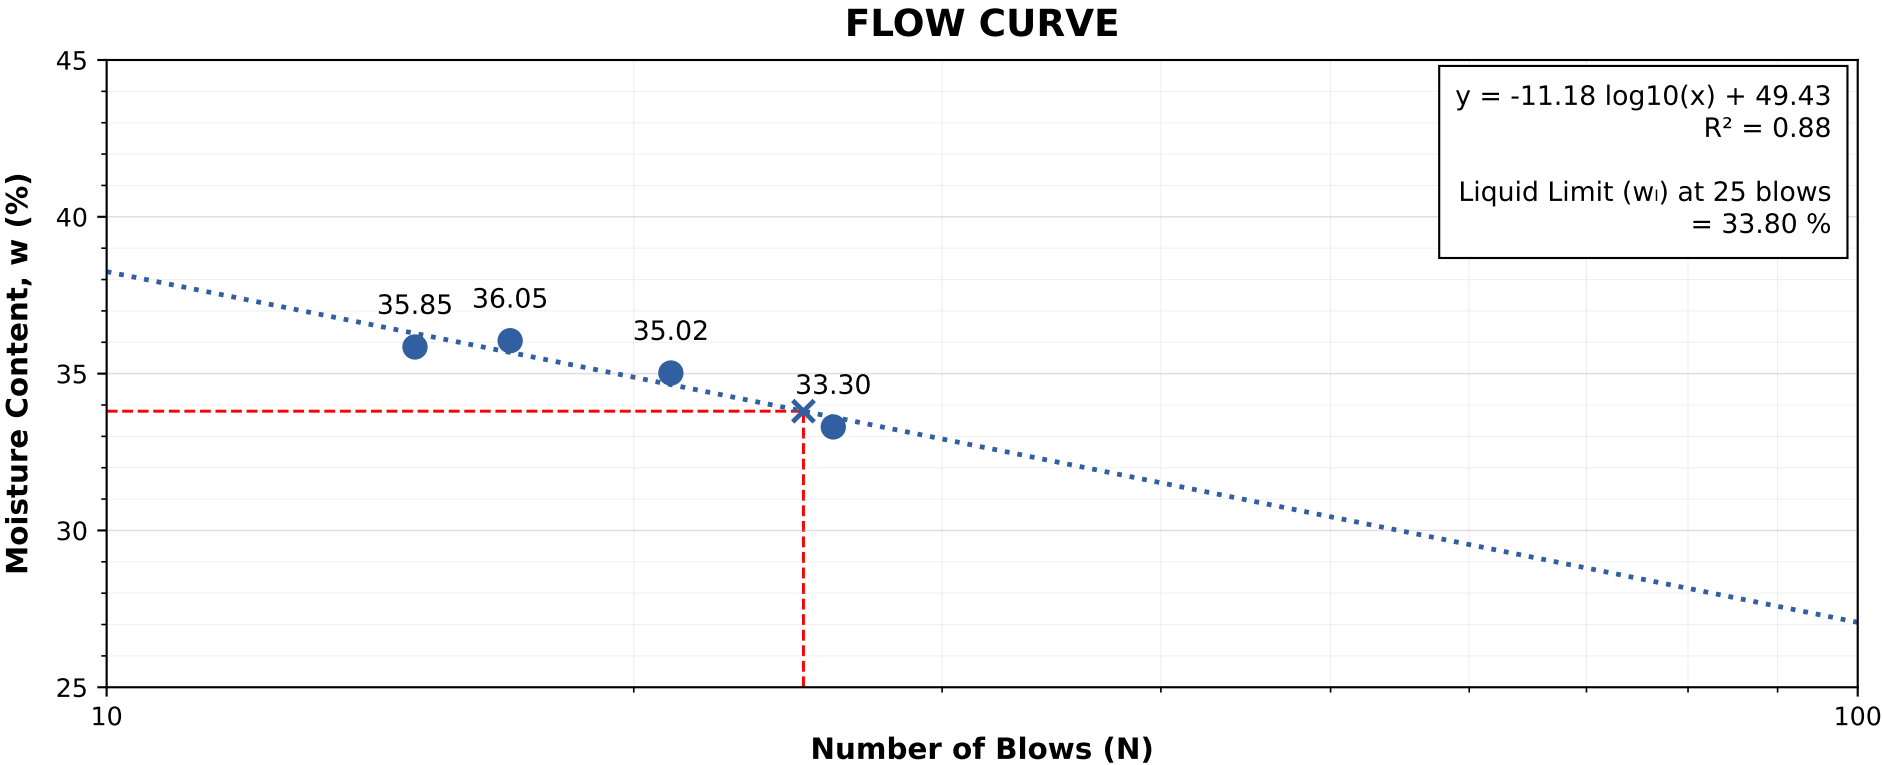

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	15	35.85
2	17	36.05
3	21	35.02
4	26	33.30

TEST RESULTS

Liquid Limit (w_L)	: 33.80 %
Plastic Limit (w_P)	: 16.90 %
Plasticity Index (PI)	: 16.90 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.


LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-8

Sample Type & Sample Depth from top : UDS & 7.50 m

FLOW CURVE

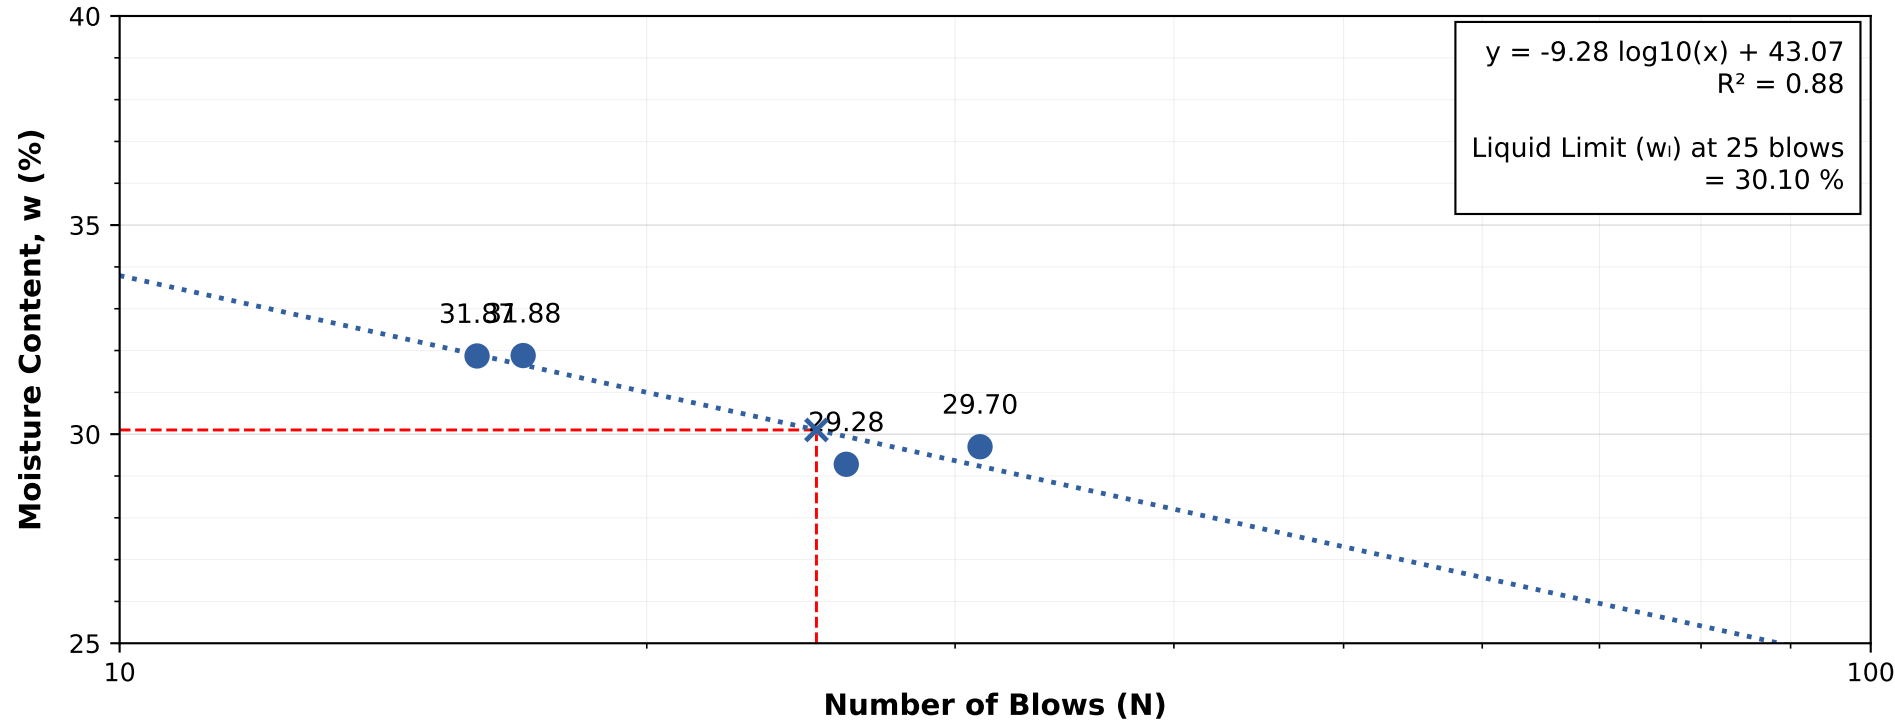

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	31.87
2	17	31.88
3	26	29.28
4	31	29.70

TEST RESULTS

Liquid Limit (w_L)	: 30.10 %
Plastic Limit (w_P)	: 15.80 %
Plasticity Index (PI)	: 14.30 %


Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-8
Sample Type & Sample Depth from top : UDS & 10.50 m

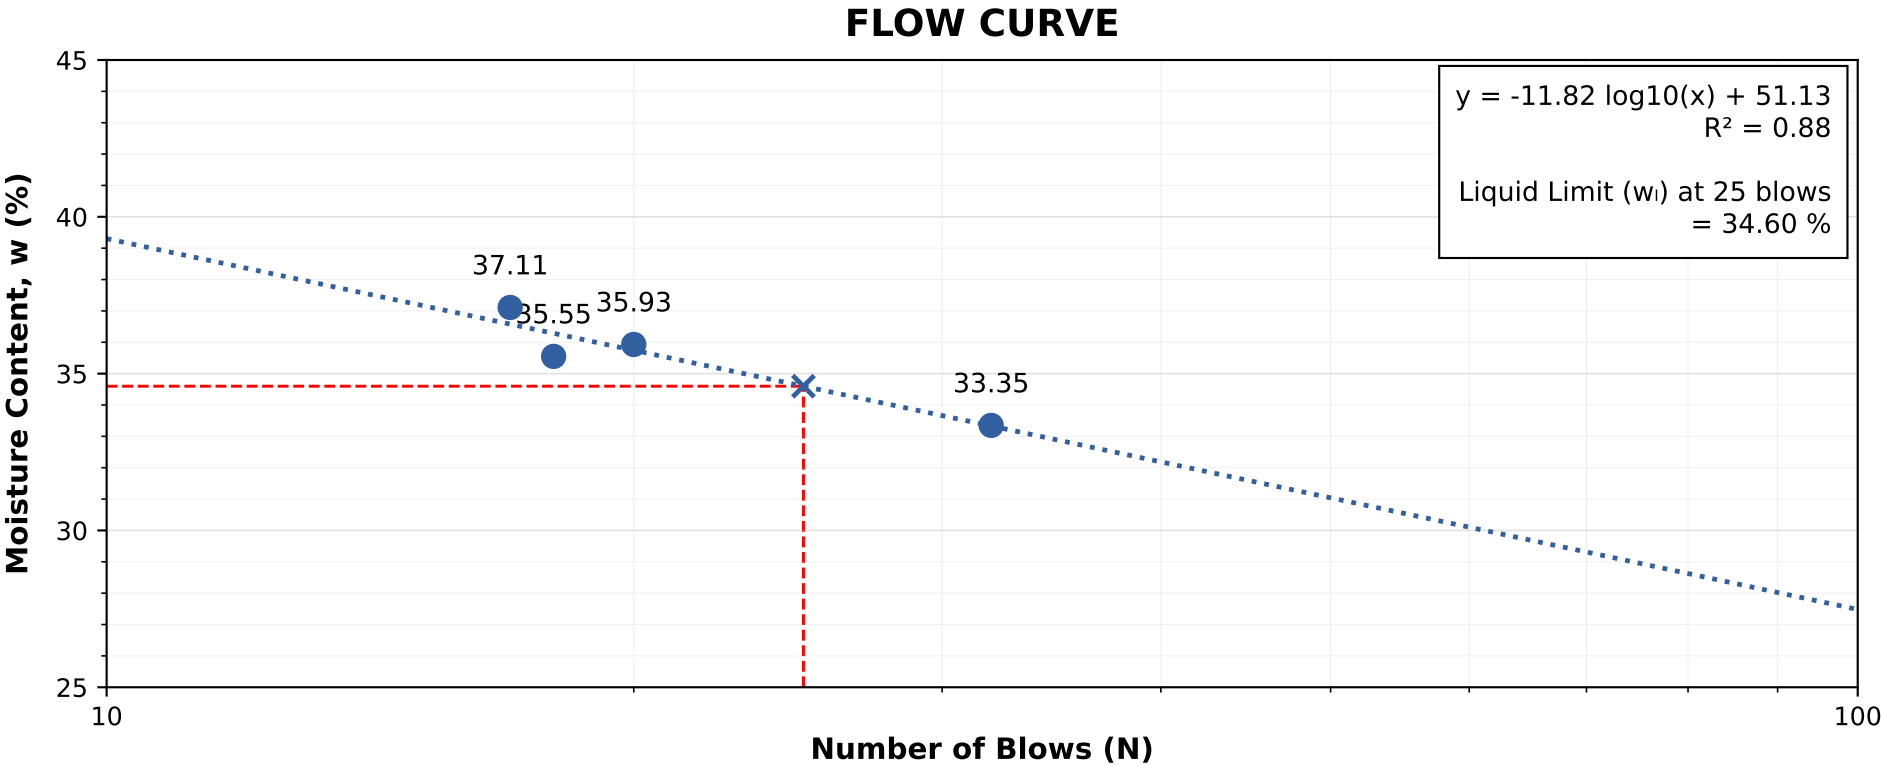

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	37.11
2	18	35.55
3	20	35.93
4	32	33.35

TEST RESULTS

Liquid Limit (w_L)	: 34.60 %
Plastic Limit (w_P)	: 17.10 %
Plasticity Index (PI)	: 17.50 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-8

Sample Type & Sample Depth from top : UDS & 13.50 m

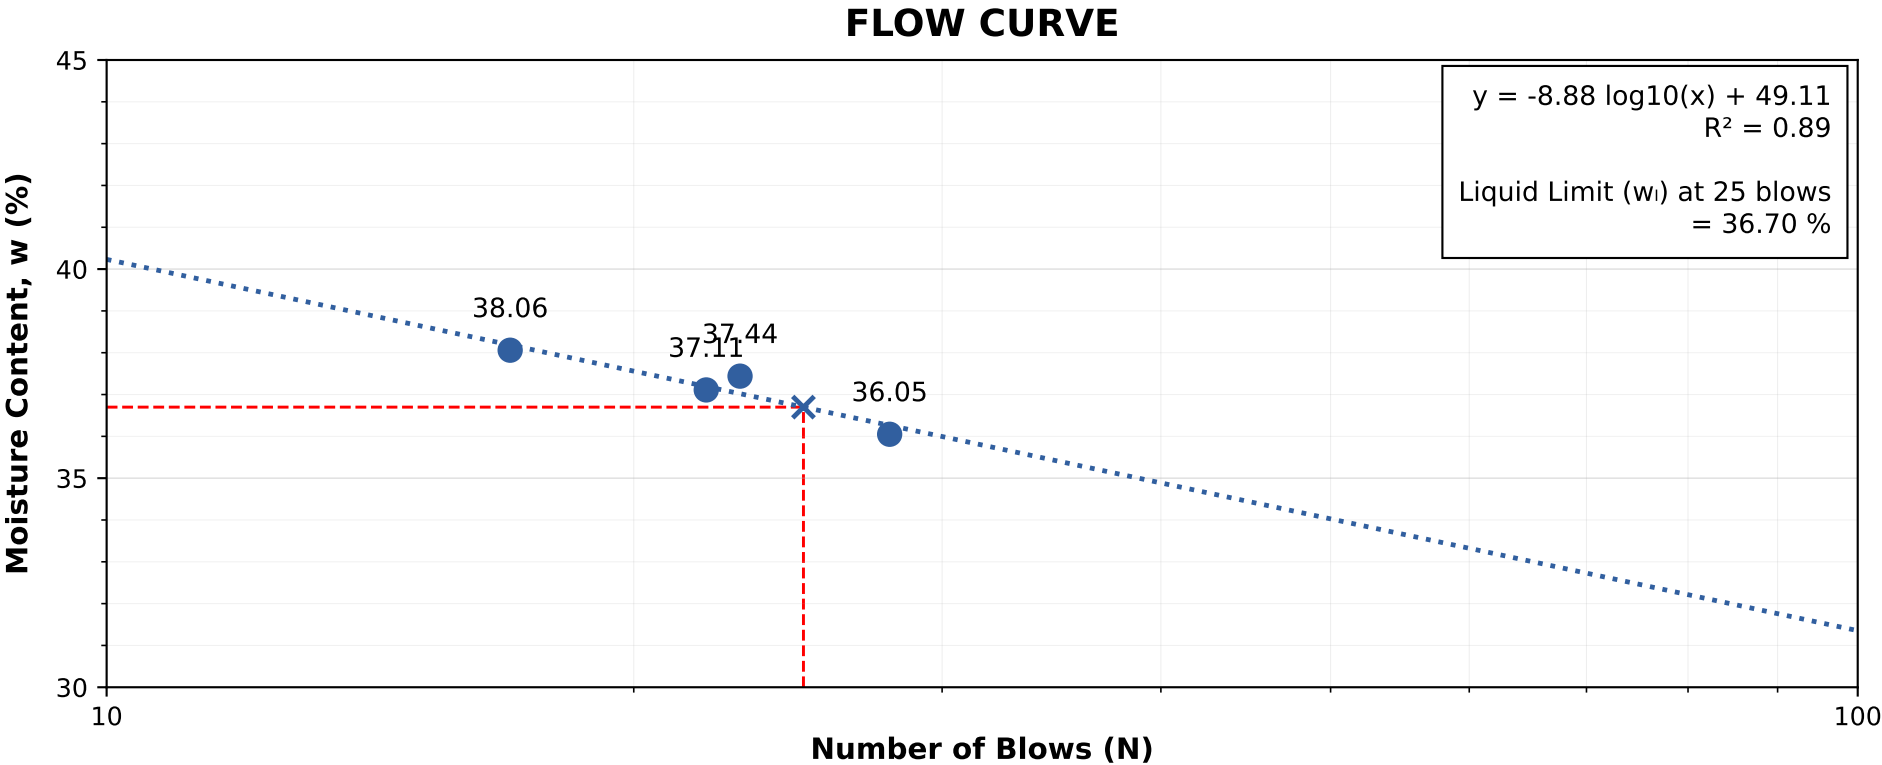

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	17	38.06
2	22	37.11
3	23	37.44
4	28	36.05

TEST RESULTS

Liquid Limit (w_L)	: 36.70 %
Plastic Limit (w_P)	: 17.30 %
Plasticity Index (PI)	: 19.40 %

Remarks / Note:


- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.

LIQUID LIMIT DETERMINATION - FLOW CURVE

Test Method: IS 2720 (Part 5)

Borehole ID : CBH-8

Sample Type & Sample Depth from top : SPT & 15.50 m

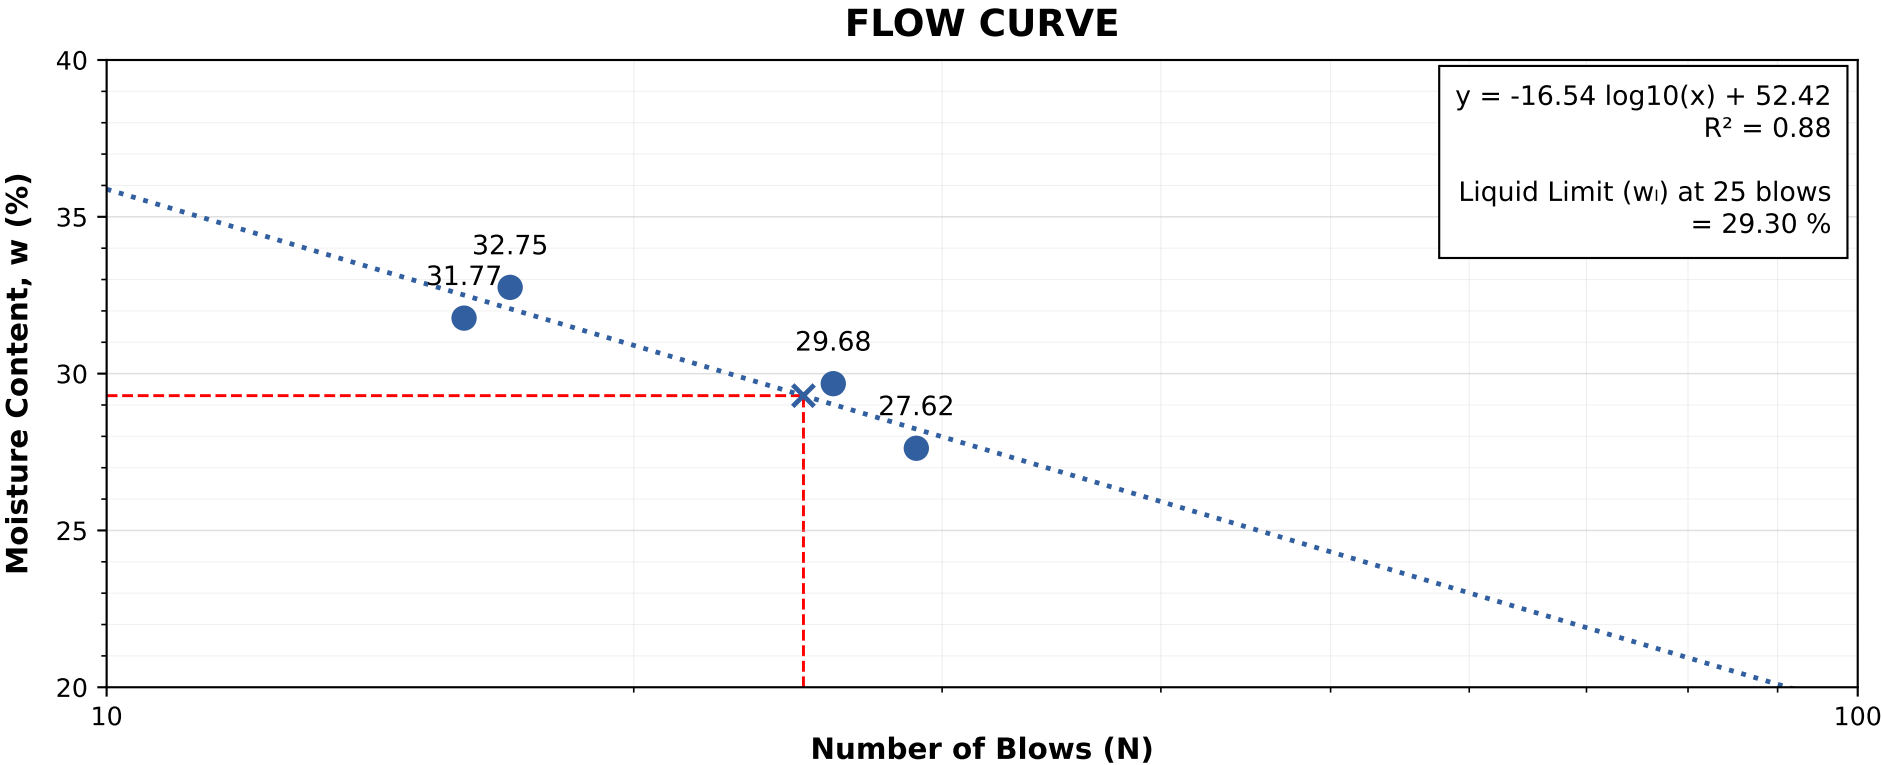

LIQUID LIMIT TEST OBSERVATIONS

Trial No.	Number of Blows (N)	Moisture Content, w (%)
1	16	31.77
2	17	32.75
3	26	29.68
4	29	27.62

TEST RESULTS

Liquid Limit (w_L)	: 29.30 %
Plastic Limit (w_P)	: 13.60 %
Plasticity Index (PI)	: 15.70 %

Remarks / Note:

- Flow curve plotted as per IS 2720 (Part 5) using semi-logarithmic scale.
- Liquid Limit reported at 25 blows from the best fit line.