


CryoFlow session QC report

Project **β-Galactosidase Tutorial (demo)** · 20 jobs — 19 succeeded · 0 running · 1 failed · 0 waiting.

Pipeline at a glance

- **19** succeeded jobs feed this report's QC sections;
- **0** running · **1** failed — failures stay counted here, never dropped;
- **0** waiting (idle or submitted) — no verdict exists for work that has not run.

Map QC

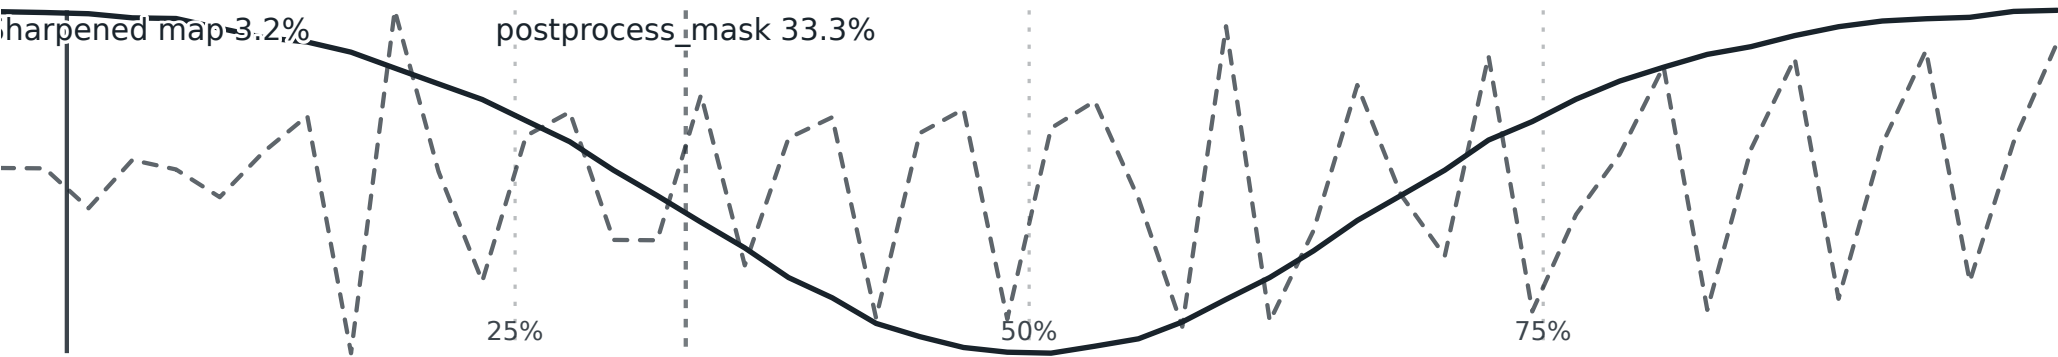

Map QC summary — Sharpened map

Job `cmuje02ai000nk6hfna1xhm62` · mean-density landscape along **Z** (64 bins).

- **Peak** mean ρ at plane 2 (**3.2%** of depth) — where the specimen's mass concentrates on this axis
- **Trough** at plane 32 (50.8%)
- **Span** across planes: 0.2548 (max -0.0012, min -0.2560)

Comparison maps (1)

Map	Bins	Peak at	Agreement r	Verdict	Shape
postprocess_mask	64	33.3%	0.02	diverges	

Where a comparison line follows the main landscape, the density is consistent between maps; where it parts ways lives noise or masking. Agreement r is the Pearson correlation on the shared 0-100% fraction scale — each terrain self-scaled to its own map's stats (the shape is the signal, not absolute ρ).

Local agreement

Map	Q1 (0-25%)	Q2 (25-50%)	Q3 (50-75%)	Q4 (75-100%)	Weakest	Depth (fraction)	Bands
postprocess_mask	0.10	0.14	-0.05	0.10	Q3 (50-75%) (-0.05)	0.50-0.75	

A global r can hide a localized betrayal — a map can agree over most of the depth and part ways in a single band (a mask edge, a noise shelf). Each quarter of the shared fraction scale is correlated independently, and the weakest quarter is the address to inspect; the Depth column quotes that address as fractions (the same numbers the viewer's bracket door jumps to). Where the half-maps disagree with each other in one band only, suspect that band, not the reconstruction.

Reading the depth addresses

Every depth in this report is a fraction of the map's thickness along the axis (0 = the front face, 1 = the back face), never an Å position — the landscape is mean density per plane, contour-independent, describing the whole map. The quarter bands are cut by an equal-count knife: each quarter holds the same number of measured planes, so a weak quarter names a real place, not a sparse one. The tables divide the labour — Comparison summarizes each map with one global r ; Local addresses (the weakest quarter, quoted as depth); Pairwise corroborates (each pair measured as its own two maps). The Comparison table deliberately carries no Depth column: its address is already quoted in the Local agreement section below — a depth printed twice has two fathers and drifts apart. In the viewer, every one of these addresses is a door: press the chip or the bracket and the plane lands on the band's centre.

Exported from CryoFlow's slice instrument — the mean-density landscape is contour-independent and describes the whole map, not the current isosurface.

Session map inventory

Every job in this session that owns a true 3D volume, newest walk first. The deep profiles above ride the newest owner; this inventory keeps every other owner visible — no map hides below the fold (the t211 lesson: a walk that stops at the first winner leaves the rest of the world unseen). Each row is a door — press it and the page hands you to that job's results (the t210 lesson carried onto the report: a name on a roster should never be a dead end). The Peak column quotes each owner's main map exactly the way the deep report quotes the winner — where the mass concentrates along the shared axis, as a fraction of depth; — means still measuring, never a guess. The Δ winner column reads every peak against the winner's own — the reference row speaks +0.0, its dash obeys the same law, and the lens never guesses; on the page the row farthest from the winner wears the amber edge (a lens, not a verdict — the exported bytes keep the numbers and let the reader judge). The Agreement r column gives every owner the winner's own comparison arithmetic — the same Pearson correlation on the shared 0-100% fraction scale, each owner's main landscape read against the winner's on the finer of the two grids; the reference row lands at 1.00 through the same path, and — means still measuring or a flat field, never a guess. The Weakest column answers the r column's next question — WHERE the shape does not follow: the same quarter-band cut the deep report's Local agreement table speaks, thinnest band first, Q1-Q4 with the band's own r ; the reference row's thinnest quarter is perfect and the cell says so.

Job	Main map	Volumes	Peak	Δ winner	Agreement r	Weakest	Shape
Post-process (tutorial)	Sharpened map	2	3.2%	+0.0	1.00	Q1 (1.00)	
3D Refine (tutorial)	run_class001	63	1.6%	-1.6	1.00	Q4 (0.99)	

Job	Main map	Volumes	Peak	Δ winner	Agreement r	Weakest	Shape
3D Classification (tutorial)	run_class001	153	1.6%	-1.6	1.00	Q4 (0.99)	
Mask Create (tutorial)	Mask	1	49.2%	+46.0	-0.75	Q2 (-0.97)	
Initial Model (tutorial)	run_class001	149	1.6%	-1.6	1.00	Q4 (0.99)	
2D Classification (tutorial)	Class 1 map (iter 1)	282	0.0%	-3.2	—	—	—

Scheduling sweep

No sweep raced this session — open the HPC queue panel and run *Compare profiles*; the winner's verdict will be bound here verbatim.

Bound from this session's live state — the pipeline glance, the map landscape and the sweep verdict each keep their own provenance. The filename carries the export stamp.