All−method bias distributions

Marginal A/C log(RR) | rare | n = 500 | ESS/n = 0.15

Adjustment: scores | fit weights: unit | source: nonem_driven | EM: high | calibration: nonem | complete 1000 / 1000

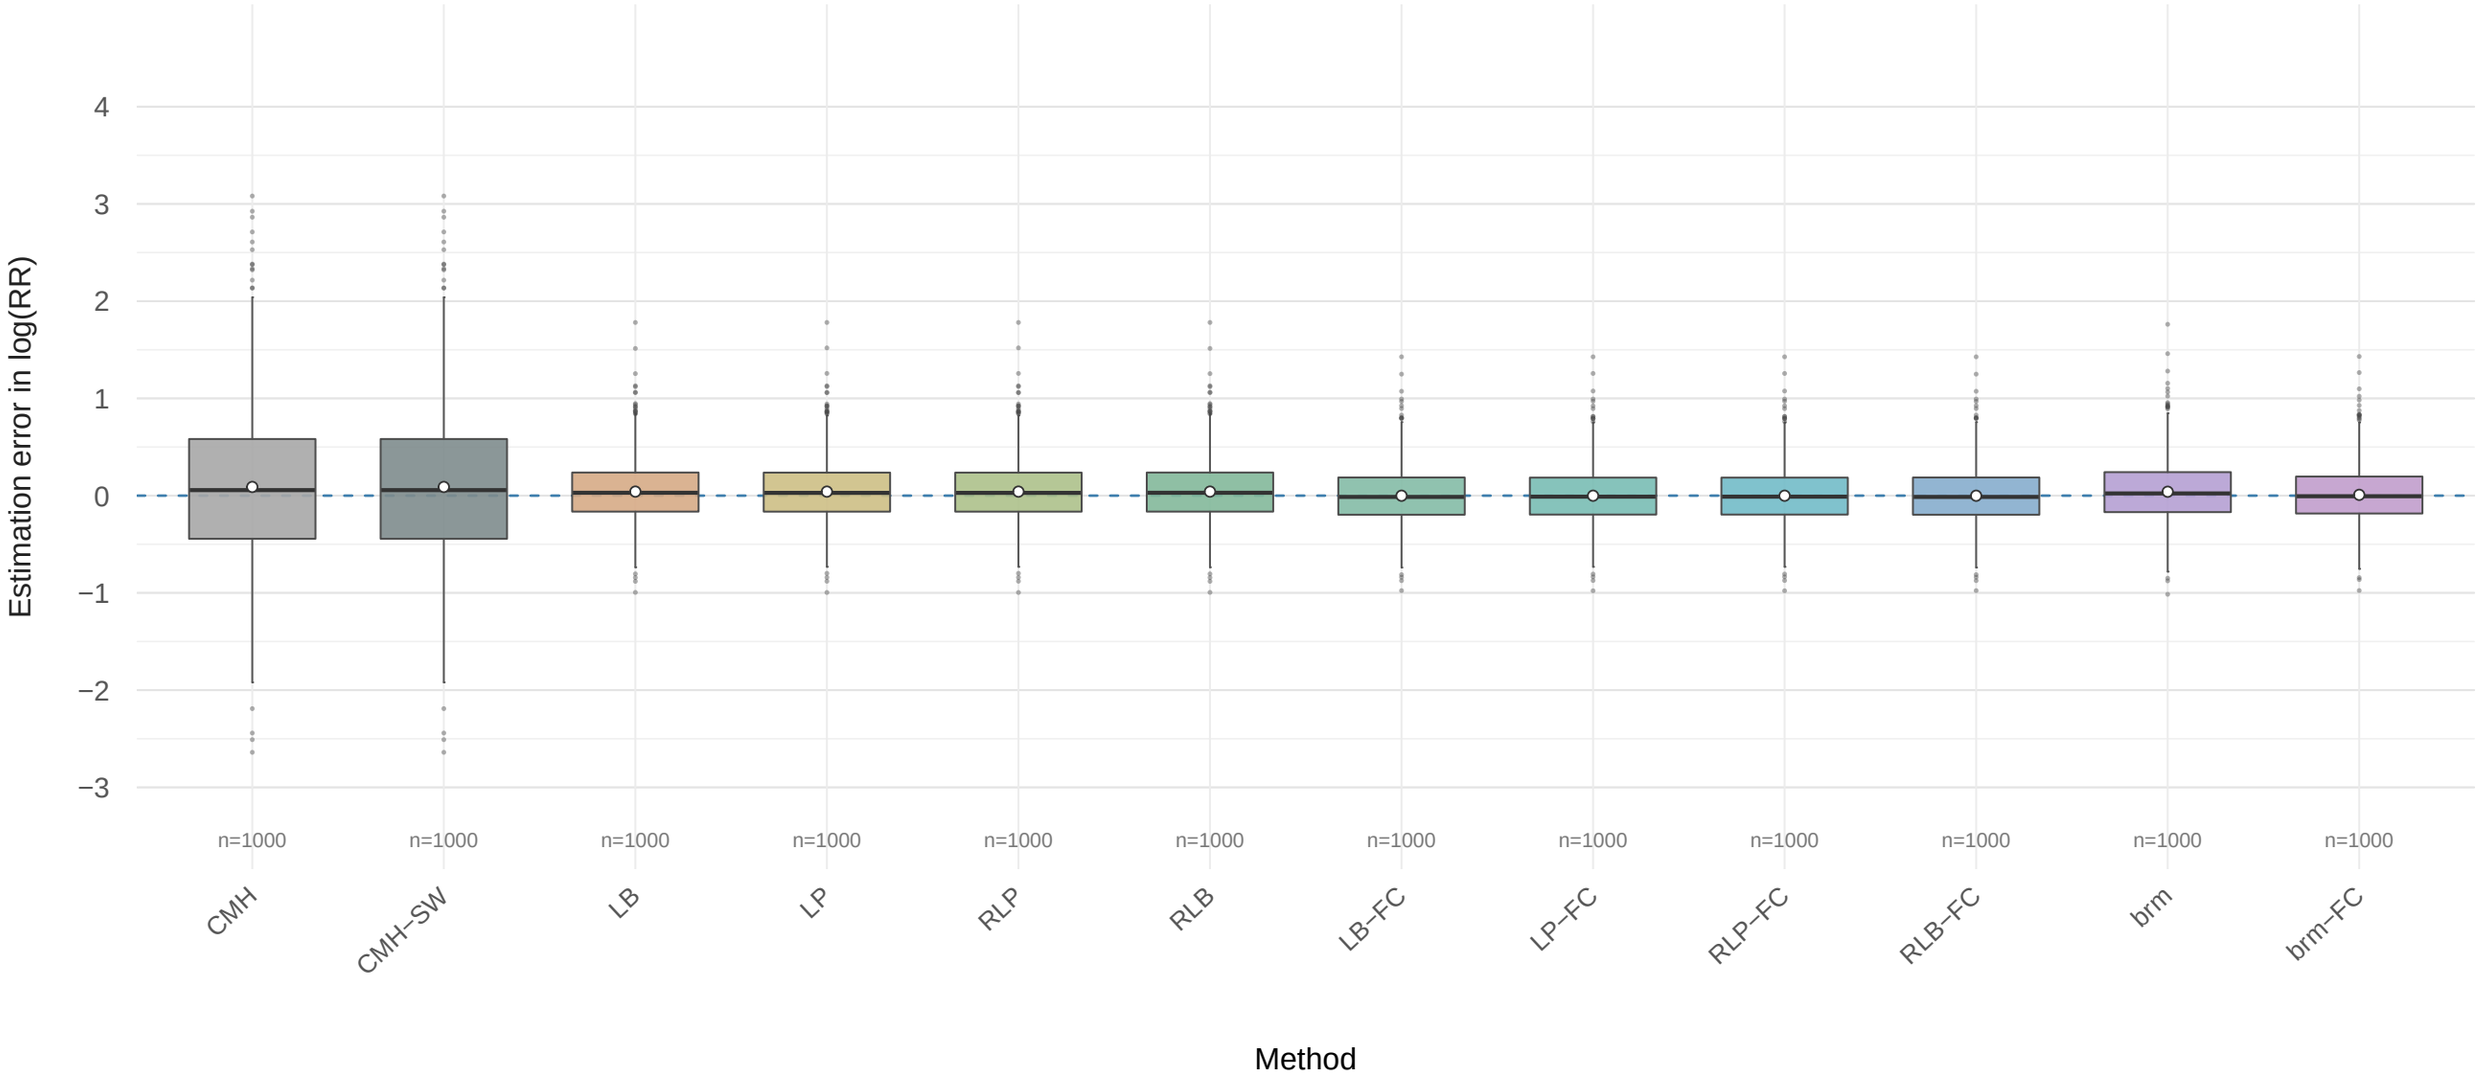

White points: full−data means. Red circles: display−clipped counts; statistics use all valid values.

Bias reference = 0; critical values +/−5; adaptive axis, no observations clipped.

All−method SE distributions

Marginal A/C log(RR) | rare | n = 500 | ESS/n = 0.15

Adjustment: scores | fit weights: unit | source: nonem_driven | EM: high | calibration: nonem | complete 1000 / 1000

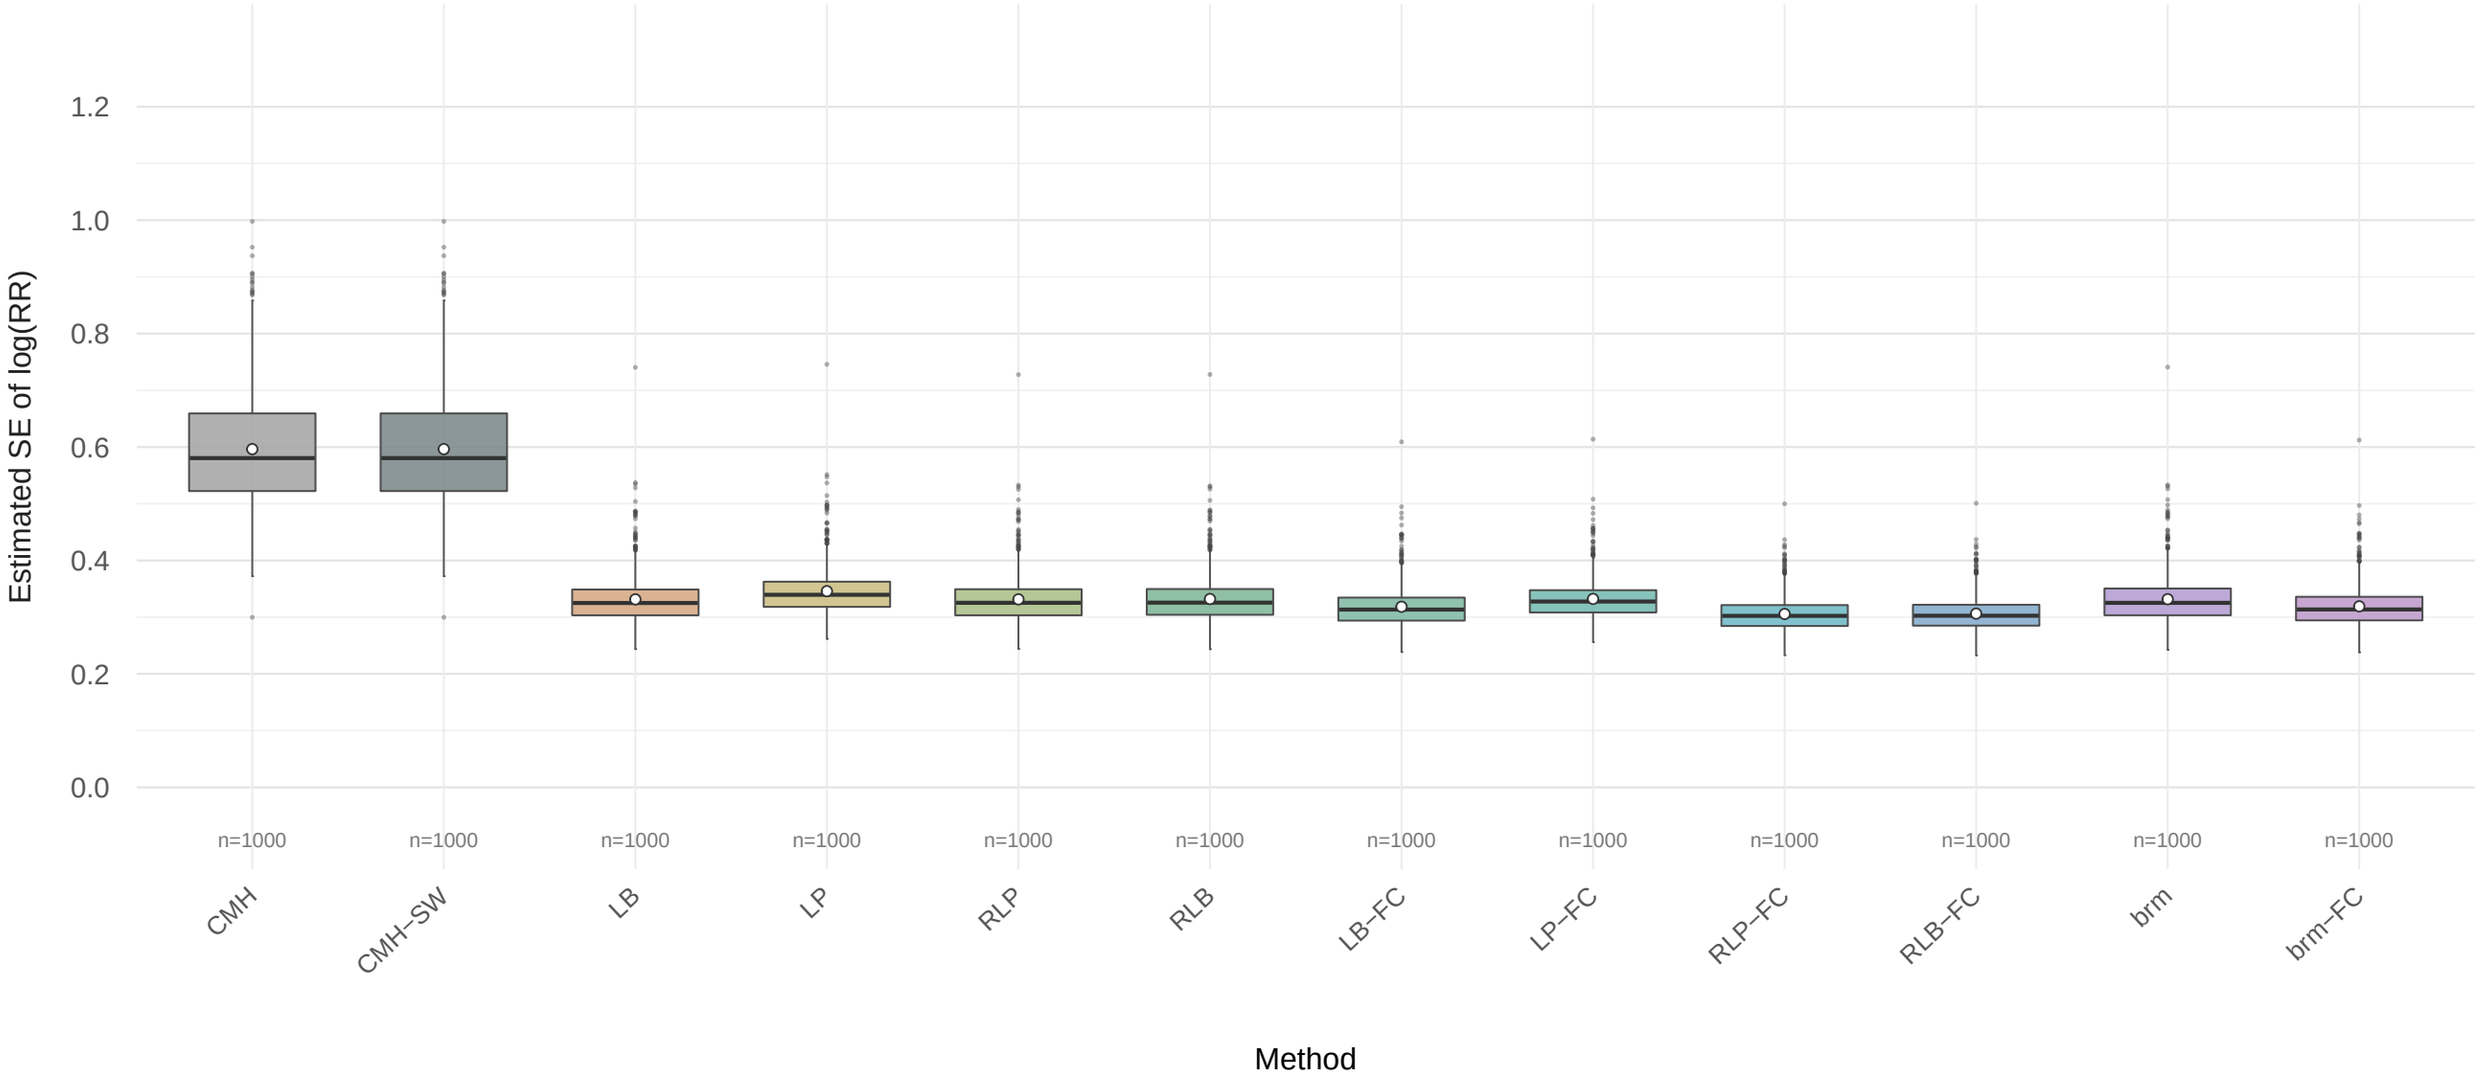

White points: full−data means. Red circles: display−clipped counts; statistics use all valid values.

SE critical value = 4; adaptive axis, no observations clipped.

All−method SE calibration

Marginal A/C log(RR) | rare | n = 500 | ESS/n = 0.15

Adjustment: scores | fit weights: unit | source: nonem_driven | EM: high | calibration: nonem | complete 1000 / 1000

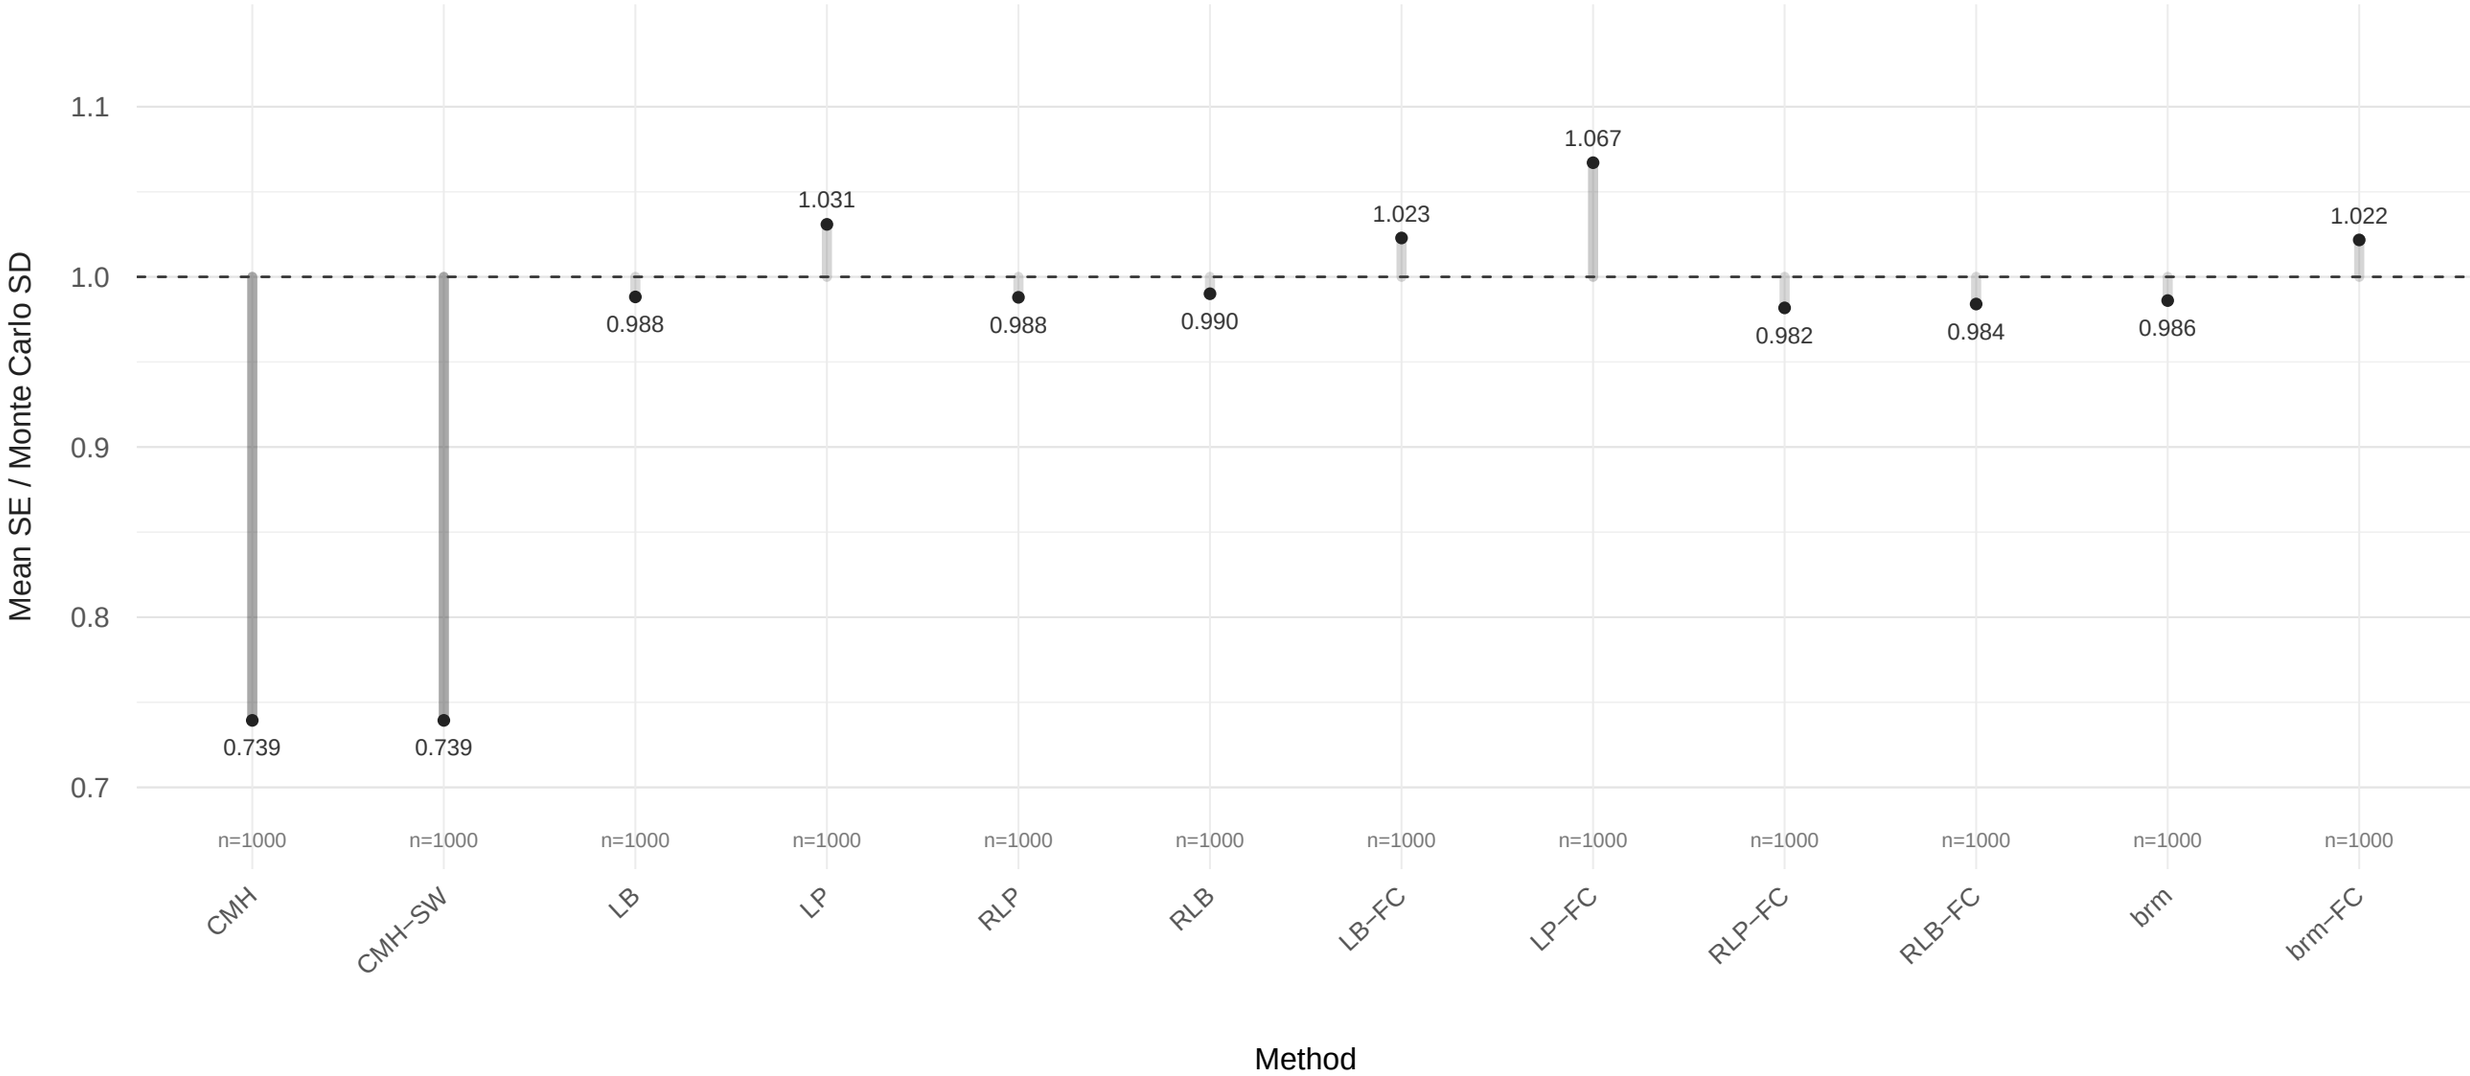

Target = 1. Matched SE−valid replicates; Exact SE not provided. Darker stems = larger deviation.

All−method coverage rate

Marginal A/C log(RR) | rare | n = 500 | ESS/n = 0.15

Adjustment: scores | fit weights: unit | source: nonem_driven | EM: high | calibration: nonem | complete 1000 / 1000

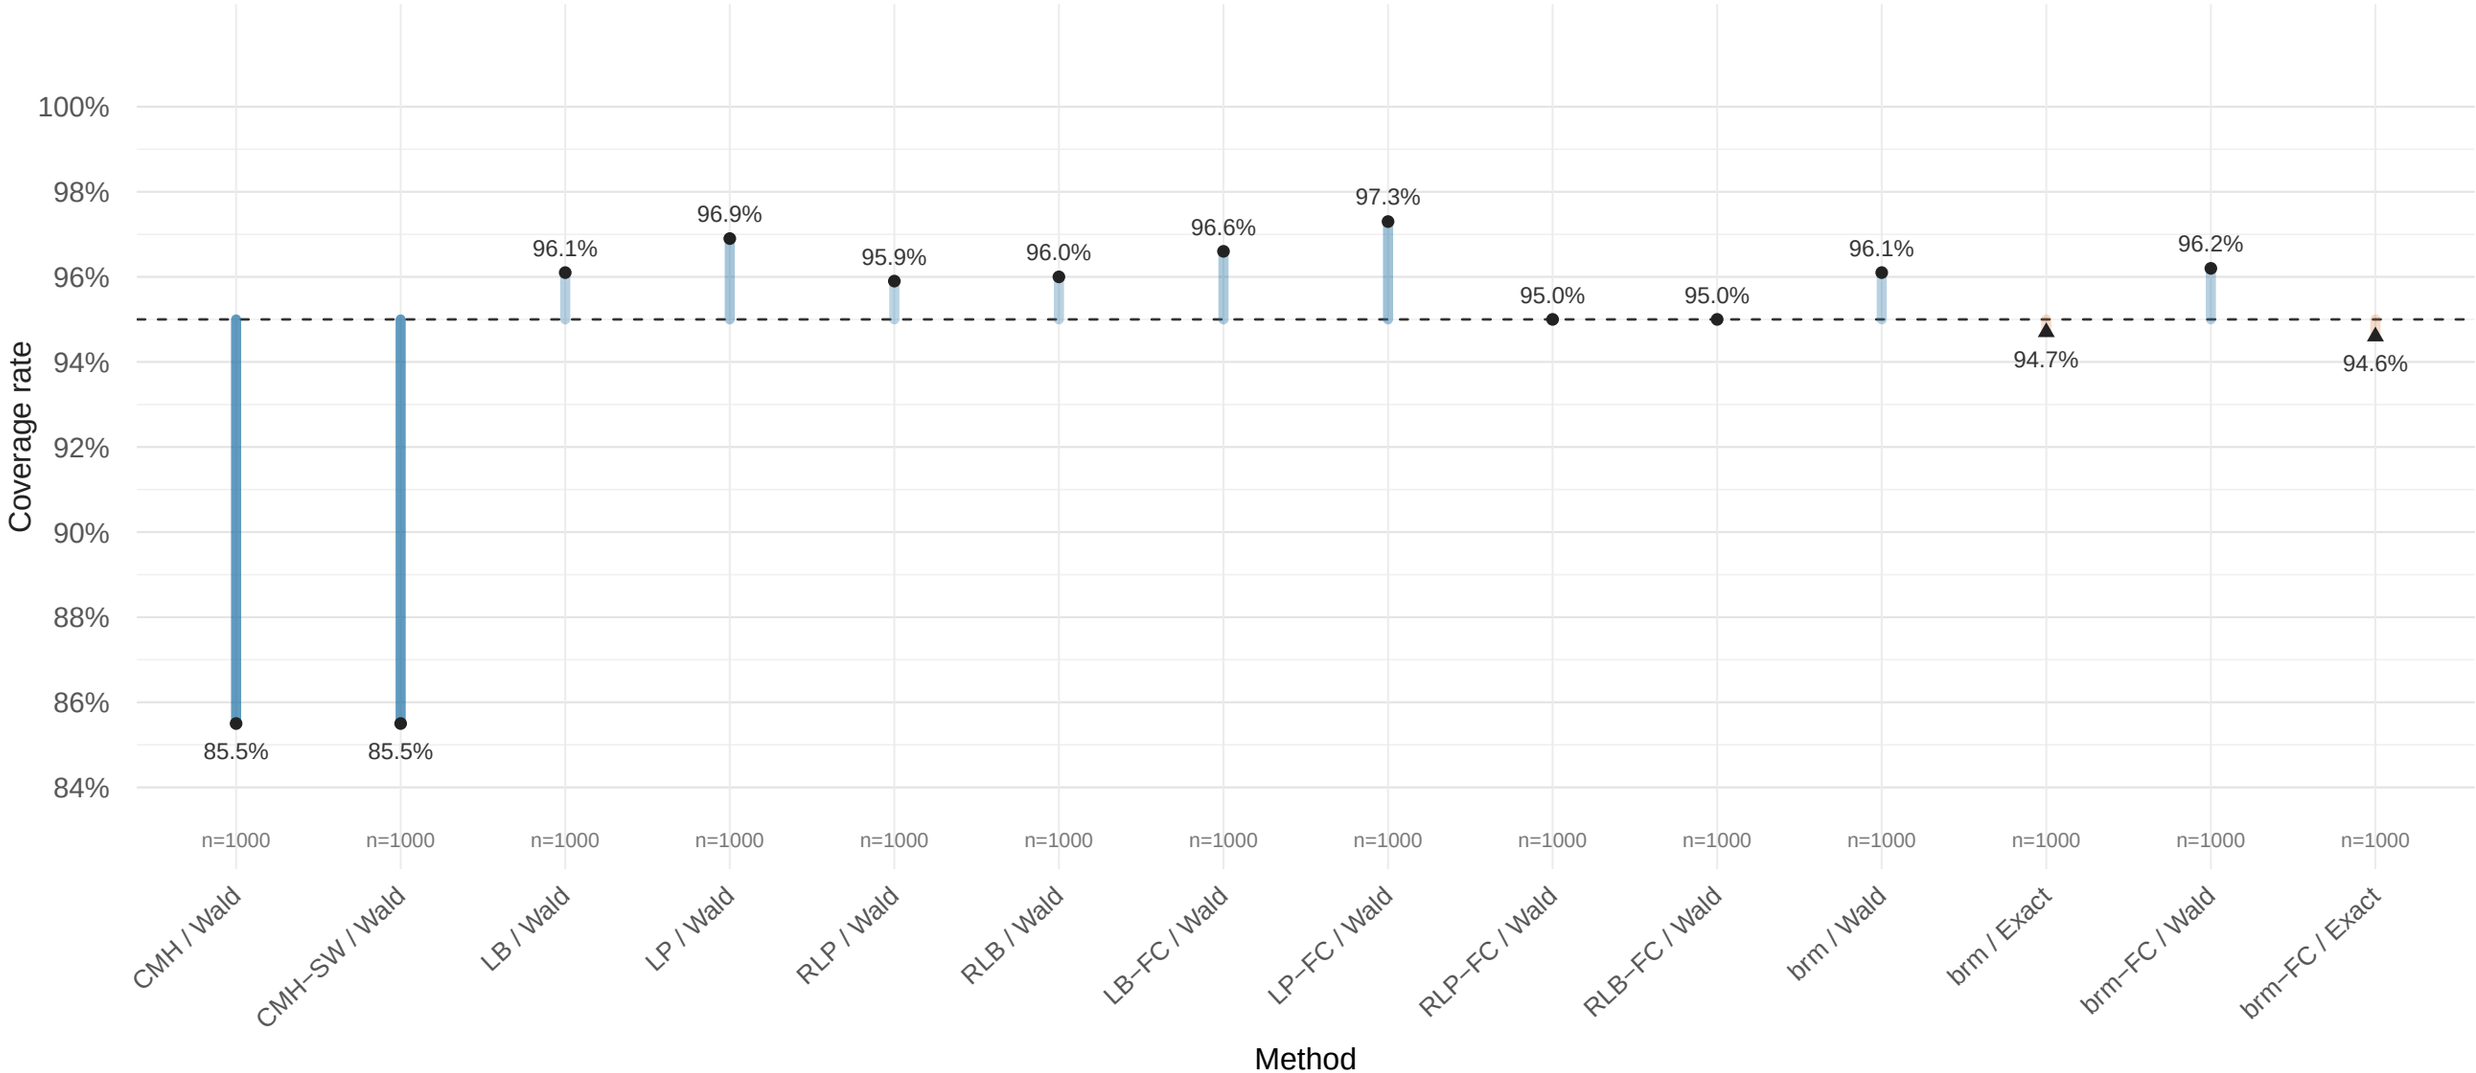

Target = 95%. Wald: blue; Exact: orange. Darker stems = larger deviation. Valid returned intervals only.