All−method bias distributions

BC population marginal A−C RD

none_MAIC | S07_rare_n500_ess015_none_MAIC | MC1000

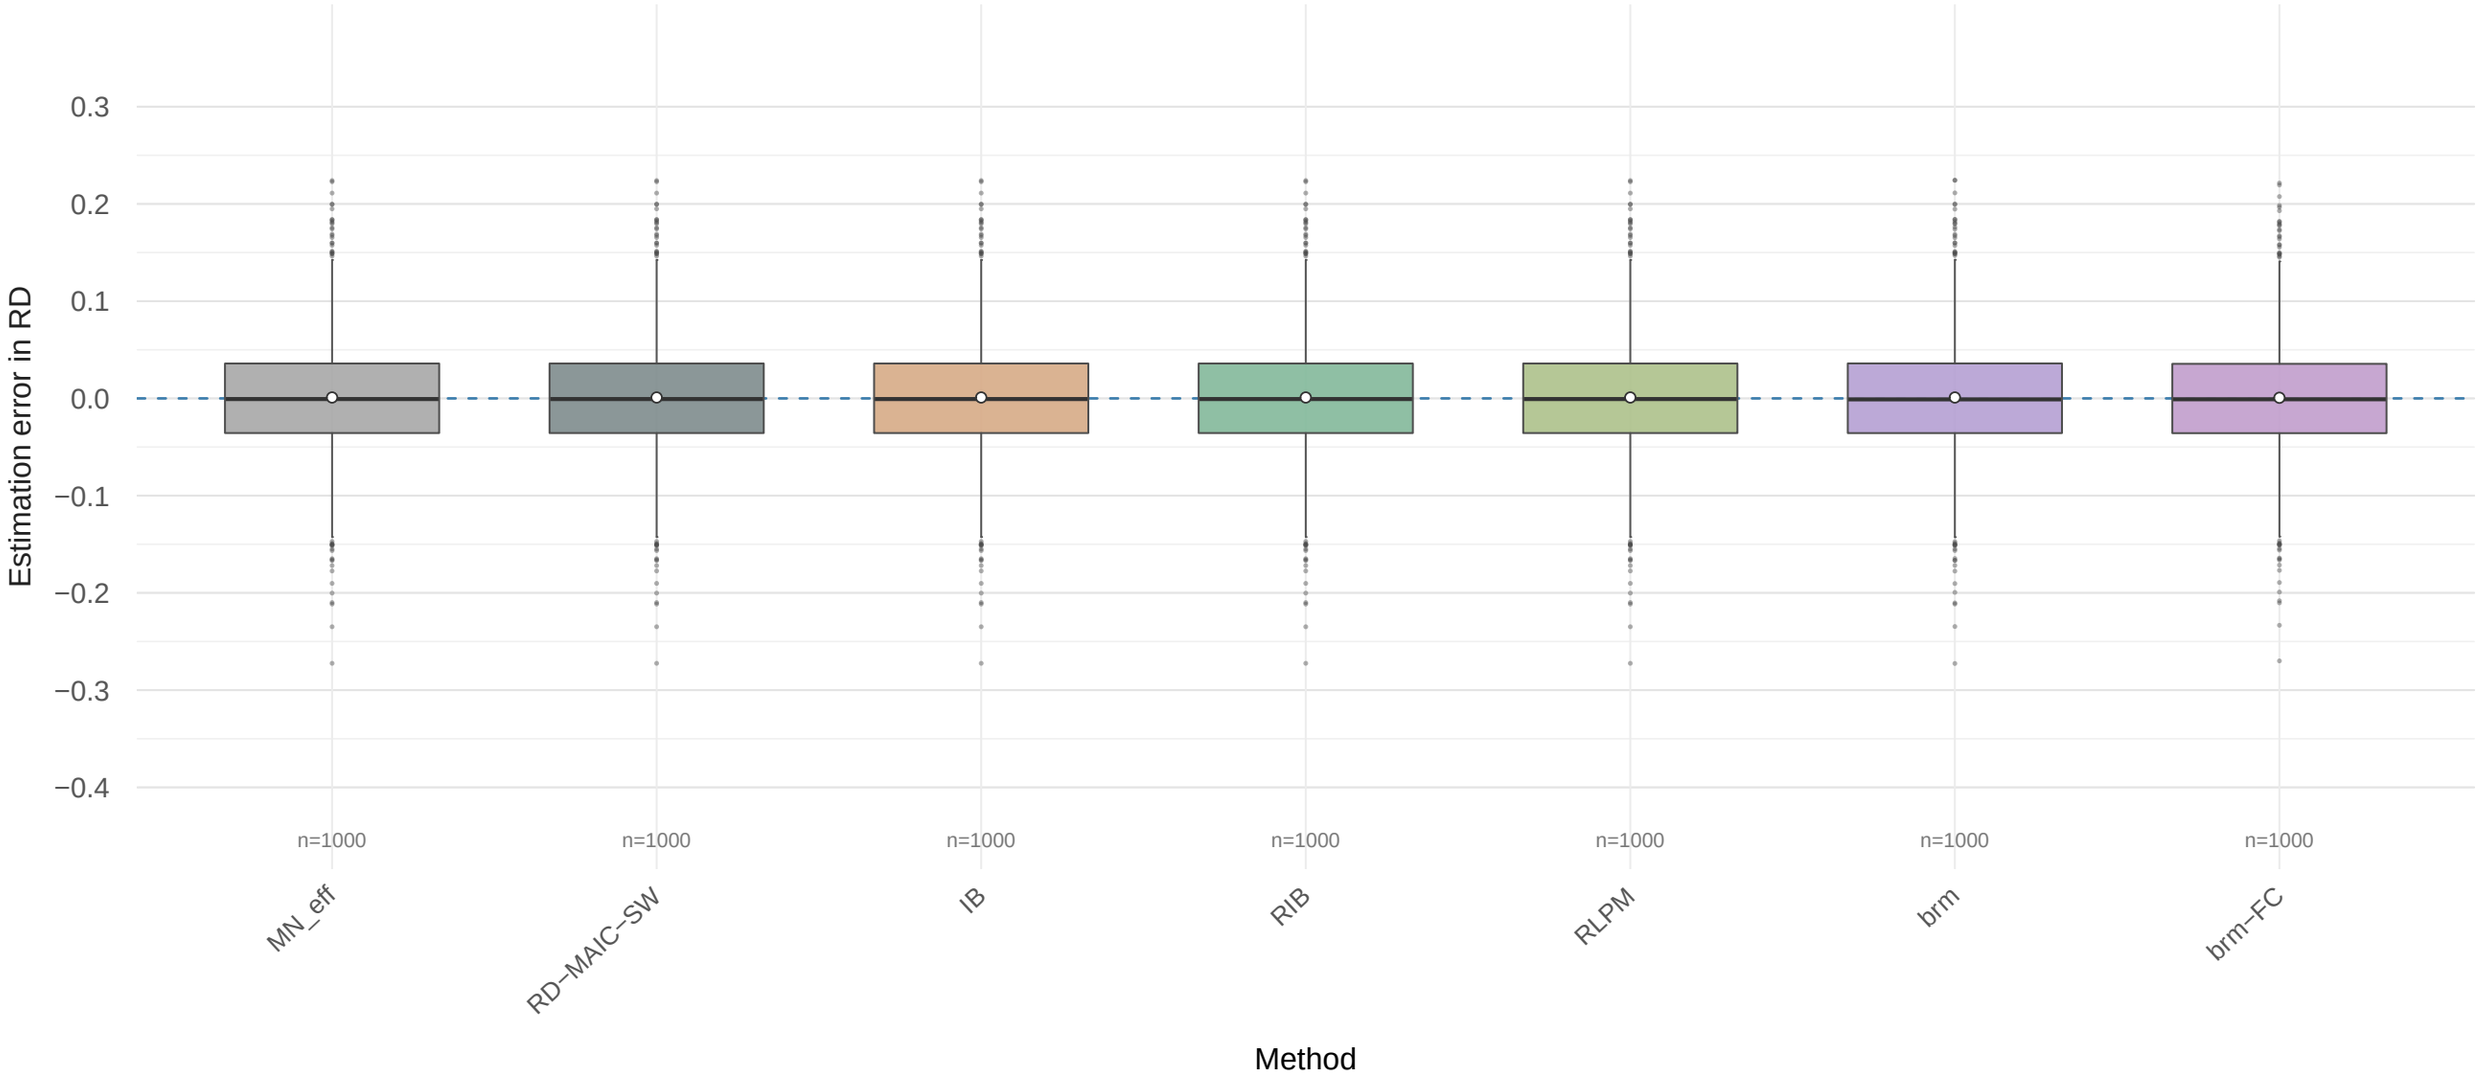

White points: full−data means. Red circles: display−clipped counts; statistics use all valid values.

Bias reference = 0; critical values +/−1; adaptive axis, no observations clipped.

All−method SE distributions

BC population marginal A−C RD

none_MAIC | S07_rare_n500_ess015_none_MAIC | MC1000

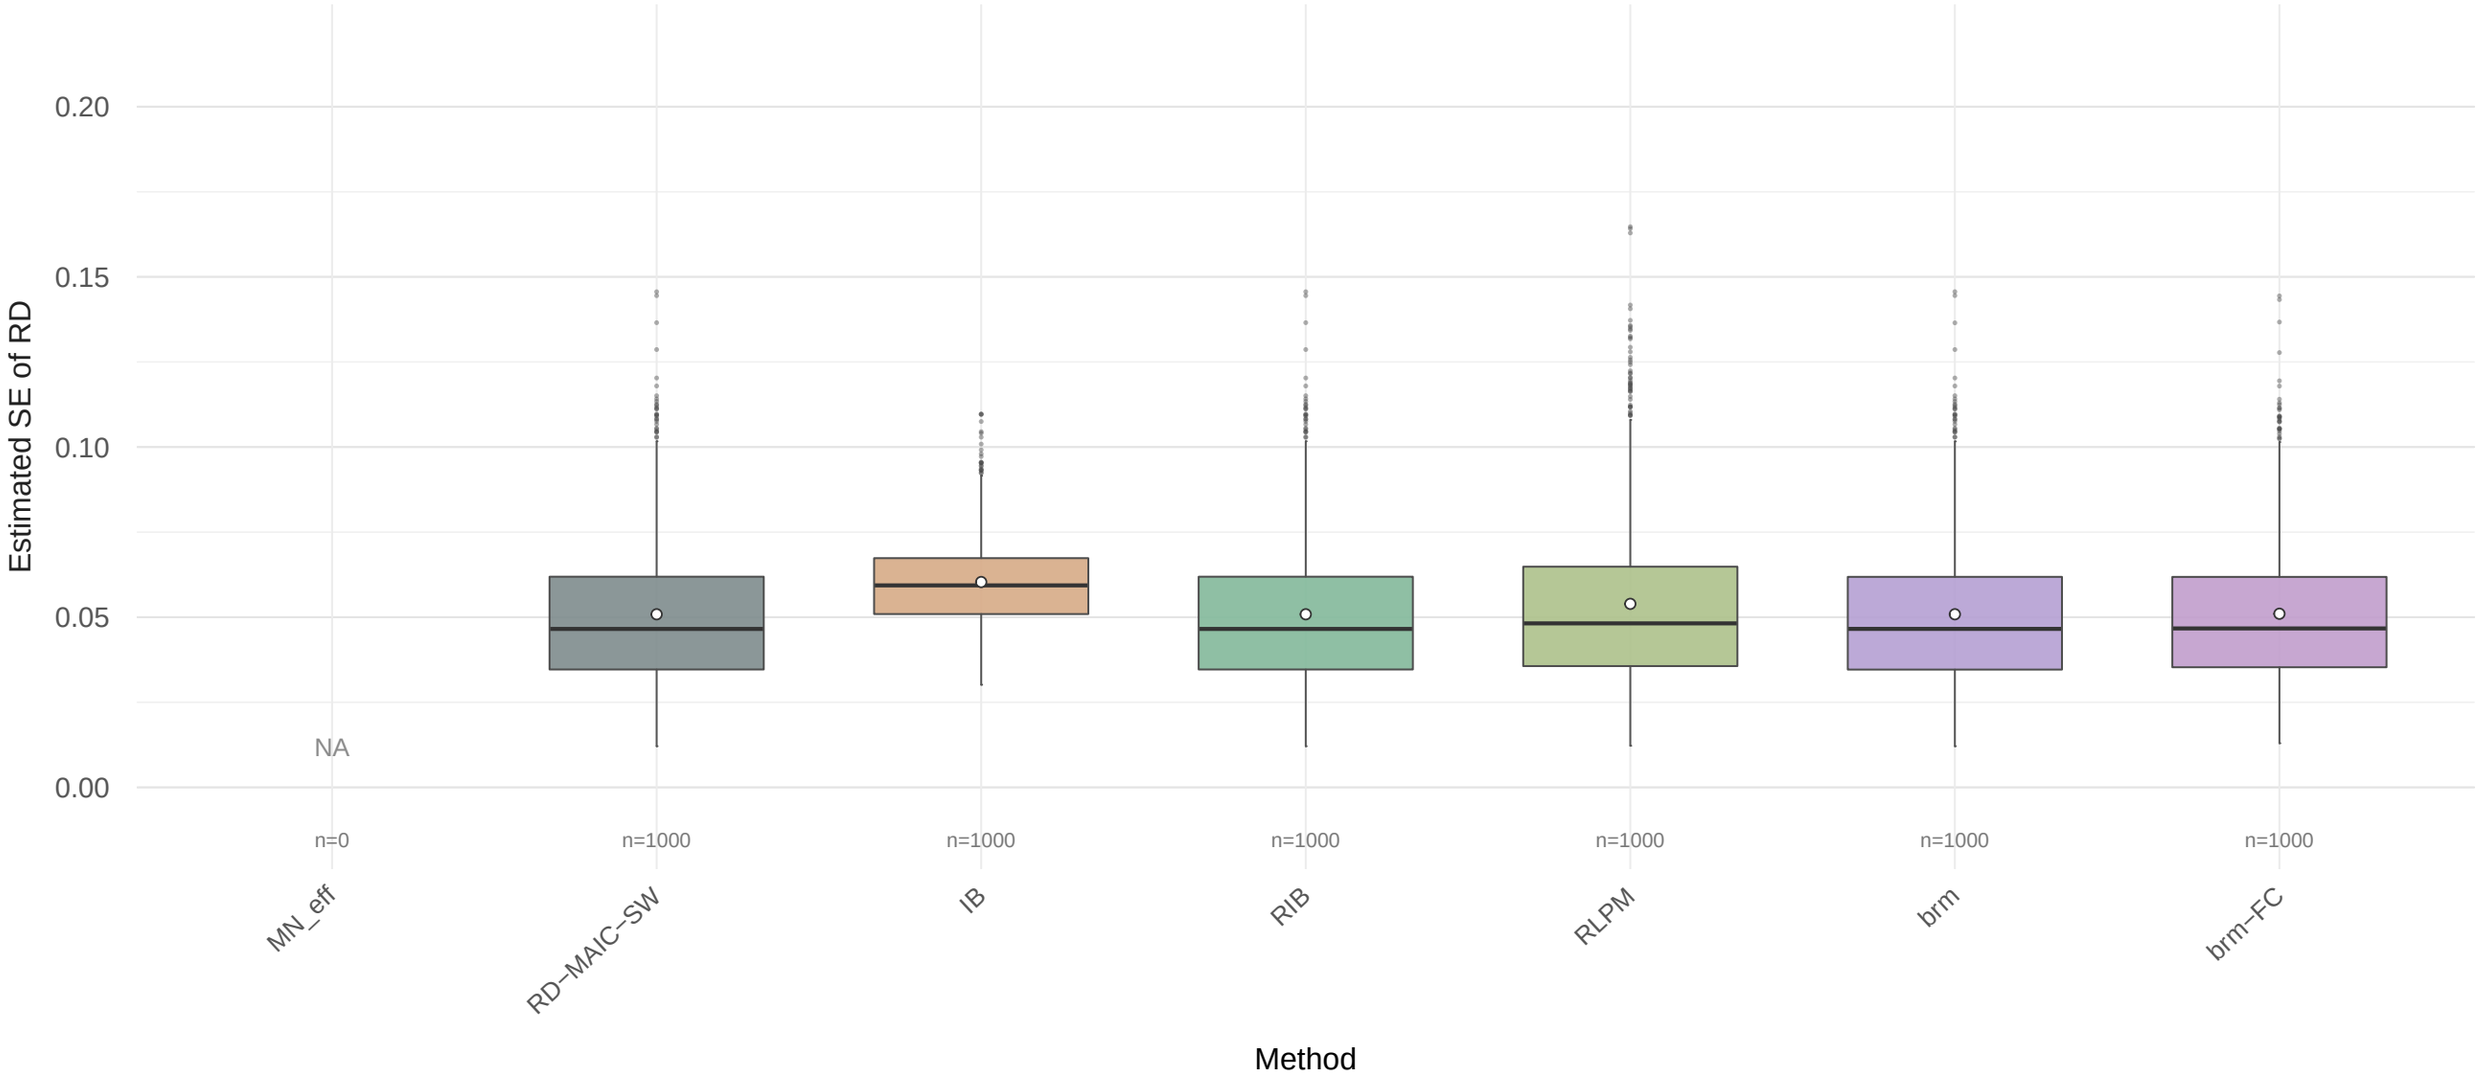

White points: full−data means. Red circles: display−clipped counts; statistics use all valid values.

SE critical value = 1; adaptive axis, no observations clipped.

All−method SE calibration

BC population marginal A−C RD

none_MAIC | S07_rare_n500_ess015_none_MAIC | MC1000

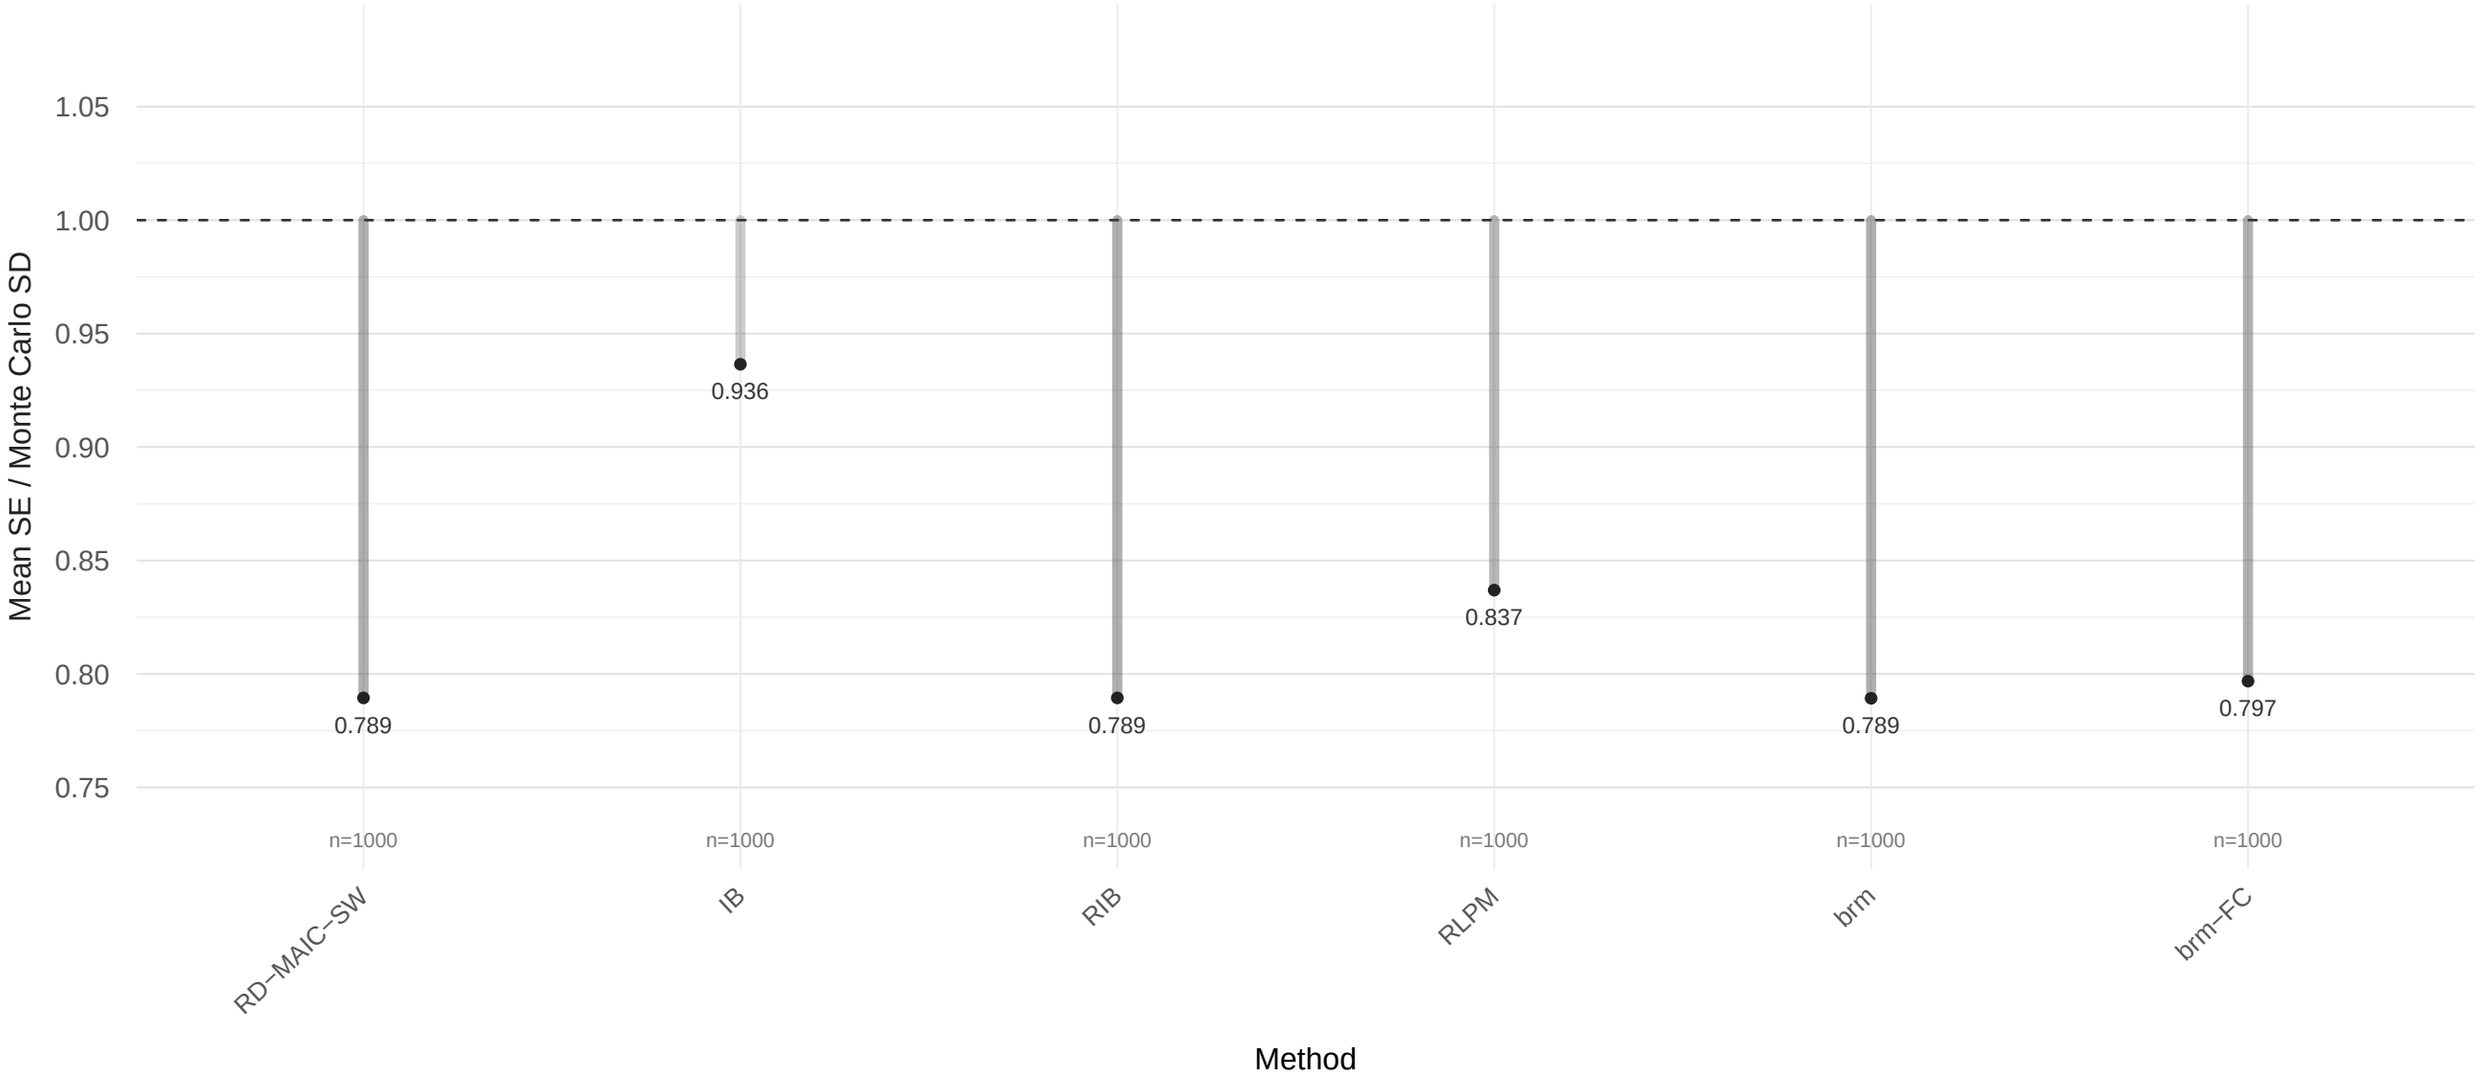

Target = 1. Matched SE−valid replicates; BC and MN_eff model SE not provided. Darker stems = larger deviation.

All−method coverage rate

BC population marginal A−C RD

none_MAIC | S07_rare_n500_ess015_none_MAIC | MC1000

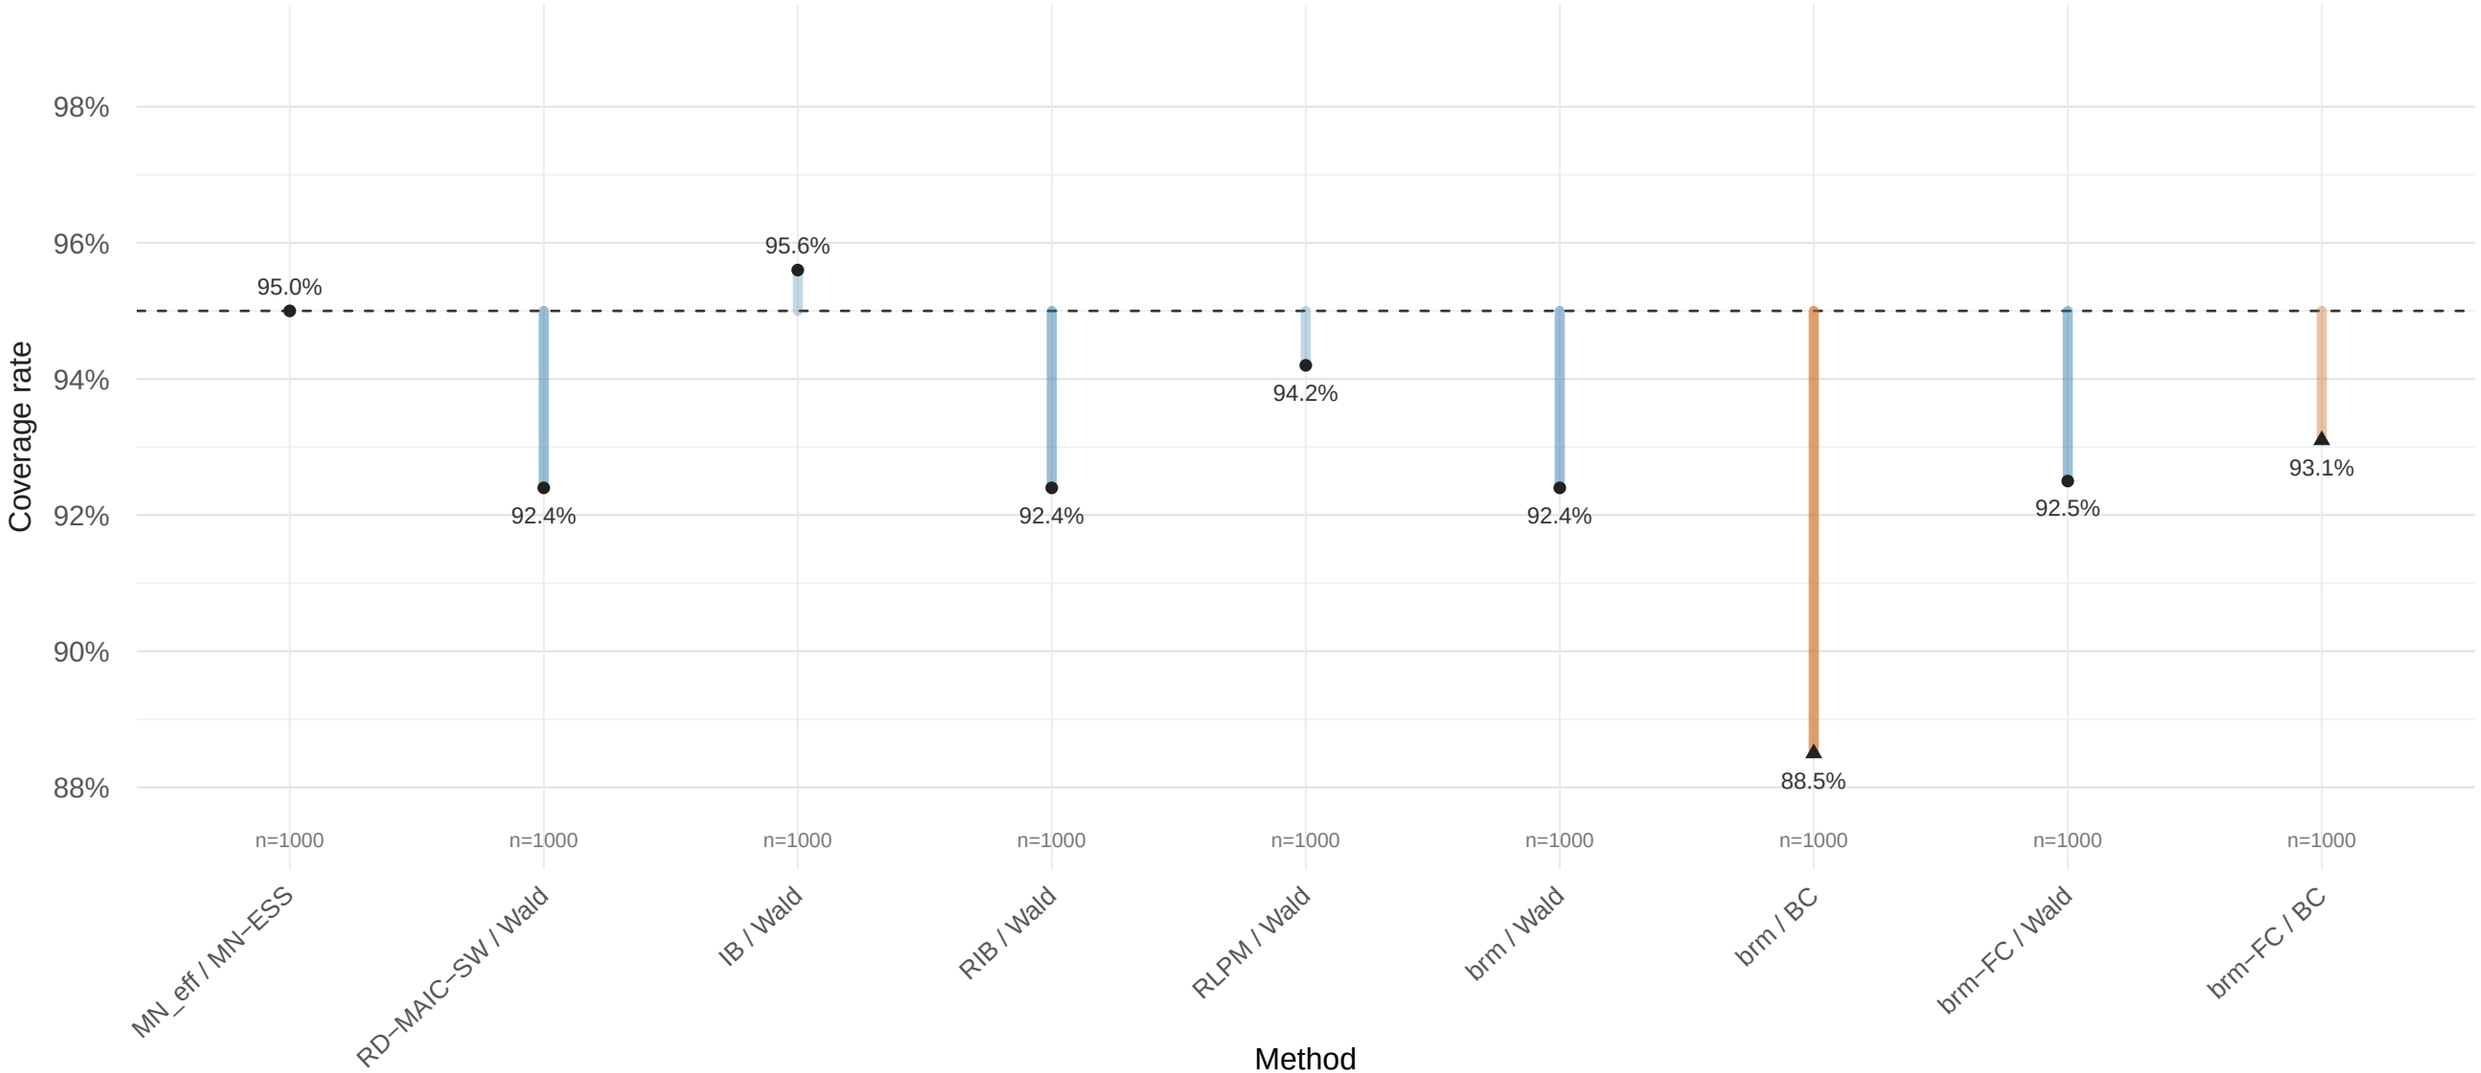

Target = 95%. Wald: blue; BC: orange; MN−ESS: purple. Darker stems = larger deviation. Valid returned intervals only.