All−method bias distributions

STC marginal A/C log RR in BC target

bc_mean_delta | S08_rare_n500_ess050_score_unit | MC1000

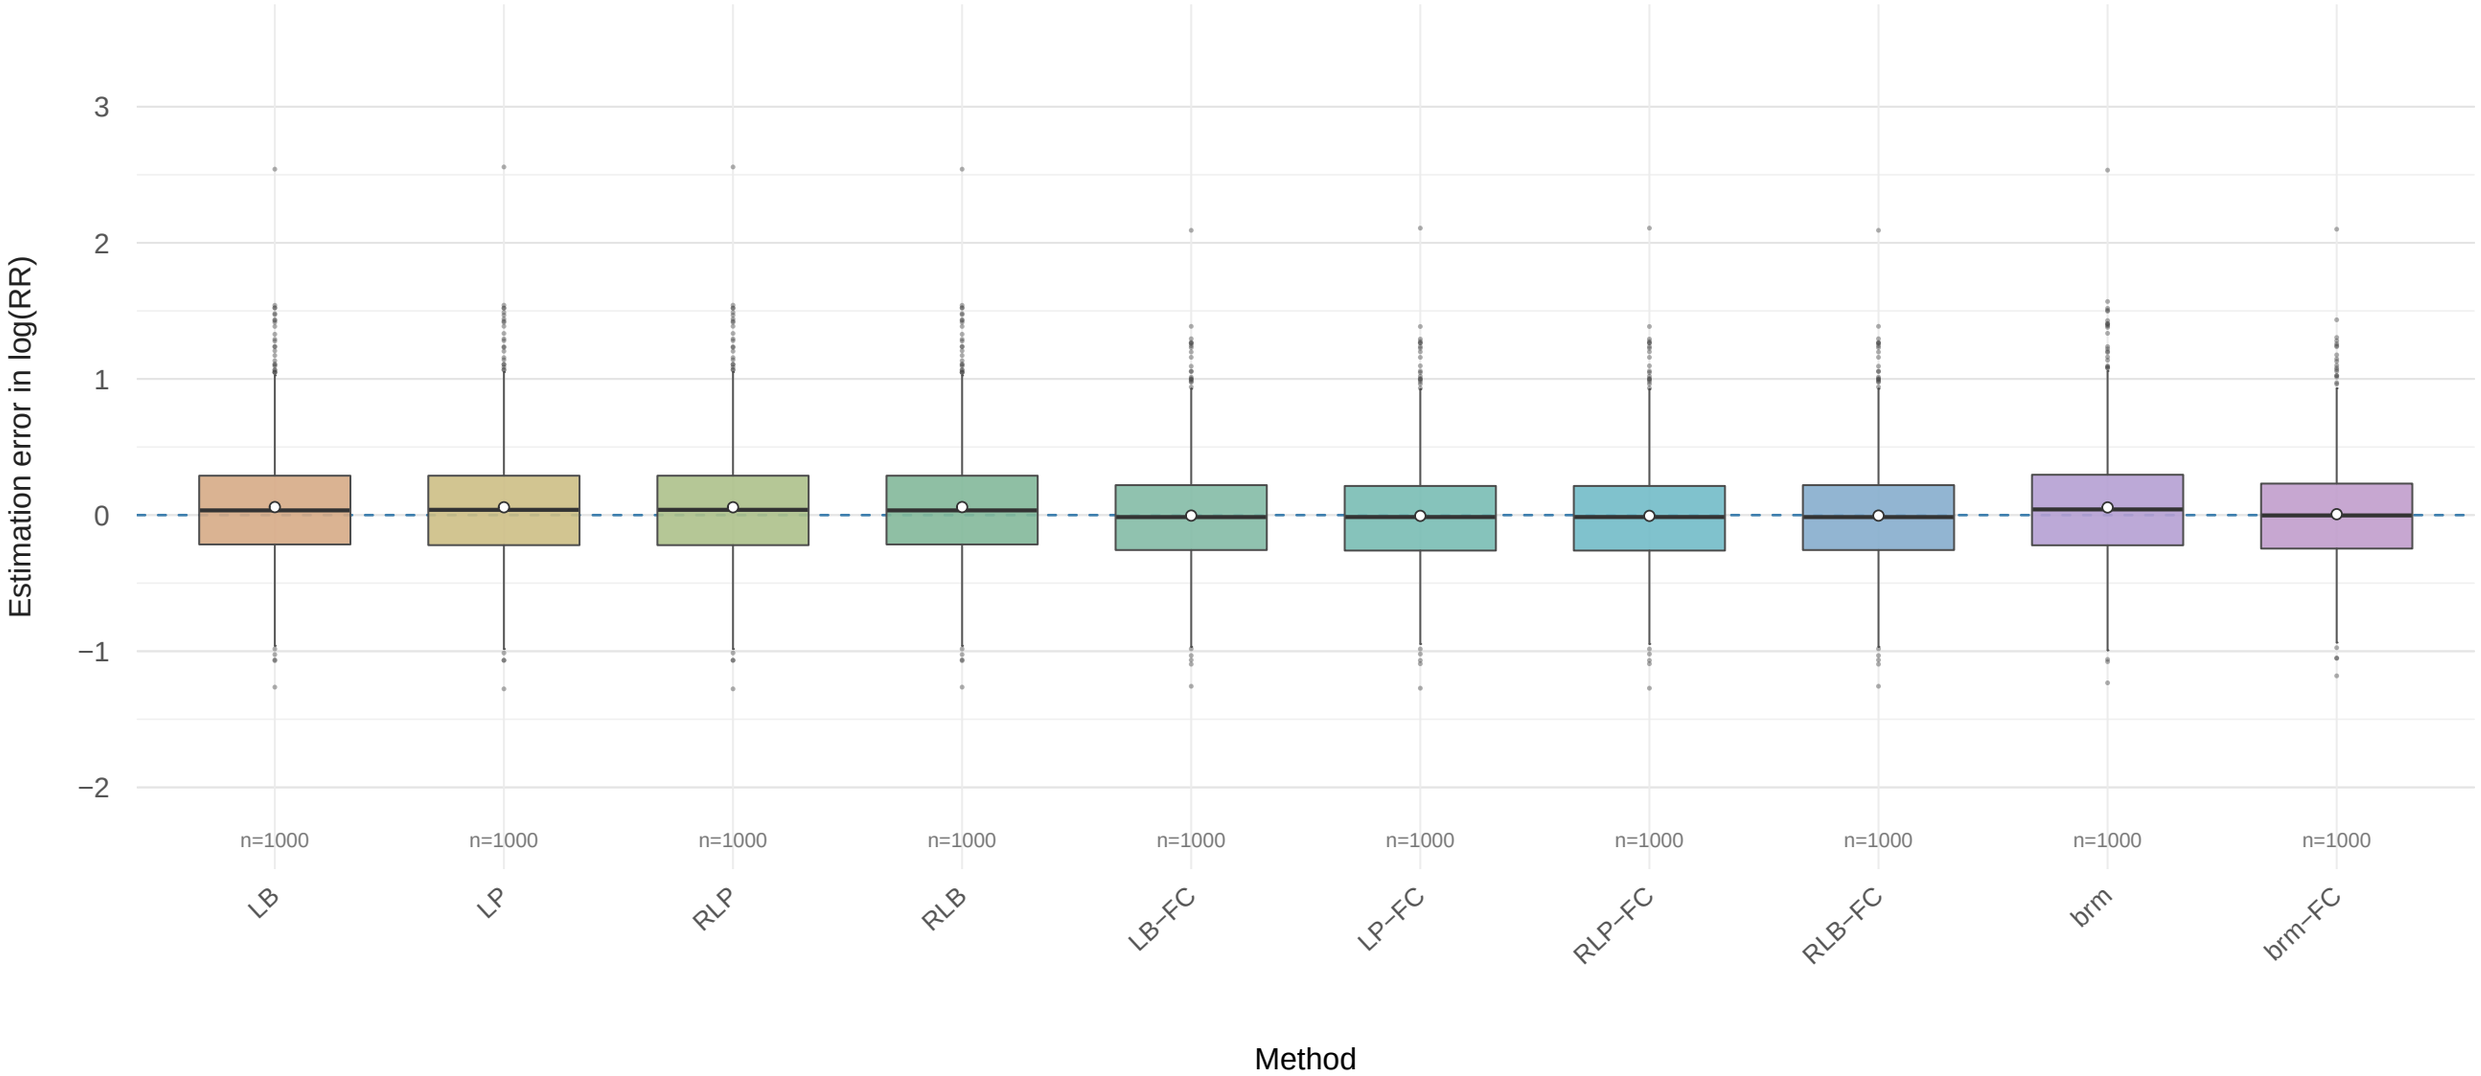

White points: full−data means. Red circles: display−clipped counts; statistics use all valid values.

Bias reference = 0; critical values +/−5; adaptive axis, no observations clipped.

All−method SE distributions

STC marginal A/C log RR in BC target

bc_mean_delta | S08_rare_n500_ess050_score_unit | MC1000

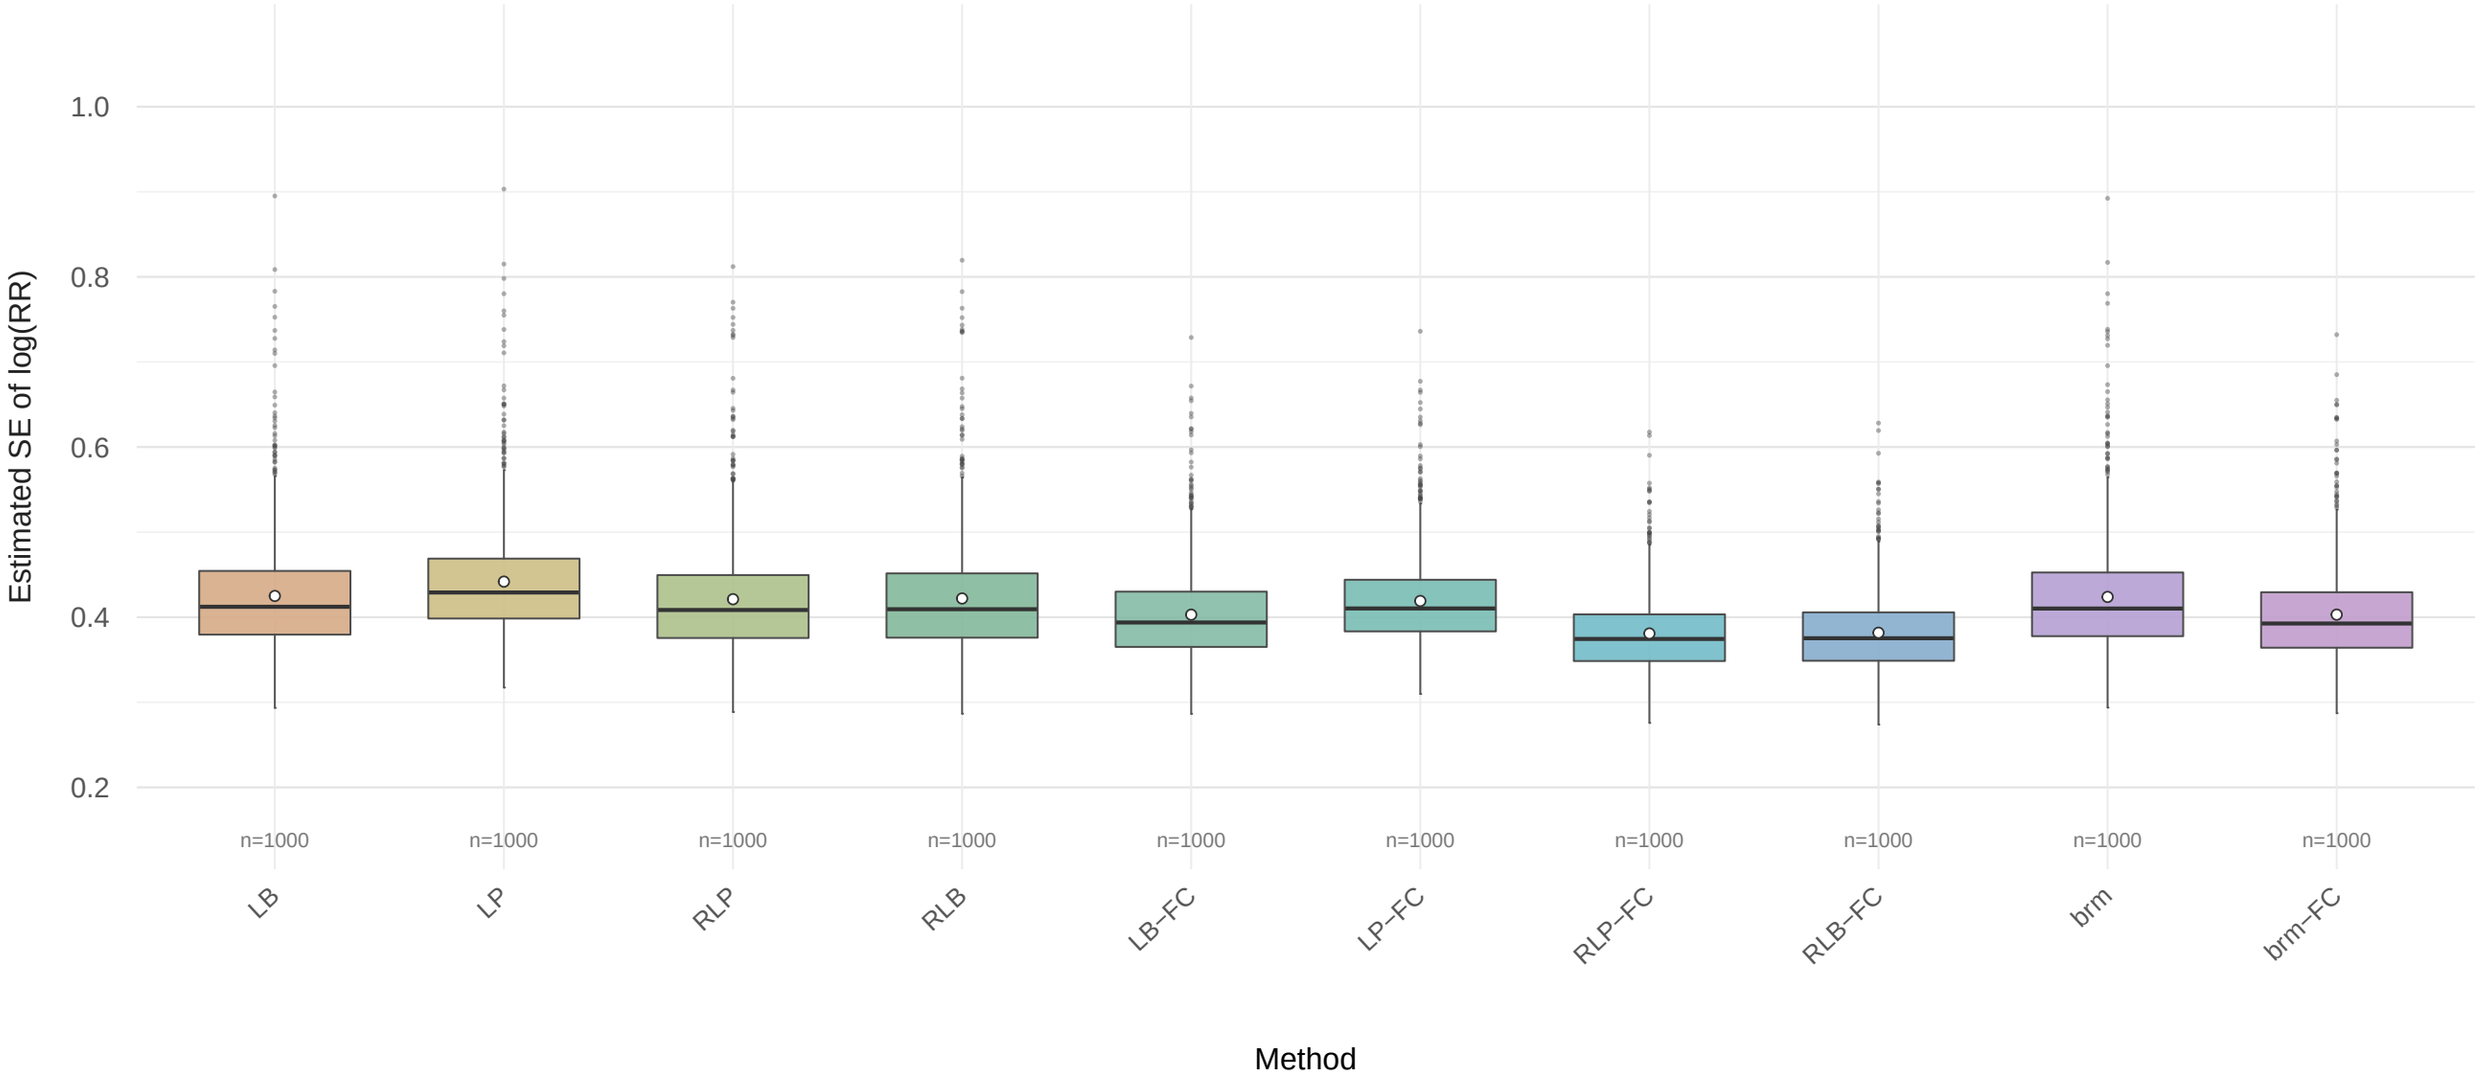

White points: full−data means. Red circles: display−clipped counts; statistics use all valid values.

SE critical value = 4; adaptive axis, no observations clipped.

All−method SE calibration

STC marginal A/C log RR in BC target

bc_mean_delta | S08_rare_n500_ess050_score_unit | MC1000

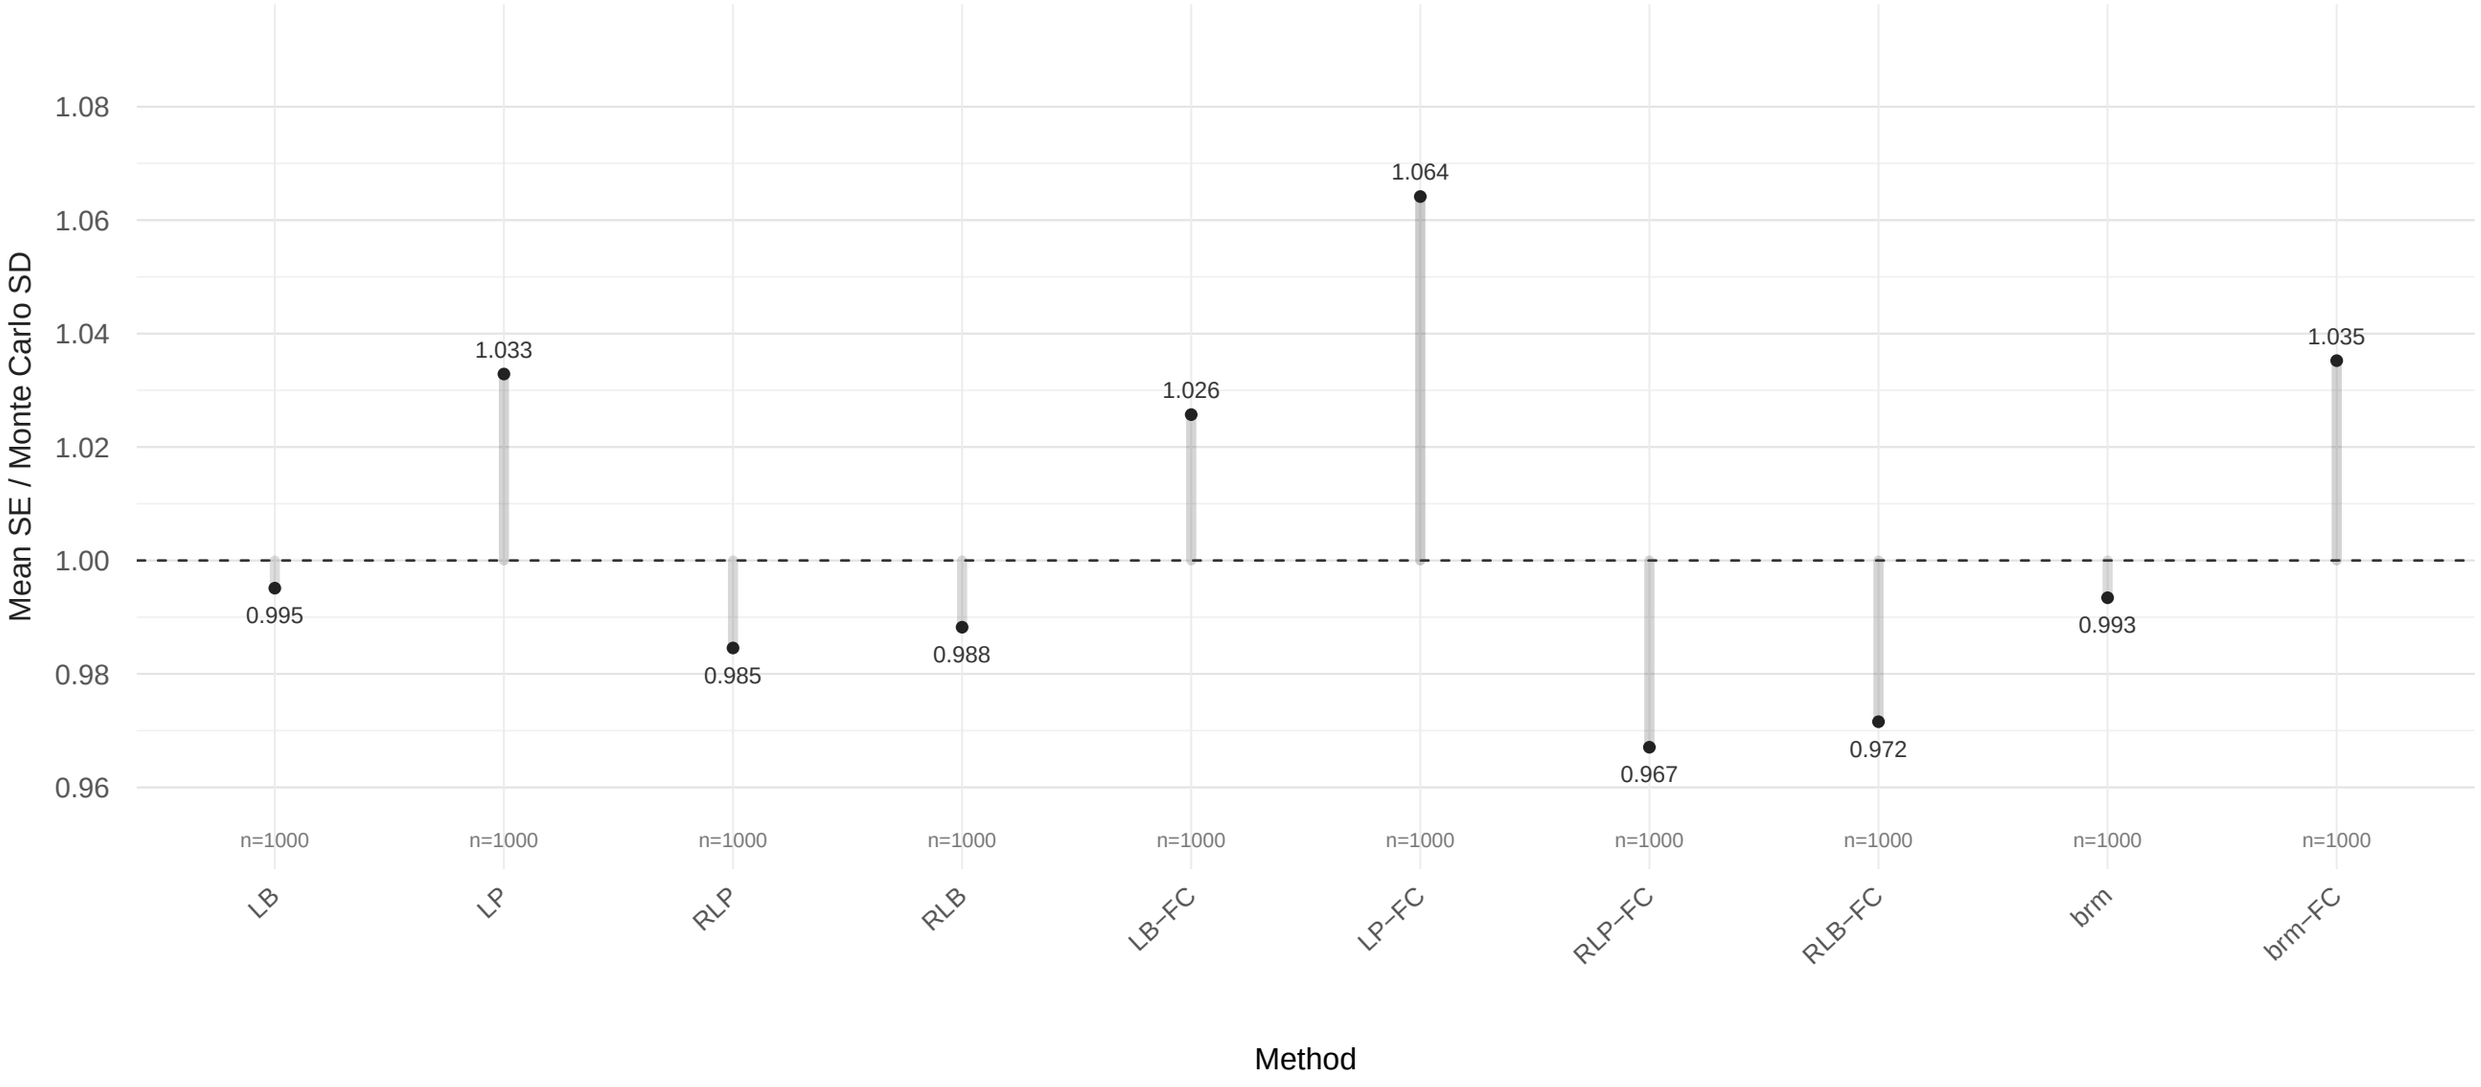

Target = 1. Matched SE−valid replicates; Exact SE not provided. Darker stems = larger deviation.

All−method coverage rate

STC marginal A/C log RR in BC target

bc_mean_delta | S08_rare_n500_ess050_score_unit | MC1000

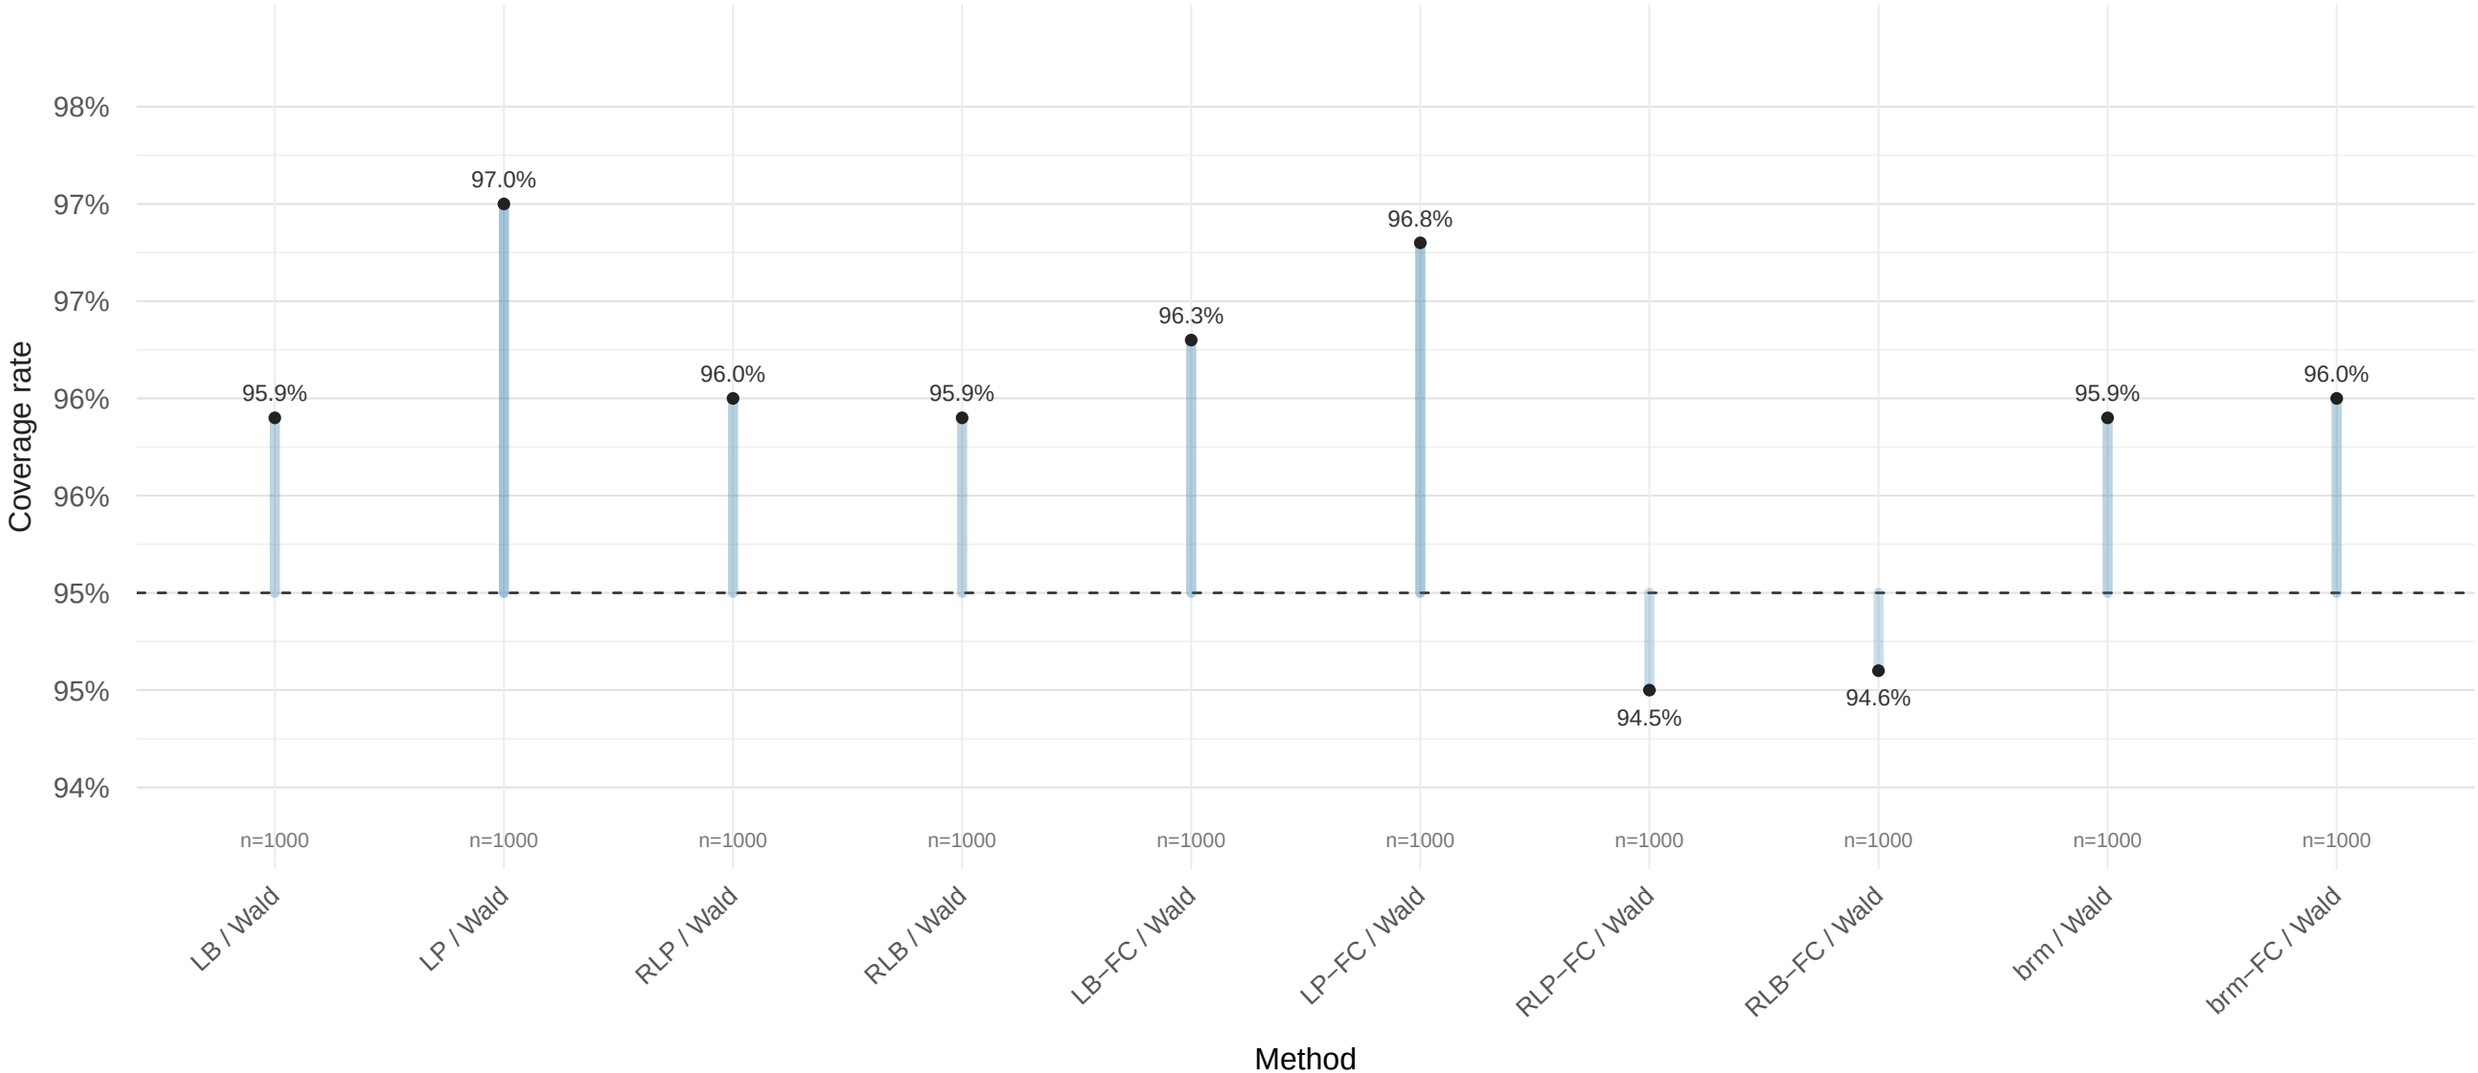

Target = 95%. Wald: blue; Exact: orange. Darker stems = larger deviation. Valid returned intervals only.