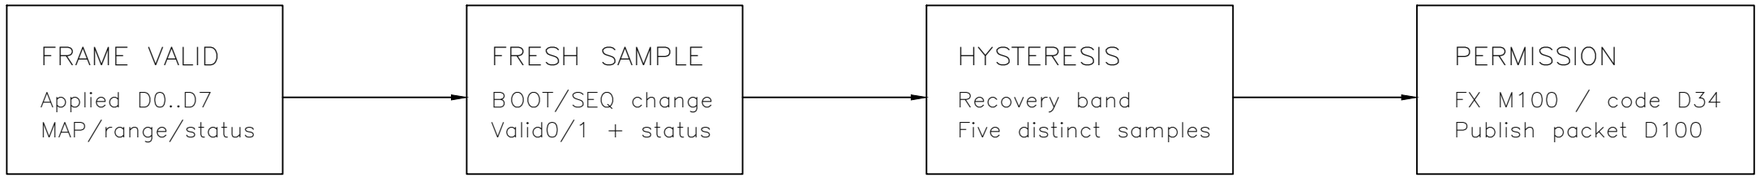

ENVIRONMENTAL PERMISSION CRITERIA	
Decision	Function
Frame/source invalid	Inhibit permission; diagnose malformed source
Sensor status2..4	Sensor error; do not use old displayed values
Sample/transfer stale	Inhibit permission; freshness is separate from temperature
Recovery	Five distinct good SEQ updates inside tighter band
Hold permitted	Remain ON only inside wider hold band
Loss of permission	LS next-cycle START blocked; running product finishes

FX ENVIRONMENT DEVICE MAP	
FX item	Definition
M0	0 real bridged sensor /1 FX internal test
D3 /D4	Temperature/RH ×100
D5 /D6 /D7	VALID / STATUS / conservative AGE
D32	Recovery good-sample counter
D33	Live packet counter0..1023
D34	0normal /1wait /2temp /3RH /4sensor /5stale /6frame
M100	Environment permission

PARAMETER CONTROL / CONFIRMED2026-10-13

Hold: 18..30 C and 30..70%RH; recovery: 19..29 C and 35..65%RH.
Recovery requires five distinct valid sample updates.
T0 K100=10s; T1 K60=6s; valid D7 AGE < K120 (12s).

Configuration and verification evidence: BL-001 settings record and drawing 017.

Environmental permission is a process quality/start condition, not a certified safety interlock.

NO.	DATE	REVISION
R0	2026-10-22	FUNCTION RECORD

DWG. TITLE

SEMICON SORTER PROJECT
Final Test and Multi-Bin Sorting Cell

FX ENVIRONMENTAL JUDGMENT

DRAWN BY	DATE
J. H. KO	2026-10-14

DWG. NO

012

SHEET NO

1 OF 1