



SHANGHAI JIAO TONG
UNIVERSITY



数据和知识管理实验室
DATA & KNOWLEDGE MANAGEMENT LAB

A Deep Recurrent Survival Model for Unbiased Ranking

Jiarui Jin

Apex Data & Knowledge Management Lab

<http://jiaruijin.com/>

22:00-23:00, August 26, 2020
Huawei Noah's Ark Lab, Shenzhen

Slides: https://jiaruijin.com/project/files/drsr_huawei.pdf

PART I: Introduction

Explicit & Implicit Feedback

- **Explicit** Feedback

- score (relevance)
- predict **relevance probability** $P(r)$ **relevance**

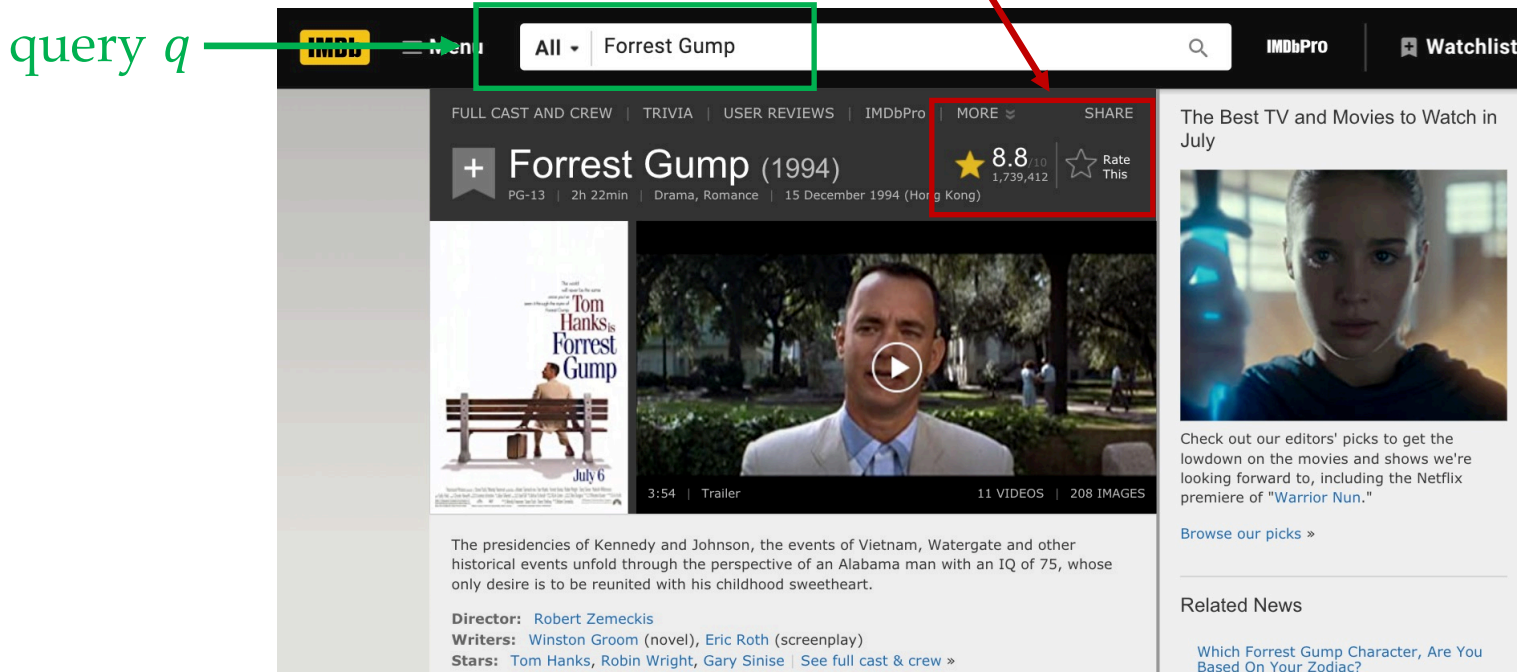


Figure: IMDB Movie

Explicit & Implicit Feedback

- **Implicit** Feedback
 - click probability, observe probability
 - predict ?

The image shows a Google search interface for the query "university college london". The search bar is highlighted with a green box and labeled "query q ". Below the search bar, the results are displayed. The first result, "UCL - London's Global University", is highlighted with a red box and labeled "observe $P(o)$ ". To the left of this result is an eye icon. Below the first result, there is a "People also ask" section with four questions, each with a dropdown arrow. The second result, "Undergraduate prospectus 2021 - UCL - University College ...", is also highlighted with a red box and labeled "click $P(c)$ ". To the left of this result is a mouse cursor icon. The text "About 1,390,000,000 results (0.87 seconds)" is visible below the search bar. The "Feedback" link is visible at the bottom right of the "People also ask" section.

Figure: Google

Position Bias

- Traditional Ranking

- information we have: **click**, **observe**
- predict click and rank click probability $P(c)$

Search Tea



Figure: Illustration of position bias

Position Bias

- Traditional Ranking

- information we have: **click, observe**
- predict click and rank click probability $P(c)$

- Position Bias

- item at low position is not likely to be observed and, of course, not be clicked

- Unbiased Ranking

- information we have: **click, observe**
- information we need: **relevance probability**
 $P(r)$

Search Tea



Figure: Illustration of position bias

Unbiased Ranking

- User Browsing Behavior Model
 - provides several basic **assumptions** about user browsing behavior.
 - [Thorsten Joachims, et al.] only model user behavior patterns without **simultaneously sufficient optimization for ranking algorithm**.
- Counterfactual Learning Framework
 - treats the position bias as the **counterfactual factor**.
 - debiases the user feedbacks through **inverse propensity weighting**.
 - ignores the **contextual information** of the given ranking list, e.g., the content of the previous items may influence the observation of the next item.

Ref: Thorsten Joachims, et al. Unbiased learning-to-rank with biased feedback. WSDM, 2017.



Current Challenges

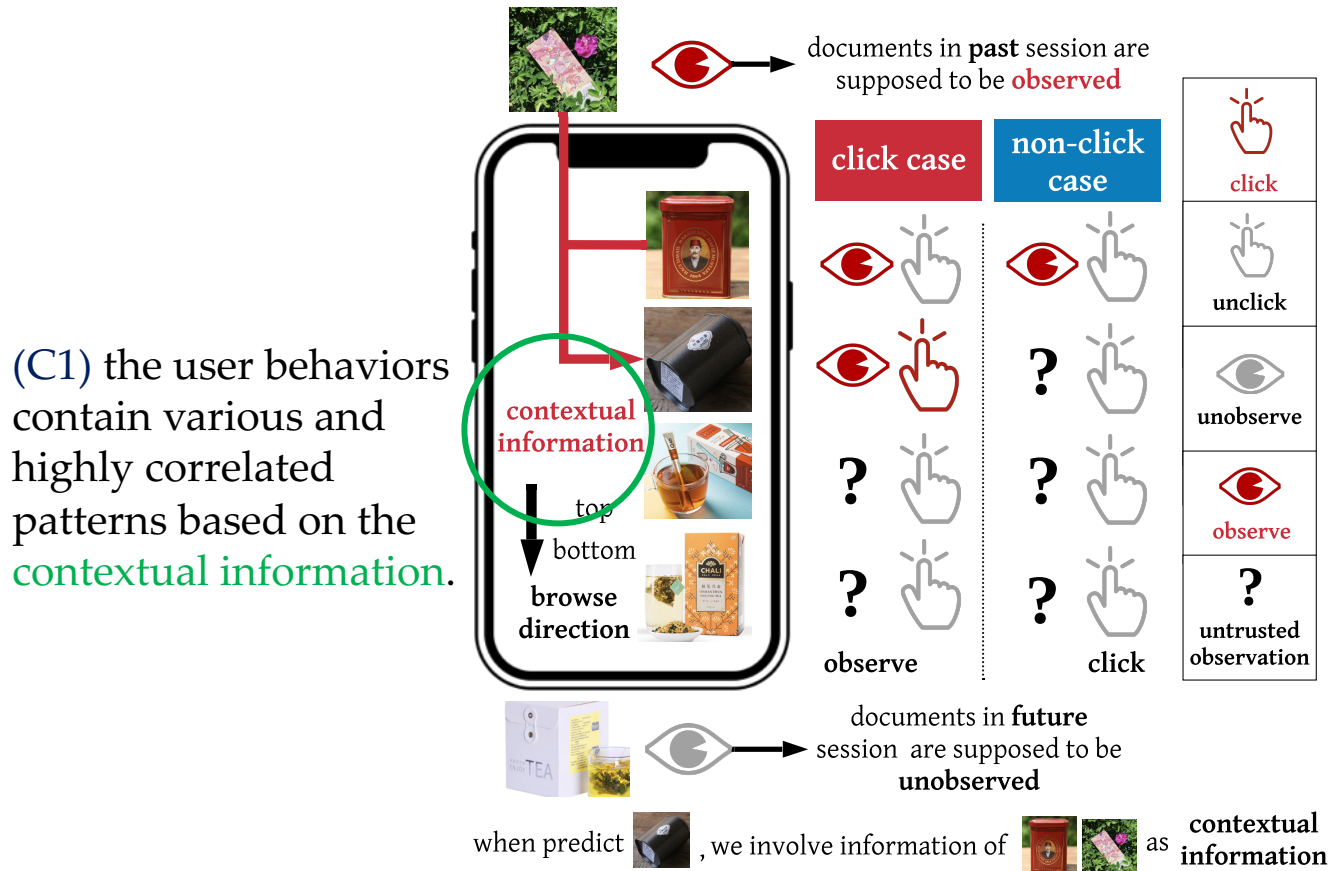


Figure: Illustration of user various behaviors (i.e., click and non-click case) when browsing document list as shown in the left side. Notations are provided in the right side.

Current Challenges


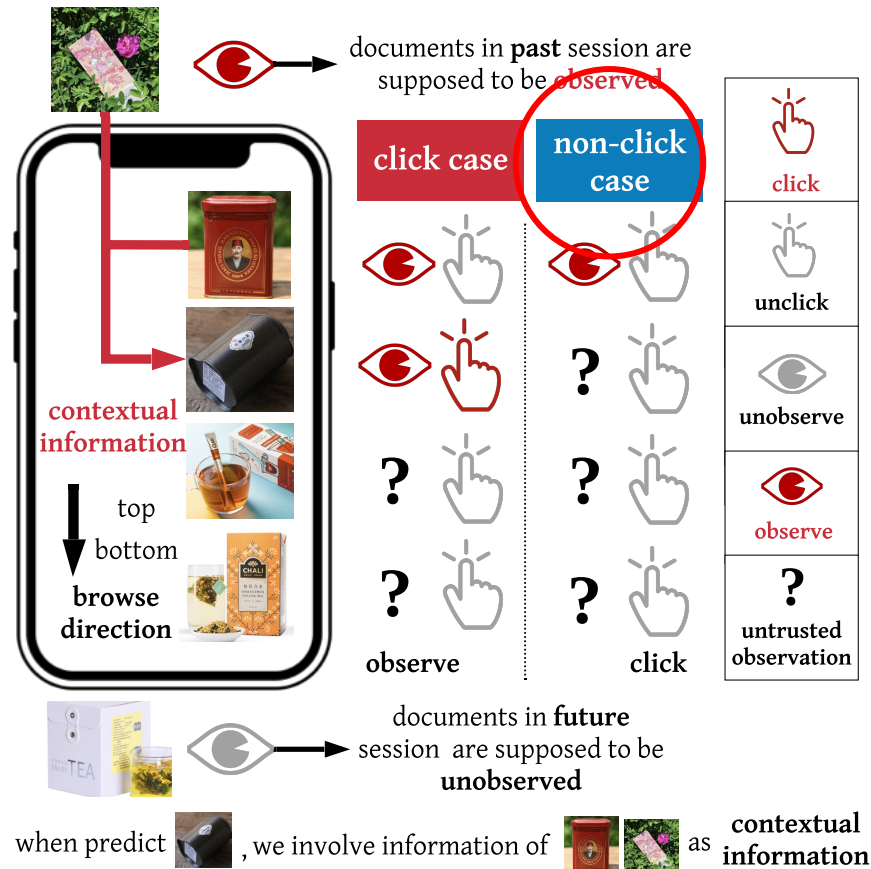


Figure: Illustration of user various behaviors (i.e., click and non-click case) when browsing document list as shown in the left side. Notations are provided in the right side.

Current Challenges

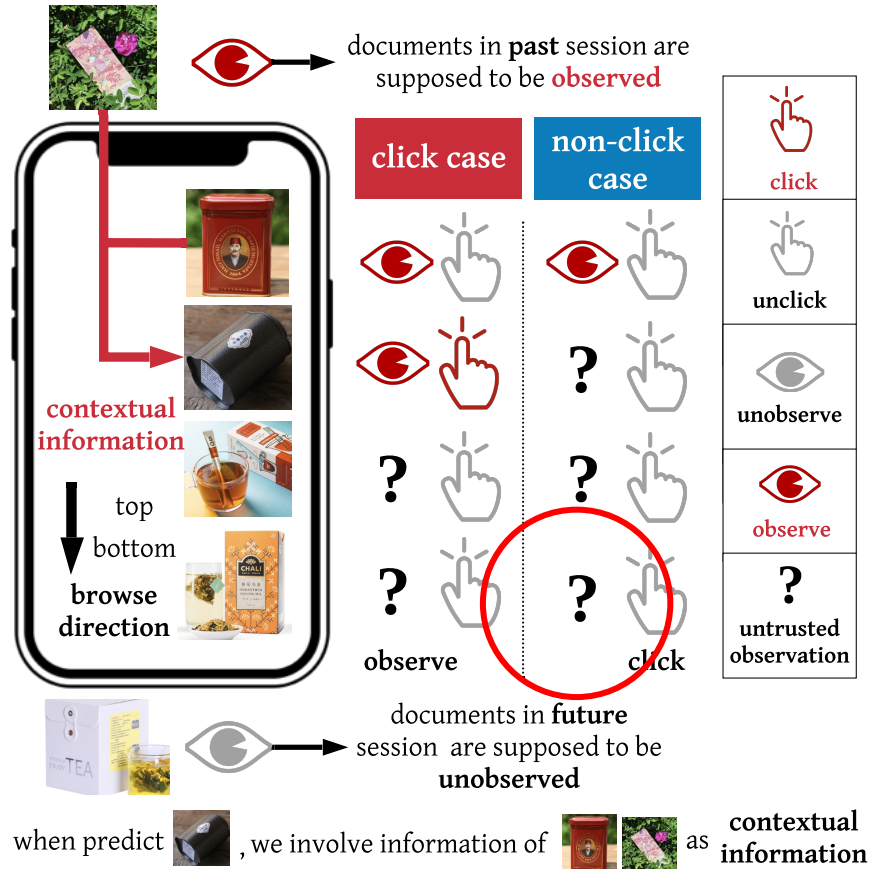

(C3) When the user scrolls down the page and observes the presented items, the tracking logs record user observations until the last position. However, this may not be true since the user may stop and lost her attention before that. We called these noisy logs **untrusted observations**.

Figure: Illustration of user various behaviors (i.e., click and non-click case) when browsing document list as shown in the left side. Notations are provided in the right side.

Outline

- Introduction
 - Unbiased Ranking
 - Information Retrieval
- Architecture
 - **Deep Recurrent Survival Model**
 - Point-wise Loss Function
 - Pair-wise Loss Function
- Experiment
- Conclusion

PART II: Architecture

Motivation

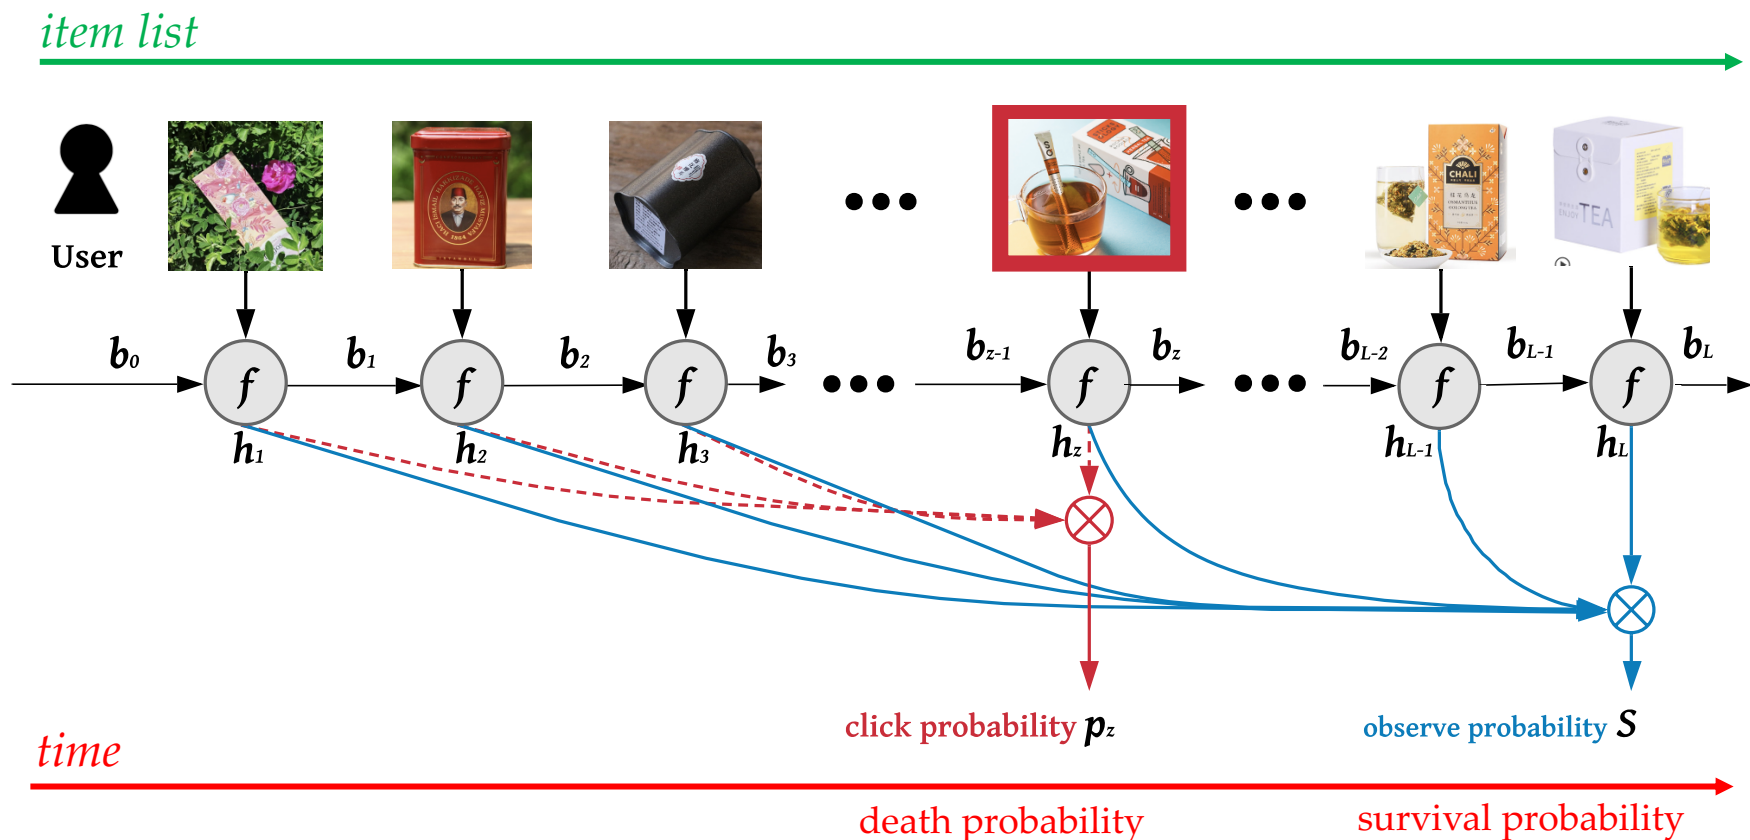


Figure: Illustration of Deep Recurrent Survival Ranking Model. Note that we mine click patterns in click case and observe patterns in both click and non-click cases.

Survival Model

click event z

- click probability (death probability), the probability density function (P.D.F.) of click occurring at i -th item

$$p_i = P(c_i = 1) = P(z = i)$$

- observe probability (survival probability), the cumulative distribution function (C.D.F.), since user will keep browsing until she finds and clicks a favored one

$$S(i) = P(o_i = 1) = \sum_{\tau \geq i} P(z = \tau)$$

- relevance probability, the conditional click probability, the click probability at item given that the item is observed

$$h_i = P(r_i = 1) = \frac{P(c_i = 1)}{P(o_i = 1)} = \frac{P(z = i)}{P(z \geq i)} = \frac{p_i}{S_i}$$

Deep Recurrent Survival Model


- relevance probability

$$h_i = P(z = i | z \geq i, x; \theta) = f_{\theta}(x_i | b_{i-1})$$

- observe probability (survival probability)

$$\begin{aligned} S(i|x; \theta) &= P(i \leq z) = P(z \neq 1, z \neq 2, z \neq 3, \dots, z \neq i-1 | x; \theta) \\ &= P(z \neq 1 | x_1; \theta) \cdot P(z \neq 2 | z \neq 1, x_2; \theta) \cdots P(z \neq i-1 | z \neq 1, \dots, z \neq i-2 | x_{i-1}; \theta) \end{aligned}$$

$$= \prod_{\tau: \tau < i} [1 - P(z = \tau | z \geq \tau, x_{\tau}; \theta)] = \prod_{\tau: \tau < i} (1 - h_{\tau})$$

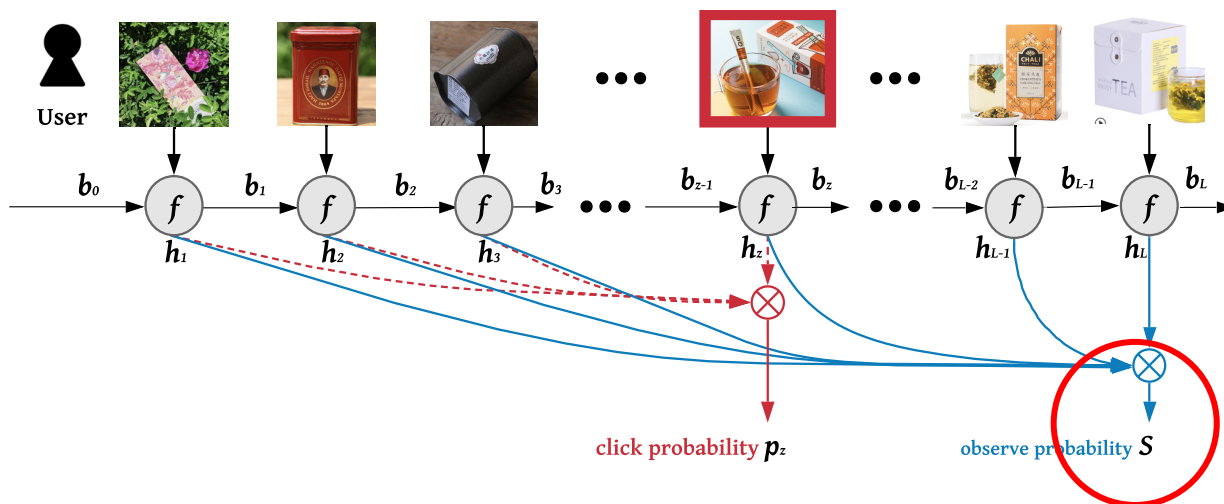

Deep Recurrent Survival Model


- relevance probability

$$h_i = P(z = i | z \geq i, x; \theta) = f_{\theta}(x_i | b_{i-1})$$

- click probability (death probability)

$$p_i = [1 - S(i + 1)] - [1 - S(i)] = S(i) - S(i + 1)$$

$$p_i = P(z = i | x; \theta) = h_i \prod_{\tau: \tau < i} (1 - h_{\tau})$$

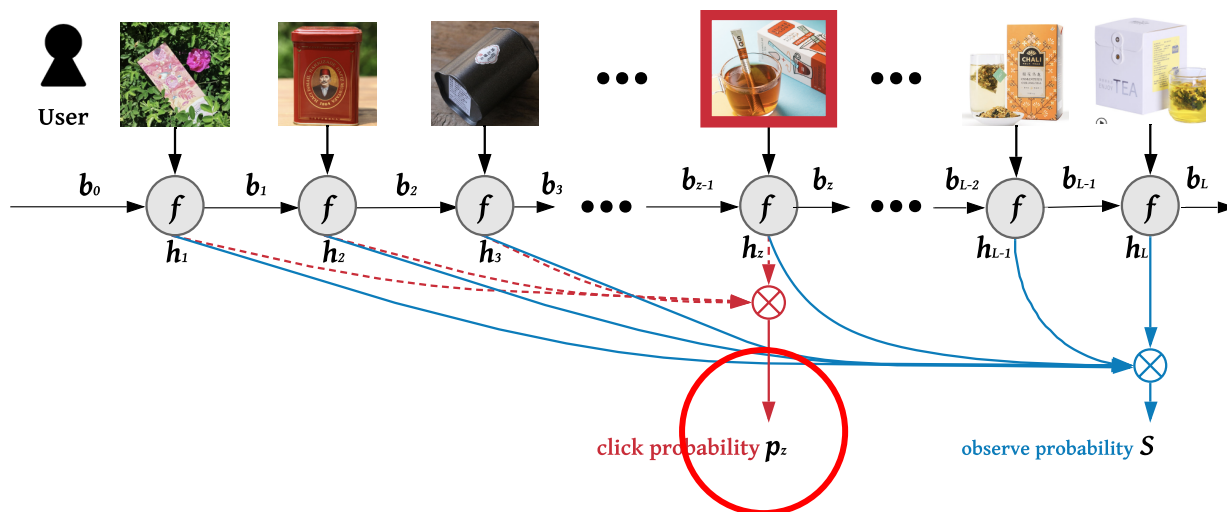

Point-wise Loss Function

- click probability (P.D.F.)

- aims to **minimize** negative log-likelihood of the click item d_j over the clicked logs as

$$\begin{aligned} L_{\text{point}(z)} &= -\log \prod_{(x,z) \in \mathcal{D}_{\text{click}}} P(z = j|x; \theta) = -\log \prod_{(x,z) \in \mathcal{D}_{\text{click}}} p_j \\ &= -\log \prod_{(x,z) \in \mathcal{D}_{\text{click}}} \left[h_j \prod_{\tau: \tau < i} (1 - h_\tau) \right] \\ &= - \sum_{(x,z) \in \mathcal{D}_{\text{click}}} [\log h_j + \sum_{\tau: \tau < i} \log(1 - h_\tau)] \end{aligned}$$

Point-wise Loss Function

- observe probability (C.D.F.)
 - push up the observe probability of items whose position in range of $[0, l]$, and pull down in range of $[l, \infty]$.

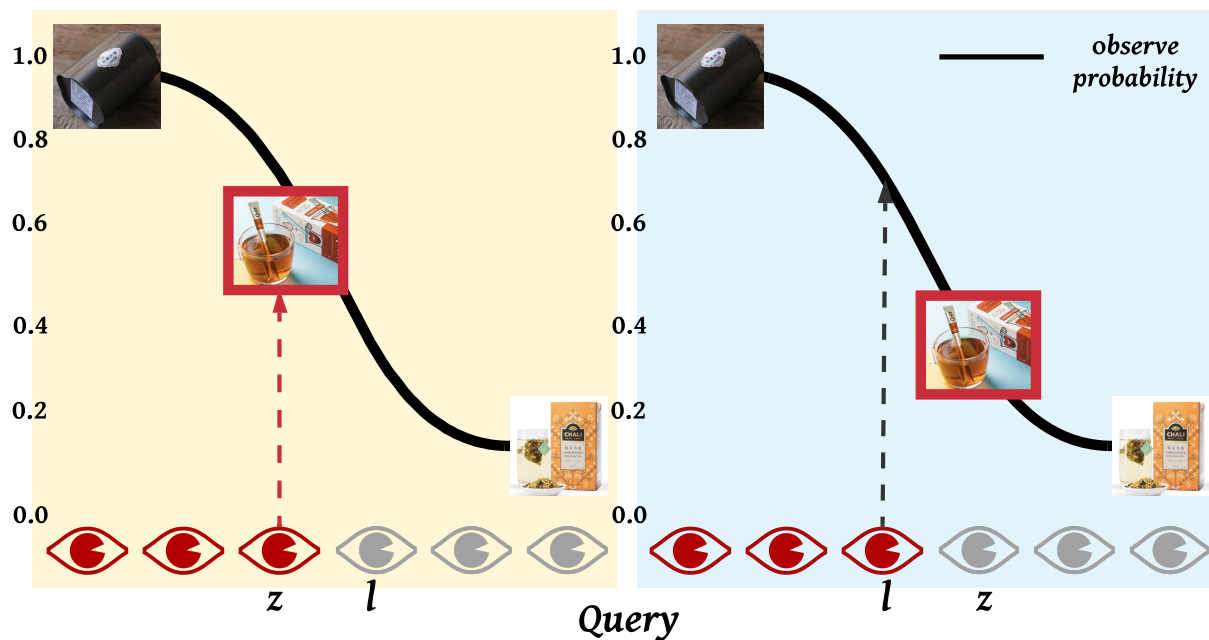


Figure: Intuition behind C.D.F. losses. The left and right sub-figures denote **click** and **non-click** cases respectively.

Point-wise Loss Function

- observe probability (C.D.F.)

- over the **click cases**

$$\begin{aligned} L_{\text{click}} &= -\log \prod_{(x,l) \in \mathcal{D}_{\text{click}}} P(l \geq z|x; \theta) \approx -\log \sum_{(x,l) \in \mathcal{D}_{\text{click}}} [1 - S(l|x; \theta)] \\ &= - \sum_{(x,l) \in \mathcal{D}_{\text{click}}} \log [1 - \prod_{\tau: \tau < l} (1 - h_{\tau})] \end{aligned}$$

- over the **non-click cases**

$$\begin{aligned} L_{\text{non-click}} &= -\log \prod_{(x,l) \in \mathcal{D}_{\text{non-click}}} P(z > l|x; \theta) \approx -\log \sum_{(x,l) \in \mathcal{D}_{\text{non-click}}} S(l|x; \theta) \\ &= - \sum_{(x,l) \in \mathcal{D}_{\text{non-click}}} \sum_{\tau: \tau < l} \log(1 - h_{\tau}) \end{aligned}$$

Pair-wise Loss Function

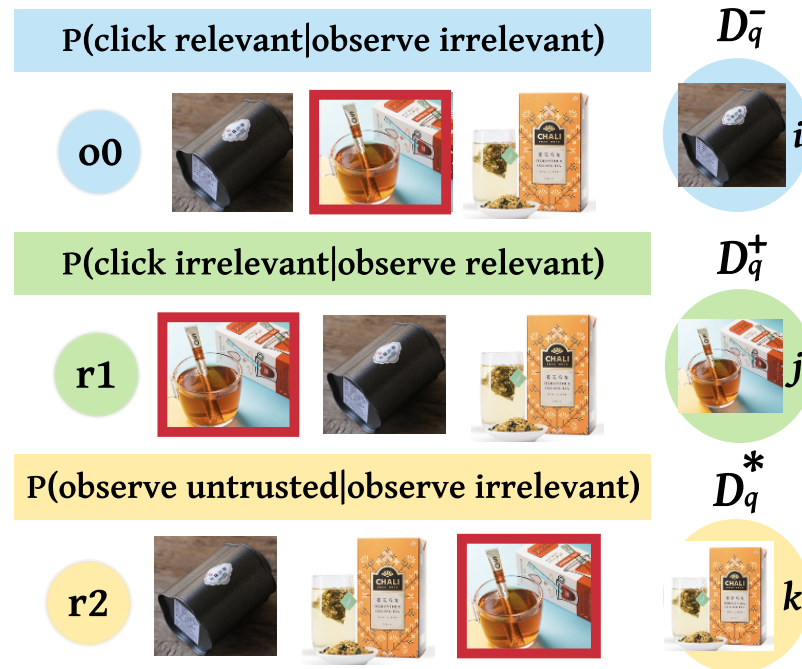


Figure: Illustration of permutation item modeling, where items here are sampled from different subsets in the right side.

Pair-wise Loss Function

- over the **o0 query**

$$\begin{aligned}
 L_{\text{pair}(o0)} &= -\log \prod_{(d_i, d_j) \in I_q} P(z = j | z \geq i, x; \theta) = -\log \prod_{(d_i, d_j) \in I_q} \frac{P(z = j | x; \theta)}{P(z \geq i | x; \theta)} \\
 &= - \sum_{(d_i, d_j) \in I_q} \left\{ \left[\log h_j \sum_{\tau: \tau < j} \log(1 - h_\tau) \right] - \sum_{\tau: \tau < i} \log(1 - h_\tau) \right\}
 \end{aligned}$$

- over the **r1 query**

$$\begin{aligned}
 L_{\text{pair}(r1)} &= \log \prod_{(d_i, d_j) \in I_q} P(z = i | z \geq j, x; \theta) = \log \prod_{(d_i, d_j) \in I_q} \frac{P(z = i | x; \theta)}{P(z \geq j | x; \theta)} \\
 &= \sum_{(d_i, d_j) \in I_q} \left\{ \left[\log h_i \sum_{\tau: \tau < i} \log(1 - h_\tau) \right] - \sum_{\tau: \tau < j} \log(1 - h_\tau) \right\}
 \end{aligned}$$

Pair-wise Loss Function

- over the **r2 query**

$$\begin{aligned} L_{\text{pair}(o0)} &= -\log \prod_{(d_i, d_k) \in I_q} P(z \geq k | z \geq i, x; \theta) = -\log \prod_{(d_i, d_j) \in I_q} \frac{P(z \geq k | x; \theta)}{P(z \geq i | x; \theta)} \\ &= - \sum_{(d_i, d_k) \in I_q} \left\{ \sum_{\tau: \tau < k} \log(1 - h_\tau) - \sum_{\tau: \tau < i} \log(1 - h_\tau) \right\} \end{aligned}$$

PART III: Experiment

Experiment

Table 2: Comparison of different unbiased learning-to-rank methods under Yahoo Search Engine and Alibaba Recommender System. CCM is utilized as click generation model. * indicates p-value < 0.001 in significance test vs the best baseline.

Ranker	Debiasing Method	Yahoo Search Engine (CCM)				Alibaba Recommender System (CCM)			
		MAP	NDCG@1	NDCG@3	NDCG@5	MAP	NDCG@1	NDCG@3	NDCG@5
DRSR (Ours)	Labeled Data	0.861	0.747	0.759	0.771	0.850	0.737	0.741	0.755
	Pairwise Debiasing	0.842*	0.719*	0.721*	0.737*	0.831*	0.684*	0.685*	0.707*
	Pointwise Debiasing	0.839*	0.713*	0.717*	0.730*	0.830*	0.682*	0.684*	0.706*
	Regression-EM [43]	0.829	0.679	0.685	0.701	0.820	0.657	0.668	0.673
	Click Data	0.817	0.636	0.652	0.667	0.810	0.613	0.627	0.658
LambdaMART	Labeled Data	0.854	0.745	0.745	0.757	0.847	0.729	0.732	0.743
	Ratio Debiasing [17]	0.830	0.688	0.685	0.699	0.821	0.661	0.669	0.674
	Regression-EM [43]	0.826	0.669	0.676	0.691	0.818	0.636	0.651	0.667
	Click Data	0.813	0.628	0.646	0.673	0.804	0.603	0.618	0.646
DNN	Labeled Data	0.831	0.677	0.685	0.705	0.824	0.674	0.679	0.693
	Dual Learning Algorithm [2]	0.825	0.672	0.678	0.691	0.814	0.629	0.647	0.674
	Regression-EM [43]	0.823	0.665	0.669	0.687	0.813	0.628	0.645	0.672
	Click Data	0.809	0.611	0.619	0.648	0.801	0.600	0.612	0.641

[Regression-EM] [Xuanhui Wang, et al.] a regression-based EM method where position bias is estimated from regular clicks.

[Dual Learning Algorithm] [Qingyao Ai, et al.] a dual learning framework jointly learning a ranker and debiasing click data.

[Ratio Debiasing] [Ziniu Hu, et al.] an unbiased pair-wise learning-to-rank based on inverse propensity weight.

[Point-wise Debiasing] our model in point-wise setting.

[Pair-wise Debiasing] our model in pair-wise setting.

[Click Data] the raw click data without debiasing to train the ranker.

[Labeled Data] the human annotated relevance labels without any bias.

Ref: Xuanhui Wang, et al. Position bias estimation for unbiased learning to rank in personal search. WSDM, 2018.

Ref: Qingyao Ai, et al. Unbiased Learning to Rank with Unbiased Propensity Estimation. SIGIR, 2018.

Ref: Ziniu Hu, et al. Unbiased LambdaMART: An Unbiased Pairwise Learning-to-Rank Algorithm. WWW, 2019.



Experiment

Table 3: Comparison with PBM as click generation model.
Notations are same with Table 2.

Yahoo Search Engine (PBM)				
Ranker	MAP	NDCG@1	NDCG@3	NDCG@5
DRSR (Ours)	0.861	0.747	0.759	0.771
	0.848*	0.726*	0.737*	0.745*
	0.843*	0.723*	0.731*	0.740*
	0.834	0.698	0.705	0.712
	0.825	0.671	0.679	0.693
LambdaMART	0.854	0.745	0.745	0.757
	0.836	0.717	0.716	0.728
	0.830	0.685	0.684	0.700
	0.820	0.658	0.669	0.672
DNN	0.831	0.677	0.685	0.705
	0.828	0.674	0.683	0.697
	0.829	0.676	0.684	0.699
	0.819	0.637	0.651	0.667

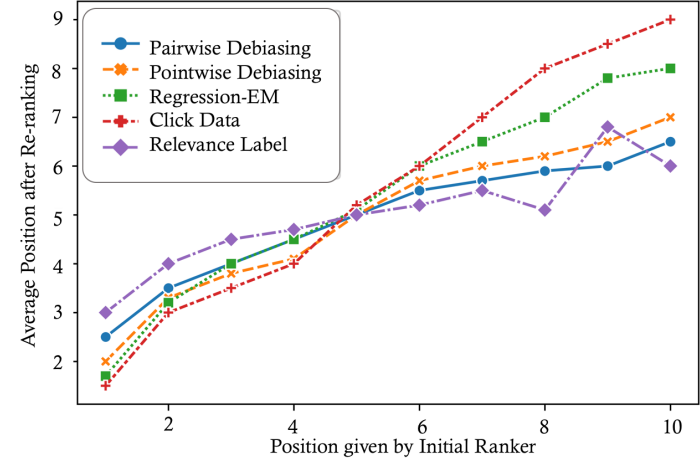


Figure: Average positions after re-ranking of documents at each original position by different debiasing methods combined with DRSR.

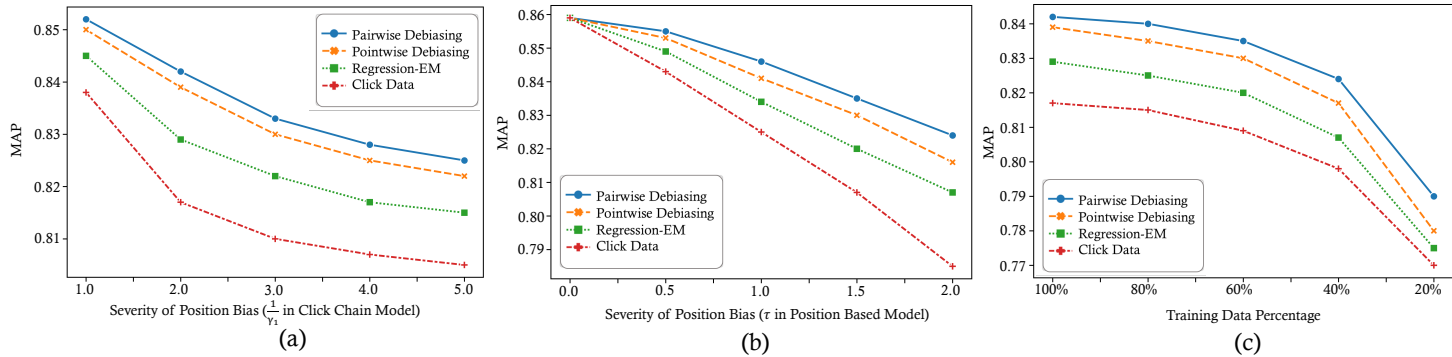


Figure: (a) & (b) Performance of DRSR against other debiasing methods with different degrees of position bias. (c) with different sizes of training data.



PART IV: Conclusion

Conclusion


- We adopt **survival analysis techniques** accompanied with **probability chain rule** to derive the joint probability of user various behaviors.
- This framework enables unbiased model to leverage the **contextual information** in the ranking list.
- Also, we incorporate with survival analysis, and thus can model the **non-click queries** as the **censored click logs**.
- DRSR can be easily adopted in the **pair-wise** loss setting to capture relative relevance between trusted function and **untrusted observation**.

Thanks for Your Listening



Slides Link

Jerry's Wechat



Full Paper Link

Email: jnjarui97@gmail.com

Website: <https://jjaruijin.com/>