








+ interconnection architecture






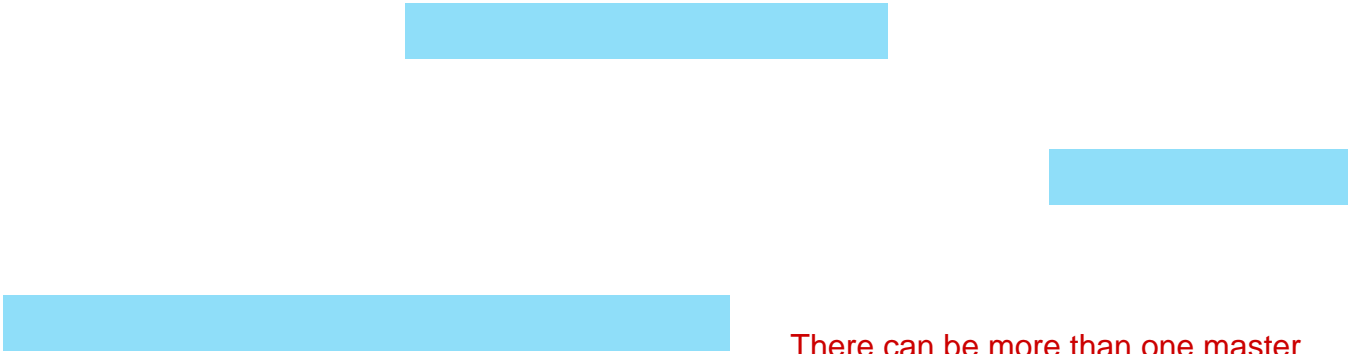


There can be more than one master

Buffer structure / to synchronize data










Cheaper than a Mux / because it is some transistors





Slightly faster

* Tri-state

* Mux

Takes less area + less costly

