

# On data and medatata formats for electrophysiological experiments

Jiří Vaněk, Roman Mouček

Faculty of Applied Sciences, Department of Computer Science and Engineering

University of West Bohemia

Univerzitní 8, 306 14, Pilsen, Czech Republic

Email: vanek2@kiv.zcu.cz, moucek@kiv.zcu.cz

**Abstract**—Currently there is no standardized data format for storing electrophysiological data. This standard is necessary for effective collaboration between scientists. This work deals with adjustments of existing data/metadata model for electrophysiological experiments and with proposal/implementation of data format for their storage.

## I. INTRODUCTION

Brain research has been very popular recently. Measurements producing large are conducted every year and it is very important to store measured data and metadata for later use. It was common that experiments were designed, measured and analyzed and after evaluation this recorded data was deleted. However, during recent years it has become more important to store experimental data and metadata for later use and to share them with other researchers to provide subsequent independent analyses.

It is important to identify and develop an independent standard for storing and exporting experimental data and metadata. If this standard is accepted by a larger community, it will allow easy sharing and better understanding of experimental results.

At first we had to get familiar with current formats for storing electrophysiology data. We explored existing models, terminologies, and ontologies. We became acquainted with a standard proposal from International Neuroinformatics Coordinating Facility (INCF) Electrophysiology Task Force for data sharing [17]. The storing options for experiments conducted at the University of West Bohemia were checked and currently used formats containing data and metadata were analyzed. Then it was necessary to look for available formats for storing EEG data, compare them and choose, eventually develop the best one.

The paper is organized in the following way. First data sharing culture is introduced including the INCF Program for data sharing. Then two selected formats for storing electrophysiology data, the NIX format and BrainVision format, are described. Moreover, HDF data model and odML initiative are introduced. Then these formats are compared and mapping of BrainVision format to the NIX format is described. The next part deals with design, analysis, implementation, and testing of HDFExport Program that converts existing data from BrainVision format into HDF5 container. Conclusion section sums up and discusses the work results.

## II. STATE OF THE ART

### A. Data Sharing

A trend towards sharing of neuroinformatics data has emerged in recent years. Nevertheless, a number of barriers continue to impede easy sharing of experiment's data. Many researchers and institutions remain uncertain about how to share data or lack the tools and expertise to participate in data sharing. The motivation for sharing is:

- **to accelerate progress in understanding of the brain**  
Several researchers claim that more rapid scientific discoveries are possible with shared data [19] [23].
- **to improve data quality**  
The sharing data helps uncover mistakes as missing data, noise, errors, etc. and improves the quality of the data in future experiments [3].
- **to reduce cost of research**  
For example, neuroimaging research is costly both in terms of the data acquisition costs and the time spent in data documentation. A significant amount of money could be saved from redundant data acquisition if data were shared with appropriate metadata descriptions [3].

### B. Program on Standards for Data Sharing

INCF is an international non-profit organization devoted to advancing the field of neuroinformatics. The INCF Program on Standards for Data Sharing was established to specify a standard for storing electrophysiology data. This Program aims to develop generic standard and tools to facilitate the recording, sharing, and reporting of neuroscience metadata in order to improve practices for the archiving and sharing of neuroscience data. Metadata define the methods and conditions of data acquisition and subsequent analytical processing. Metadata also describe conditions under which the actual raw-data were acquired [13].

The current focus of the Program on Standards for Data Sharing is in two areas: neuroimaging and electrophysiology. The most important requirement of such a standard is to accommodate common types of data used in electrophysiology or neuroimaging and also the metadata required to describe them [13].

### C. Current Formats for Storing Electrophysiology Data

Some of the existing formats for storing electrophysiology data are proprietary and even though some of them are well documented, they are complicated to use or edit due to their licensing policy. Focusing on the open ones, the most known and used formats are Ovation [25], NeXus Format [22], NEO [20], NeuroHDF [21], EDF+ [18], and NIX (Pandora) [24]. Most of them use the HDF format for storing electrophysiology data. Also Electrophysiology Task Force of the INCF Program on Standards for Data Sharing in Requirements for a standard recommends basing a standard on HDF5 [8]. In the following sections only the NIX format and BrainVision format are described.

1) *NIX format*: The NIX project (previously called Pandora) started in the context of the Electrophysiology Task Force which is part of the INCF Datasharing Program. This format specification closely defines an inner structure of file, especially the data part. The meta data part is defined by odML II-E.

NIX is one approach to this problem: it uses highly generic models for data as well as for metadata and defines standard schemata for HDF5 files representing these models. Last but not least NIX aims to provide a convenient C++ library to simplify the access to the defined format. The design principle of the data model used by NIX was to create a rather minimalistic, generic, yet expressive model that is able to represent data stored in other widely used formats or models like Neuroshare or NEO without any loss of information. Due to its generic approach, the data model is also able to represent other kinds of data used in the field e.g. image data or image stacks [24].

This format's scheme (Figure 1) served as a base format for the EEGBase file format (data in this format are finally stored in the HDF5 container) that includes the experimental data originally stored in BrainVision data format and selected metadata structures originally stored in the EEGBase Portal [5]. The experimental data are stored in blocks. Each block identifies an experiment and related metadata section. Raw data (signals, stimuli) are stored in DataArrays and specified by the attributes Dimension, Sample, Set, Representation, and Range (Figure 1) and could be specified by the section DataTag. The stimuli and artifacts are stored in the section SimpleTag (one stimulus) or MultiTag (more stimuli). The source for the sections DataArrays and/or Tags could be specified by the section Source. Each section could contain a link to the metadata part that contains information about experiment.

2) *BrainVision Format*: EEG data at University of West Bohemia are recorded by the BrainVision Recorder [11]. This program records raw data and saves it to three files. The BrainVision Recorder does not allow users to record data in any other format natively. The format of these files is described in the BrainVision Recorder User Manual [10]:

- **data file**  
This is binary file which contains recorded values from a recording device. The data are stored as double numbers.
- **vhdr file**

This text file is Brain Vision Data Exchange Header File Version 1.0 and includes basic information about measurements. The format of the header file is based on the Windows INI format. It consists of various named sections containing key values. The file stores basic information about measuring: coding, data file name, marker file name, number of channels, sampling interval in microseconds, information about binary format (IEEE\_FLOAT\_32), and information about channels (channel number, channel name, unit, resolution of unit).

- **vmrk file**  
This is the Brain Vision Data Exchange Marker File, Version 1.0. The marker file is based upon the same principle of sections and key values as the header file is. This text file contains information about stimuli. The file stores stimuli number, type of the stimuli, stimuli description, position, size and its channel number.

These files are stored in the EEGBase Portal [5] together with metadata describing experimental conditions.

### D. Hierarchical Data Format

HDF is a data model, file format and library for storing extremely large and complex data collections. This technology is able to store any kind of data and is used all over the world in research centers and government agencies. For example, the format HDF5 is used by Cardiff University for resolving their problem with grid computing, Deutsche Bank for financial engineering, Diamond Light Source in synchrotron science, Laboratory for Neural Computation for bio-engineering and many others. A lot of formats for storing electrophysiology data use HDF5. "The grouping structure in HDF5 enables applications to organize data objects in HDF5 to reflect complex relationships among objects. The rich collection of HDF5 datatypes, including datatypes that can point to data in other objects, and including the ability for users to define their own types, lets applications build sophisticated structures that match well with complex data. The HDF5 library has a correspondingly rich set of operations that enables applications to access just those components that are important." [15]

HDF is similar to XML documents, self-describing HDF files allow users to specify complex data relationships and dependencies. Several APIs for programming languages C, C++, Fortran 90, Java and others are available for this format. HDF is open-source (BSD license); stored data are human readable and the metadata model is easily customized.

### E. Open Metadata Markup Language

The metadata in electrophysiology domain are indispensable for the analysis and the management of experimental data within a lab. However, only rarely are metadata available in a structured, comprehensive, and machine-readable form [14]. odML defines the format, not the content, it means that it is inherently extensible and can be adapted to the specific requirements of any laboratory. For data sharing a correct understanding of metadata and data is only possible if the same terminology is used or if mappings between terminologies are

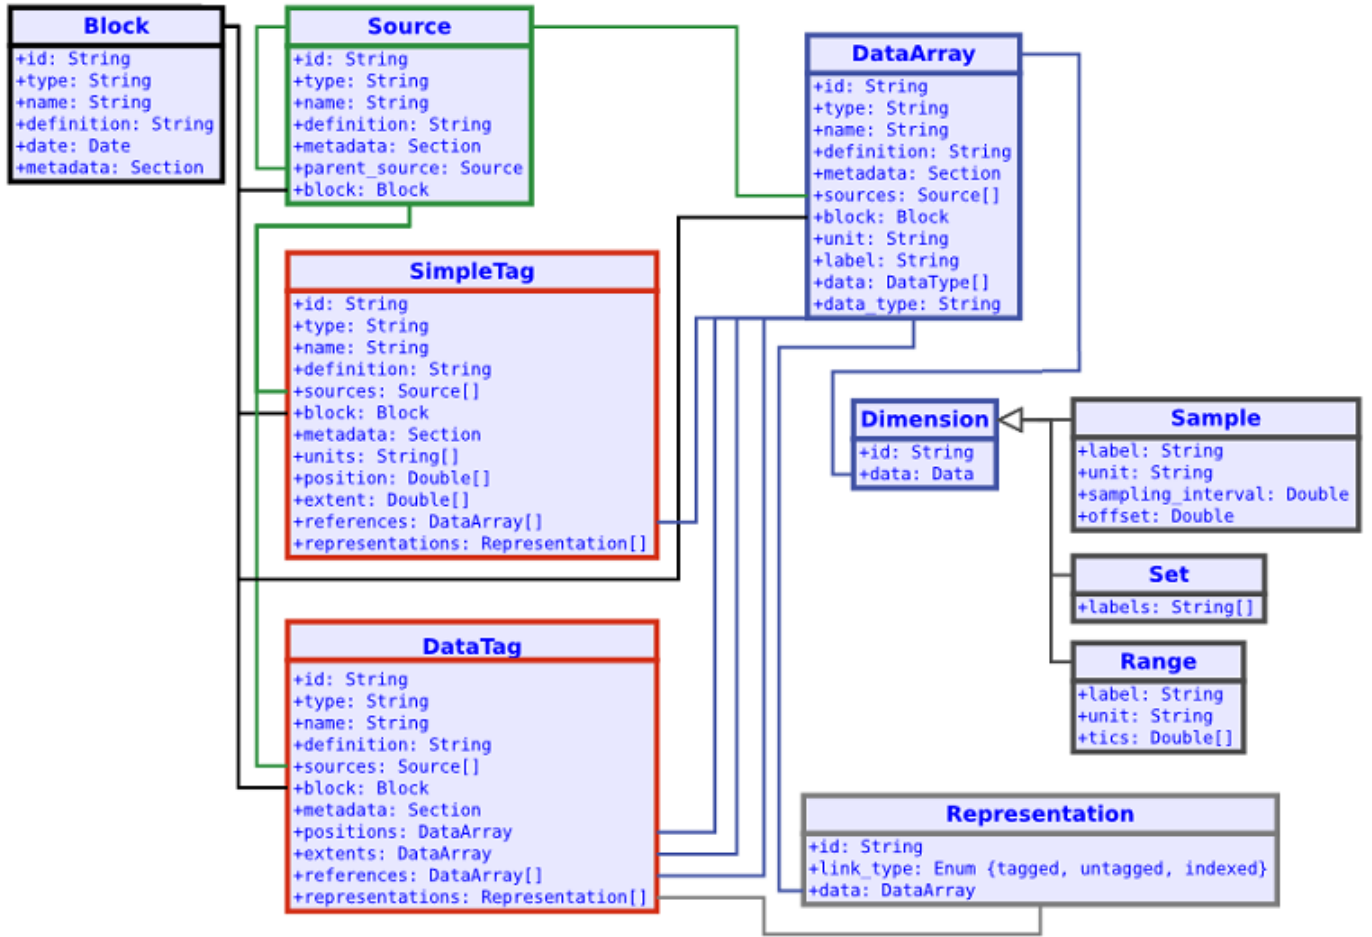


Figure 1. NIX data scheme. [24]

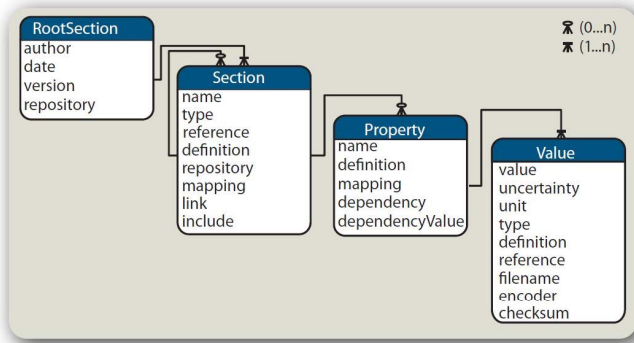


Figure 2. Open metadata Markup Language Entity-Relation diagram. [14]

provided. For this purpose were assembled terminologies with definitions of commonly used terms. [9]

### III. FILE FORMAT MAPPING AND COMPARISON OF TERMINOLOGIES

This section describes mapping of the BrainVision file format to the NIX format and comparison of odML terminology with EEGBase terminology. The EEGBase model is divided into two autonomous parts DATA and METADATA, which relate to each other, but could be read or written separately.

1) *Data Model*: The EEGBase data model is based on the NIX data model (Figure 1 and Section II-C1). The NIX model is able to save data from any electrophysiology experiment. However, for EEG experiments the NIX model is too general. As a result we used only the necessary parts of the model while other sections were omitted. All the omitted parts are in the NIX model optional, in this way the EEGBase data model is compatible with the NIX definition. The EEGBase data model is described in Figure 3. It uses the NIX scheme of sections Block, DataArray, MultiTag, DataTag and SimpleTag. The section Block is used to divide measurement, the section DataArray is used for storing raw signal data and stimuli, the section MultiTag is used for storing stimuli information, and the section DataTag contains EEG channel information. DataArrays are divided into SIGNAL and MARKER parts for better transparency. The names of DataArrays also correspond to the names of channels. These adjustments allow better human readability of the file and do not influence information

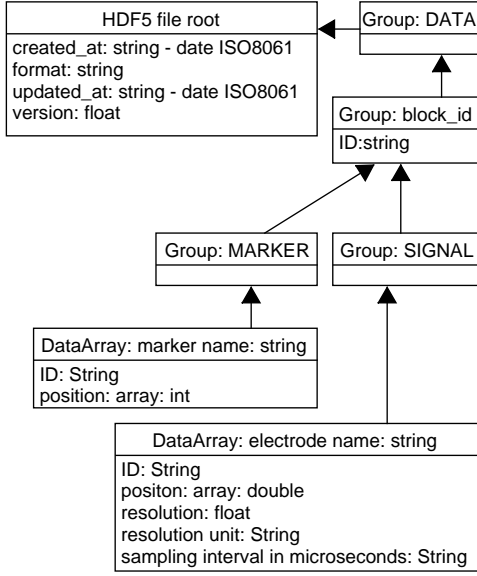


Figure 3. The EEGBase data model. The data are stored in a tree structure using fixed terminology. Each Group MARKER and SIGNAL could contain zero or more DataArrays sections containing raw data.

content at all. Metadata necessary for description of raw data form a part of the EEGBase model (they are also included in the NIX model).

#### A. Metadata Model

Metadata are organized according to odML terminology. The odML scheme and terminology was used for the metadata part of file. Since the metadata scheme at UWB used terms that had not been included or not had an alternative term in the original odML terminology, this was extended with these terms. These changes and adjustments are described in Section III-B.

#### B. Metadata Terminology Extensions

In order to save all our metadata into the HDF5 container we extended the odML model. These modifications were committed to G-Node INCF GitHub repository [7]. New sections **Environment**, **Protocol** and **Software** and several attributes to the existing sections **Person** and **Electrode** were added. All suggested changes were accepted by odML developers. All modifications are listed in Table I.

### IV. HDFEXPORT PROGRAM

This section deals with design and implementation of HDFExport program that converts the BrainVision file format data and EEGBase portal metadata into the HDF5 container.

Table I. MODIFICATIONS OF THE ODML MODEL.

Name	Property	Value	Definition
Electrode	Usage	Ground	Usage of electrode. <sup>1</sup>
Electrode	Usage	Reference	Usage of electrode. <sup>1</sup>
Electrode	Usage	Channel	Usage of electrode. <sup>1</sup>
Electrode	Description	String	
Environment	Weather	String	
Environment	RoomTemperature	String	
Environment	AirHumidity	float	The air humidity in %.
Environment	Description	String	
Protocol	Description	String	Description of the experiment
Protocol	Author	person	The persons who create this protocol.
Protocol	ProtocolFile	binary	Protocol File.
Protocol	ProtocolFileURL	URL	URL of protocol file.
Protocol	Version	String	Version of the protocol.
Person	Education level	String	Highest archived education level of the person.
Person	Role	Subject	The role of this person.
Person	Email	String	Person's e-mail.
Person	PhoneNumber	String	Person's phone number.
Person	Laterality	String	Handedness - The dominant hand of the subject.
Software	Name	String	The software name.
Software	Owner	String	The owner of software.
Software	Developer	String	Developer or developers firm of the software.
Software	Version	String	Version of the software.
Software	License	String	License type.
Software	LicenceStart	date	The start date of time limited license.
Software	LicenceExpiration	date	The end date of time limited license.
Software	LicenceDuration	String	Duration of the license for the software.
Software	LicenceCount	int	Number of the software license. <sup>2</sup>
Software	Distribution	String	Distribution type.
Software	Description	String	
Software	LicenceDuration	String	Duration of the license for the software.

1) *Use Cases:* The HDFExport program is designed for several use cases that could be divided by data and metadata location (Figure 4):

- data and metadata export from locally stored BrainVision files only,
- data and metadata export from locally stored BrainVision files and metadata from EEGBase portal,
- data and basic metadata export from in EEGBase portal stored BrainVision files without experiments metadata,
- data and metadata export from EEGBase portal and BrainVision files stored in EEGBase portal

We can also divide use cases according to the type of exported data (Figure 5):

- Only raw EEG data and basic metadata are exported. Only data and metadata from the BrainVision files are exported. Stimuli are not exported (not all measurements uses stimuli).
- Raw EEG data, basic metadata and stimuli are exported. All data, metadata and stimuli from BrainVision files are exported.
- Raw EEG data, basic metadata, stimuli and experiments metadata are exported.

<sup>1</sup> Added terminology that describes usage of electrode.

<sup>2</sup> For floating licenses

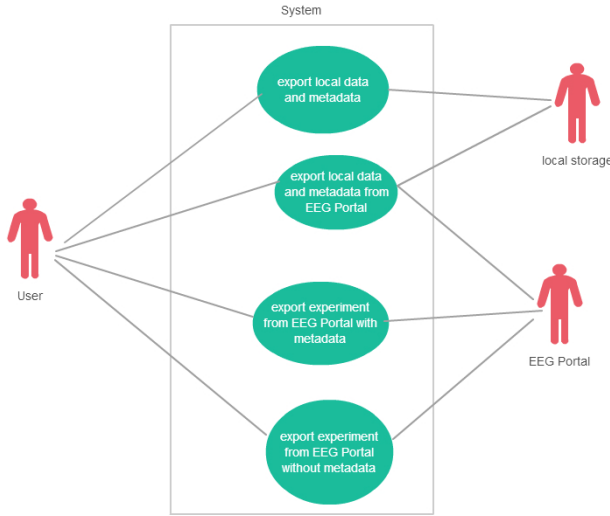


Figure 4. Use cases of HDFExport Program.

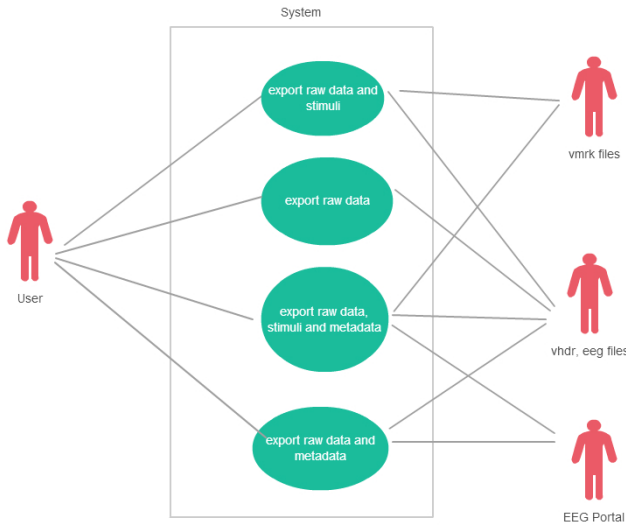


Figure 5. Use cases of HDFExport Program.

All data, metadata and stimuli from the BrainVision files and experiments metadata from EEGBase portal are exported.

- Raw EEG data, basic metadata and experiments information are exported.
- All data, metadata and experiments information are exported.

2) *Implementation:* Java was selected as a programming language for program developing, since there already exists a parser of BrainVision formats developed. Moreover, the EEGBase portal is written in Java. There is an effort to include the export program into the EEGBase portal for easy export.

## V. TESTS

The program was manually tested for several use cases and all created HDF5 files were verified manually (they were opened and the contents was checked) by the program provided by the HDF Group, HDFView [6] in version 2.11.

Table II. PERFORMANCE TESTS WITH GZIP COMPRESSION. EACH FILE WAS SAVED SEVEN TIMES.

File size of Brain Vision files	Time needed for conversion in ms			
	Best	Worst	Average	With compression
21,3 MB	3010	3501	3132	7529
51,2 MB	6160	7906	6700	26051
58 MB	7668	8262	7947	29032
87,2 MB	31364	35957	32820	44877
197,8 MB	13060	14625	13502	40168
221,3 MB	14589	16321	15197	42679
221,6 MB	14347	16108	14871	43586

### A. Performance Tests

The write performance tests were conducted to determine time consumption of export. The tests were run on a standard desktop computer (Intel Core i7 at 3,4 GHz, 8 GB of DDR3 RAM, standard HDD with 7200 rpm). An unusually high memory consumption was detected during the test. The amount of occupied memory by the EEGExport program for big (220 MB) experimental data reached up to 4 GB of memory. Further testing showed that Java Virtual Machine, in attempt to speed up export, did not free allocated memory. However, when the program was paused, the size of allocated memory became lower. Finally, the disk writing speed was a limited factor. The conversion times with GZip compression are shown in Table II. The GZip compression was used to reduce file size. The GZip compression is integrated in HDF libraries and it is supported natively (reading of the data does not require any special actions).

### B. File Size Tests

Several file size tests were conducted to determine the resulting file size of the HDF5 container storing all data. Data from real experiments were used for the tests. The test showed that the size of the HDF5 container was influenced by exported data and the original file size was not the only decisive factor. The size of the HDF5 container was always bigger than BrainVision files, four times bigger at the worst case, two times at the best case. The results are shown in Table III.

Table III. FILE SIZE TESTS.

File size of BrainVision files	HDF5 file size	HDF5 file size with compression	Ratio
21,3 MB	80,9 MB	26,92 MB	1,26x
51,2 MB	194,2 MB	112,98 MB	2,21x
58 MB	221,1 MB	102,79 MB	1,77x
87,2 MB	329,7 MB	124,51 MB	1,43x
197,8 MB	370,9 MB	305,19 MB	1,54x
221,3 MB	414,9 MB	355,58 MB	1,61x
221,6 MB	415,5 MB	334,46 MB	1,51x

Table IV. FILE SIZE DEPENDENCY ON COMPRESSION CHUNK SIZE.

Original file size	HDF5 file size in MB			
	chunk 64	chunk 256	chunk 512	chunk 1024
21,3 MB	39,76	26,92	23,30	20,46
51,2 MB	155,47	112,98	99,31	87,85
58 MB	151,31	102,79	88,60	77,96
87,2 MB	176,53	124,51	112,43	104,15
197,8 MB	365,63	305,19	292,59	285,48
221,3 MB	422,83	355,58	341,72	333,83
221,6 MB	402,81	334,46	320,22	312,10

## VI. CONCLUSION

We examined current file formats and standardizing efforts dealing with description and storage of electrophysiology data. Many of them use HDF as a data container. Then the most suitable format (the NIX project) was selected; INCF recommendations were taken into account. The local EEGBase data model was mapped to the NIX data model and several terms from the EEGBase metadata set extended (some of them were mapped to) odML terminology. These data and metadata models were fully reflected when the inner structure of the HDF container (the EEGBase format) was proposed. Finally, the program HDFExport was designed and developed. This software tool transfers both data (stored mostly in BrainVision files) and metadata from the EEGBase portal repositories to the HDF5 container. The resulting HDF5 container was tested for its content and the process of creating HDF5 container was tested for its performance and size of the resulting file.

The proposed EEGBase format is capable of storing a large variety of electrophysiology data and metadata. Exporting experimental data and metadata stored in the EEGBase to the HDF5 container improves sharing capabilities of the EEGBase portal and overall attractiveness of stored experiments.

The software tool HDFExport currently uses EEGBase web services for metadata download, the usage of web services for data download is currently prepared. The next step is to integrate this so far standalone application in the EEGBase Portal.

## ACKNOWLEDGEMENTS

This work was supported by the UWB grant SGS-2013-039 Methods and Applications of Bio- and Medical Informatics.

## REFERENCES

- [1] POLDRACK, R. A. The future of fMRI in cognitive neuroscience. *NeuroImage*. aug 2012, 62, 2, s. 1216–1220. 10.1016/j.neuroimage.2011.08.007. Available from: <http://dx.doi.org/10.1016/j.neuroimage.2011.08.007>.
- [2] MILHAM, M. P. Open Neuroscience Solutions for the Connectome-wide Association Era. *Neuron*. jan 2012, 73, 2, s. 214–218. 10.1016/j.neuron.2011.11.004. Available from: <http://dx.doi.org/10.1016/j.neuron.2011.11.004>.
- [3] POLINE, J.-B. et al. Data sharing in neuroimaging research. *Frontiers in Neuroinformatics*. 2012, 6. 10.3389/fninf.2012.00009. Available from: <http://dx.doi.org/10.3389/fninf.2012.00009>.
- [4] FRIEDRICH, S. et al. Mission and activities of the INCF Electrophysiology Data Sharing Task Force. *Frontiers in Neuroinformatics*. 2014, 8. 10.3389/conf.fninf.2014.08.00088. Available from: <http://dx.doi.org/10.3389/conf.fninf.2014.08.00088>.
- [5] *EEGbase* [online]. 2015. [cit. 10.5.2015]. RRID:nif-0000-08190. Available from: <https://eegdatabase.kiv.zcu.cz/>.
- [6] *HDF Java Products* [online]. 2014. [cit. 1.5.2015]. HDF Group. Available from: <https://www.hdfgroup.org/products/java/>.
- [7] *INCF GitHub odML repository* [online]. [cit. 12.5.2015]. Available from: <https://github.com/INCF/odml-terminologies>.
- [8] Requirements for storing electrophysiology data, Version 0.72. Available from: <https://goo.gl/QbClkE>. Electrophysiology Task Force of the INCF Program on Standards for Data Sharing, 2014.
- [9] BENDA, J. From recording to sharing of data - embedding metadata handling into the laboratory workflow using odML. *Frontiers in Neuroinformatics*. 2011, 5. 10.3389/conf.fninf.2011.08.00100. Available from: <http://dx.doi.org/10.3389/conf.fninf.2011.08.00100>.
- [10] Brain Products GmbH. *BrainVision Recorder User Manual*. Brain Products GmbH, 011 edition, December 2014.
- [11] *Brain Products GmbH* [online]. 2014. [cit. 03.07.2014]. Brain Products GmbH. Available from: <http://www.brainproducts.com/index.php>.
- [12] BRINKMAN, R. R. et al. Modeling biomedical experimental processes with OBI. *Journal of Biomedical Semantics*. 2010, 1, Suppl 1, s. S7. 10.1186/2041-1480-1-s1-s7. Available from: <http://dx.doi.org/10.1186/2041-1480-1-s1-s7>.
- [13] FRIEDRICH, S. et al. Mission and activities of the INCF Electrophysiology Data Sharing Task Force. *Frontiers in Neuroinformatics*. 2014, 8. 10.3389/conf.fninf.2014.08.00088. Available from: <http://dx.doi.org/10.3389/conf.fninf.2014.08.00088>.
- [14] GREWE, J. – WACHTLER, T. – BENDA, J. A Bottom-up Approach to Data Annotation in Neurophysiology. *Frontiers in Neuroinformatics*. 2011, 5. 10.3389/fninf.2011.00016. Available from: <http://dx.doi.org/10.3389/fninf.2011.00016>.
- [15] *HDF Technologies* [online]. 2013. [cit. 03.07.2014]. The HDF Group. Available from: <http://www.hdfgroup.org/>.
- [16] *INCF* [online]. 2015. [cit. 4.3.2015]. Available from: <http://www.incf.org/>.
- [17] *INCF Electrophysiology Task Force* [online]. 2015. [cit. 4.3.2015]. Available from: <http://incf.org/activities/our-programs/datasharing/electrophysiology-task-force/>.
- [18] KEMP, B. – OLIVAN, J. European data format ‘plus’ (EDF+), an EDF alike standard format for the exchange of physiological data. *Clinical Neurophysiology*. sep 2003, 114, 9, s. 1755–1761. 10.1016/s1388-2457(03)00123-8. Available from: [http://dx.doi.org/10.1016/s1388-2457\(03\)00123-8](http://dx.doi.org/10.1016/s1388-2457(03)00123-8).
- [19] MILHAM, M. P. Open Neuroscience Solutions for the Connectome-wide Association Era. *Neuron*. jan 2012, 73, 2, s. 214–218. 10.1016/j.neuron.2011.11.004. Available from: <http://dx.doi.org/10.1016/j.neuron.2011.11.004>.
- [20] *Neo* [online]. 2014. [cit. 03.07.2014]. Available from: <http://pythonhosted.org/neo/>.
- [21] *NeuroHDF* [online]. 2014. [cit. 03.07.2014]. NeuroHDF Interest Group. Available from: <https://neurohdf.readthedocs.org/>.
- [22] *NeXus Format* [online]. 2014. [cit. 03.07.2014]. NeXus International Advisory Committee. Available from: <http://www.nexusformat.org/>.
- [23] POLDRACK, R. A. The future of fMRI in cognitive neuroscience. *NeuroImage*. aug 2012, 62, 2, s. 1216–1220. 10.1016/j.neuroimage.2011.08.007. Available from: <http://dx.doi.org/10.1016/j.neuroimage.2011.08.007>.
- [24] *NIX* [online]. 2014. [cit. 03.02.2015]. G-Node. Available from: <https://github.com/G-Node/nix/wiki>.
- [25] *Ovation* [online]. 2014. [cit. 3.7.2014]. Physion LLC. Available from: <http://physion.us/>.
- [26] *The Open Biological and Biomedical Ontologies* [online]. 2015. [cit. 10.5.2015]. Available from: <http://www.obofoundry.org/>.