locator()


locator() is a Playwright method used to identify and interact with an element using a selector:
1)cssSelector
2)xpath

```
Syntax:page.locator("selector")
```

CssSelector

-->An HTML CSS selector is a pattern used to identify and locate elements on a web page based on their HTML tag, class, ID, or attributes.
-->CSS selectors are unidirectional

eg:

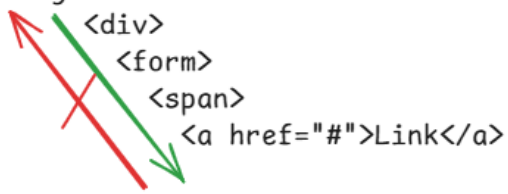

Selector	Syntax	Example
ID	#id	#email
Class	.class	.btn
Attribute	[attr="value"]	[type="text"]
Tagname+class	tag.class	button.primary
Tagname+id	tag#id	input#email
Tagname+Attribute	tag[attr="value"]	input[type="text"]

```
ests > JS CSS.spec.js > test("cssSelector") callback
1   import {test} from "@playwright/test"
2   test("cssSelector",async({page})=>{
3   await page.goto("https://www.saucedemo.com/")
4   //tagname+id 0r id
5   await page.locator("input#user-name").fill("standard_user")
6   //tagname+att or att
7   await page.locator("[name='password']").fill("secret_sauce")
8   //tagname +class 0r classname
9   await page.locator("input.submit-button").click()
10  await page.waitForTimeout(2000)
11  })
```