
fixture

->fixture is a reusable piece/block of setup code that prepares
  somethings for our test so that we can use it directly
->it is pre-defined object provided by playwright for performing
  action like
  1)opening a browser and creating new tabs
  2)navigating to a URL
  3)clicking elements
  4)typing text
  5)reading text
  6)taking screenshots
->A fixture is a ready-made object provided by Playwright that handles setup
  and teardown for our tests.
->Setup: before the test, it launches the browser and creates the context and
  a tab (page).
->Teardown: after the test,it closes everything automatically.
  why teardown is important?
  1)the browser stay opens
  2)ram consumption increase
  3)performance get low
  4)test run slow
  5)sometimes it will fail the test because of open resource

Type of fixture

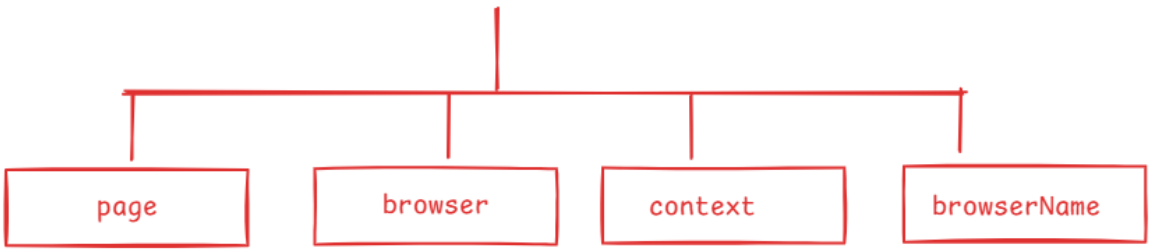

Page

-->It is built-in playwright fixture that represent a browser tab/fresh
  page and provides all the methods required to interact with that webpage

```
import {test} from "@playwright/test"
//page
Run | Debug | Inspect
test("pageFixture",async({page})=>{
await page.goto("https://demowebshop.tricentis.com/")
await page.waitForTimeout(2000)
})
```

browser

-->it is built-in playwright fixture represents the browser instance
itself (Chromium, Firefox or WebKit).

-->use=to create new contexts(session) and pages manually, when you need multiple users or isolated sessions.

Multiple users: testing two different people at the same time in one test. For example, one person logs in as a customer and another logs in as an admin.

Isolated sessions: each session is completely separate, with its own cookies, login and storage. What happens in one session does not affect the other.

```
import {test} from "@playwright/test"
//brower
Run | Debug | Inspect
test("browserFixture",async({browser})=>{
let context1=await browser.newContext()
let page1=await context1.newPage()
await page1.goto("https://demowebshop.tricentis.com/")

let context2=await browser.newContext()
let page2=await context2.newPage()
await page2.goto("https://www.instagram.com/")
await page2.waitForTimeout(3000)
})
```

context

-->it is built-in playwright fixture represents that represents one browser session (like incognito), holding cookies and storage and containing one or more pages

```
//context
Run | Debug | Inspect
test("contextFixture",async({context})=>{
let page1=await context.newPage()
await page1.goto("https://www.instagram.com/")

let page2=await context.newPage()
await page2.goto("https://demowebshop.tricentis.com/")
await page2.waitForTimeout(3000)
})
```

browserName

-->it is built-in fixture provided by playwright which gives us the name of the currently running browser as a string

```
//browsername
Run | Debug | Inspect
test("browserNameFixture",async({browserName,page})=>{
await page.goto("https://www.instagram.com/")
console.log(browserName)
})
```