

# Computer Science 3MI3 – 2020 homework 1

Implementing trees in Scala

Mark Armstrong

September 11th, 2020

## Contents

### Introduction

Scala is a purely object-oriented language on the JVM, and in addition to object-oriented abstractions it fully supports the abstractions of *functional programming*. We are interested in it because of this functional programming support.

Herein we implement several types of trees, the de facto example of an *algebraic datatype*, along with **flatten**-ing functions which convert those trees to the less structured type of lists.

### Boilerplate

#### Submission procedures

##### Submission method

Homework should be submitted to your McMaster CAS Gitlab respository in the `cs3mi3-fall2020` project.

Ensure that you have **pushed** the commits to the remote repository in time for the deadline, and not just committed to your local copy.

#### Naming requirements

Place all files for the homework inside a folder titled `hn`, where `n` is the number of the homework. So, for homework 1, the use the folder `h1`, for homework 2 the folder `h2`, etc. Ensure you do not capitalise the `h`.

Unless otherwise instructed in the homework questions, place all of your code for the homework in a single file in the `hn` folder named `hn.ext`, where `ext` is the appropriate extension for the language used according to this list:

- For Scala, `ext` is `sc`.
- For Prolog, `ext` is `pl`.
- For Ruby, `ext` is `rb`.
- For Clojure, `ext` is `clg`.

If multiple languages are used in the homework, submit a `hn.ext` file for each language.

**If the language supports multiple different file extensions, you must still follow the extension conventions above.**

**Incorrect naming of files may result in up to a 10% deduction in your grade.**

#### **Do not submit testing or diagnostic code**

Unless you are instructed to do so in the homework questions, **you should not submit testing code with your homework submission.**

This includes

- any `main` function,
- any `print` statements which output information **that is not directly requested as console output in the homework questions.**

If you do not wish to remove diagnostic print statements manually, you will have to find a way to ensure that they are disabled in your final submission.

For instance, by using a wrapper on the `print` function or macros.

#### **Due date and allowance for technical difficulties**

Homework is due on the second Sunday following its release, by the end of the day (midnight). Submissions past 00:00 may not be considered.

If you experience technical difficulties leading up to the submission time, please contact Mark **ASAP** with the details of the problem and, if possible, attach the current state of your homework to the communication. This information will help ensure we are able to accept your submission once the technical difficulties are resolved.

## Proper conduct for coursework

### Individual work

Unless explicitly stated in the homework questions, all homework in this course is intended to be *individually completed*.

You are welcome to discuss the content of the homework in the public forum of the class Microsoft Teams team homework channel, though obviously solutions or partial solutions should not be posted or described.

Private discussions about the homework cannot reasonably be forbidden, but such discussions should follow the same guidelines as public discussions.

### **Inappropriate collaboration via private discussions which is later discovered by course staff may be considered academic dishonesty.**

When in doubt, make the discussion private, or report its contents to the course staff by making a note of it in your homework.

To clarify what is considered appropriate discussions of homework content, here are some examples:

1. Discussing the language features introduced or needed for the homework.
  - Such as relevant builtin datatypes and datatype definition methods and their general use.
  - Code snippets that are not partial solutions to the homework are welcome and encouraged.
2. Questions of the form “What is meant by `x`?”, “Does `x` really mean `y`?” or “Is there a mistake with `x`?”
  - Of course, questions of those form which would be answered by partial solutions are not considered appropriate.
3. Questions or advice about errors that may be encountered.
  - Such as “If you see a `scala.MatchError` you should probably add a catch-all `_` case to your `match` expressions.”

## Language library resources

Unless explicitly stated in the questions, it is not expected that you will use any language library resources in the homeworks.

Possible exceptions to this rule include implementations of datatypes we discuss in this course, such as lists or options/maybes, if they are included in a standard library instead of being builtin.

*Basic* operations on such types would also be allowed.

- For instance, `head`, `tail`, `append`, etc. on lists would not require explicit permission to be used.
- More complex operations such as sorting procedures would require permission before you used them.

## Part 0.1: Installing Scala [0 points]

In this course, we will be targetting

- [Scala](#) version 2.13 and
- [Ammonite](#), an “improved” Scala REPL (read, evaluate, print loop), version 1.7.1,

as used in the [lolhens/ammonite](#) Docker image.

**If there is any update to the Docker image, or if for any other reason we change our targeted versions, we will make an announcement on the homepage.**

All of that said, any recent version of Scala and Ammonite should suffice for our purposes; it is unlikely we will be using any features which could have compatibility issues. You may install whatever is most convenient on your system, and later run tests in the Docker image to verify there are no compatibility issues.

So, we recommend whatever installation method that seems appropriate for your operating system, and we link to guides to get you started below.

## Installation guides

- The [Ammonite](#) homepage.
- [Chapter 2](#) of the online “Hands-on Scala”, titled “Setting Up”.

- “[Hands-on Scala](#)”, by Li Haoyi, is a very recent book on Scala using Ammonite. Its first 5 chapters are free to read online.

## Part 0.2: Basic Scala programming [0 points]

Some basic tutorial on Scala will be given in an upcoming lecture, and also in the tutorials, and should provide you with the knowledge you need to complete this homework.

In the meantime, there are numerous useful guides online which can get you started. In particular, the introductory chapters of the aforementioned “[Hands-on Scala](#)”, which are freely available online.

## Part 1: Representations of two tree types [20 points]

In Scala, implement the following types.

1. The type of unordered binary trees which, given an arbitrary type **A**, carry elements of **A** in their leaves (nodes without children) only. Call this type **LeafTree**.
2. The type of unordered binary which, given an arbitrary type **A**, carry elements of **A** on each node. Call this type **BinTree**.


There are multiple ways you could implement these types in Scala, and we will not force you to choose a particular implementation here. But we recommend implementing them using **sealed traits** and **case class**-es, as discussion in “Hands-on Scala” [section 5.1](#). **case class**-es in Scala are used to implement algebraic datatypes, which you may have seen in Haskell

```
data LeafTree a = Leaf a | Branch (Tree a) (Tree a)
```


or Elm

```
type LeafTree a = Leaf a | Branch (Tree a) (Tree a)
```

The type **LeafTree** on **Int** represents trees such as

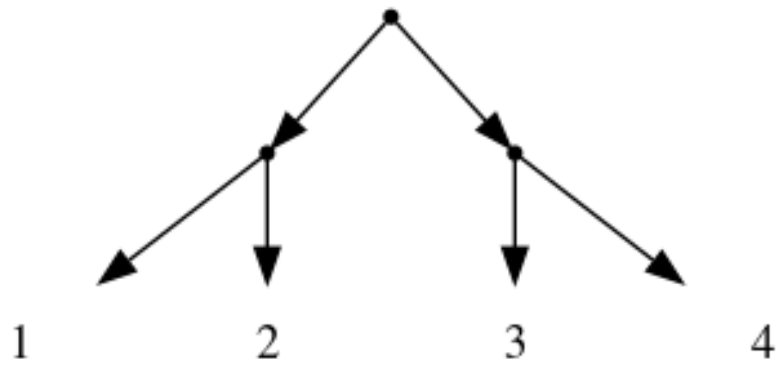

While the type `BinTree` on `Int` represents trees such as

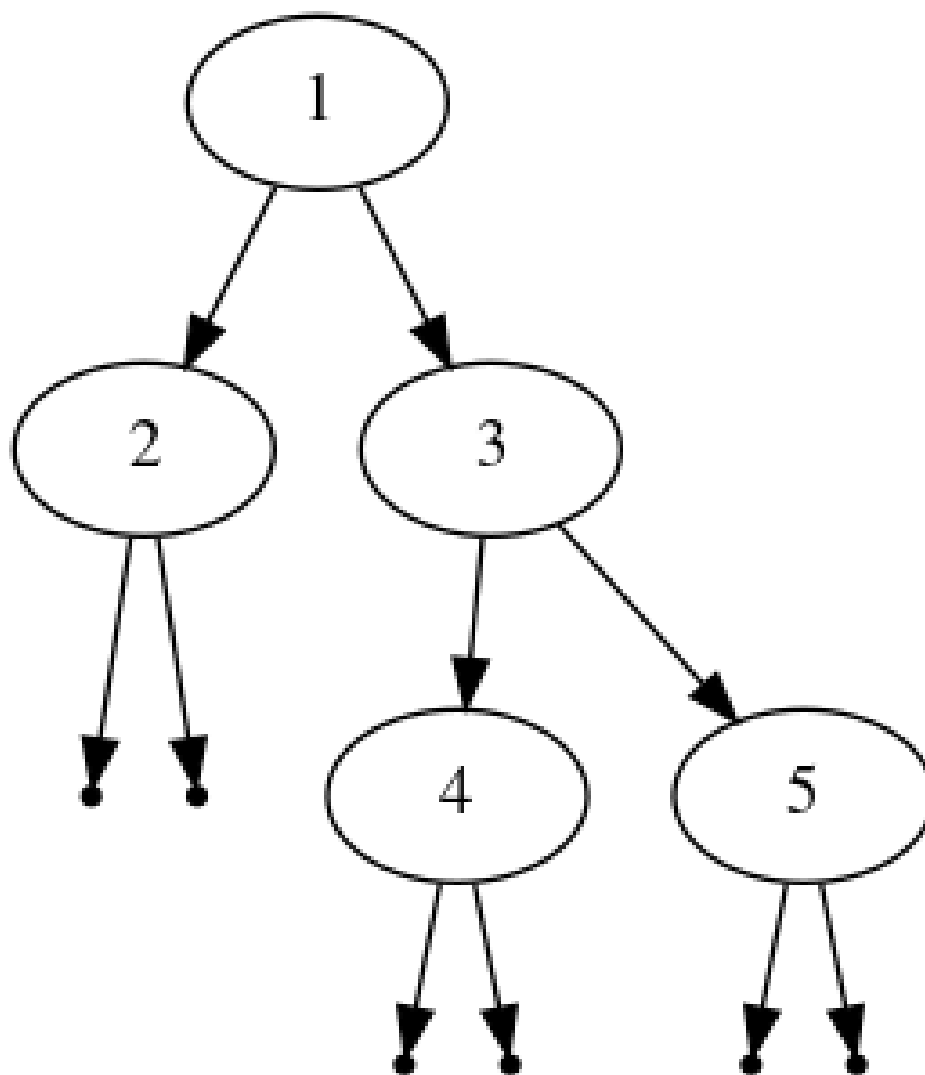

## Part 2: Flattening trees to lists [20 points]

Implement a function named `flatten` for our two tree types defined above, each of which convert the trees to lists, discarding the tree structure. Note that we are able to reuse the name `flatten` for two different functions so long as the type signatures are different. Specifically,

1. the first `flatten` should have type `LeafTree[A] => List[A]`, and

2. the second `flatten` should have type `BinTree[A] => List[A]`.

For the `LeafTree` type, the elements should appear in the same left-to-right order as they did in the tree. So the above example tree would flatten to the list `[1,2,3,4]`.

For the `BinTree` type, for a given node `N`, all elements in the left subtree of `N` should appear in the list *before* the element of said node, and all elements in the right subtree of that node should appear in the list *after* the element of said node. So the above example tree would flatten to `[2,1,4,3,5]`.

### Part 3: Elements of a Tree[Int] in order [20 points]

For each of the two tree types we have implemented, implement a function `orderedElems` which converts trees containing integers into lists *which are sorted in **increasing** order*. So,

1. the first `orderedElems` should have type `LeafTree[Int] => List[Int]`, and
2. the second `orderedElems` should have type `BinTree[Int] => List[Int]`

and in each case you must ensure the result is ordered in increasing order.

You must implement your own sorting function on integer lists, not use any builtin or library functions.

The marking of these functions will take into account the *elegance* of the solution.

**Try to avoid unnecessary or repeated work.**


### Part 4: Trees which describe structure [10 points]

Implement one additional type of unordered binary trees which, given arbitrary types `A` and `B`, carry elements of `A` in their non-leaf nodes and elements of `B` in their leaf nodes. Call this type `StructTree`.

- This naming is inspired by the fact that these trees can be seen as an `A` labelled structure on top of elements of `B`. Note the similarity to parse trees.

The type `StructTree[String][Int]` could be used to represent trees such as



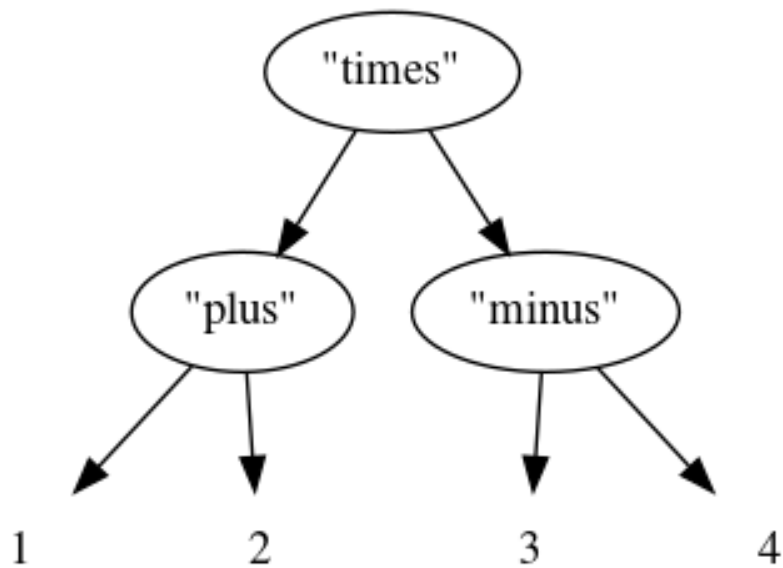

### Part 5: Flattening structure trees [bonus 20 points]

Define an appropriate `flatten` operation for the `StructTree` type.

As this is a bonus question, there are many possible interpretations of “appropriate”, and the marks for this question will heavily depend upon which interpretation you use.

Try to come up with an implementation which discards *as little structure as possible*, bearing in mind that the transformation to lists necessitates discarding at least some structure.