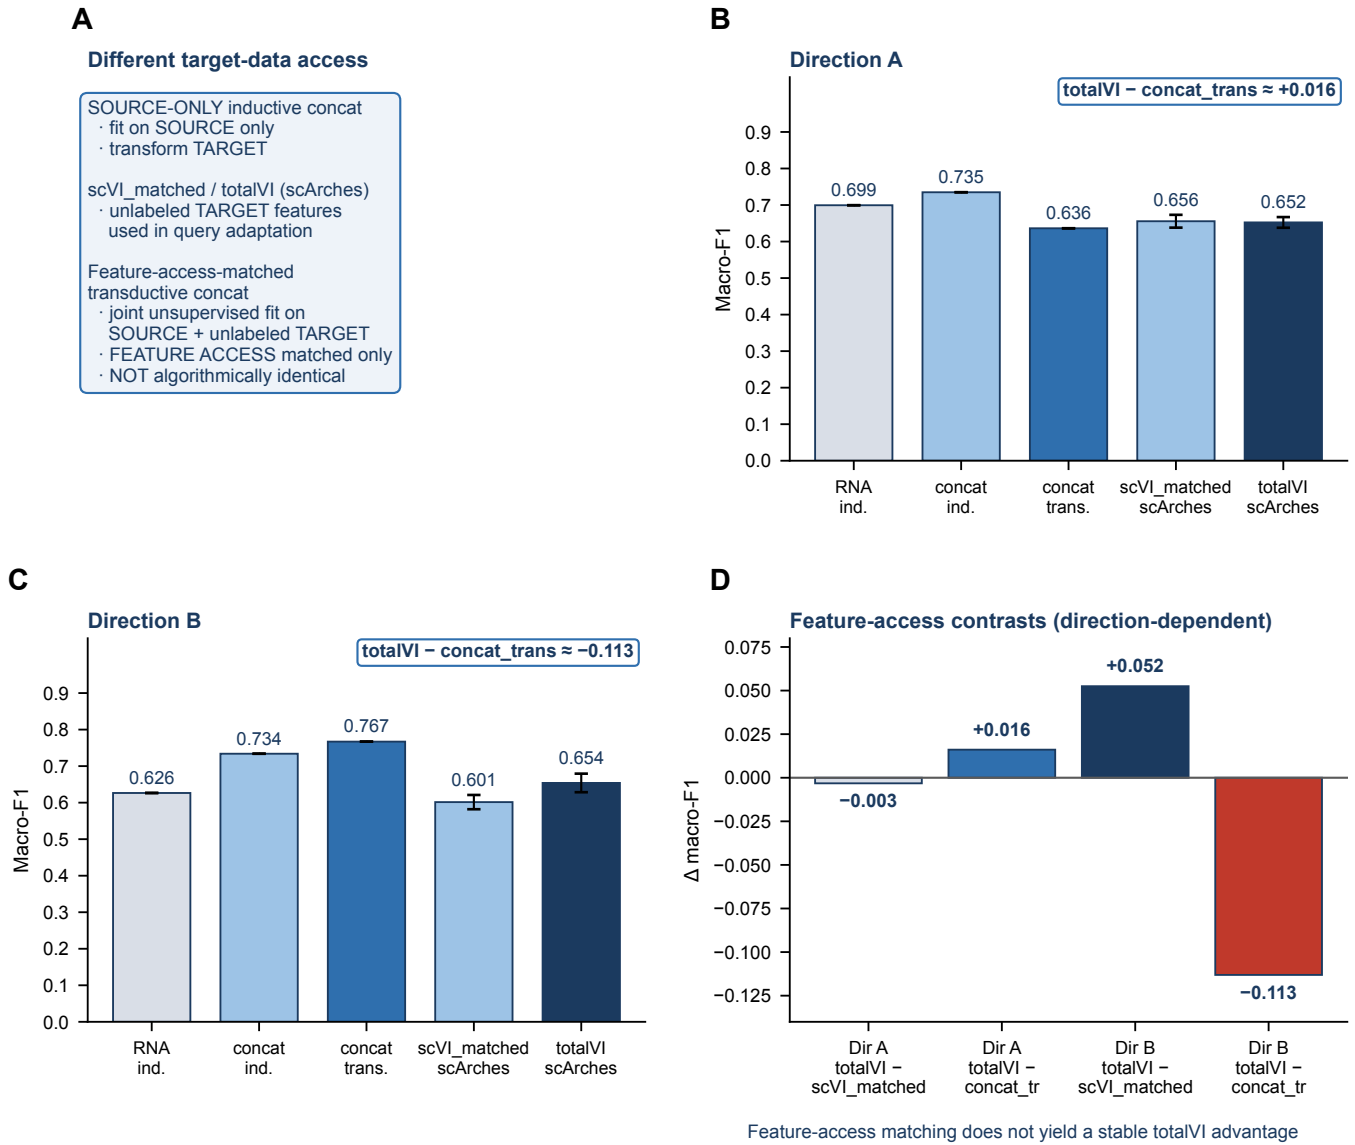
A
Different target-data access
SOURCE-ONLY inductive concat
· fit on SOURCE only
· transform TARGET
scVI_matched / totalVI (scArches)
· unlabeled TARGET features used in query adaptation
Feature-access-matched transductive concat
· joint unsupervised fit on SOURCE + unlabeled TARGET
· FEATURE ACCESS matched only
· NOT algorithmically identical
B
Direction A
totalVI − concat_trans ≈ +0.016
Macro-F1
0.699
0.735
0.636
0.656
0.652
RNA ind.
concat ind.
concat trans.
scVI_matched scArches
totalVI scArches
C
Direction B
totalVI − concat_trans ≈ −0.113
Macro-F1
0.626
0.734
0.767
0.601
0.654
RNA ind.
concat ind.
concat trans.
scVI_matched scArches
totalVI scArches
D
Feature-access contrasts (direction-dependent)
Δ macro-F1
−0.003
+0.016
+0.052
−0.113
Dir A totalVI − scVI_matched
Dir A totalVI − concat_tr
Dir B totalVI − scVI_matched
Dir B totalVI − concat_tr
Feature-access matching does not yield a stable totalVI advantage