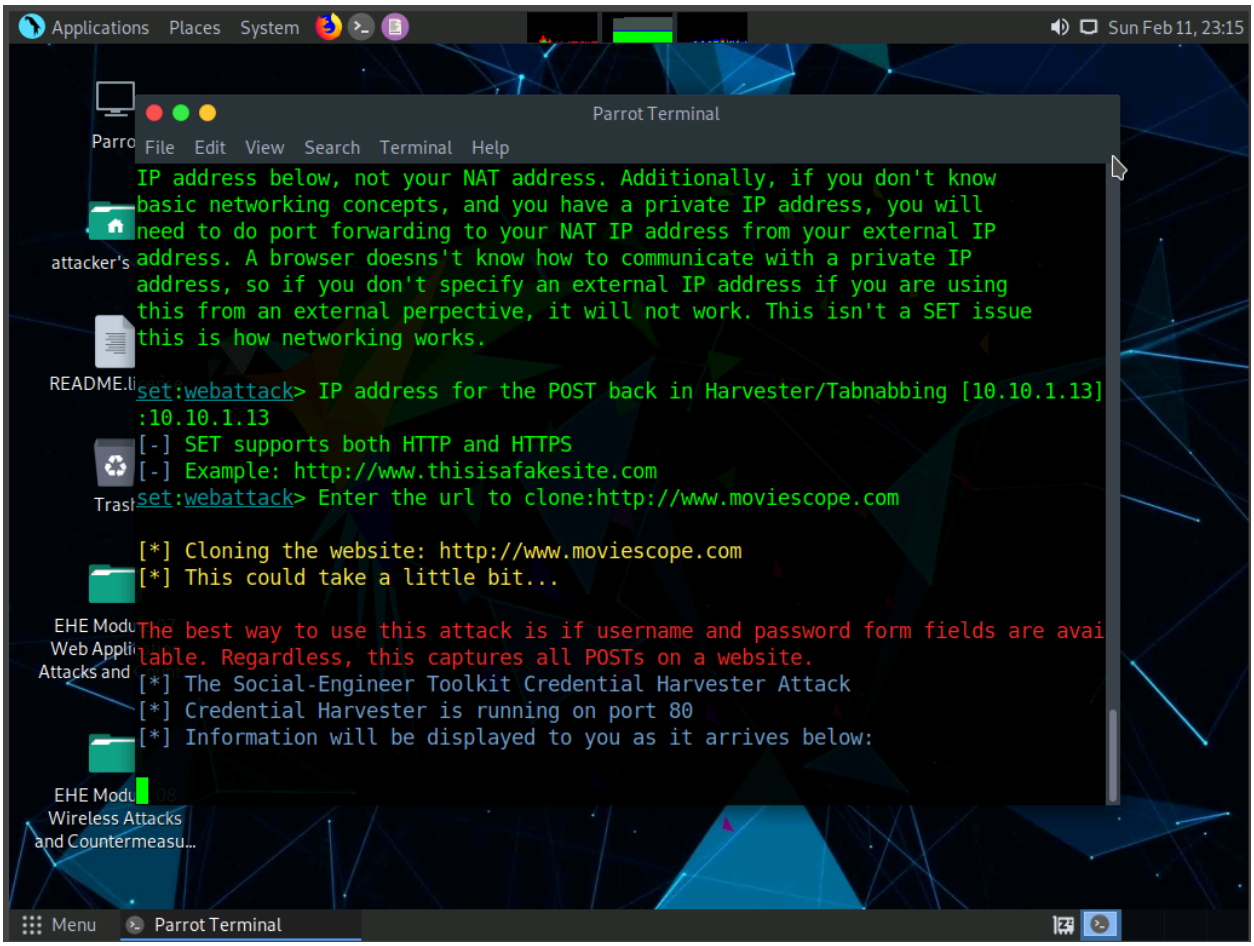
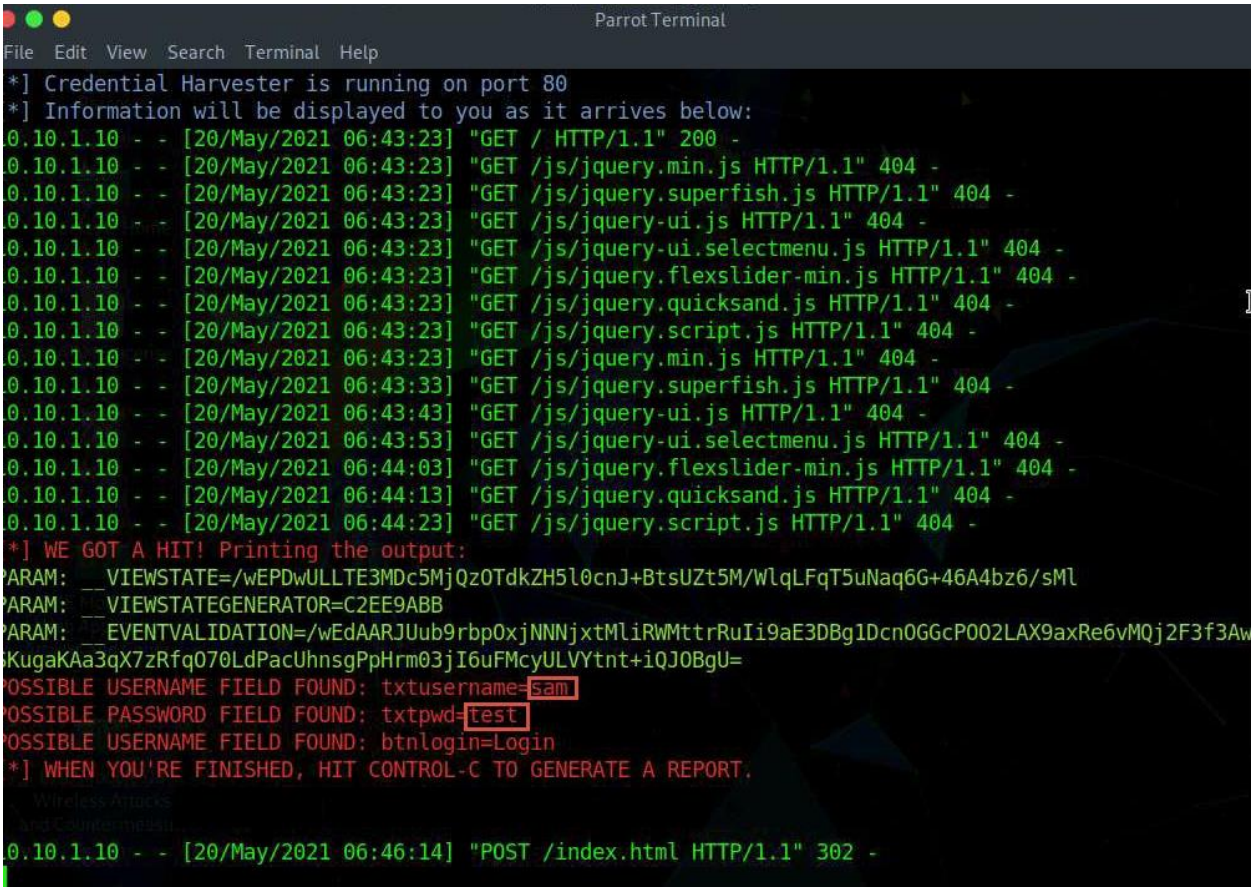

Applications
Places
System
Sun Feb 11, 23:15
Parrot Terminal
File Edit View Search Terminal Help
IP address below, not your NAT address. Additionally, if you don't know
basic networking concepts, and you have a private IP address, you will
need to do port forwarding to your NAT IP address from your external IP
address. A browser doesns't know how to communicate with a private IP
address, so if you don't specify an external IP address if you are using
this from an external perpective, it will not work. This isn't a SET issue
this is how networking works.
set:webattack> IP address for the POST back in Harvester/Tabnabbing [10.10.1.13]
:10.10.1.13
[-] SET supports both HTTP and HTTPS
[-] Example: http://www.thisisafakesite.com
set:webattack> Enter the url to clone:http://www.moviescope.com
[*] Cloning the website: http://www.moviescope.com
[*] This could take a little bit...
The best way to use this attack is if username and password form fields are avai
lable. Regardless, this captures all POSTs on a website.
[*] The Social-Engineer Toolkit Credential Harvester Attack
[*] Credential Harvester is running on port 80
[*] Information will be displayed to you as it arrives below:
attacker's
README.li
Trash
EHE Modu
Web Appli
Attacks and
EHE Modu
Wireless Attacks
and Countermeasu...
Menu
Parrot Terminal



1) What worked well in the lab?

   Everything Worked it perfectly.

2) What parts were troublesome?

   I did not understand I had to create a test email for the phishing attack, so I was looking on the step by step the email information.

3) Over all impression of the lab?

   Great lab where I was able to create a phishing email and collect information.