

Development and demonstration of a proof-of-concept for the integration of programming frameworks for high performance computing into a container-based workflow orchestrator.

2. Project Paper

submitted on October 21, 2023

Faculty for Business and Health

Degree program in Business Informatics

International Management for Business and Information Technology

by

JON ECKERTH

Practice supervisor :

⟨ Hewlett Packard Labs ⟩
⟨ Harumi Kuno, PhD ⟩
⟨ Principal Research Scientist ⟩

DHBW Stuttgart:

⟨ Dominic Viola ⟩

Signature of the practice supervisor:

Statement of Integrity

Hereby I solemnly declare:

1. that this 2. Project Paper titled "*Development and demonstration of a proof-of-concept for the integration of programming frameworks for high performance computing into a container-based workflow orchestrator.*" is entirely the product of my own scholarly work, unless otherwise indicated in the text or references, or acknowledged below;
2. I have indicated the thoughts adopted directly or indirectly from other sources at the appropriate places within the document;
3. this 2. Project Paper has not been submitted either in whole or part, for a degree at this or any other university or institution;
4. I have not published this 2. Project Paper in the past;
5. the printed version is equivalent to the submitted electronic one.

I am aware that a dishonest declaration will entail legal consequences.

Dublin, October 21, 2023



Jon Eckerth

Abstract:

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Contents

List of abbreviations	IV
List of figures	V
List of tables	VI
1 Introduction	1
1.1 Motivation	1
1.2 Problem Statement	2
1.3 Research Questions	3
1.4 Contributions	4
2 Methodology	5
2.1 Prototyping	5
2.2 Decision Making	6
2.2.1 Weighted Sum Model	6
2.2.2 Simple Multi-Attribute Rating Technique	7
2.2.3 SMART Exploiting Ranks	8
3 State of the Art	9
3.1 Containerization	9
3.2 Workflow Management Tools	10
3.3 High Performance Computing Frameworks	11
3.4 Additional Tooling	12
4 Creation of the Artifact	13
4.1 Initial Goals	13
4.2 Overall Structure	14
4.3 Selection of Workflow Management Tools	15
4.4 Implementation of the Artifact	19
4.4.1 Infrastructure	19
4.4.2 Tightly Coupled Parallel Problem (TCPP) HPC Workloads	21
4.4.3 Supplementary Services	21
4.5 Evaluation of the Artifact	22
5 Conclusion	23
6 Summary and Outlook	24
6.1 Summary	24
6.2 Outlook	24
Appendix	24
List of literature	26

List of abbreviations

AI	Artificial Intelligence
k8s	Kubernetes
ML	Machine Learning
HPC	High Performance Computing
CC	Cloud Computing
CI/CD	Continuous Integration/Continuous Delivery
IaC	Infrastructure as Code
PoC	Proof of Concept
HPE	Hewlett Packard Enterprise
CNCF	Cloud Native Computing Foundation
CLASP	Cloud Application Services Platform
CWL	Common Workflow Language
SME	Subject Matter Expert
TCPP	Tightly Coupled Parallel Problem
SMART	Simple multiattribute rating technique
WSM	Weighted Sum Model
MAUT	Multi-attribute Utility Theory
SMART-ER	Simple multiattribute rating technique Exploiting Ranks
ROC	Rank order centroid
RS	Rank Sum
RR	Rank Reciprocal
PFS	Pachyderm File System
PV	Persistent Volume
VM	Virtual Machine
CNI	Container Network Interface

List of Figures

1	Formula for calculating the Weighted Sum Model (WSM) score ¹	6
2	Formula for calculating the Simple multiattribute rating technique (SMART) score ²	7
3	Formula for the Rank order centroid (ROC) weights	8
4	Formula for the Rank Sum (RS) weights	8
5	Formula for the Rank Reciprocal (RR) weights	8
6	Pachykouda high level diagram showing three main aspects	14

List of Tables

1	Weighting of the criteria	18
2	Evaluation of the suggested tools	18
3	Evaluation of the additional tools	18

1 Introduction

In this section, the underlying motivation of this project is explained. Furthermore, the problems which will be addressed by this project are described, which serve as the basis for the research questions which will guide this project and ultimately result in solutions and further questions which are listed in the contributions section and discussed in the conclusion.

1.1 Motivation

The proliferation of "Big Data" has led to the need to compute, analyse, and visualize ever-increasing amounts of datasets, which themselves are getting more and more complex, has led to an ever increasing demand for more efficient and quicker ways to process data.

Both the High Performance Computing (HPC) and the Cloud Computing (CC) community have been working on solutions to distribute and parallelize computations for decades, both with their own approaches and solutions to their respective problems.

While the HPC community has been putting a lot of effort into developing new and extremely efficient ways to parallelize computations, the CC community has been focusing on improving the flexibility, scalability and resilience of their solutions as well as improving the ease of use for their developers and users.

Both used to be very distinct and separate communities due to their very different usecases, while the HPC community was mostly concerned with scientific computing and simulations of physical phenomena, the CC community is mostly concerned with providing a reliable and easily up and down scalable infrastructure for the industry and businesses.

Now with the advent of Machine Learning (ML) and Artificial Intelligence (AI) the two communities are starting to converge, as the ML and AI community is adopting the tools and techniques of both communities to solve their problems as they see fit.

But this convergence of the two is not without its problems, being developed in two coexisting and separate communities, the tools and techniques of both communities are not always compatible with each other, the goal of this project is to find a way to bridge this gap and to find a way to combine the best of both worlds.

1.2 Problem Statement

The following key problems have emerged from the convergence of High Performance Computing (HPC) and Cloud Computing (CC) communities, especially in the context of Machine Learning (ML) and Artificial Intelligence (AI) research:

- **Workload Resilience and Fault Tolerance in HPC:** HPC systems often lack mechanisms to recover from task failures within larger jobs, running for an extended time. When a component task fails, it can invalidate the entire computation, requiring a restart from scratch. This need for resilient failover and verification strategies as well as the need to avoid computational wastage is a key challenge for HPC systems, especially with every increasing system sizes and complexity.³
- **Environment/Package Management in HPC:** HPC systems are notorious for their complex package management systems. As having a shared infrastructure between many users each with their own specific needs and requirements of different versions of packages, libraries and software, all the while sharing a common environment. Many solutions to this problem have been developed, each with their own advantages and disadvantages.⁴⁵⁶⁷
- **Portability Issues with HPC:** Tying in with the previous point, HPC systems are often designed to be optimized for specific hardware as well as having a very specific software stack. This makes the portability of applications between different HPC systems very difficult and often infeasible.⁸ This lack of portability contrasts sharply with the more platform-agnostic nature of CC environments, where the containerization of applications has become the norm for ensuring portability.
- **Scalability and Flexibility in HPC:** Due to its direct access to the hardware and very specific hardware needs, HPC systems are often hard to dynamically scale and inflexible. while CC systems are designed to be easily scalable and flexible and are often designed to be hardware agnostic and abstract away the underlying hardware. This becomes especially relevant in the context of heterogeneous hardware, where the hardware is not uniform and consists of different types of hardware, which is becoming more and more common in the context of ML and AI research.
- **Lack of Interconnected Problem Solving in CC:** The workloads traditionally deployed on CC systems are often independent of each other, like load balancing, web hosting, etc. This is in stark contrast to the interconnected nature of HPC workloads, where each part of the input data is dependent on the other parts of the input data, such that all nodes of the system need to be able to communicate with each other.

³Egwutuoha et al. 2013

⁴Dubois/Epperly/Kumfert 2003

⁵Bzeznik et al. 2017

⁶Gamblin et al. 2015

⁷Hoste et al. 2012

⁸Canon/Younge 2019, p. 50

- **Provenance and Reproducibility:** Another need that is becoming more and more important in the context of ML and AI research is the need for provenance and reproducibility of results. Being able to tell which data was used to train the model, is of ever increasing importance as the influence the resulting models have on our lives increases as well as the data used to train the model. This is especially important since it is crucial to ensure that the data is not biased, outdated, or otherwise flawed, which could lead to incorrect predictions, decisions, or recommendations. In addition various data sources, from images to text, may have copyright restrictions that, when overlooked, can lead to significant legal complications.
- **Versioning Limitations:** The dynamic nature of ML and AI research necessitates robust versioning solutions for data, configurations and code. While CC has developed many solutions to this problem over the years, making them their own subsection of the ecosystem, namely Continuous Integration/Continuous Delivery (CI/CD) tools for the testing and deployment of applications as well as Infrastructure as Code (IaC) tools for the deployment of infrastructure. While many solutions have been developed for the one-off deployment of HPC systems, the dynamic nature of CC systems necessitates a more robust solution to this problem, from which the HPC community could benefit as well.

1.3 Research Questions

To address the aforementioned problems, to bridge the gap between the two paradigms and to combine the best of both worlds, an integration of the two paradigms is needed. This was accomplished by integrating a HPC framework called 'Arkouda'⁹ into a container based CC workflow management tool called 'Pachyderm'¹⁰ and integrating both with the supporting infrastructure the CC system enables us to use. This process of integration and prototyping as well as the explanation of the underlying concepts and technologies will be the focus of this project.

- **RQ1:** *How can a high-performance computing framework be effectively integrated into a container-based workflow management tool?*
- **RQ2:** *What are the opportunities for improving the integration of high-performance computing frameworks with container-based workflow management tools?*

⁹Merrill/Reus/Neumann 2019

¹⁰**pachydermPachyderm**

1.4 Contributions

In order to address the problems stated above, find answers to the research questions and to bridge the gap between the two paradigms, the following contributions were made:

- **C1:** *An analysis of the problem space and existing solution, within the constraints of time, resources and businesses needs.*
- **C2:** *A prototype implementation combining the 'Arkouda' framework with the Kubernetes (k8s) based workflow orchestrator 'Pachyderm'*
- **C3:** *Further integrations of tools from both sides of the spectrum, addressing many of afformentioned painpoints*

2 Methodology

2.1 Prototyping

Needs to have a methodology from the Spectrum of Methodologies for Business information systems¹¹

Argumentation why this project is centrally a Prototyping project:

- The research questions are directly inspired by the needs of the customer - The limitations and the scope are both defined by the available resources of the business unit as well as the time constraints of the project and the available know-how - test

!TODO!

¹¹Wilde/Hess w.y.

2.2 Decision Making

As previously described, the methodology of Prototyping benefits from a very tight loop of iterations between the different phases of the project. While this is highly effective in producing a good end result, it can also take many iterations and a lot of experimentation until an adequate tool or solution has been found. Given the constraints of a limited time frame for this project, it becomes crucial to use this time as efficiently as possible. Sometimes, when the time does not permit a thorough exploration of

To ensure that the decisions made are the most optimal within the constraints of the available information, adopting a systematic, replicable, and transparent decision-making process becomes essential. Over the years, various frameworks have been crafted to guide decision-making, particularly when information is complex and multi-dimensional.

2.2.1 Weighted Sum Model

Evangelos Triantaphyllou suggests that the Weighted Sum Model (WSM) is in practice the most used and most relevant decision-making framework¹². The WSM method, by design, mandates the assignment of specific weights to each criterion based on its relevance. Subsequent to this, every alternative is evaluated based on these weighted criteria, resulting in a cumulative score. The alternative with the highest score is therefore the optimal choice.

$$A_i^{WSM-score} = \sum_{j=1}^n w_j a_{ij} \quad for \ i = 1, 2, 3, \dots, m.$$

Abb. 1: Formula for calculating the WSM score¹³

Where:

- !TODO! add explanations of variables

This method, despite its simplicity and direct approach, isn't without limitations. One notable drawback is its dependence on dimensionless scales. For the weights to properly reflect the criteria's importance, the scores need to be on a common, dimensionless scale, a detail not always feasible or convenient in practice.

¹²Triantaphyllou 2000, p. 1

¹³*Weighted Sum Model* 2022

2.2.2 Simple Multi-Attribute Rating Technique

In contrast to the WSM, which predominantly utilizes a direct mathematical approach to rank alternatives based on their weighted sum scores, the Simple multiattribute rating technique (SMART) methodology offers a more comprehensive approach to multi-criteria decision-making. While WSM is primarily concerned with simple weighted arithmetic sums, the SMART method dives deeper, ensuring that diverse performance values—both quantitative and qualitative are harmonized and placed on a common scale.

The SMART method, grounded in Multi-attribute Utility Theory (MAUT), provides a structured framework that encompasses more than just the weighting of criteria. It involves:

1. Discernment of vital criteria pertinent to the decision in focus.
2. Weight allocation to each criterion in accordance to its significance.
3. Evaluation of each potential alternative against the identified criteria, culminating in a score.
4. Aggregation of these individual scores via their associated weights, yielding a total score for every alternative.

By adhering to the SMART framework, alternatives can be sequenced based on their aggregated weighted scores. This systematic approach equips decision-makers to choose solutions that align closely with their objectives. The computational formula integral to the SMART method is:

$$x_j = \frac{\sum_{i=1}^m w_i a_{ij}}{\sum_{i=1}^m w_i}, \quad j = 1, \dots, n.$$

Abb. 2: Formula for calculating the SMART score¹⁴

Where:

- x_j Is the overall utility score for alternative j . The higher the score, the better the alternative, in comparison to the other alternatives.
- a_{ij} Is the utility score for alternative j for the criterion i .
- w_i Is the weight of criterion i .

This method's emphasis on utility functions ensures a more nuanced and adaptable approach to decision-making compared to models like WSM, making it suitable for complex scenarios where criteria and alternatives are diverse in nature¹⁵.

¹⁴Taken from Fülöp 2005, p. 6

¹⁵Fülöp 2005, p. 6

2.2.3 SMART Exploiting Ranks

The Simple multiattribute rating technique Exploiting Ranks (SMART-ER) method is a variant of the SMART method that attempts to alleviate the largest issue of the original SMART method, namely the problem of a somewhat arbitrary ranking of the options if no numerical values can be derived.

This method addresses the issue by letting the decision maker simply ranking the different criteria in relation to each other and then normalizing the weights¹⁶. They propose the different weighting curves.

$$w_i(ROC) = \frac{1}{n} \sum_{j=1}^n \frac{1}{j}, \quad i = 1, \dots, n.$$

Abb. 3: Formula for the ROC weights

The ROC takes the centroid of the rank order and uses the reciprocal of the rank as the weight.

$$w_i(RS) = \frac{n+1-i}{n(n+1)/2}, \quad i = 1, \dots, n.$$

Abb. 4: Formula for the RS weights

The RS uses linear curve where weights are normalized by dividing them by the sum of all weights.

$$w_i(RR) = \left(\frac{\frac{1}{i}}{\sum_{j=1}^n \frac{1}{j}} \right), \quad \text{rank } i = 1, \dots, n, \text{ option } j = 1, \dots, n$$

Abb. 5: Formula for the RR weights

The RR emphasizes the most important criteria by using the reciprocal of the rank as the weight, then normalizing each weight by the sum of all reciprocals.

¹⁵ *Multi-Criteria Decision Analysis for Use in Transport Decision Making* 2014, p. 26

¹⁶ Roberts/Goodwin 2002, p. 296

3 State of the Art

3.1 Containerization

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Container Solutions

Software defined Infrastructure

Large Scale Container Orchestration

3.2 Workflow Management Tools

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Apache Airflow

Pachyderm

Kubeflow

Apache Oozie

3.3 High Performance Computing Frameworks

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Apache Spark

MapReduce

Apache Flink

Dask

3.4 Additional Tooling

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Versioning

CI/CD

Fabric attached Memory

Object Storage

4 Creation of the Artifact

4.1 Initial Goals

As this project was first and foremost a project, designed to interactively explore the problemspace from the perspective of the HPC community, all the while being contained by business requirements and time constraints, the initial goals of this project were very broad and open ended. At first the initial goal was simply to create a Proof of Concept (PoC) of a realistic workflow engine using the "Arkouda" project, in order to present the Customer with a easily graspable example of its capabilities.

While we are approaching the problem from the perspective of the HPC community, the intended enduser of this tool are the data scientists and Subject Matter Expert (SME)s that are working with the HPC systems, and therefore the tool needs to be designed and selected with the fact in mind that the enduser will most likely not be knowledgeable in the field of HPC or the underlying infrastructure.

In the first iteration of the project a preselection of possible Workflow management tools was given from the business side, with the option to increase the scope if the presented tools were not sufficient.

Therefore the goals of the first iteration of this project was twofold, first to determine which, if any, of the presented tools were suitable for the task at hand, and to determine what would make an adequate PoC for the customer.

The following iterations are split into the tree main aspects of the project and will be discussed in their own subsections. While these steps where happening concurrently, they each address a different aspect of the project and therefore underwent their own iterative processes.

4.2 Overall Structure

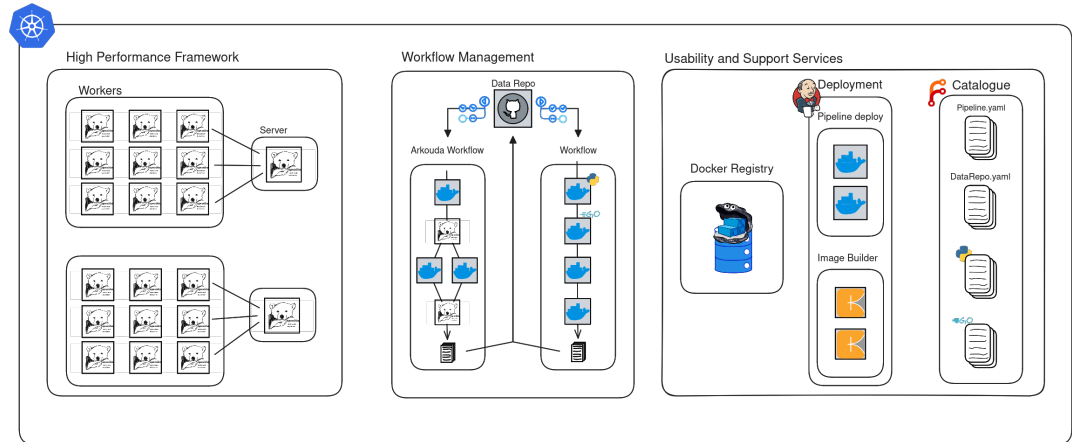


Abb. 6: Pachykouda high level infrastructure diagramm

As can be seen in figure 6, the artifact is composed of 3 main components, the **Central Workflow Engine** which is responsible for the orchestration of the workflows (center) and interfaces directly with the underlying infrastructure, the **HPC Framework** which is responsible for the execution of TCPP workloads (left) and the **Supplementary Services** which aim at improving the usability and accessibility for the enduser (right).

All this is build ontop of a hardware agnostic k8s cluster, which is responsible for the orchestration of the different components and the underlying infrastructure.

4.3 Selection of Workflow Management Tools

As described in section 4.1, the first iteration of this project was to determine which, if any, of the presented tools were suitable for the task at hand. The following section will describe the process of selecting the tools and the criteria that were used to evaluate them. Because the time frame does not allow for a full integration and testing of all the presented tools in depth we will be using a decision making framework to evaluate the tools, as described in the Methodologies 2.2 to determine which tools will be most suitable for an initial PoC and will serve as a good starting point for the project and future iterations.

- **Pachyderm:** A k8s based Workflow manager, written in go which was recently acquired by Hewlett Packard Enterprise (HPE).
- **Argo:** A k8s based Workflow manager , written in go, which is a Cloud Native Computing Foundation (CNCF) project¹⁷.
- **Cloud Application Services Platform (CLASP):** An in-house developed workflow manager, written in Java, utilizing Servlet to execute workflows¹⁸.
- **Snaplogic:** A commercial low-code/no-code workflow manager with a focus on data integration and data engineering¹⁹.

But given that it was possible to select projects outside of the initial selection, the following projects also need to be considered:

- **Airflow:** A Python-based workflow manager under the CNCF umbrella, known for its easy-to-use interface and extensibility²⁰.
- **Kubeflow:** A k8s-native platform for deploying, monitoring, and running ML workflows and experiments, also a CNCF project, streamlining ML operations alongside other Kubernetes resources²¹.
- **Knative:** An open-source k8s-based platform to build, deploy, and manage modern serverless workloads, simplifying the process of building cloud-native applications²².
- **Luigi:** An open-source Python module created by Spotify to build complex pipelines of batch jobs, handling dependency resolution, workflow management, and visualization seamlessly²³.

¹⁷Argoproj/Argo-Workflows 2023

¹⁸Sayers et al. 2015

¹⁹iPaaS Solution for the Enterprise 2023

²⁰Haines 2022

²¹Kubeflow 2023

²²Home - Knative 2023

²³Spotify/Luigi 2023

- **Common Workflow Language (CWL):** An open-standard for describing analysis workflows and tools in a way that makes them portable and scalable across a variety of software and hardware environments, from workstations to cluster, cloud, and high-performance computing environments.

Selection Criteria

Due to this extensive list of diverse tools, a set of criteria was established to determine which tool would be the most suitable for the task at hand. The following list of criteria was established to evaluate the tools:

- **Ease of use:** As the intended endusers of the tool are not primarily HPC experts, the tool needs to be easy to use and understand, and should not require the enduser to have a deep understanding of the underlying infrastructure. While we can expect that the administration of the infrastructure will be done by adequately trained personnel, the enduser should be spared having to adapt to the underlying infrastructure as much as possible.
- **Extensibility:** One significant constraint of the project is the restricted number of available work-hours. Given that the project's environment predominantly centers around HPC (High Performance Computing) workloads, it's essential for the tool to be easily expandable without requiring extensive modifications to the underlying system. Ideally this property would be transferred to the enduser, allowing them to easily extend the developed tool further to their needs.
- **Community, Support and Documentation:** It is not enough that the software technically permits extensibility, the software also needs to be adequately documented and a support framework needs to be in place. Be it a community of users or a dedicated support team, the enduser and the developers need to be able to rely on the software being maintained and updated as well as being able to find expert help in case of problems.
- **Maturity:** With the boom of AI and ML in recent years²⁴, the number of tools and frameworks has exploded, and while this is a good thing it also means that a lot of these tools are still paving their way and are developing rapidly. While this is not necessarily a bad thing, it does mean that the tool might not be ready for production use and might not be able to provide the stability and reliability that is required for a production environment or are lacking in documentation and support.
- **Strategic alignment with HPE:** As this project is being developed within the context of HPE, it is important to consider the strategic alignment of the tool with HPE. HPE has is a large company with a diverse portfolio of products and services, and this project

²⁴ *24 Top AI Statistics & Trends In 2023 – Forbes Advisor 2023*

intersects with many different parts of the company. Therefore it is important to consider the strategic alignment of the tool with HPE and its products and services.

- **License:** While this PoC is not a commercial product in itself but rather an exploration of the problem space and a demonstration of what a final commercial product might be like, it is important to consider the licenses of the tools that are being used. Having to strip out a tool later on because of licensing issues would be a significant setback and therefore needs to be considered.
- **Cost:** Time is not the only constraint of this project, as the project is being developed within the context of HPE it is important to consider the cost of the tools that are being used.

Weighting of the Criteria

An integral part of the SMART methodology is the weighting of the criteria, as described in section 2.2. In order to rank the criteria themselves, as they are quite hard to quantify, We will be using the weighing methodology as described in the SMART-ER methodology 2.2.3.

The first step of which is the ranking of the criteria from most important to least important.

1. **Extensibility** As this is first and foremost a prototyping project, the actual development it at least for the first couple steps of the highest importance.
2. **Community, Support & Docs** This also applies for the external support available to the development team as if they are stuck, no developed can proceed, no matter the other factors.
3. **License** This criterion has to weighted carefully, as a highly restrictive license might be a dealbreaker, but a license that is too permissive might conflict with the strategic alignment with HPE.
4. **Strategic alignment with HPE** As this is developed by and for HPE their requirements need to be consider aswell.
5. **Ease of Use** While the ease of use is important as this should eventually become a product, for now the central aspect is to create a PoC therefore the usability is a priority, but not the highest.
6. **Cost** As this is a PoC and not a commercial product, the cost is not the highest priority as this will be of small scale and therefore the cost will be negligible in most cases.
7. **Maturity** While the maturity of the tool is important, as this is a PoC and not a commercial product, if the maturity of the tool does not impact the extensibility of the tool or the development process, it is not the highest priority.

As all these criteria are quite important, the weighting function selected for the criteria is the RS function, as described in section 2.2.3, as it does not rank the criteria too harshly. The lookup tables for the weighting function can be found in the appendix 6.2.

Criteria	Weight
Extensibility	0.2500
Community, Support and Documentation	0.2143
License	0.1786
Strategic alignment with HPE	0.1429
Ease of use	0.1071
Maturity	0.0714
Cost	0.0357

Tab. 1: Weighting of the criteria

Evaluation of the Tools

Now that we have established the criteria aswell as their weighing, we can beginn to evaluate the tools based on the criteria. Here we will be using a mix of Methodologies, as some of these criteria can simply be indexed via analogous values, while others are of a more non specific nature. The discussion of which values will be used on which weighing scale for the tools comparison will be done for each category independently.

Criteria	Pachyderm	Argo	CLASP	Snaplogic
Ease of use	TBD	TBD	TBD	TBD
Extensibility	TBD	TBD	TBD	TBD
Community, Support & Docs	TBD	TBD	TBD	TBD
Maturity	TBD	TBD	TBD	TBD
Strategic alignment	TBD	TBD	TBD	TBD
License	TBD	TBD	TBD	TBD
Cost	TBD	TBD	TBD	TBD

Tab. 2: Evaluation of the suggested tools

The following table shows the evaluation of the tools which where chosen for their relevance to the problem space, based on the criteria and the weighting of the criteria:

Criteria	Airflow	Kubeflow	Knative	Luigi	CWL
Ease of use	TBD	TBD	TBD	TBD	TBD
Extensibility	TBD	TBD	TBD	TBD	TBD
Community, Support & Docs	TBD	TBD	TBD	TBD	TBD
Maturity	TBD	TBD	TBD	TBD	TBD
Strategic alignment	TBD	TBD	TBD	TBD	TBD
License	TBD	TBD	TBD	TBD	TBD
Cost	TBD	TBD	TBD	TBD	TBD

Tab. 3: Evaluation of the additional tools

Conculsion of the Selection Process

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

4.4 Implementation of the Artifact

This section will describe the iterative process of implementing the larger artifact and is broken up into 3 subsections. While these steps where happening concurrently, they each address a different aspect of the project and therefore underwent their own iterative processes.

4.4.1 Infrastructure

First iteration - Minikube

As the decision of the Workflow management tool was made, it was obvious that a dedicated k8s infrastructure was needed to run the tool²⁵. The Pachyderm documentation gave two recommendations for setting up an initial development environment, preferably Docker Desktop or alternatively Minikube²⁶. Due to the exclusive license of Docker-Desktop²⁷, which prevents large companies free usage of the product²⁸ the choice fell on Minikube for an initial test setup.

In addition to the underlying k8s Pachyderm also needs an external S3 Storage Bucket for its Pachyderm File System (PFS) for which we used MinIO, a self hostable S3 compliant object storage²⁹, which was also based on recommendations by the Pachyderm documentation.

The persistent storage requirements for the Pachyderm itself was fulfilled by manually creating two Persistent Volume (PV)’s on the hosts local harddrive. Using the Helm packagemanager³⁰ for k8s the at that point newest version 2.6.4 was installed from the official Artifactory repository³¹.

²⁵*Pachyderm Docs - On-Prem Deploy* 2023

²⁶*Pachyderm Docs - Local Deploy* 2023

²⁷*Docker Terms of Service* / Docker 2022

²⁸*Docker FAQs* / Docker 2021

²⁹*Inc* 2023

³⁰*Helm Docs Home* 2023

³¹*Artifactory Pachyderm 2.6.4* 2023

The hosts system of this iteration was a single ProLiant DL385 Gen10 Plus running Ubuntu 22.04.3 LTS x86_64. The detailed instructions to the setup for this specific system at that point in time, can be found in the projects repository³²

Learnings from the first iteration

The shortcomings of this naive first iteration became apparent very quickly, which was to be expected, as the goal of this iteration was to create a minimal working example to get a better understanding of the toolings and the underlying infrastructure.

The first and foremost issue where the limitations imposed by Minikubes reliance on an Internal Virtual Machine (VM), during testing the inability to on the fly increase the resources of the VM became a significant bottleneck. At some point during the testing of 4.4.2 the VM was so overloaded that the installation was irreparably damaged which was seen as a sign to move on to the next iteration.

Another more subtle issue was the discrepancy between the experience a small scale k8s installation within Minikube and a large scale k8s cluster like the one that would be used in later steps of the project. Therefore it was decided that a more realistic k8s cluster would be needed for the next iteration, which became the Heydar cluster.

Second iteration - Heydar Cluster

Improving upon the shortcomings of the first iteration, the second iteration was based in the attempt to create a more realistic k8s cluster. To achieve this 20 ProLiant DL360 Gen9 Servers, running Ubuntu 22.04.3 LTS x86_64 were used to create a bare metal k8s cluster, using kubeadm as it provides deep integration with the underlying infrastructure³³.

But a bare metal cluster also comes with its own set of challenges, as the cluster needs to be provisioned and configured manually.

One important aspect of a production like cluster is the networking, as k8s does not natively manage communication on a cluster level, but instead relies on so called Container Network Interface (CNI)s to manage and abstract the underlying network infrastructure³⁴.

Here we were spoiled for choice once again, as there are a multitude of different CNIs available, each with their own advantages and disadvantages. The Kubernetes documentation provides a non exhaustive list of 17 different CNIs³⁵, which all fulfill this essential task in different ways. As the needs regarding the network plugin were not very specific at this point, the choice fell

³²Eckerth 2023

³³*Creating a Cluster with Kubeadm* 2023

³⁴*Cluster Networking* 2023

³⁵*Kubernetes CNI Plugins* 2023

on Calico, as surface level research showed that it was a popular choice for bare metal clusters³⁶, provided security and enterprise support as well having a wide range of features³⁷. But Calico proved to be more difficult to setup than expected, after consulting with a college who set up a different cluster with Calico, it was decided to use Flannel³⁸ as a CNI instead. His recommendation was very helpful as using the Flannel config³⁹ worked out of the box.

- Storage harddrive - Open FAM

4.4.2 TCPP HPC Workloads

4.4.3 Supplementary Services

³⁶*Explore Network Plugins for Kubernetes* 2023

³⁷Mehndiratta 2023

³⁸*Flannel* 2023

³⁹*Flannel Install Config* 2023

4.5 Evaluation of the Artifact

5 Conclusion

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

6 Summary and Outlook

6.1 Summary

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

6.2 Outlook

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Appendix

SMART-ER lookup tables

List of literature

24 Top AI Statistics & Trends In 2023 – Forbes Advisor (2023). URL: <https://www.forbes.com/advisor/business/ai-statistics/> (retrieval: 10/07/2023).

Argoproj/Argo-Workflows (2023). Argo Project. URL: <https://github.com/argoproj/argo-workflows> (retrieval: 10/07/2023).

Artifacthub Pachyderm 2.6.4 (2023). URL: <https://artifacthub.io/packages/helm/pachyderm/pachyderm/2.6.4> (retrieval: 10/18/2023).

Bzeznik, B./Henriot, O./Reis, V./Richard, O./Tavard, L. (2017): Nix as HPC Package Management System. In: *Proceedings of the Fourth International Workshop on HPC User Support Tools*. HUST'17. New York, NY, USA: Association for Computing Machinery, pp. 1–6. ISBN: 978-1-4503-5130-0. DOI: 10.1145/3152493.3152556. URL: <https://dl.acm.org/doi/10.1145/3152493.3152556> (retrieval: 10/03/2023).

Canon, R. S./Younge, A. (2019): A Case for Portability and Reproducibility of HPC Containers. In: *2019 IEEE/ACM International Workshop on Containers and New Orchestration Paradigms for Isolated Environments in HPC (CANOPIE-HPC)*. 2019 IEEE/ACM International Workshop on Containers and New Orchestration Paradigms for Isolated Environments in HPC (CANOPIE-HPC). Denver, CO, USA: IEEE, pp. 49–54. ISBN: 978-1-72816-028-3. DOI: 10.1109/CANOPIE-HPC49598.2019.00012. URL: <https://ieeexplore.ieee.org/document/8950982/> (retrieval: 10/04/2023).

Cluster Networking (2023). Kubernetes. URL: <https://kubernetes.io/docs/concepts/cluster-administration/networking/> (retrieval: 10/18/2023).

Creating a Cluster with Kubeadm (2023). Kubernetes. URL: <https://kubernetes.io/docs/setup/production-environment/tools/kubeadm/create-cluster-kubeadm/> (retrieval: 10/18/2023).

Docker FAQs | Docker (2021). URL: <https://www.docker.com/pricing/faq/> (retrieval: 10/18/2023).

Docker Terms of Service | Docker (2022). URL: <https://www.docker.com/legal/docker-terms-service/> (retrieval: 10/18/2023).

Dubois, P./Epperly, T./Kumfert, G. (2003): Why Johnny Can't Build [Portable Scientific Software]. In: *Computing in Science & Engineering* 5.5, pp. 83–88. ISSN: 1558-366X. DOI: 10.1109/MCISE.2003.1225867. URL: <https://ieeexplore.ieee.org/abstract/document/1225867> (retrieval: 10/03/2023).

Eckerth, J. (2023): Installation Instructions Minikube Commit 69a05a755facc8d387e031ff5991c20d46db URL: <https://github.com/Jo-Eck/ProjectPaper-2/tree/69a05a755facc8d387e031ff5991c20d46db/project/Pachyderm> (retrieval: 10/18/2023).

Egwutuoha, I. P./Levy, D./Selic, B./Chen, S. (2013): A Survey of Fault Tolerance Mechanisms and Checkpoint/Restart Implementations for High Performance Computing Systems. In: *J Supercomput* 65.3, pp. 1302–1326. ISSN: 1573-0484. DOI: 10.1007/s11227-013-0884-0. URL: <https://doi.org/10.1007/s11227-013-0884-0> (retrieval: 10/03/2023).

- Explore Network Plugins for Kubernetes (2023): Explore Network Plugins for Kubernetes: CNI Explained | TechTarget. IT Operations. URL: <https://www.techtarget.com/searchitoperations/tip/Explore-network-plugins-for-Kubernetes-CNI-explained> (retrieval: 10/19/2023).
- Flannel (2023). flannel-io. URL: <https://github.com/flannel-io/flannel> (retrieval: 10/19/2023).
- Flannel Install Config (2023). URL: <https://github.com/flannel-io/flannel/blob/master/Documentation/kube-flannel.yml> (retrieval: 10/19/2023).
- Fülöp, J. (2005):** Introduction to Decision Making Methods. In: *BDEI-3 Workshop, Washington*, pp. 1–15. URL: <https://www.academia.edu/download/43447287/decisionmakingmethods.pdf> (retrieval: 10/12/2023).
- Gamblin, T./LeGendre, M./Collette, M. R./Lee, G. L./Moody, A./de Supinski, B. R./Futral, S. (2015):** The Spack Package Manager: Bringing Order to HPC Software Chaos. In: *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*. SC '15. New York, NY, USA: Association for Computing Machinery, pp. 1–12. ISBN: 978-1-4503-3723-6. DOI: 10.1145/2807591.2807623. URL: <https://dl.acm.org/doi/10.1145/2807591.2807623> (retrieval: 10/03/2023).
- Haines, S. (2022):** ‘Workflow Orchestration with Apache Airflow’. In: *Modern Data Engineering with Apache Spark: A Hands-On Guide for Building Mission-Critical Streaming Applications*. Springer, pp. 255–295.
- Helm Docs Home (2023). URL: <https://helm.sh/docs/> (retrieval: 10/18/2023).
- Home - Knative (2023). URL: <https://knative.dev/docs/> (retrieval: 10/07/2023).
- Hoste, K./Timmerman, J./Georges, A./De Weirdt, S. (2012):** EasyBuild: Building Software with Ease. In: *2012 SC Companion: High Performance Computing, Networking Storage and Analysis*. 2012 SC Companion: High Performance Computing, Networking Storage and Analysis, pp. 572–582. DOI: 10.1109/SC.Companion.2012.81. URL: <https://ieeexplore.ieee.org/abstract/document/6495863> (retrieval: 10/03/2023).
- Inc, M. (2023):** MinIO | MinIO for Kubernetes. MinIO. URL: <https://min.io> (retrieval: 10/18/2023).
- iPaaS Solution for the Enterprise (2023). SnapLogic. URL: <https://www.snaplogic.com/> (retrieval: 10/07/2023).
- Kubeflow (2023). Kubeflow. URL: <https://www.kubeflow.org/> (retrieval: 10/07/2023).
- Kubernetes CNI Plugins (2023). Kubernetes. URL: <https://kubernetes.io/docs/concepts/cluster-administration/addons/> (retrieval: 10/19/2023).
- Mehndiratta, H. (2023):** Comparing Kubernetes Container Network Interface (CNI) Providers | Kubevious.Io. URL: <https://kubevious.io/blog/post/comparing-kubernetes-container-network-interface-cni-providers> (retrieval: 10/19/2023).
- Merrill, M./Reus, W./Neumann, T. (2019):** Arkouda: Interactive Data Exploration Backed by Chapel. In: *Proceedings of the ACM SIGPLAN 6th on Chapel Implementers and Users Workshop*. CHI UW 2019. New York, NY, USA: Association for Computing Machinery, p. 28. ISBN: 978-1-4503-6800-1. DOI: 10.1145/3329722.3330148. URL: <https://dl.acm.org/doi/10.1145/3329722.3330148> (retrieval: 10/04/2023).

- Multi-Criteria Decision Analysis for Use in Transport Decision Making (2014). Red. by Michael Bruhn Barfod/Steen Leleur. DTU Lyngby: DTU Transport.
- Pachyderm Docs - Local Deploy (2023). Pachyderm Docs - Local Deploy. URL: <https://docs.pachyderm.com/2.6.x/set-up/local-deploy/> (retrieval: 10/18/2023).
- Pachyderm Docs - On-Prem Deploy (2023). Pachyderm Docs - On-Prem Deploy. URL: <https://docs.pachyderm.com/latest/set-up/on-prem/> (retrieval: 10/18/2023).
- Roberts, R./Goodwin, P. (2002):** Weight Approximations in Multi-Attribute Decision Models. In: *Journal of Multi-Criteria Decision Analysis* 11.6, pp. 291–303. ISSN: 1099-1360. DOI: 10.1002/mcda.320. URL: <https://onlinelibrary.wiley.com/doi/abs/10.1002/mcda.320> (retrieval: 10/16/2023).
- Sayers, C./Laffitte, H./Reddy, P./Ozonat, K./Sayal, M./Simitsis, A./Singhal, S./Koutrika, G./Das, M./Aji, A./Bosamiya, H./Riss, M./Wilkinson, K./Lucio, J./Cantal, A./Carvalho, C. (2015):** Cloud Application Services Platform (CLASP): User Guide, Introduction, and Operation. In: pp. 1–60.
- Spotify/Luigi* (2023). Spotify. URL: <https://github.com/spotify/luigi> (retrieval: 10/12/2023).
- Triantaphyllou, E. (2000):** ‘Introduction to Multi-Criteria Decision Making’. In: *Multi-Criteria Decision Making Methods: A Comparative Study*. Ed. by Evangelos Triantaphyllou. Applied Optimization. Boston, MA: Springer US, pp. 1–4. ISBN: 978-1-4757-3157-6. DOI: 10.1007/978-1-4757-3157-6_1. URL: https://doi.org/10.1007/978-1-4757-3157-6_1 (retrieval: 10/12/2023).
- Weighted Sum Model* (2022). In: *Wikipedia*. URL: https://en.wikipedia.org/w/index.php?title=Weighted_sum_model&oldid=1114224941 (retrieval: 10/16/2023).
- Wilde, T./Hess, T. (w.y.):** Methodenspektrum der Wirtschaftsinformatik: Überblick und Portfoliobildung. In.