

Partner Center

API Reference

Issue 66
Date 2023-10-10



HUAWEI TECHNOLOGIES CO., LTD.



Copyright © Huawei Technologies Co., Ltd. 2023. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Security Declaration

Vulnerability

Huawei's regulations on product vulnerability management are subject to "Vul. Response Process". For details about the policy, see the following website:<https://www.huawei.com/en/psirt/vul-response-process>

For enterprise customers who need to obtain vulnerability information, visit:<https://securitybulletin.huawei.com/enterprise/en/security-advisory>

Contents

1 Change History.....	1
2 Partner Operation Capability API (Reseller Model).....	18
3 API Invoking Methods.....	24
3.1 RESTful API.....	24
3.1.1 Constructing Requests.....	24
3.1.2 Authentication.....	28
3.1.3 Returned Values.....	29
3.2 Web UI Mode.....	30
3.3 API Access Permission (Partner).....	39
4 Product Management.....	43
4.1 Quering Product Information.....	43
4.1.1 Querying Cloud Service Types.....	43
4.1.2 Querying Resource Types.....	46
4.1.3 Querying Resources by Cloud Service Type.....	49
4.1.4 Querying Usage Types.....	53
4.1.5 Querying Measurement Units.....	57
4.1.6 Querying the Measurement Unit Number System.....	61
4.2 Querying the Price of a Product.....	65
4.2.1 Querying the Price of a Pay-Per-Use Product.....	65
4.2.2 Querying the Price of a Yearly/Monthly Product.....	75
4.2.3 Querying the Renewal Price of a Yearly/Monthly Resource.....	86
5 Customer Management.....	93
5.1 Customer Registration.....	93
5.1.1 Verifying Customer Registration Information.....	93
5.1.2 Sending a Verification Code.....	96
5.1.3 Creating a Customer.....	98
5.2 Real-Name Authentication.....	105
5.2.1 Requesting an Individual Real-Name Authentication.....	105
5.2.2 Requesting an Enterprise Real-Name Authentication.....	113
5.2.3 Requesting a Real-Name Authentication Change.....	120
5.2.4 Querying the Real-Name Authentication Review Result.....	128
5.3 Customer Management.....	130

5.3.1 Querying Customers.....	130
5.3.2 Freezing a Customer Account.....	137
5.3.3 Unfreezing a Customer Account.....	140
6 Managing Huawei Cloud Resellers.....	143
6.1 Querying Huawei Cloud Resellers.....	143
6.1.1 Querying the List of Huawei Cloud Resellers.....	143
7 Transaction Management.....	149
7.1 Managing Customers' Budgets.....	149
7.1.1 Querying Customers' Budgets.....	149
7.1.2 Setting Customers' Budgets.....	152
7.2 Coupons Management.....	154
7.2.1 Querying Coupons.....	154
7.3 Managing Yearly/Monthly Orders.....	166
7.3.1 Querying Orders.....	166
7.3.2 Querying Order Details.....	176
7.3.3 Paying Yearly/Monthly Product Orders.....	186
7.3.4 Canceling Orders in the Pending Payment Status.....	195
7.3.5 Querying the Amount of Unsubscription Orders.....	197
7.4 Managing Yearly/Monthly Resources.....	200
7.4.1 Querying Customer's Yearly/Monthly Resources.....	200
7.4.2 Renewing Subscription to Yearly/Monthly Resources.....	207
7.4.3 Unsubscribing from Yearly/Monthly Resources.....	211
7.4.4 Enabling Automatic Subscription Renewal for Yearly/Monthly Resources.....	215
7.4.5 Disabling Automatic Subscription Renewal for Yearly/Monthly Resources.....	217
7.4.6 Enabling/Canceling the Change from Yearly/Monthly to Pay-per-Use upon Expiration.....	220
7.5 Managing Resource Packages.....	223
7.5.1 Querying Resource Packages.....	224
7.5.2 Viewing Resource Package Usage.....	231
7.5.3 Querying Resource Package Usage Details.....	236
7.6 Managing Pay-Per-Use Resources.....	241
7.6.1 Querying Customer's Pay-Per-Use Resources.....	241
8 Bill Management.....	248
8.1 Managing Customer Consumptions.....	248
8.1.1 Querying Customer Resource Usage.....	248
8.2 Managing Partner Bill.....	255
8.2.1 Querying Monthly Bills.....	256
8.2.2 Querying Bill Details of Monthly Expenditures.....	258
9 Invoice Management.....	267
9.1 Invoice Management.....	267
9.1.1 Querying the Invoice List.....	267
10 Managing Service Tickets.....	276

11 API to Be Brought Offline.....	277
11.1 Product Management.....	277
11.1.1 Querying Product Information.....	277
11.1.1.1 Querying Cloud Service Types (Old).....	277
11.1.1.2 Querying Resource Types (Old).....	280
11.1.2 Querying Product Price.....	283
11.1.2.1 Querying Resource Provisioning Details of an Order.....	283
11.2 Managing Customers.....	287
11.2.1 Customer Registration.....	287
11.2.1.1 Verifying Customer Registration Information (Old).....	287
11.2.1.2 Sending a Verification Code(Old).....	291
11.2.1.3 Creating a Customer (Old).....	294
11.2.2 Real-Name Authentication.....	300
11.2.2.1 Querying the Real-Name Authentication Review Result (Old).....	300
11.2.3 Customer Management.....	303
11.2.3.1 Querying Customers (Old).....	303
11.2.3.2 Querying Customers (Old).....	310
11.2.3.3 Freezing a Customer Account.....	317
11.2.3.4 Unfreezing a Customer Account.....	321
11.3 Transaction Management.....	326
11.3.1 Managing Customer' Budgets.....	326
11.3.1.1 Querying Customers' Budgets.....	326
11.3.1.2 Setting Customers' Budgets.....	329
11.3.2 Yearly/monthly Order Management.....	332
11.3.2.1 Querying Orders.....	332
11.3.2.2 Querying Order Details.....	343
11.3.2.3 Paying Yearly/Monthly Product Orders (Old).....	353
11.3.2.4 Paying Yearly/Monthly Product Orders.....	360
11.3.2.5 Canceling Orders in the Pending Payment Status.....	369
11.3.2.6 Querying the Amount of Unsubscription Orders.....	372
11.3.3 Yearly/Monthly Resource Management.....	376
11.3.3.1 Querying Customer's Yearly/Monthly Resources.....	376
11.3.3.2 Renewing Subscription to Yearly/Monthly Resources.....	383
11.3.3.3 Unsubscribing from Yearly/Monthly Resources.....	388
11.3.4 Managing Resource Packages.....	393
11.3.4.1 Querying Resource Packages.....	393
11.3.5 Managing Pay-Per-Use Resources.....	401
11.3.5.1 Querying Customer's Pay-Per-Use Resources.....	401
11.4 Bill Management.....	408
11.4.1 Querying Customer Resource Usage.....	408
11.4.2 Querying Monthly Bills.....	424
12 Appendix.....	434

12.1 Switching to the HUAWEI CLOUD Page and Binding the HUAWEI CLOUD Account.....	434
12.2 How Do I Obtain the xaccountType Value?.....	446
12.3 How Can I Replace a Partner Token with a Customer Token.....	446
12.4 File Subscription.....	449
12.5 How Do I Upload the Attachment for Real-Name Authentication?.....	452
12.6 Support for Discounts or Coupons.....	452
12.7 Status Code.....	453
12.8 Error Codes.....	456
12.9 SDK Overview.....	476

1

Change History

Description	Released On
<p>This issue is the sixty-eighth official release.</p> <p>This release incorporates the following change:</p> <p>Removed the API (V1) for querying prices by product specification.</p>	2023-11-1
<p>This issue is the sixty-seventh official release.</p> <p>This release incorporates the following changes:</p> <p>Added the enumerations, 4: Savings plan-subscription and 5: Savings plan-hourly billing to the field, Billing Mode, in the bill details generated from the API, Querying Bill Details of Monthly Expenditures.</p> <p>Added the enumeration, 11: Savings plan, to the field, Billing Mode and added the enumeration, 23: Expenditure-savings plans to the parameter, bill_type in the resource usage details generated from the API, Querying Customer Resource Usage.</p> <p>Added the enumeration, 11: Savings plan to the parameter, cycleType for the API, Querying coupons.</p> <p>Added the error code, CBC.99000088: Your payment is being processed, to the API, Paying a yearly/monthly order.</p>	2023-6-29
<p>This issue is the sixty-sixth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added section 3.3 API Access Permission (Partner). An operator account of a partner needs to obtain permissions before accessing APIs. Roles with according access permissions can be granted to this account.Added the error code "CBC.30050013: Renewal not supported" to 4.2.3 Querying the Renewal Price of a Yearly/Monthly Resource.The V1 API for synchronizing customer real-name authentication information is taken offline.	2023-4-18

Description	Released On
<p>This issue is the sixty-fifth official release.</p> <p>This release incorporates the following change:</p> <p>Added the API for querying the renewal price of a yearly/monthly resource. Customers can query the renewal price of yearly/monthly resources by criteria.</p>	2023-3-30
<p>This issue is the sixty-fourth official release.</p> <p>This release incorporates the following change:</p> <p>Deleted the enumerated value 7: International driver license of the verified_type field in the API for requesting an individual real-name authentication.</p>	2023-2-28
<p>This issue is the sixty-third official release.</p> <p>This release incorporates the following change:</p> <p>Added the response parameter fail_resource_infos (used for query the resources that fails to be subscribed to or unsubscribed from) to the APIs for renewing subscription to yearly/monthly resources and unsubscribing from yearly/monthly resources.</p>	2023-2-9
<p>This issue is the sixty-second official release.</p> <p>This release incorporates the following change:</p> <p>Took the API for querying available discounts of an order offline.</p>	2022-12-27
<p>This issue is the sixty-first official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> ● Added the error codes CBC.50010085 - Customer association not allowed. The account of this partner has been restricted. and CBC.50010086 - Customer association not allowed. This partner is a Huawei Cloud reseller, and the account of its associated distributor has been restricted. to the V2 API for creating a customer and V1 API for creating a customer. ● Added the error code CBC.70600026 - Sorry, Huawei Cloud cannot review your real-name authentication information. Please contact your account manager for assistance. to the APIs for requesting an individual real-name authentication, requesting an enterprise real-name authentication, and requesting a real-name authentication change. 	2022-12-13
<p>This issue is the sixtieth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> ● Brought the V1 API for enabling automatic subscription renewal for yearly/monthly resources offline. ● Brought the V1 API for disabling automatic subscription renewal for yearly/monthly resources offline. 	2022-11-17

Description	Released On
<p>This issue is the fifty-ninth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added the enumerated value 60: KooGallery product discounts in resales for Settlement Product Type in the API for querying bill details of monthly expenditures.Brought the V1 API for enabling automatic subscription renewal offline.Brought the V1 API for disabling automatic subscription renewal offline.	2022-10-31
<p>This issue is the fifty-eighth official release.</p> <p>This release incorporates the following changes:</p> <p>Added the V3 API for paying yearly/monthly product orders, and moved the V2 API for paying yearly/monthly product orders to 11 API to Be Brought Offline.</p>	2022-09-27
<p>This issue is the fifty-seventh official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added the request parameter indirect_partner_id to the API for querying orders. This parameter is used to query the orders of a Huawei Cloud reseller's customer.Added the request parameter indirect_partner_id to the API for querying order details. This parameter is used to query order details of a Huawei Cloud reseller's customer.Added the request parameter indirect_partner_id to the API for querying the pay-per-use resources of a customer. This parameter is used to query the pay-per-use resources of a Huawei Cloud reseller's customer.Added error code CBC.99000037 to the API for querying orders.Added error code CBC.99000037 to the API for querying order details.Added error code CBC.99000037 to the API for querying customer's pay-per-use resources.	2022-08-30

Description	Released On
<p>This issue is the fifty-sixth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added the request parameter indirect_partner_id to the API for creating customers to support creating customers for a Huawei Cloud reseller.Added the request parameter indirect_partner_id to the API for querying customers to support querying the customers of a Huawei Cloud reseller.Added the request parameter indirect_partner_id to the API for freezing customer accounts to support freezing the accounts of customers of a Huawei Cloud reseller.Added the request parameter indirect_partner_id to the API for unfreezing customer accounts to support unfreezing the accounts of customers of a Huawei Cloud reseller.Added the request parameter indirect_partner_id to the API for querying customers' budgets to support querying the budgets set for the customers of a Huawei Cloud reseller.Added the request parameter indirect_partner_id to the API for setting budgets for customers to support setting budgets for customers of a Huawei Cloud reseller.	2022-08-16
<p>This issue is the fifty-fifth official release.</p> <p>This release incorporates the following change:</p> <p>Changed Elite Service Provider to Huawei Cloud Reseller and Marketplace to KooGallery.</p>	2022-08-10
<p>This issue is the fifty-fourth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Changed the length of the value for password in the V1 API for create customers. The value can be a string of 8 to 32 characters.Changed the length of the value for password in the V2 API for creating customer. The value can be a string of 8 to 32 characters.	2022-08-02
<p>This issue is the fifty-third official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added the error code CBC.30010035 to the API for unsubscribing from yearly/monthly resources.Added error code CBC.50010059 to the V1 API for creating a customer.Added error code CBC.50010059 to the V2 API for creating a customer.	2022-07-19

Description	Released On
<p>This issue is the fifty-third official release.</p> <p>This release incorporates the following change:</p> <p>Added the following description for the API in 7.4.3 Unsubscribing from Yearly/Monthly Resources: Confirm the resource information and the refund before unsubscribing from in-use resources. After being unsubscribed from, the resources not in the recycle bin cannot be restored. If you want to continue using these resources, unsubscribe from the subscription term renewed but not used yet.</p>	2022-07-05
<p>This issue is the fifty-second official release.</p> <p>This release incorporates the following change:</p> <p>Added the enumerated value 2: Account and resources and changed enumerated value 1: Yes to 1: Only account for the response parameter is_frozen in 5.3.1 Querying Customers.</p>	2022-06-21
<p>This issue is the fifty-first official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> ● Added the API for querying cloud service types, and moved the old API for querying cloud service types to 11 API to Be Brought Offline. ● Added the API for querying resource types, and moved the old API for querying resource types to 11 API to Be Brought Offline. ● Added service_type_name, indicating the cloud service type, and resource_type_name, indicating the resource type, to the response parameters of the APIs for querying usage types, paying yearly/monthly product orders, querying the amount of unsubscription orders, querying customer's yearly/monthly resources, and querying customer's pay-per-use resources. ● Added service_type_name, indicating the cloud service type, to the response parameters of the APIs for querying order details and querying resource packages. 	2022-04-12
<p>This issue is the fiftieth official release.</p> <p>This release incorporates the following change:</p> <p>The Prepayment model has been changed to the Authorized Distributor model. The transaction model name in Chinese for Referral has been changed, but the English name remains unchanged.</p>	2022-03-25
<p>This issue is the forty-ninth official release.</p> <p>This release incorporates the following change:</p> <p>Added error code CBC.99003605 in the response of the V2 API for canceling automatic renewal for yearly/monthly resources.</p>	2022-03-15

Description	Released On
<p>This issue is the forty-eighth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added error code CBC.30010036 in the response of the API for renewing subscription to yearly/monthly resources.Added error code CBC.99003602 in the response of the API for enabling automatic subscription renewal for yearly/monthly resources.Added the enumerated value 20: Refund - change for the bill type in the file exported through the API for querying customer resource usage.Changed 11: Service cross-charging to 11: Special price request for the parameter Settlement Product Type in the file exported through the API for querying bill details of partner's monthly expenditures.Added section 12.4 File Subscription in 12 Appendix. Partners can subscribe to files in the Partner Center on HUAWEI CLOUD.	2022-01-25
<p>This issue is the forty-seventh official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added error code CBC.0250 to the response of the API for querying the price of a yearly/monthly product.Added error code CBC.30050006 in the response of the API for renewing subscription to yearly/monthly resources.Added error code CBC.99003115 to the response of the V2 API for paying yearly/monthly product orders.Added error code CBC.99003156 to the response of the V2 API for paying yearly/monthly product orders.Added error code CBC.99003156 to the response of the V1 API for paying yearly/monthly product orders.	2022-01-11
<p>This issue is the forty-sixth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Changed the description of error code CBC.99000051 to Customer creation failed because this mobile number or email address has been preregistered by Huawei. for the API in 5.1.3 Creating a Customer.Added error code CBC.99000051 to the API in 11.2.1.3 Creating a Customer (Old).	2021-12-14
<p>This issue is the forty-fifth official release.</p> <p>This release incorporates the following change:</p> <p>Deleted error code CBC.99003001 from the API in 7.4.2 Renewing Subscription to Yearly/Monthly Resources.</p>	2021-11-30

Description	Released On
<p>This issue is the forty-fourth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Changed the description of error code CBC.99005030 returned by the API in 5.2.1 Requesting an Individual Real-Name Authentication to The partner did not complete real-name authentication or bucket authentication. Added the description of the parameter related to the subscription duration for the API in 8.1.1 Querying Customer Resource Usage. This parameter can be a non-integer in the exported CSV file. 	2021-11-16
<p>This issue is the forty-third official release.</p> <p>This release incorporates the following change:</p> <p>Change the description of the error message for CBC.99003016 to "The resources have expired and been deleted or do not exist." in 7.4.2 Renewing Subscription to Yearly/Monthly Resources.</p>	2021-11-02
<p>This issue is the forty-second official release.</p> <p>This release incorporates the following change:</p> <p>Added the description of anti-injection-reconstruction for input parameter values of Resource Name and Resource Tag in the file of the API for querying customer resource usage.</p>	2021-10-19
<p>This issue is the forty-first official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added the V3 API for querying resource packages and moved the V2 API for querying resource packages to 11 API to Be Brought Offline. Added request parameters expire_time_begin and expire_time_end to the API in Querying Customer's Yearly/Monthly Resources. These two parameters are used to query the list of resources that expire in a specified period. 	2021-09-28
<p>This issue is the fortieth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added error code CBC.30000010 to the API for paying yearly/monthly product orders. Added a description for the Unit parameter in 8.1.1 Querying Customer Resource Usage to differentiate the unit of the linear products from that of non-linear products. 	2021-08-31
<p>This issue is the thirty-ninth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added the API for querying customer resource usage. Moved the old API 11.4.1 Querying Customer Resource Usage to 11 API to Be Brought Offline. 	2021-08-13

Description	Released On
<p>This issue is the thirty-eighth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Deleted the old APIs for requesting an individual real-name authentication, requesting an enterprise real-name authentication, and requesting real-name authentication change, and the API for unsubscribing from yearly/monthly products that fail to be provisioned or changed.Added user_name in the response parameters of the API in 7.3.2 Querying Order Details to specify the order creator returned by the API for querying order details.	2021-07-13
<p>This issue is the thirty-seventh official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added the API for querying the resource packages of a customer in 11.3.4.1 Querying Resource Packages.Added the API for querying the resource package usage in 7.5.2 Viewing Resource Package Usage.Added the field partnerPreferentialType and changed the calculation method of amount due in Querying Bill Details of Monthly Expenditures.Added response parameters salePrice, stepNum, stepNumMeasureId, and partnerPreferentialType in 11.4.2 Querying Monthly Bills. These parameters are returned when partnerPreferentialType is set to 1.	2021-06-15
<p>This issue is the thirty-sixth official release.</p> <p>This release incorporates the following change:</p> <p>Added Querying Available Discounts of an Order. You can invoke this API to query available discounts when paying an order.</p>	2021-04-28
<p>This issue is the thirty-fifth official release.</p> <p>This release incorporates the following change:</p> <p>Added fields Settlement Amount, Partner Coupon, Scene, Partner Amount Without Tax, Tax Amount, and Usage Type Name in Querying Bill Details of Monthly Expenditures. These fields are not displayed for partners in the Asia Pacific region.</p>	2021-02-08
<p>This issue is the thirty-fourth official release.</p> <p>This release incorporates the following change:</p> <p>Modified 5.3.1 Querying Customers. Specifically, added fields xaccount_id, xaccount_type, and customer_level for returning the partner sales platform user ID, partner sales platform ID, and customer level, respectively.</p>	2021-01-28

Description	Released On
<p>This issue is the thirty-third official release.</p> <p>This release incorporates the following changes:</p> <p>Added 4.1.5 Querying Measurement Units and 4.1.6 Querying the Measurement Unit Number System.</p>	2020-12-30
<p>This issue is the thirty-second official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added the V2 interface in Querying Monthly Bills and moved the V1 interface in 11.4.2 Querying Monthly Bills to 11 API to Be Brought Offline. Added the parameter discount_infos and table DiscountSimpleInfo for the API that is used for paying yearly/monthly product orders to query available discounts that can be used for paying yearly/monthly orders. 	2020-12-16
<p>This issue is the thirty-first official release.</p> <p>This release incorporates the following changes:</p> <p>Modified the old API for querying customer resource usage. The system generates the resource usage details from 12:00 to 20:00 (not later than 24:00) every day.</p>	2020-12-01
<p>This issue is the thirtieth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added 4.1.4 Querying Usage Types for querying usage types. Added 7.4.6 Enabling/Canceling the Change from Yearly/Monthly to Pay-per-Use upon Expiration for querying resource types. Added the enumerated value "610: Discount amount" for parameter discount_type in 7.3.1 Querying Orders and 7.3.2 Querying Order Details, as well as 11.3.2.1 Querying Orders and 11.3.2.2 Querying Order Details to be brought offline. 	2020-11-18
<p>This issue is the twenty-ninth official release.</p> <p>This release incorporates the following changes:</p> <p>Added the API in Querying Cloud Service Types (Old).</p> <p>Added the API in Querying Resource Types (Old).</p> <p>Added 4.1.3 Querying Resources by Cloud Service Type for querying resource list by cloud service type.</p>	2020-11-04
<p>This issue is the twenty-eighth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Add parameter include_association_result in 5.1.3 Creating a Customer. When this parameter is called, the result of associating a partner and its sub-customer will be returned. Moved 11.1.2.1 Querying Resource Provisioning Details of an Order to 11 API to Be Brought Offline. 	2020-10-21

Description	Released On
<p>This issue is the twenty-seventh official release.</p> <p>This release incorporates the following changes:</p> <p>Added Table 7-39 to support query by language and response parameter product_spec_desc (indicating product specifications) in 7.6.1 Querying Customer's Pay-Per-Use Resources.</p>	2020-09-28
<p>This issue is the twenty-sixth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> ● Added response parameters product_owner_service and commercial_resource in 7.3.2 Querying Order Details. ● Changed the default value of measure_id in the following APIs from cent to dollar. After this modification, the unit for the values of currency-related fields is also changed to dollar. Check the currency unit in use during an API call. <ul style="list-style-type: none"> - 7.3.1 Querying Orders - 7.3.2 Querying Order Details - 7.3.5 Querying the Amount of Unsubscription Orders 	2020-09-16
<p>This issue is the twenty-fifth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> ● Added the V2 interface in 5.3.2 Freezing a Customer Account and moved the V1 interface in 11.2.3.3 Freezing a Customer Account to 11 API to Be Brought Offline. ● Added the V2 interface in 5.3.3 Unfreezing a Customer Account and moved the V1 interface in 11.2.3.4 Unfreezing a Customer Account to 11 API to Be Brought Offline. ● Added the V2 interface in Querying Customers' Budgets and moved the V1 interface in 11.3.1.1 Querying Customers' Budgets to 11 API to Be Brought Offline. ● Added the V2 interface in Setting Customers' Budgets and moved the V1 interface in 11.3.1.2 Setting Customers' Budgets to 11 API to Be Brought Offline. ● Added error codes CBC.99006006, CBC.99006055, and CBC.99006074 in 4.2.1 Querying the Price of a Pay-Per-Use Product and 4.2.2 Querying the Price of a Yearly/Monthly Product. 	2020-09-02

Description	Released On
<p>This issue is the twenty-fourth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added the V2 interface in 7.3.5 Querying the Amount of Unsubscription Orders and moved the V1 interface in 11.3.2.6 Querying the Amount of Unsubscription Orders to 11 API to Be Brought Offline.Added the V2 interface in 7.4.1 Querying Customer's Yearly/Monthly Resources and moved the V1 interface in 11.3.3.1 Querying Customer's Yearly/Monthly Resources to 11 API to Be Brought Offline.Added the V2 interface in 7.4.4 Enabling Automatic Subscription Renewal for Yearly/Monthly Resources and moved the V1 interface in Enabling Automatic Subscription Renewal for Yearly/Monthly Resources to 11 API to Be Brought Offline.Added the V2 interface in 7.4.5 Disabling Automatic Subscription Renewal for Yearly/Monthly Resources and moved the V1 interface in Disabling Automatic Subscription Renewal for Yearly/Monthly Resources to 11 API to Be Brought Offline.Added the V2 interface in 7.6.1 Querying Customer's Pay-Per-Use Resources and moved the V1 interface in 11.3.5.1 Querying Customer's Pay-Per-Use Resources to 11 API to Be Brought Offline.	2020-06-30

Description	Released On
<p>This issue is the twenty-third official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added the V2 interface in 7.3.1 Querying Orders and moved the V1 interface in 11.3.2.1 Querying Orders to 11 API to Be Brought Offline. Added the V2 interface in 7.3.2 Querying Order Details and moved the V1 interface in 11.3.2.2 Querying Order Details to 11 API to Be Brought Offline. Added the V2 API for paying yearly/monthly product orders. Moved the V1 API from 11.3.2.3 Paying Yearly/Monthly Product Orders (Old) to 11 API to Be Brought Offline. Added the V2 interface in 7.3.4 Canceling Orders in the Pending Payment Status and moved the V1 interface in 11.3.2.5 Canceling Orders in the Pending Payment Status to 11 API to Be Brought Offline. Added the V2 interface in 7.4.2 Renewing Subscription to Yearly/Monthly Resources and moved the V1 interface in 11.3.3.2 Renewing Subscription to Yearly/Monthly Resources to 11 API to Be Brought Offline. Added the V2 interface in 7.4.3 Unsubscribing from Yearly/Monthly Resources and moved the V1 interface in 11.3.3.3 Unsubscribing from Yearly/Monthly Resources to 11 API to Be Brought Offline. 	2020-06-17
<p>This issue is the twenty-second official release.</p> <p>This release incorporates the following changes:</p> <p>Added the V2 interface in 5.1.1 Verifying Customer Registration Information and moved the V1 interface in 11.2.1.1 Verifying Customer Registration Information (Old) to 11 API to Be Brought Offline.</p> <p>Added the V2 interface in 5.1.2 Sending a Verification Code and moved the V1 interface in 11.2.1.2 Sending a Verification Code(Old) to 11 API to Be Brought Offline.</p>	2020-06-03

Description	Released On
<p>This issue is the twenty-first official release.</p> <p>This release incorporates the following changes:</p> <p>Added the V2 API in 5.2.1 Requesting an Individual Real-Name Authentication, and moved the V1 API for requesting an individual real-name authentication to 11 API to Be Brought Offline.</p> <p>Added the V2 API in 5.2.2 Requesting an Enterprise Real-Name Authentication, and moved the V1 API for requesting an enterprise real-name authentication to 11 API to Be Brought Offline.</p> <p>Added the V2 API in 5.2.3 Requesting a Real-Name Authentication Change, and moved the V1 API for requesting a real-name authentication change to 11 API to Be Brought Offline.</p> <p>Added the V2 interface in 5.2.4 Querying the Real-Name Authentication Review Result and moved the V1 interface in 11.2.2.1 Querying the Real-Name Authentication Review Result (Old) to 11 API to Be Brought Offline.</p> <p>Added the V2 interface in 5.3.1 Querying Customers. Added response parameter account_managers. Moved the V1 interface in 11.2.2.1 Querying the Real-Name Authentication Review Result (Old) to 11 API to Be Brought Offline.</p>	2020-05-20
<p>This issue is the twentieth official release.</p> <p>This release incorporates the following changes:</p> <p>Added the V2 interface in 5.1.3 Creating a Customer and brought the interface in 11.2.1.3 Creating a Customer (Old) offline.</p>	2020-04-22
<p>This issue is the nineteenth official release.</p> <p>This release incorporates the following changes:</p> <p>Added 4.2.1 Querying the Price of a Pay-Per-Use Product and 4.2.2 Querying the Price of a Yearly/Monthly Product.</p> <p>Brought the API in Querying Product Prices Based on the Product Specifications (Old) offline.</p>	2020-03-25
<p>This issue is the eighteenth official release.</p> <p>This release incorporates the following changes:</p> <p>Added 9.1.1 Querying the Invoice List.</p>	2020-01-15
<p>This issue is the seventeenth official release.</p> <p>This release incorporates the following changes:</p> <p>Added parameter cooperationType in the request of the API in 11.2.1.3 Creating a Customer (Old).</p> <p>Modified the description of status codes CBC.4004 and CBC.4005 in 5.1.2 Sending a Verification Code.</p>	2019-12-18

Description	Released On
<p>This issue is the sixteenth official release.</p> <p>This release incorporates the following changes:</p> <p>Added error code CBC.3016 in 7.4.2 Renewing Subscription to Yearly/Monthly Resources. This error code indicates that expired resources exist.</p>	2019-11-20
<p>This issue is the fifteenth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added 11.2.3.3 Freezing a Customer Account. Added 11.2.3.4 Unfreezing a Customer Account. Added response parameter <code>isFrozen</code> in 11.2.3.1 Querying Customers (Old). This parameter is used to indicate whether the customer account is frozen. Added request parameter <code>cancelPartnerFrozen</code> in 11.3.1.2 Setting Customers' Budgets. This parameter is used to specify whether to unfreeze the customer account while setting the budget for the customer. Added the Amount after Coupons and Amount Due fields in Querying Bill Details of Monthly Expenditures. 	2019-10-23
<p>This issue is the fourteenth official release.</p> <p>This release incorporates the following changes:</p> <p>Added 10 Managing Service Tickets.</p>	2019-09-25
<p>This issue is the thirteenth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added response parameter <code>uplimit</code> in 5.1.1 Verifying Customer Registration Information. The parameter indicates whether the number of verification code sending times reaches the upper limit. Added the section "12.1.2.2.3-Requesting a Real-Name Authentication Change (Old)". 	2019-09-17
<p>This issue is the twelfth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none"> Added response parameter <code>customerType</code> in 11.2.3.1 Querying Customers (Old). The parameter indicates the customer type. Added the section "12.1.2.2.1-Requesting an Individual Real-Name Authentication (Old)". Added the section "12.1.2.2.2-Requesting an Enterprise Real-Name Authentication (Old)". Added 11.2.2.1 Querying the Real-Name Authentication Review Result (Old). Moved the API in Synchronizing Customer Real-Name Authentication Information to 11 API to Be Brought Offline. 	2019-09-04

Description	Released On
<p>This Issue is the eleventh official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added 7.3.5 Querying the Amount of Unsubscription Orders.Added periodType, periodNum, and categoryCode to response messages of the API in 11.4.2 Querying Monthly Bills.	2019-08-21
<p>This issue is the tenth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added 11.1.2.1 Querying Resource Provisioning Details of an Order.Added parameters Project ID and Project Tag to the file in 11.4.1 Querying Customer Resource Usage.	2019-08-14
<p>This issue is the ninth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added error code CBC.0100 in 7.4.1 Querying Customer's Yearly/Monthly Resources.Moved API in 11.2.3.2 Querying Customers (Old) to 11 API to Be Brought Offline. For details about the new API, see 11.2.3.1 Querying Customers (Old).	2019-07-24
<p>This issue is the eighth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">Added parameter categoryCode in response table Table 7-14 in 7.3.2 Querying Order Details.Added Bill Type in table 3 in Querying Bill Details of Monthly Expenditures.Changed the API for querying customer credit limit to the API for querying customers' budgets in 11.3.1.1 Querying Customers' Budgets.Changed the API for setting customer credit limit to the API for setting customers' budgets in 11.3.1.2 Setting Customers' Budgets.	2019-07-10

Description	Released On
<p>This issue is the seventh official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">• In 7.3.1 Querying Orders<ul style="list-style-type: none">- Added parameters currencyOfficial, amountInfo, and serviceType in Table 7-7.- Added response parameter tables Table 7-8 and Table 7-9.- Added status code CBC.0100, CBC.0101, CBC.0151, and CBC.0155.• In 7.3.2 Querying Order Details<ul style="list-style-type: none">- Added parameters offset and limit to Table 7-10.- Added response parameters currencyOfficial, amountInfo, currencyType, and serviceType in Table 7-13.- Added response parameter tables Table 7-14, Table 7-15, and Table 7-16.- Added status code CBC.0100, CBC.0101, CBC.0151, and CBC.0155.• Added status code CBC.7254 in 11.2.1.3 Creating a Customer (Old).	2019-06-26
<p>This issue is the sixth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">• Added parameter isCloseMarketMs in the request of API in 11.2.1.3 Creating a Customer (Old).	2019-06-14
<p>This issue is the fifth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">• Added 8.1 Managing Customer Consumptions.• Added 12.7 Status Code.• Added 12.8 Error Codes.	2019-05-22
<p>This issue is the fourth official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">• Adjusted the sections in 5 Customer Management, 7 Transaction Management, and 8 Bill Management based on service scenarios in 2 Partner Operation Capability API (Reseller Model).• Added 7.3.2 Querying Order Details.• Added the API for paying yearly/monthly product orders.• Added 7.3.4 Canceling Orders in the Pending Payment Status.• Added 7.6.1 Querying Customer's Pay-Per-Use Resources.	2019-05-10

Description	Released On
<p>This issue is the third official release.</p> <p>This release incorporates the following changes:</p> <ul style="list-style-type: none">• Added 2.1.2.1-Synchronizing Customer Real-Name Authentication Information.• Added Querying Product Prices Based on the Product Specifications (Old).• Added 7.3.1 Querying Orders.• Added 7.4.1 Querying Customer's Yearly/Monthly Resources.• Added 7.4.2 Renewing Subscription to Yearly/Monthly Resources.• Added 7.4.3 Unsubscribing from Yearly/Monthly Resources.• Added 7.4.4 Enabling Automatic Subscription Renewal for Yearly/Monthly Resources.• Added 7.4.5 Disabling Automatic Subscription Renewal for Yearly/Monthly Resources.	2019-04-29
<p>This issue is the second official release.</p> <p>This release incorporates the following changes:</p> <p>Added the APIs to be supported and their descriptions in 2 Partner Operation Capability API (Reseller Model).</p>	2019-04-13
This issue is the first official release.	2019-03-22

2 Partner Operation Capability API (Reseller Model)

HUAWEI CLOUD provides the operation capabilities in the reseller model for partners to manage customers, coupons, transactions, cloud services, bills, service tickets, products, and invoices on the partner sales platform.

Table 2-1 APIs and descriptions

Scenario	Sub-Scenario	API Name	Description
Product management	Product information query	Querying Cloud Service Types	This API is used to query cloud service types on the partner sales platform.
		Querying Resource Types	This API is used to query the resource types on the partner sales platform.
		Querying Resources by Cloud Service Type	This API is used to query the resource type code and name by associated cloud service on the partner sales platform and to query the price of a pay-per-use or yearly/monthly product.
		Querying Usage Types	This API is used to query resource usage types on the partner sales platform.
		Querying Measurement Units	This API is used to query the resource usage, measurement unit for the duration and amount of a yearly/monthly resource, as well as the measurement unit type on the partner sales platform.
		Querying the Measurement Unit Number System	This API is used to query the measurement unit number system on the partner sales platform.

Scenario	Sub-Scenario	API Name	Description
	Product price query	Querying the Price of a Pay-per-Use Product	Partners can query the price of a pay-per-use product by criteria on the sales platform.
		Querying the Price of a Yearly/Monthly Product	This API is used to query the price of a yearly/monthly product by criteria on the partner sales platform.
		Querying the Renewal Price of a Yearly/Monthly Resource	Customers can query the renewal price of a yearly/monthly resource by criteria on the partner sales platform.
	Customer management	Customer registration	Verifying Customer Registration Information
			This API is used to check whether the account name, and mobile number or email address entered by the customer can be used for registration.
			Sending a Verification Code
		Creating a Customer	If a customer enters an email address during registration, the system sends a registration verification code to the email address to verify the information.
			This API is used to create a Huawei Cloud account for a customer when the customer creates an account on your sales platform, and bind the customer account on the partner sales platform to the HUAWEI CLOUD account. In addition, the Huawei Cloud account is bound to the partner account.
	Real-name authentication	Requesting an Individual Real-name Authentication	This API can be used to submit an individual real-name authentication application.
		Requesting an Enterprise Real-name Authentication	This API can be used to submit an enterprise real-name authentication application.

Scenario	Sub-Scenario	API Name	Description
Customer management		Requesting a Real-Name Authentication Change	This API can be used to submit a real-name authentication change application.
		Querying the Real-Name Authentication Review Result	If the response to a real-name authentication application or real-name authentication change application indicates that manual review is required, this API can be used to query the review result.
	Customer management	Querying Customers	This API is used to query your customers.
		Freezing a Customer Account	A partner can freeze an account of a customer associated with the partner by reseller model.
		Unfreezing a Customer Account	A partner can unfreeze an account of a customer associated with the partner by reseller model.
Reseller management	Querying resellers	Querying Huawei Cloud Resellers	A Huawei Cloud distributor can query the list of its associated Huawei Cloud resellers.
Transaction management	Customer budget management	Querying Customers' Budgets	This API is used to query the budget of a customer for the partner to determine whether to adjust the budget. Currently, you can query monthly budgets, rather than one-time budgets.
		Setting Customers' Budgets	This API is used to set or adjust a customer's budget. Currently, you can set monthly budgets for customers, rather than one-time budgets.
	Coupon management	Querying Coupons	Partners can query information about their coupons.
	Yearly/monthly order management	Querying Orders	After a customer purchases yearly/monthly resources, it can query the orders in different statuses, such as in the pending approval, processing, canceled, completed, and pending payment statuses.
		Querying Order Details	Customers can view order details on the partner sales platform.

Scenario	Sub-Scenario	API Name	Description
Yearly/ Monthly resource management		Paying Yearly/ Monthly Product Orders	A customer can invoke this API to pay yearly-monthly product orders in the pending payment status.
		Canceling Orders in the Pending Payment Status	A customer can invoke this API to cancel orders in the pending payment status.
		Querying the Amount of Unsubscription Orders	A customer can query the resources and original orders of the unsubscription amount for an unsubscription order or degrade order on the partner sales platform.
	Yearly/ Monthly resource management	Querying Customer's Yearly/ Monthly Resources	A customer can query one or all yearly/monthly resources on the partner sales platform.
		Renewing Yearly/ Monthly Resources	A customer can renew subscription to yearly/monthly resources on the partner sales platform.
		Unsubscribing Yearly/ Monthly Resources	If a customer has subscribed to a yearly/monthly resource, the customer can use this API to unsubscribe from the resource, including the renewed part and currently used part. The customer cannot use the resources after unsubscription.
		Configuring Automatic Renewal for Yearly/ Monthly Resources	A customer can use this API to enable automatic subscription renewal for its long-term yearly/monthly resources to prevent the resources from being deleted when they are expired.
		Canceling Automatic Renewal for Yearly/ Monthly Resources	A customer can disable automatic subscription renewal when needed. After disabling this function, the customer needs to manually renew the subscription to the resources before they expire.

Scenario	Sub-Scenario	API Name	Description
		Enabling/Canceling the Change from Yearly/Monthly to Pay-per-Use upon Expiration	A customer can change the billing mode of resources from yearly/monthly to pay-per-use after the resources expire. The pay-per-use mode takes effect upon a yearly/monthly expiration.
	Resource package management	Querying Resource Packages	This API is used to query resource packages.
		Querying the Resource Usage	Partners can query the resource package usage of customers on the partner sales platform by resource.
	Pay-per-use resource management	Querying Customer's Pay-per-Use Resources	A partner can query the pay-per-use resources that have been provisioned for customers associated with the partner in the Reseller model.
Cloud service resource management	Cloud service resource management	Switching from the partner sales platform to the HUAWEI CLOUD portal	This API is used to switch from the partner sales platform to the HUAWEI CLOUD portal using a link to manage cloud service resources.
Bill management	Customer resource usage management	Querying Customer Resource Usage	This API is used to query customer resource usage.
	Partner bill management	Querying Monthly Bills	You can query your monthly bills that cover amount due, expenditures, refunds, and adjustments.
		Querying Monthly Expenditures	A partner can subscribe to the partner bill (customer resource usage) in the HUAWEI CLOUD Partner Center. For details, see File Subscription . Your sales platform will calculate the customer expenditures and generate the customer bills based on this bill and then you can perform reconciliation with HUAWEI CLOUD.

Scenario	Sub-Scenario	API Name	Description
Invoice management	Invoice management	Querying the Invoice List	Partners can query the invoice list.
Managing service tickets	Managing service tickets	Service ticket management APIs	Partners and customers can submit HUAWEI CLOUD service tickets on the partner sales platform. When receiving the service tickets, the HUAWEI CLOUD after-sales service team will assist the customers to handle the problems related to HUAWEI CLOUD usage.

3 API Invoking Methods

3.1 RESTful API

The partner sales platform can invoke RESTful APIs provided by HUAWEI CLOUD. Alternatively, customers can switch from the partner sales platform to HUAWEI CLOUD through the web UI to purchase cloud services and manage cloud service resources.

3.1.1 Constructing Requests

This section describes the structure of a RESTful API request, and uses the API for creating customers of HUAWEI CLOUD partners as an example to describe how to call an API.

Request URI

A request URI consists of the following:

{URI-scheme}://{Endpoint}/{resource-path}?{query-string}

Although the request URI is included in the request header, most languages or frameworks require that it be transmitted separately from the request message. Therefore, the request URI is listed independently.

Table 3-1 URI parameter description

Parameter	Description
URI-scheme	Protocol used to transmit requests. All APIs use HTTPS .
Endpoint	Specifies the domain name or IP address of the server bearing the REST service endpoint. The operations API endpoint for partner is bss-intl.myhuaweicloud.com .

Parameter	Description
resource-path	Resource path, that is, the API access path. Obtain the path from the URI of the API. For example, the resource-path of the API for creating a customer is /v2/partners/sub-customers .
query-string	Query parameter, which is optional. Ensure that a question mark (?) is included before each query parameter that is in the format of " <i>Parameter name=Parameter value</i> ". For example, ?limit=10 indicates that a maximum of 10 data records will be displayed.

For example, to obtain the request URI for creating a customer, obtain the corresponding **resource-path** (**/v2/partners/sub-customers**). Then, construct the URI as follows:

`https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers`



NOTE

To simplify URI display, each API is provided with only **resource-path** and the request method. This is because the **URI-scheme** value of all APIs is **HTTPS**, and the endpoints in a region are the same. Therefore, the two parts are omitted.

Request Method

The HTTP protocol defines the following request methods that can be used to send a request to the server:

Table 3-2 HTTP methods

Method	Description
GET	Requests a server to return a specified resource.
PUT	Requests a server to update a specified resource.
POST	Requests a server to add a resource or perform a special operation.
DELETE	Requests a server to delete a specified resource (for example, an object).

Method	Description
HEAD	Requests a server resource header.
PATCH	Requests a server to update partial content of a specified resource. If the resource does not exist, the PATCH method is used to create a new resource.

As shown in the URI for creating a customer, the request method is **POST**. The request URI is as follows:

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers
```

Request Header

You can also add additional fields to the request header, for example, the fields required by a specified URI and an HTTP method. **Table 3-3** lists common request header fields.

Table 3-3 Common request header fields

Field	Description	Mandatory	Example
Host	Specifies the server domain name and port number of the resources being requested. The value can be obtained from the URL of the service API. If the port number is not specified, the default port is used. The default port number for https is 443 .	No This field is mandatory only when AK/SK is used for authentication.	bss-intl.myhuaweicloud.com or bss-intl.myhuaweicloud.com:443
Content-Type	Specifies the request body MIME type. You are advised to use the default value application/json . For an object or image upload API, the value varies depending on the flow type.	Yes	application/json

Field	Description	Mandatory	Example
Content-Length	Length of the request body. The unit is byte.	No	3495
X-Auth-Token	Specifies the user token. For details about how to obtain a token, see Token Authentication .	No This field is mandatory only when the token is used for authentication.	The following is part of an example token: MIIPAgYJKoZIhvcNAQc-CollO8zCCDu8CAQExDTA LBglghkgBZQMEAegEwgg 1QBgkqhkiG9w0BBwGgg g1BBIINPXsidG9rZ

NOTE

In addition to supporting authentication using tokens, APIs support authentication using AK/SK, which uses SDK to sign a request. During the signature, the **Authorization** (signature authentication) and **X-Sdk-Date** (time when a request is sent) headers are automatically added to the request.

For more details, see [Authentication Using AK/SK in Authentication](#).

The request of the interface for creating a customer is as follows after the request header is added:

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers  
Content-Type: application/json  
X-Auth-Token: MIIPAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
```

(Optional) Request Body

This part is optional. A request body is often sent in a structured format (for example, JSON or XML) as defined in the **Content-Type** header field. If the request body contains Chinese characters, these characters must be coded in UTF-8.

Request bodies vary with API. Some APIs do not require a request body, such as the APIs requested using the GET and DELETE methods.

In the case of the API used to create a customer, you can obtain the required request parameters and parameter description from the API request. The following is a request carrying the message body, where the request parameters vary with actual condition.

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIPAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
```

```
{  
    "domain_name": "test",  
    "email": "xxx@huawei.com",  
    "verification_code": "253xxx",  
    "domain_area": "HK",  
    "xaccount_id": "35reyxxxx",  
    "xaccount_type": "xxx_IDP",  
    "password": "xxxxxxxx",  
}
```

```
"is_close_market_ms": "true",
"cooperation_type": "1"
}
```

If all data required for the API request is available, you can send the request to call the API through [curl](#), [Postman](#), or coding.

3.1.2 Authentication

You can use either of the following authentication methods when invoking an API:

- Token authentication: Requests are authenticated using tokens. This method is relatively simple.
- AK/SK authentication: Requests are encrypted using the access key ID (AK) and secret access key (SK). AK/SK authentication is recommended because it provides higher security than token authentication.

When a partner invokes some APIs, the customer authentication information is required. The partner can obtain this information only using the method provided in [Obtaining a User Token with the assume_role Method](#) or [Obtaining a Temporary Access Key and Security Token Through an Agencysecuritytoken](#). Therefore, using token authentication is recommended.

Token Authentication



The validity period of a token is 24 hours. If a token needs to be used, the system caches the token to avoid frequent calling. For details about token validity periods, see [Obtaining a User Token Through Password Authentication](#)

A token specifies certain permissions in a computer system. Authenticating using a token adds the token to the request header during API calling to obtain permissions to operate APIs through IAM.

In [3.1.1 Constructing Requests](#), the process of calling the [API for obtaining a user token](#) is described as an example. After obtaining the partner or customer token, add the **X-Auth-Token** header in a request to specify the token when calling other APIs. For example, if the token is ABCDEFJ...., add **X-Auth-Token: ABCDEFJ....** in a request as follows:

```
Content-Type: application/json
X-Auth-Token: ABCDEFJ....
```

- For details about how to obtain a partner token, see [Obtaining a User Token](#).
- For details about how to obtain a customer token, see [Obtaining a User Token with the assume_role Method](#).

AK/SK Authentication



AK/SK authentication supports API requests with a body size not larger than 12 MB. For API requests with a larger size, token authentication is recommended.

In AK/SK-based authentication, AK/SK is used to sign requests and the signature is then added to the requests for authentication.

- AK: access key ID, which is a unique identifier used together with an SK to sign requests cryptographically.
- SK: secret access key, which is used in conjunction with an AK to sign requests cryptographically. It identifies a request sender and prevents the request from being modified.

You can use AK/SK to sign requests based on the signature algorithm or use a dedicated signature SDK to sign the requests. For details about how to sign requests and use the signing SDK, see [API Request Signing Guide](#).

NOTE

The signing SDK is only used for signing requests and is different from the SDKs provided by services.

3.1.3 Returned Values

Status Code

After sending a request, you will receive a response containing the status code, response header, and response body.

A status code, a group of digits ranging from 1xx to 5xx, indicates the status of a response. For more information, see [Status Code](#).

If **204** is returned for calling the API used to create a customer, the request is successful.

Response Header

Similar to a request, a response also has a header, for example, [Content-Type](#).

[Figure 3-1](#) shows the response header for the API used to create a customer.

Figure 3-1 Response header for the API used to create a customer

Temporary Headers (8)							
Body	Cookies	Headers (12)	Test Results	Status: 200 OK	Time: 1994ms	Size: 476 B	Save Response ▾
KEY	VALUE						
X-Frame-Options ⓘ	SAMEORIGIN						
Server ⓘ	SecAs						
Cache-Control ⓘ	no-cache, no-store, must-revalidate						
X-Content-Type-Options ⓘ	nosniff						
wise_spanid ⓘ	1-1						
wise_traceid ⓘ	1017999-1591056752028-914815						
Expires ⓘ	Thu, 01 Jan 1970 00:00:00 GMT						
Pragma ⓘ	no-cache						
X-XSS-Protection ⓘ	1; mode=block						
Date ⓘ	Mon, 08 Jun 2020 01:44:16 GMT						
Content-Type ⓘ	application/json; charset=utf-8						
content-length ⓘ	71						

(Optional) Response Body

The body of a response is often returned in structured format (for example, JSON or XML) as specified in the **Content-Type** header field. The response body transfers content except the response header.

The following is part of the response body for the API used to create a customer:

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "domain_id": "08f25edee500d3e70f4ec007d082eb80",
    "domain_name": "testdomainnamexxx"
}
```

If an error occurs during API calling, an error code and a message will be displayed. The following shows an error response body.

```
{
    "error_msg": "The name exists.cse://CBCCustomerRegService/rest/cbc/cbccustomerregservice/v1/
customer/register[error_code]:CBC.7156[msg]:{\"error_code\":\"CBC.7156\",\"error_msg\":\"domainName
exist.\\"} ",
    "error_code": "CBC.99000038"
}
```

In the preceding information, **error_code** is an error code, and **error_msg** describes the error.

3.2 Web UI Mode


After logging in to the partner sales platform, a customer can directly switch to HUAWEI CLOUD to purchase cloud services and manage cloud service resources. The partner sales platform must complete SAML authentication to establish a trust relationship with HUAWEI CLOUD.

Prerequisites

The partner has performed steps in [Access Configuration](#).

SAML Authentication

[Figure 3-2](#) shows the SAML authentication process.

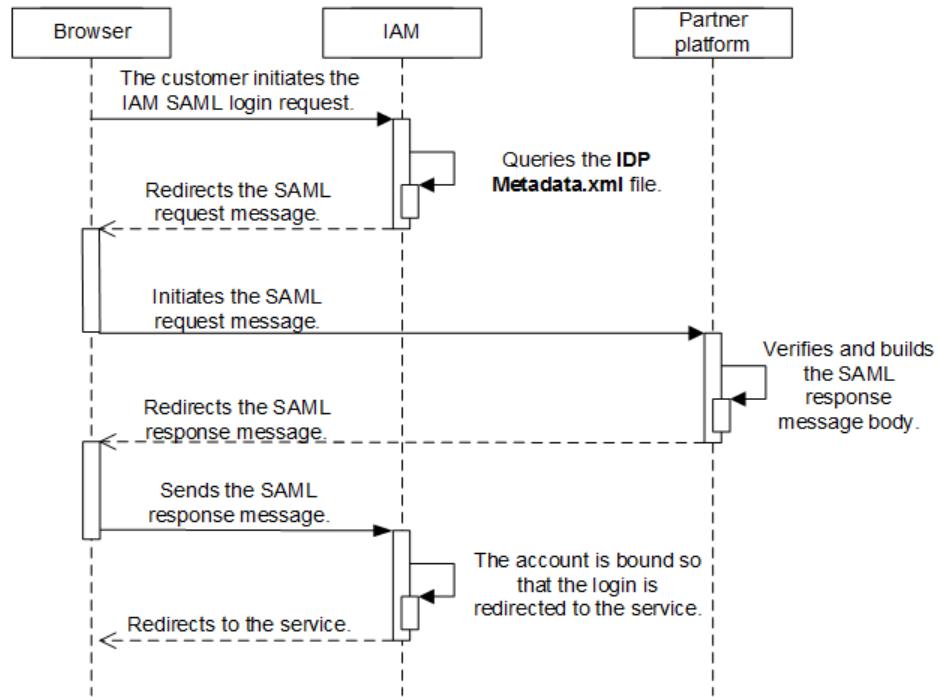Figure 3-2 SAML authentication process

1. A partner's customer uses a browser to call the HUAWEI CLOUD login link. IAM sends the SAML request.
 - a. The customer uses a browser to call the HUAWEI CLOUD login link.
`https://auth-intl.huaweicloud.com/authui/saml/login?xAccountType=ZXT&isFirstLogin=false&service=https%3a%2f%2fconsole-intl.huaweicloud.com%2fiam%2f`

Parameter	Mandatory	Description	Example
xAccountType	Yes	Indicates the identifier of the partner sales platform, which is globally unique. The value is provided by Huawei. After the partner configures the access parameters on the Partner Center page, the partner ID is generated. For details about how to obtain the platform ID, see How Do I Obtain the xaccountType Value?	ZXT

Parameter	Mandatory	Description	Example
isFirstLogin	No	<p>If no HUAWEI CLOUD account is bound, this parameter is mandatory and must be set to true. Otherwise, the value can be left empty or set to false.</p> <p>After the account creation API is successfully called to create a customer account, HUAWEI CLOUD CBC has bound the customer account on the partner sales platform with the customer HUAWEI CLOUD account.</p>	false
service	Yes	<p>Indicates the redirection address after login.</p> <p>The encodeURIComponent function is used for coding.</p>	https%3a%2f%2fconsole-intl.huaweicloud.com%2fiam%2f

- b. IAM receives the login request of the partner's customer, locates the **SingleSignOnService** configuration item in the **IDP Metadata.xml** file based on the **xAccountType** value, and sends the **samlRequest** request to the required path.

```
▼ Query String Parameters view source view URL encoded
SAMLRequest: jYLltbtsePVnvcn7bguyT1wvY1k0apepTQSfSK4kJRSp82K2/vpRstukKGlnuV22ZhfXvzqBdqANvLDSRhbJ8)Kpissmww/1bTDH18uFoZ1le7jytpVbeHfgLPKL0pBj28N056Ko4VZ12oEh1pF9ewOpQFmeg2sYkgptD0I084g4fXXyZba3tDogg5NQTh2je+j8WFeFTHmkknycTqch5XgxB8EV0u+QK29PC6pHU86a/cqdnw/QD2+fAbkp0XVnW11ab1lqe0iu1vunZ7img8Gm3WGFzhbXOTTP7Uasn+qlmimi7qu+Z7tmphneeg/KjQfG8B3BnzbGwLJg01cxJlyNSPtqCep98xyk92fTeLy991b38ehwz3X25Kn8XJuapPSzj9ADfFR02Z/Tq1y8D07ctev1+vYRFsae60/PfPXIm3u8Ge/UoUitb/RQK23XioMo8sdzle108VeBFu45qymnCQfqljHhC/O5p42Ug/94dvtDyptffYz8=RelayState: _uinakzs3gsbypjdcuwdzeenfq44ft2o5d
SigAlg: http://www.w3.org/2001/04/xmldsig-more#rsa-sha256
Signature: fwTq+fiy6XQlaccVHQ7f30iLgVYLU1qdx0X12y025xF226aBAYoIFPhn1hdcp0po7ytJPNvXv8HX70HE112c418R9YlwR6ZrGeDaa0Ngx9xFNQGVAVh8PbHRQ1gU3mlaC11dLYeNxC2kDlr2us134repcr6hyh0rqYv1+A+
```

Parameter	Description
SAMLRequest	<p>Indicates the response message body.</p> <p>The response message is in XML format. IAM then compresses the message, encodes the message using Base64, and URL encodes the message.</p> <ul style="list-style-type: none"> • If the partner uses the SAML toolkits, this parameter can be directly used. The partner does not need to parse the XML file. • If the partner needs to parse the XML file, the partner needs to URL decode the message, decode the message using Base64, and decompress the message (zip.inflate). For details, see Sample Code for Parsing the SAMLRequest.
RelayState	Indicates the response parameters for SAML.

Parameter	Description
SigAlg	Indicates the signature algorithm. Huawei uses SHA256 for signatures by default. HTTP://WWW.W3.ORG/2001/04/XMLSIG-MORE#RSA-SHA256
Signature	Indicates the signature. The signature is used to verify the initiator of a request. When initiating a request, HUAWEI CLOUD uses the private key to sign <i>SAMLRequest={ SAMLRequest }&RelayState={ RelayState } &SigAlg={ SigAlg }</i> in request https://www.test.com/saml/login? <i>SAMLRequest={SAMLRequest }&RelayState={ RelayState } &SigAlg={ SigAlg }&Signature={ Signature }</i> and then performs Base64 coding to obtain the signature value. The signature algorithm is specified by the SigAlg field. When receiving the request, the receiver verifies the signature value using the public key provided by HUAWEI CLOUD (the value in the <ds:X509Certificate></ds:X509Certificate> tag in the SP Metadata.xml file). If the signature verification succeeds, the request is sent by HUAWEI CLOUD, and the follow-up operations can be performed. Otherwise, the request is invalid.

2. The partner sales platform generates the SAML response message and sends it to HUAWEI CLOUD IAM.
 - a. The partner sales platform obtains the HUAWEI CLOUD public key and the response message path of **samlResponse** from the **SP Metadata.xml** file. For details, see **Example, Public Key, and Response Path** in [Obtaining the SP Metadata File](#).
 - b. The partner sales platform generates the SAML response message.
The response message body is in XML format. For the correct response message body and its parameter description, see the following displayed content.

NOTICE

The following content is for reference only. The description in the comments must be modified. The time and ID defined by SAML vary depending on the message. Therefore, it is recommended that you should not directly modify the response message content. Instead, you shall use the SAML toolkits to generate the response message.

```

<?xml version="1.0" encoding="UTF-8"?>
<!-- Parameter InResponseTo needs to be the same as the ID configuration item of
AuthnRequest in the SAML request message. -->
<!-- Parameter Destination needs to be the same as the Location value in the
AssertionConsumerService tag in the SP Metadata.xml file. -->
<saml2p:Response Consent="urn:oasis:names:tc:SAML:2.0:consent:unspecified"
ID="_d794dc393ae6724e236003bf0b917cf0" Destination="https://auth.huaweicloud.com/authui/
saml/SAMLAssertionConsumer"
InResponseTo="_dck4mm08qmdhc8k4nuir07hghetdqgq8umg5"
IssueInstant="2018-10-30T08:21:41.740Z" Version="2.0"
    xmlns:saml2p="urn:oasis:names:tc:SAML:2.0:protocol">
<!-- Must be the same as the entityID value in the IDP Metadata.xml file. -->
<saml2:Issuer Format="urn:oasis:names:tc:SAML:2.0:nameid-format:entity"
    xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion">https://www.test.com</saml2:Issuer>
<saml2p:Status>
    <saml2p:StatusCode Value="urn:oasis:names:tc:SAML:2.0:status:Success" />
    <saml2p:StatusMessage>urn:oasis:names:tc:SAML:2.0:status:Success</saml2p:StatusMessage>
</saml2p:Status>
<saml2:Assertion ID="_2320c40ac7b5e857b2d0d4ea0c8758c3"
IssueInstant="2018-10-30T08:21:41.740Z" Version="2.0"
    xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
<!-- Must be the same as the entityID value in the IDP Metadata.xml file. -->
<saml2:Issuer>https://www.test.com</saml2:Issuer>
<ds:Signature xmlns:ds="http://www.w3.org/2000/09/xmldsig#">
    <ds:SignedInfo>
        <ds:CanonicalizationMethod Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
        <ds:SignatureMethod Algorithm="http://www.w3.org/2001/04/xmldsig-more#rsa-
sha256" />
<!-- The value after "URI #" must be the same as the ID in the Assertion tag. -->
<ds:Reference URI="#_2320c40ac7b5e857b2d0d4ea0c8758c3">
    <ds:Transforms>
        <ds:Transform Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-signature" />
        <ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#">
            <ec:InclusiveNamespaces PrefixList="xsd"
                xmlns:ec="http://www.w3.org/2001/10/xml-exc-c14n#" />
        </ds:Transform>
    </ds:Transforms>
    <ds:DigestMethod Algorithm="http://www.w3.org/2001/04/xmlenc#sha256" />
<!-- The value of DigestValue is the digest of the Assertion tag object. The digest
algorithm is the same as that of DigestMethod. -->
<ds:DigestValue>rFrycznfGNYOnprZIJJou4ro0Mz65+43MIR5F0+H4=</ds:DigestValue>
</ds:Reference>
</ds:SignedInfo>
<!-- Partner signature value. For details about how to obtain the value, see the
following description. -->
<ds:SignatureValue>
    YqTWQngAPfGqQmWa610PM7LeefqWdKuveUVINrql67NoHJIDa2WxLwdVzoJlUh64QiNPr6+ndm
    LDCMgIC5F/9juzhICZcc6lHNjjy6EsPkKRjfo9oeoVAqLgG/kmvQYeHLBID0y11RNXXpAVY4nhJ
    26KilVGt7ywvKAmhichE+eW/UYAGiO15vkfgD2gZUGV+yPkv64k7xK4yAH3mL2NaCPuw/90e4enm
    iUx0YuazDwM5FirUSMpcJ50rcNmS6clWAUcCzbOx+y2vJgtTjh7k3UsmpnTop5eYNp94+sDPEat
    8FaV4SgafMEL5z54gpe8+/9yOWEvIBs1b0RYg==
</ds:SignatureValue>
<ds:KeyInfo>
    <ds:X509Data>
        <!-- Partner public key certificate. The certificate must be the one specified in the IDP
Metadata.xml file. -->
        <ds:X509Certificate>
            MII BjANBgkqhkiG9w0BAQEAAQCAQ8AMIIBCgKCAQEAhK3L160NjP9EhBGQOC2s4r
            +Wc62bkRkc nUxfhizWcWldQCykzuLOAoATinfoEamV5W25xtSS5kFs+4OC0mVYpKcI3SWoydX
            +UE5Qik5Ufj8Dt G1AvSEKhSluyO9axrV5Uv089jMxBnlm/R+xND73WcZM11ylbKJEZSTCEDfh
            +KnFbmW108umFMden RZCrNWUjoSp/90XeG0V2Nmj7Fkq72skSifwiASLRq9KqLbmh1QwUX
            +AoWpHK/jRUBustMBmG1n1i
            AqpD4EBjjBOB27k1wXZ30+loJt8IZmfSZRFoNn5VFWXNeEmZ1aQvGSvd3Tyw2/Wr+w/
            8Mag569C mpeX6QIDAQAB
        </ds:X509Certificate>
    </ds:X509Data>
</ds:KeyInfo>

```

```
</ds:Signature>
<saml2:Subject>
<!-- The value of NameQualifier must be the same as the entityID value in the SP
Metadata.xml file. --&gt;
&lt;saml2:NameID Format="urn:oasis:names:tc:SAML:2.0:nameid-format:transient"
NameQualifier="https://auth.huaweicloud.com/"&gt;Some NameID value&lt;/saml2:NameID&gt;
&lt;saml2:SubjectConfirmation Method="urn:oasis:names:tc:SAML:2.0:cm:bearer"&gt;
<!-- Parameter InResponseTo needs to be the same as the ID configuration item of
AuthnRequest in the samlRequest message. --&gt;
&lt;saml2:SubjectConfirmationData
InResponseTo="_dck4mm08qmdhc8k4nuir07hghetdqg8umg5"
NotBefore="2018-10-28T08:21:41.740Z" NotOnOrAfter="2018-11-01T08:21:41.740Z"
Recipient="https://auth.huaweicloud.com/authui/saml/SAMLAssertionConsumer" /&gt;
&lt;/saml2:SubjectConfirmation&gt;
&lt;/saml2:Subject&gt;
&lt;saml2:Conditions NotBefore="2018-10-28T08:21:41.740Z"
NotOnOrAfter="2018-11-01T08:21:41.740Z"&gt;
&lt;saml2:AudienceRestriction&gt;
<!-- Must be the same as the entityID value in the SP Metadata.xml file. --&gt;
&lt;saml2:Audience&gt;https://auth.huaweicloud.com/&lt;/saml2:Audience&gt;
&lt;/saml2:AudienceRestriction&gt;
&lt;/saml2:Conditions&gt;
&lt;saml2:AttributeStatement&gt;
<!-- For values between&lt;saml2:AttributeValue&gt; and &lt;/saml2:AttributeValue&gt;, see the
following table. --&gt;
&lt;saml2:Attribute FriendlyName="xUserId" Name="xUserId"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri"&gt;
&lt;saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string"&gt;*****&lt;/saml2:AttributeValue&gt;
&lt;/saml2:Attribute&gt;
<!-- The values of xAccountId and xUserId must be the same. --&gt;
&lt;saml2:Attribute FriendlyName="xAccountId" Name="xAccountId"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri"&gt;
&lt;saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string"&gt;*****&lt;/saml2:AttributeValue&gt;
&lt;/saml2:Attribute&gt;
&lt;saml2:Attribute FriendlyName="bplId" Name="bplId"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri"&gt;
&lt;saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string"&gt;*****&lt;/saml2:AttributeValue&gt;
&lt;/saml2:Attribute&gt;
&lt;saml2:Attribute FriendlyName="email" Name="email"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri"&gt;
&lt;saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string" /&gt;
&lt;/saml2:Attribute&gt;
&lt;saml2:Attribute FriendlyName="name" Name="name"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri"&gt;
&lt;saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string"&gt;*****&lt;/saml2:AttributeValue&gt;
&lt;/saml2:Attribute&gt;
&lt;saml2:Attribute FriendlyName="mobile" Name="mobile"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri"&gt;
&lt;saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string"&gt;*****&lt;/saml2:AttributeValue&gt;
&lt;/saml2:Attribute&gt;
&lt;/saml2:AttributeStatement&gt;
&lt;saml2:AuthnStatement AuthnInstant="2018-10-30T08:21:41.741Z"&gt;
<!-- Must be the same as the entityID value in the SP Metadata.xml file. --&gt;
&lt;saml2:SubjectLocality Address="https://auth.huaweicloud.com/" /&gt;
&lt;saml2:AuthnContext&gt;
&lt;saml2:AuthnContextClassRef&gt;urn:oasis:names:tc:SAML:2.0:ac:classes:unspecified&lt;/
saml2:AuthnContextClassRef&gt;
&lt;/saml2:AuthnContext&gt;
&lt;/saml2:AuthnStatement&gt;
&lt;/saml2:Assertion&gt;
&lt;/saml2p:Response&gt;</pre>
```

The partner signature value is in standard XML format, and the signature type is **enveloped-signature**. You are advised to use the SAML library provided by a third party for signature.

The signature procedure is as follows.

i. Obtain the signature object (**Assertion**).

```
<saml2:Assertion ID="_2320c40ac7b5e857b2d0d4ea0c8758c3"  
IssueInstant="2018-10-30T08:21:41.740Z" Version="2.0"  
xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion"  
xmlns:xsd="http://www.w3.org/2001/XMLSchema">  
.....  
</saml2:Assertion>
```

ii. Obtain the tag object (**Signature**).

```
<ds:Signature  
xmlns:ds="http://www.w3.org/2000/09/xmldsig#">  
  <ds:SignedInfo>  
    <ds:CanonicalizationMethod Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />  
    <ds:SignatureMethod Algorithm="http://www.w3.org/2000/09/xmldsig#rsa-sha256" />  
    <ds:Reference URI="#_2320c40ac7b5e857b2d0d4ea0c8758c3">  
      <ds:Transforms>  
        <ds:Transform Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-signature" />  
        <ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />  
        <ec:InclusiveNamespaces  
          xmlns:ec="http://www.w3.org/2001/10/xml-exc-c14n#" PrefixList="xs" />  
      </ds:Transform>  
    </ds:Transforms>  
    <ds:DigestMethod Algorithm="http://www.w3.org/2000/09/xmldsig#sha256" />  
    <ds:DigestValue>.....</ds:DigestValue>  
  </ds:Reference>  
  </ds:SignedInfo>  
<!-- Third-party signature value -->  
  <ds:SignatureValue>  
  .....  
</ds:SignatureValue>  
  <ds:KeyInfo>  
    <ds:X509Data>  
      <!-- Third-party public key certificate -->  
      <ds:X509Certificate>  
      .....  
    </ds:X509Certificate>  
    </ds:X509Data>  
  </ds:KeyInfo>  
</ds:Signature>
```

iii. Generate the **DigestValue** value for the signature object **Assertion**.

- 1) Convert **Assertion** according to the algorithm defined in **Transform of Signature**.

- 2) Generate a digest for the object obtained in 1) according to the algorithm specified in **DigestMethod**.

- 3) Place the generated digest value in the **DigestValue** tag.

iv. Use the private key in **Step 6** in **Generating a Certificate** to generate the **SignatureValue** value for the **SignedInfo** object signature.

- 1) Convert **SignedInfo** according to the algorithm defined in **CanonicalizationMethod**

- 2) Generate the signature value for the object obtained in 1) according to the signature algorithm defined in

SignatureMethod. Place the obtained signature value in **SignatureValue**.

- v. Combine the values of **DigestValue** and **SignatureValue** to form the final **Signature** object. Place the value in **Assertion** as its sub-element.

The signature is displayed as follows.

```
<saml2:Assertion ID="_2320c40ac7b5e857b2d0d4ea0c8758c3"  
IssueInstant="2018-10-30T08:21:41.740Z" Version="2.0"  
xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion"  
xmlns:xsd="http://www.w3.org/2001/XMLSchema">  
.....  
    <ds:Signature  
        xmlns:ds="http://www.w3.org/2000/09/xmldsig#">  
        .....  
        <!-- Third-party signature value -->  
        <ds:SignatureValue>  
        .....  
        </ds:SignatureValue>  
        <ds:KeyInfo>  
            <ds:X509Data>  
                <!-- Third-party public key certificate -->  
                <ds:X509Certificate>  
                .....  
                </ds:X509Certificate>  
                </ds:X509Data>  
            </ds:KeyInfo>  
        </ds:Signature>  
    </saml2:Assertion>
```

Table 3-4 Description of parameters between **<saml2:AttributeValue>** and **</saml2:AttributeValue>**

Parameter	Description
xUserId	Indicates the user ID of the partner's customer on the partner sales platform. This parameter value equals the value of xAccountId .
xAccountId	Indicates the account ID of the partner's customer on the partner sales platform.
bpld	Indicates the partner ID. For details, see How Do I Check the Partner ID?
email	Indicates the email address. This parameter is optional. The parameter must meet the following requirements: <ul style="list-style-type: none">• Must be unique for each customer.• A maximum of 64 characters• Passes the verification using the following regular expression: ^[azA-Z0-9.!#\$%&*+\\"/?^_{}~-]+@[a-zA-Z0-9](?:[a-zA-Z0-9-]{0,61}[a-zA-Z0-9])?(?:\.[a-zA-Z0-9](?:[a-zA-Z0-9-]{0,61}[a-zA-Z0-9]))?*\$

Parameter	Description
name	Indicates the account name transferred on the partner sales platform. This parameter is optional. The account name must be the same as the value of domain_name in the request for API in 5.1.3 Creating a Customer .

NOTE

Table 3-4 involves the account ID and user ID because HUAWEI CLOUD IAM has the account and user concepts. For details about the two concepts, see "Account" and "IAM User" in [Basic Concepts](#).

- c. If the customer has logged in to the partner sales platform, the SAML response message is returned directly. Otherwise, the SAML response message is displayed after the login.
Send a POST request to the HUAWEI CLOUD response path **AssertionConsumerService** in [2.a](#). The parameters must be in the Form Data format.

<pre>TQUq1IFJ7%2FFNMFHF1kQgbKijyS1M8uQqb%2FKSFxN%2B9S6dvim%2BaatPgbxX9hj0pfR%28HEXEPzRNnd5wX6LQaqPQ%2F%28c4Iufmvz7Rue%2FAA%3D%3D&RelayState=_lidh2rjxc81dnuc72qmpbslf4bml6r9fgtn8rNI5twTosXm0NhZDj%2BGnfV8fG9T4X5nis0K843vRqzY1JCPmb0swQWb%2FFHryetP9deoceEBkTgf81xM1HCPUJ%2BNSZc5aUinPUDIn9gxGsEMosv8f%2FcYPe1GL%2F9iMS1ChGe1k18Rmj6Y5F3SVrFEsVVYMcKzPPAz1L2Ts%2B4BW8YbdqeUyfIKJwruVfx8KoHdC8xC18bRN5mOHqAjCMYTQAjrCm%2BBGJVxUXit0gYeEqkYH6dYkVfBgDXY1GUeOQqdcKhgT36Aiz2GCZwK7lpvhAEFi2xMZGU4x1KVZNYy1yzfjMB164pMsyd3JDrzZfcbraPnT8a:Upgrade-Insecure-Requests: 1User-Agent: Mozilla/5.0 (Windows NT 6.1; WOW64) AppleWebKit/537.36 (KHTML, like Gecko)</pre>	
Form Data	view source view URL encoded
<pre>SAMLResponse: P094bwNgdmVyc2lvbj0iMS4wIiBlbmNvZGlubZi0iVVRGLTgiPz4KPHNhbwWyCdpSZXNwb5MDAzYmYwYjkxN2NmMCIGSW5SZXNwb25zZVRvPSJfZGNrNG1tMDhxbwRoYzhrNG51aXIwN2hnaGV0ZHFXZzh1b11lczp0YzpTQU1MOjIuMDpwcm90b2NvbCI+PHNhbWwyOk1zc3Vlci8Gbj3jtYXQ9InVybjpvYXNpczpuYw1lczp0Pmh0dBHzO18vaWRwLm1zZXNbC5jb20vaWRwL3NoaWJib2xldGg8L3NhbWwyOk1zc3Vlcz48c2FtbDJwO1N0Y)RhdHVzTwVzc2FnZT51cm46b2FzaXM6bmFtZXm6dGM6U0FNTDoyLja6c3RhdHVzO1N1Y2N1c3M8L3NhbWwyCdpIE1zc3VlSw5zdGFudD0iMjAxOC0xMC0zMFQwODoyMTo0MS43NDBaIiBWZXJzaW9uPSIyLjAiIHhtbG5zOnNhb1</pre>	

Parameter	Description
SAMLResponse	Identifies the string obtained by encoding the SAML response message body in 2.b using Base64.
RelayState	The value of this parameter is the same as that in the SAML request message.

3. IAM parses the SAMLResponse. When the customer account creation API is called to create an account, HUAWEI CLOUD CBC binds the customer account on the partner sales platform with the HUAWEI CLOUD account. Therefore, the customer can be redirected to the service page and purchase and manage the cloud services.

3.3 API Access Permission (Partner)

An operator account of a partner needs to obtain permissions before accessing APIs. Roles with according access permissions can be granted to this account. Supported actions of APIs are listed in the following table. The API can be accessed as long as one of its actions is supported.

 NOTE

For APIs not listed in the table, fine-grained permission verification is not required and all operator accounts can access them.

- For more details, visit:
 - [Partner Center API Reference \(International Website\)](#)

Table 3-5

Scenario	Sub-Scenario	API Description	URL	Supported Action
Customer management	Customer registration	Verifying customer registration information	POST /v2/partners/sub-customers/users/check-identity	Customer Business > Customer Management > Customer List > Register APIs (newly added)
		Sending a verification code	POST /v2/bases/verificationcode/send	Customer Business > Customer Management > Customer List > Register APIs (newly added)
		Creating a customer	POST /v2/partners/sub-customers	Customer Business > Customer Management > Customer List > Register APIs (newly added)
	Real-name authentication	Requesting individual real-name authentication	POST /v2/customers/realname-auths/individual	Customer Business > Customer Management > Customer List > Real-name authentication synchronization (API Management) (newly added)

Scenario	Sub-Scenario	API Description	URL	Supported Action
Customer Business > Customer Management > Customer List > Real-name authentication synchronization (API Management) (newly added)	Real-name authentication	Requesting enterprise real-name authentication	POST /v2/customers/realname-auths/enterprise	Customer Business > Customer Management > Customer List > Real-name authentication synchronization (API Management) (newly added)
		Requesting real-name re-authentication	PUT /v2/customers/realname-auths/enterprise	Customer Business > Customer Management > Customer List > Real-name authentication synchronization (API Management) (newly added)
		Querying the real-name authentication review result	GET /v2/customers/realname-auths/result	Customer Business > Customer Management > Customer List > Real-name authentication synchronization (API Management) (newly added)
	Customer management	Querying customers	POST /v2/partners/sub-customers/query	<ul style="list-style-type: none"> Customer Business > Customer Management > Customer List > View Customer List Customer Business > Customer Management > Reseller Customers > View Customers
		Freezing a customer account	POST /v2/partners/sub-customers/freeze	<ul style="list-style-type: none"> Customer Business > Customer Management > Reseller Customers > Freeze/Unfreeze Accounts Customer Business > Customer Management > Customer List > Freeze/Unfreeze Account

Scenario	Sub-Scenario	API Description	URL	Supported Action
		Unfreezing a customer account	POST /v2/partners/sub-customers/unfreeze	<ul style="list-style-type: none"> Customer Business > Customer Management > Reseller Customers > Freeze/Unfreeze Accounts Customer Business > Customer Management > Customer List > Freeze/Unfreeze Account
Reseller management	Querying resellers	Querying the list of resellers	POST /v2/partners/indirect-partners/query	Sales Management > My Resellers > Query Resellers
Transaction Management	Coupon management	Querying coupons	GET /v2/promotions/benefits/coupons	<ul style="list-style-type: none"> Financial Information > Cash Coupons > View Cash Coupon > View Cash Coupon List Customer Business > Order Payments > Pay for Orders
	Yearly/monthly order management	Querying orders	GET /v2/orders/customer-orders	<ul style="list-style-type: none"> Customer Business > Customer Orders > View List Customer Business > Customer Orders > Reseller Customer Orders > View Orders
		Querying order details	GET /v2/orders/customer-orders/details/{order_id}	<ul style="list-style-type: none"> Customer Business > Customer Orders > View List Customer Business > Customer Orders > Reseller Customer Orders > View Details

Scenario	Sub-Scenario	API Description	URL	Supported Action
Customer Business > Customer Management > Customer List > View Customer Resources	Managing Pay-Per-Use Resources	Querying customer's pay-per-use resources	POST /v2/partners/sub-customers/on-demand-resources/query	Customer Business > Customer Management > Customer List > View Customer Resources
	Managing Customers' Budgets	Querying customers' budgets	GET /v2/partners/sub-customers/budget	<ul style="list-style-type: none"> • Customer Business > Customer Management > Customer List > Adjust Credit Limit • Customer Business > Customer Management > Reseller Customers > Set Monthly Budgets
		Setting customers' budgets	POST /v2/partners/sub-customers/budget	<ul style="list-style-type: none"> • Customer Business > Customer Management > Customer List > Adjust Credit Limit • Customer Business > Customer Management > Reseller Customers > Set Monthly Budgets
Bill Management	-	Querying monthly bills of a customer	GET /v2/bills/partner-bills/postpaid-bill-summary	Financial Information > Partner Bills > View Partner Bill
Invoice Management	Invoice Management	Querying the invoice list	GET /v1.0/{domain_id}/payments/intl-invoices	Financial Information > Invoices > View Invoice Requests

4 Product Management

4.1 Quering Product Information

4.1.1 Querying Cloud Service Types

Function

This API is used to query cloud service types on the partner sales platform.

Constraints

This API can be invoked using the partner AK/SK or token.

KooGallery services are not included.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/products/service-types

Table 4-1 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	No	A maximum of 8 characters	Language. <ul style="list-style-type: none">• zh_CN: Chinese• en_US: English Default value: zh_CN

Table 4-2 Query parameters

Parameter	Mandatory	Type	Value Range	Description
offset	No	Integer	0 to 100000000	<p>Offset, which starts from 0. The default value is 0.</p> <p>NOTE</p> <p>This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	Integer	[1-1000]	Number of records queried each time. The default value is 10 .

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/products/service-types?offset=0&limit=10 HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
X-Language: zh_CN
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . This parameter is returned only when the query failed.

Parameter	Type	Value Range	Description
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
total_count	Integer	-	Total number.
service_types	List<ServiceType>	-	Cloud service type list. For details, see Table 4-3 .

Table 4-3 ServiceType

Parameter	Type	Value Range	Description
service_type_name	String	A maximum of 200 characters	Cloud service type name.
service_type_code	String	A maximum of 64 characters	Cloud service type code.
abbreviation	String	A maximum of 200 characters	Abbreviation of the cloud service type.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
Date: response time
{
    "total_count": 1,
    "service_types": [
        {
            "service_type_name": "Huawei Cloud WeLink",
            "service_type_code": "hws.service.type.workplace",
```

```
        "abbreviation": "WeLink"
    }
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Invalid parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

4.1.2 Querying Resource Types

Function

This API is used to query the resource types on the partner sales platform.

Constraints

This API can be invoked using the partner AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/products/resource-types

Table 4-4 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	No	A maximum of 8 characters	Language. • zh_CN: Chinese • en_US: English Default value: zh_CN

Table 4-5 Query parameters

Parameter	Mandatory	Type	Value Range	Description
offset	No	Integer	0 to 100000000	Offset, which starts from 0. The default value is 0. NOTE This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned. For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.
limit	No	Integer	[1-1000]	Number of records queried each time. The default value is 10.

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/products/resource-types?offset=0&limit=10 HTTP/1.1
Content-Type: application/json
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ
X-Language: zh_CN
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
total_count	Integer	-	Total number.
resource_types	List<ResourceTypes>	-	Resource type list. For details, see Table 4-6 .

Table 4-6 ResourceTypes

Parameter	Type	Value Range	Description
resource_type_code	String	A maximum of 64 characters	Resource type code. For example, the resource type code of ECS is hws.resource.type.vm .
resource_type_name	String	A maximum of 200 characters	Resource type name.
resource_type_desc	String	A maximum of 200 characters	Resource type description.
service_type_code	String	A maximum of 64 characters	Code of the service type which a resource belongs to. Example: hws.service.type.offline .

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "total_count": 1,
    "resource_types": [
        {
            "resource_type_code": "hws.resource.type.workspacehost.desktop",
            "resource_type_name": "Cloud Desktop",
            "resource_type_desc": "Cloud Desktop",
            "service_type_code": "hws.service.type.workspacehost"
        }
    ]
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Invalid parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

4.1.3 Querying Resources by Cloud Service Type

Function

This API is used to query the resource type code and name by associated cloud service on the partner sales platform and to query the price of a pay-per-use or yearly/monthly product.

Constraints

This API can be invoked using the partner AK/SK or token.

This API cannot be used to query the resources by KooGallery service type.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/products/service-resources

Table 4-7 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	No	A maximum of 8 characters	<p>Language.</p> <ul style="list-style-type: none">• zh_CN: Chinese• en_US: English <p>Default value: zh_CN</p>

Table 4-8 Request parameters

Parameter	Mandatory	Type	Value Range	Description
service_type_code	Yes	String	A maximum of 64 characters	<p>Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs. To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types.</p>
offset	No	Integer	0 to 1000000	<p>Offset, which starts from 0. The default value is 0.</p> <p>NOTE</p> <p>This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	Integer	[1-100]	<p>Number of records queried each time. The default value is 10.</p> <p>This parameter cannot be left empty.</p>

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/products/service-resources?  
service_type_code=hws.service.type.obs&limit=5&offset=0 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ  
X-Language: zh_CN
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
total_count	Integer	-	Total number.
infos	List<ServiceResourceInfo>	A maximum of 100 values	List of basic resource information. For details, see Table 4-9 .

Table 4-9 ServiceResourceInfo

Parameter	Type	Value Range	Description
basic_info	BasicInfo Object	-	Basic resource information. For details, see Table 4-10 .

Table 4-10 ResourceBasicInfo

Parameter	Type	Value Range	Description
resource_type_code	String	A maximum of 64 characters	Resource type code. Example: hws.resource.type.general .
product_owner_service	String	A maximum of 64 characters	Code of the service where a resource belongs. Example: hws.service.type.offline .
name	String	A maximum of 1024 characters	Resource type. Example: general specifications.
description	String	A maximum of 1024 characters	Resource type description.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "total_count": 5,
    "infos": [
        {
            "basic_info": {
                "resource_type_code": "hws.resource.type.general",
                "product_owner_service": "hws.service.type.offline",
                "name": "general specifications",
                "description": "general specifications"
            }
        },
        {
            "basic_info": {
                "resource_type_code": "hws.resource.type.bandwidth",
                "product_owner_service": "hws.service.type.vpc",
                "name": "fixed bandwidth",
                "description": "fixed bandwidth"
            }
        },
        {
            "basic_info": {
                "resource_type_code": "hws.resource.type.ip",
                "product_owner_service": "hws.service.type.vpc",
                "name": "ip specifications",
                "description": "ip specifications"
            }
        }
    ]
}
```

```
        "name": "EIP",
        "description": "EIP"
    },
},
{
    "basic_info": {
        "resource_type_code": "hws.resource.type.vm.image",
        "product_owner_service": "hws.service.type.ec2",
        "name": "ECS image",
        "description": "ECS image"
    }
},
{
    "basic_info": {
        "resource_type_code": "hws.resource.type.vm",
        "product_owner_service": "hws.service.type.ec2",
        "name": "ECS",
        "description": "ECS"
    }
}
]
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Invalid parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

4.1.4 Querying Usage Types

Function

This API is used to query resource usage types on the partner sales platform.

Constraints

This API can be invoked using the partner AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/products/usage-types

Table 4-11 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	No	A maximum of 8 characters	<p>Language.</p> <ul style="list-style-type: none">• zh_CN: Chinese• en_US: English <p>Default value: zh_CN</p>

Table 4-12 Query parameters

Parameter	Mandatory	Type	Value Range	Description
resource_type_code	No	String	A maximum of 64 characters	<p>Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm. To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If the value is "", it can be used as a filter criterion.</p>
offset	No	Integer	0 to 100000000	<p>Offset, which starts from 0. The default value is 0.</p> <p>NOTE</p> <p>This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	Integer	1 to 100	Number of records queried each time. The default value is 10 .

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/products/usage-types?  
resource_type_code=hws.resource.type.vm&offset=0&limit=100 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ  
X-Language: zh_CN
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
total_count	Integer	-	Total number.
usage_types	List<UsageType>	-	Usage type list. For details, see Table 4-13 .

Table 4-13 UsageType

Parameter	Type	Value Range	Description
code	String	A maximum of 64 characters	Usage type code, for example, reqNumber.

Parameter	Type	Value Range	Description
name	String	A maximum of 1024 characters	Usage type name, for example, the number of invoking times.
resource_type_code	String	A maximum of 64 characters	Resource type code. For example, the resource type code of VM is hws.resource.type.vm .
service_type_code	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
resource_type_name	String	A maximum of 200 characters	Resource type. For example, the resource type of ECS is Cloud Host .
service_type_name	String	A maximum of 200 characters	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "total_count": 1133,
    "usage_types": [
        {
            "code": "flow",
            "name": "Video connection traffic",
            "resource_type_code": "hws.resource.type.live.videoconnect",
            "service_type_code": "hws.service.type.live"
        },
        {
            "code": "reqNumber",
            "name": "Invoking times",
            "resource_type_code": "hws.resource.type.pca.quantity",
            "service_type_code": "hws.service.type.ccm"
        },
        {
            "code": "dailyalarmnum",
            "name": "Alarms",
            "resource_type_code": "hws.resource.type.pca.quantity",
            "service_type_code": "hws.service.type.ccm"
        }
    ]
}
```

```
        "resource_type_code": "hws.resource.type.aicms.cdfl",
        "service_type_code": "hws.service.type.aimgs",
        "resource_type_name": "Cloud Host",
        "service_type_name": "Elastic Cloud Server"
    }
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.
400	CBC.0100	Parameter error.

4.1.5 Querying Measurement Units

Function

This API is used to query the resource usage, measurement unit for the duration and amount of a yearly/monthly resource, as well as the measurement unit type on the partner sales platform.

Constraints

This API can be invoked using the partner AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/bases/measurements

Table 4-14 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	No	A maximum of 8 characters	Language. • zh_CN : Chinese • en_US : English Default value: zh_CN

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/bases/measurements HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
X-Language: zh_CN
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
measure_units	List<MeasureUnitRest>	-	Measurement unit information. For details, see Table 4-15 .

Table 4-15 MeasureUnitRest

Parameter	Type	Value Range	Description
measure_id	Integer	-	Measurement unit ID. For example, 10 indicates GB.
measure_name	String	A maximum of 128 characters	Measurement unit name, which is returned based on the language type. Example: GB.
abbreviation	String	A maximum of 64 characters	Abbreviation of a measurement unit name. For example, the abbreviation of GB is G .

Parameter	Type	Value Range	Description
measure_type	Integer	-	<p>Measurement type.</p> <ul style="list-style-type: none">● 1: currency● 2: duration● 3: traffic● 4: quantity● 7: capacity● 9: number of lines● 10: period● 11: frequency● 12: number● 16: bandwidth● 17: capacity-duration● 18: query rate● 19: bandwidth (1000)● 20: performance test usage● 21: area● 22: video● 23: throughput● 24: resolution● 26: deduction unit for a general resource package● 27: number of cores x duration● 28: memory x duration● 29: IOPS x duration● 30: throughput x duration● 31: number/duration● 40: traffic (1000)● 41: 1K tokens

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "measure_units": [
        {
            "measure_id": 0,
            "measure_name": "Day",
            "abbreviation": "d",
            "measure_type": 2
        },
    ]
}
```

```
{  
    "measure_id": 1,  
    "measure_name": "USD",  
    "abbreviation": "YDollar",  
    "measure_type": 1  
},  
{  
    "measure_id": 10,  
    "measure_name": "GB",  
    "abbreviation": "G",  
    "measure_type": 3  
}  
]
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

4.1.6 Querying the Measurement Unit Number System

Function

This API is used to query the measurement unit number system on the partner sales platform.

Constraints

This API can be invoked using the partner AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/bases/conversions

Table 4-16 Request parameters

Parameter	Mandatory	Type	Value Range	Description
measure_type	No	Integer	-	<p>Measurement type.</p> <ul style="list-style-type: none">• 1: currency• 2: duration• 3: traffic• 4: quantity• 7: capacity• 9: number of lines• 10: period• 11: frequency• 12: number• 16: bandwidth• 17: capacity-duration• 18: query rate• 19: bandwidth (1000)• 20: performance test usage• 21: area• 22: video• 23: throughput• 26: Deduction unit for a general resource package <p>If this parameter is not included in the request parameters, is left empty, or is set to null, it cannot be used as a filter criterion.</p>

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/bases/conversions?measure_type=3 HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
conversions	List<Conversion>	-	Measurement unit conversion information. For details, see Table 4-17 .

Table 4-17 Conversion

Parameter	Type	Value Range	Description
measure_id	Integer	-	Measurement unit ID. For example, 10 indicates GB.
ref_measure_id	Integer	-	Measurement unit ID after conversion. For example, 11 indicates MB.
conversion_ratio	Long	-	Conversion ratio. Example: If the measurement unit is GB and the target unit is MB, the conversion ratio is 1024 (1 GB = 1024 MB).

Parameter	Type	Value Range	Description
measure_type	Integer	-	<p>Measurement type.</p> <ul style="list-style-type: none">● 1: currency● 2: duration● 3: traffic● 4: quantity● 7: capacity● 9: number of lines● 10: period● 11: frequency● 12: number● 16: bandwidth● 17: capacity-duration● 18: query rate● 19: bandwidth (1000)● 20: performance test usage● 21: area● 22: video● 23: throughput

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "conversions": [
        {
            "measure_id": 10,
            "ref_measure_id": 11,
            "conversion_ratio": 1024,
            "measure_type": 3
        },
        {
            "measure_id": 0,
            "ref_measure_id": 5,
            "conversion_ratio": 1440,
            "measure_type": 2
        }
    ]
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

4.2 Querying the Price of a Product

4.2.1 Querying the Price of a Pay-Per-Use Product

Function

Partners can query the price of a pay-per-use product by criteria on the sales platform.

If the tenant who purchases the product enjoys a discount, the discount amount and the final price can be obtained from the query result.

If the tenant has enjoyed multiple types discounts, the system will return the commercial discount amount and the final price preferentially.

⚠ CAUTION

HUAWEI CLOUD allows you to query products by service type, service region, resource type, and resource specification. Ensure that you enter correct criteria for search. Otherwise, the API returns an error indicating that the product cannot be found.

Constraints

This API can be invoked using the customer token replaced by the partner token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/bills/ratings/on-demand-resources

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
project_id	Yes	String	A maximum of 64 characters	<p>Project ID.</p> <p>NOTE</p> <ul style="list-style-type: none">If the customer token is used, invoke the API for obtaining a user token with the assume_role method to obtain the project ID of the target region. For details, see Step 2 in How Can I Replace a Partner Token with a Customer Token.To call this API, an IAM member account must be authorized by the IAM master account. For details, see Creating a User Group and Assigning Permissions.
product_infos	Yes	List<DemandProductInfo>	A maximum of 100 values	Indicates the product information list. For details, see Table 4-18 .
inquiry_precision	No	Integer	-	<p>Precision of the price query result. The default value of this parameter is 0 (default precision of the price query result).</p> <ul style="list-style-type: none">0: The default precision of the query result. The result contains a maximum of six decimal places with the unit of USD, such as USD 0.000001.1: The result contains a maximum of 10 decimal places with the unit of USD, such as USD 1.0000000001. <p>NOTE</p> <p>Value 0 and value 1 make differences only when the query result contains at least six decimal places.</p>

Table 4-18 DemandProductInfo

Parameter	Mandatory	Type	Value Range	Description
id	Yes	String	A maximum of 64 characters	The ID is used to identify the mapping between the inquiry result and the request and must be unique in an inquiry.
cloud_service_type	Yes	String	A maximum of 400 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
resource_type	Yes	String	A maximum of 400 characters	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types . The relationship between ResourceType and CloudServiceType is as follows: A resource type represents a resource contained in the cloud service type, and the cloud service type is a combination of multiple resource types.

Parameter	Mandatory	Type	Value Range	Description
resource_spec	Yes	String	A maximum of 400 characters	<p>Resource specifications of cloud service types. The following gives some examples of mappings between resource specifications and cloud service types.</p> <ul style="list-style-type: none">● ECS<ul style="list-style-type: none">Add .win or .linux to the end of the ECS flavor ID based on the OS type, for example, s2.small.1.linux. Call the API for querying details about flavors and extended flavor information to obtain the flavor IDs.● Bandwidth<ul style="list-style-type: none">- 12_bgp: dynamic BGP bandwidth billed by traffic- 12_sbgp: static BGP bandwidth billed by traffic- 19_bgp: dynamic BGP bandwidth billed by bandwidth- 19_sbgp: static BGP bandwidth billed by bandwidth- 19_share: shared bandwidth billed by bandwidth● IP address:<ul style="list-style-type: none">- 5_bgp: dynamic BGP public IP address- 5_sbgp: static BGP public IP address● EVS<ul style="list-style-type: none">- SATA: common I/O EVS disk- SAS: high I/O EVS disk- GPSSD: general-purpose SSD EVS disk- SSD: ultra-high I/O EVS disk
region	Yes	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .

Parameter	Mandatory	Type	Value Range	Description
usage_factor	Yes	String	A maximum of 64 characters	<p>Usage factor. The value is the same as the usage factor value in the SDR. The mapping between cloud services and usage factors is as follows:</p> <ul style="list-style-type: none">• Cloud server: Duration• Cloud disk: Duration• EIP: Duration• Bandwidth: Duration or upflow• Marketplace image: Duration <p>You can call the API in 4.1.4 Querying Usage Types to obtain the value of parameter code in Table 4-13. The value indicates the billing factor of each cloud service.</p>
usage_value	Yes	BigDecimal	-	<p>Usage value.</p> <p>For example, if you want to inquire a product price by hour, set usageValue to 1 and usageMeasureID to 4 (hour).</p>
usage_measure_id	Yes	Integer	A maximum of 4 characters	<p>Usage unit. You can call the API in 4.1.5 Querying Measurement Units to obtain the value.</p> <p>For example, if you want to inquire a product price by hour, set usageValue to 1 and usageMeasureID to 4 (hour).</p>
subscription_num	Yes	Integer	[1-10000]	Number of subscriptions.
available_zone	No	String	A maximum of 64 characters	AZ ID. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.

Parameter	Mandatory	Type	Value Range	Description
resource_size	No	Integer	[1-214783647]	<p>Resource capacity. It can be the subscribed volume size or bandwidth size.</p> <p>This parameter is mandatory for a linear product. Linear products are those whose size must be specified during a subscription, such as hard disks and bandwidth. For example, you can select 10 GB or 20 GB during a disk subscription.</p> <p>For non-linear products, if this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion.</p>
size_measure_id	No	Integer	A maximum of 4 characters	<p>Resource capacity measurement ID. The options are:</p> <ul style="list-style-type: none">• 15: Mbit/s (used when the bandwidth is subscribed)• 17: GB (used when an EVS disk is subscribed to)• 14: amount (times) <p>This field should be filled together with resource_size or left blank.</p> <p>Linear products are those whose size must be specified during a subscription, such as hard disks and bandwidth. For example, you can select 10 GB or 20 GB during a disk subscription.</p> <p>For non-linear products, if this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/bills/ratings/on-demand-resources HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXdG9rZ
```

```
{  
    "project_id": "06488a*****832f55c016b0e337d7",  
    "product_infos": [  
        {  
            "id": "1",  
            "cloud_service_type": "hws.service.type.ec2",  
            "resource_type": "hws.resource.type.vm",  
        }  
    ]  
}
```

```
"resource_spec": "c3.3xlarge.2.linux",
"region": "ap-southeast-1",
"usage_factor": "Duration",
"usage_value": 2,
"usage_measure_id": 4,
"subscription_num": 1,
"available_zone": null
},
{
"id": "2",
"cloud_service_type": "hws.service.type.ebs",
"resource_type": "hws.resource.type.volume",
"resource_spec": "SSD",
"region": "ap-southeast-1",
"usage_factor": "Duration",
"usage_value": 2,
"usage_measure_id": 4,
"subscription_num": 1,
"resource_size": 10,
"size_measure_id": 17
},
{
"id": "3",
"cloud_service_type": "hws.service.type.vpc",
"resource_type": "hws.resource.type.ip",
"resource_spec": "5_bgp",
"region": "ap-southeast-1",
"usage_factor": "Duration",
"usage_value": 3,
"usage_measure_id": 4,
"subscription_num": 1,
"available_zone": null
},
{
"id": "4",
"cloud_service_type": "hws.service.type.vpc",
"resource_type": "hws.resource.type.bandwidth",
"resource_spec": "12_sbpg",
"region": "ap-southeast-1",
"usage_factor": "upflow",
"usage_value": 4,
"usage_measure_id": 10,
"subscription_num": 1,
"available_zone": "cn-north-1a",
"resource_size": 1,
"size_measure_id": 15
}
],
"inquiry_precision": 1
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Status code. For details, see Returned Values . This parameter is returned only when the query failed.

Parameter	Type	Value Range	Description
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
amount	BigDecimal	-	Final price after discount
discount_amount	BigDecimal	-	Discount amount (difference between list price and final price).
official_website_amount	BigDecimal	-	List price of a pay-per-use product
measure_id	Integer	A maximum of 4 characters	Measurement unit ID. 1: USD
currency	String	A maximum of 20 characters	Currency. USD If the parameter is left blank, USD is used.
product_rating_results	List<DemandProductRatingResult>	-	Product price query result. For details, see Table 4-19 .

Table 4-19 DemandProductRatingResult

Parameter	Type	Value Range	Description
id	String	A maximum of 64 characters	The ID is used to identify the mapping between the inquiry result and the request and must be unique in an inquiry.
product_id	String	A maximum of 64 characters	Product ID.

Parameter	Type	Value Range	Description
amount	BigDecimal	-	Final price after discount
discount_amount	BigDecimal	-	Discount amount (difference between the list price and final price).
official_website_amount	BigDecimal	-	List price of a pay-per-use product
measure_id	Integer	A maximum of 4 characters	Measurement unit ID. 1: USD
discount_rating_results	List<DemandDiscountRatingResult>	-	Discount details, including the product promotion information and commercial or partner discount information. For details, see Table 4-20 .

Table 4-20 DemandDiscountRatingResult

Parameter	Type	Value Range	Description
discount_id	String	A maximum of 64 characters	Discount ID.
discount_type	Integer	A maximum of 4 characters	Discount type. <ul style="list-style-type: none">● Commercial discounts:<ul style="list-style-type: none">- 605: Contract commercial discount in the HUAWEI CLOUD BE scenario- 606: Contract commercial discount in the reseller BE scenario● Partner discounts: 607: Partner authorized discount
amount	BigDecimal	-	Discounted amount.

Parameter	Type	Value Range	Description
measure_id	Integer	A maximum of 4 characters	Measurement unit ID. 1: USD
discount_name	String	A maximum of 256 characters	Discount name.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "amount": 8.128,
    "discount_amount": 0.0,
    "official_website_amount": 8.128,
    "measure_id": 1,
    "currency": "USD",
    "product_rating_results": [
        {
            "id": "1",
            "product_id": "00301-243025-0--0_merge",
            "amount": 5.48,
            "discount_amount": 0.0,
            "official_website_amount": 5.48,
            "measure_id": 1,
            "discount_rating_results": []
        },
        {
            "id": "2",
            "product_id": "00301-290407774-0--1",
            "amount": 0.028,
            "discount_amount": 0.0,
            "official_website_amount": 0.028,
            "measure_id": 1,
            "discount_rating_results": []
        },
        {
            "id": "3",
            "product_id": "00301-238601-0--0_merge",
            "amount": 0.06,
            "discount_amount": 0.0,
            "official_website_amount": 0.06,
            "measure_id": 1,
            "discount_rating_results": []
        },
        {
            "id": "4",
            "product_id": "00301-290407706-0--1",
            "amount": 2.56,
            "discount_amount": 0.0,
            "official_website_amount": 2.56,
            "measure_id": 1,
            "discount_rating_results": []
        }
    ]
}
```

```
        }  
    ]  
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99006006	Product not found.
400	CBC.99006050	Incorrect usage unit.
400	CBC.99006055	The queried amount exceeds the upper limit.
400	CBC.99006073	Project not found.
400	CBC.99006074	The billing item does not exist.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

4.2.2 Querying the Price of a Yearly/Monthly Product

Function

This API is used to query the price of a yearly/monthly product by criteria on the partner sales platform.

If the tenant who purchases the product enjoys a discount, the discount amount and the final price can be obtained from the query result.

If the customer enjoys multiple discounts, the system returns the rating result for each discount. The system preferentially uses the rating result of the commercial discount if the customer selects automatic payment.

CAUTION

HUAWEI CLOUD allows you to query products by service type, service region, resource type, and resource specification. Ensure that you enter correct criteria for search. Otherwise, the API returns an error indicating that the product cannot be found.

Constraints

This API can be invoked using the customer token replaced by the partner token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/bills/ratings/period-resources/subscribe-rate

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
project_id	Yes	String	A maximum of 64 characters	<p>Project ID.</p> <p>NOTE</p> <p>Obtain it in the following way:</p> <ul style="list-style-type: none">• Step 1: Call the IAM API for obtaining an agency token to obtain the customer token.• Step 2: Obtain the project ID by referring to Step 2 in How Can I Replace a Partner Token with a Customer Token.• To call this API, an IAM member account must be authorized by the IAM master account. For details, see Creating a User Group and Assigning Permissions.
product_infos	Yes	List<PeriodProductInfo>	A maximum of 100 values	Product information list. For details, see Table 4-21 .

Table 4-21 PeriodProductInfo

Parameter	Mandatory	Type	Value Range	Description
id	Yes	String	A maximum of 64 characters	The ID is used to identify the mapping between the inquiry result and the request and must be unique in an inquiry.
cloud_service_type	Yes	String	A maximum of 400 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
resource_type	Yes	String	A maximum of 400 characters	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types . The relationship between ResourceType and CloudServiceType is as follows: A resource type represents a resource contained in the cloud service type, and the cloud service type is a combination of multiple resource types.

Parameter	Mandatory	Type	Value Range	Description
resource_spec	Yes	String	A maximum of 400 characters	<p>Resource specifications of cloud service types. The following gives some examples of mappings between resource specifications and cloud service types.</p> <ul style="list-style-type: none">● ECS Add .win or .linux to the end of the ECS flavor ID based on the OS type, for example, s2.small.1.linux. Call the API for querying details about flavors and extended flavor information to obtain the flavor IDs.● Bandwidth<ul style="list-style-type: none">- 12_bgp: dynamic BGP bandwidth billed by traffic- 12_sbgp: static BGP bandwidth billed by traffic- 19_bgp: dynamic BGP bandwidth billed by bandwidth- 19_sbgp: static BGP bandwidth billed by bandwidth- 19_share: shared bandwidth billed by bandwidth● IP address:<ul style="list-style-type: none">- 5_bgp: dynamic BGP public IP address- 5_sbgp: static BGP public IP address● RDS: You can call the API for querying database specifications to obtain the RDS specifications.● DCS: You can call the API for querying service specifications to obtain the DCS specifications.

Parameter	Mandatory	Type	Value Range	Description
region	Yes	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .
period_type	Yes	Integer	[0-4]	Period type of a yearly/monthly product order. <ul style="list-style-type: none">• 0: Day• 2: Month• 3: Year• 4: Hour
period_num	Yes	Integer	[1-214783647]	Number of periods of a yearly/monthly product order.
subscription_num	Yes	Integer	[1-10000]	Number of subscriptions of a yearly/monthly product order.
available_zone	No	String	A maximum of 64 characters	AZ, for example, cn-north-1a . Obtain the value from the Availability Zone (AZ) column in Regions and Endpoints . If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
resource_size	No	Integer	[1-214783647]	Resource capacity. It can be the subscribed volume size or bandwidth size. This parameter is mandatory for a linear product. Linear products are those whose size must be specified during a subscription, such as hard disks and bandwidth. For example, you can select 10 GB or 20 GB during a disk subscription. For non-linear products, if this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion.

Parameter	Mandatory	Type	Value Range	Description
size_measure_id	No	Integer	-	<p>Resource capacity measurement ID. The options are as follows:</p> <ul style="list-style-type: none">• 15: Mbit/s (used when the bandwidth is subscribed)• 17: GB (used when a cloud disk is subscribed)• 14: amount <p>This parameter is mandatory for a linear product. Linear products are those whose size must be specified during a subscription, such as hard disks and bandwidth. For example, you can select 10 GB or 20 GB during a disk subscription.</p> <p>For non-linear products, if this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/bills/ratings/period-resources/subscribe-rate HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

```
{  
    "project_id": "84c53ec51e794a4888fb0f5c0cfb2420",  
    "product_infos": [  
        {  
            "id": "1",  
            "cloud_service_type": "hws.service.type.ec2",  
            "resource_type": "hws.resource.type.vm",  
            "resource_spec": "s3.medium.4.linux",  
            "region": "ap-southeast-1",  
            "available_zone": "cn-east-3a",  
            "resource_size": null,  
            "size_measure_id": null,  
            "period_type": 2,  
            "period_num": 1,  
            "subscription_num": 1  
        },  
        {  
            "id": "2",  
            "cloud_service_type": "hws.service.type.vpc",  
            "resource_type": "hws.resource.type.ip",  
            "resource_spec": "5_bgp",  
            "region": "ap-southeast-1",  
            "available_zone": null,  
            "resource_size": null,  
            "size_measure_id": 15,  
            "period_type": 2,  
            "period_num": 1,  
            "subscription_num": 1  
        },  
        {  
            "id": "3",  
            "cloud_service_type": "hws.service.type.vpc",  
            "resource_type": "hws.resource.type.ip",  
            "resource_spec": "5_bgp",  
            "region": "ap-southeast-1",  
            "available_zone": null,  
            "resource_size": null,  
            "size_measure_id": 15,  
            "period_type": 2,  
            "period_num": 1,  
            "subscription_num": 1  
        }  
    ]  
}
```

```
"cloud_service_type": "hws.service.type.ebs",
"resource_type": "hws.resource.type.volume",
"resource_spec": "GPSSD",
"region": "ap-southeast-1",
"available_zone": "cn-east-3a",
"resource_size": 40,
"size_measure_id": 17,
"period_type": 2,
"period_num": 1,
"subscription_num": 1
},
{
"id": "4",
"cloud_service_type": "hws.service.type.vpc",
"resource_type": "hws.resource.type.bandwidth",
"resource_spec": "19_bgp",
"region": "ap-southeast-1",
"available_zone": "cn-east-3a",
"resource_size": 40,
"size_measure_id": 15,
"period_type": 2,
"period_num": 1,
"subscription_num": 1
}
]
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Status code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
official_website_rating_result	OfficialWebsiteRatingResult Object	-	Queried price listed on the official website for the yearly/monthly product. For details, see Table 4-22 .
optional_discount_rating_results	List<OptionalDiscountRatingResult>	-	Rating results by discount if optional discounts exist. Each optional discount has a rating result. For details, see Table 4-24 .

Parameter	Type	Value Range	Description
currency	String	A maximum of 20 characters	Currency. USD If the parameter is left blank, USD is used.

Table 4-22 OfficialWebsiteRatingResult

Parameter	Type	Value Range	Description
official_website_amount	BigDecimal	-	Price of a yearly/monthly product on the official website.
measure_id	Integer	A maximum of 4 characters	Measurement unit ID. 1: USD
product_rating_results	List<PeriodProductOfficialRatingResult>	-	Queried price of the yearly/monthly product. For details, see Table 4-23 .

Table 4-23 PeriodProductOfficialRatingResult

Parameter	Type	Value Range	Description
id	String	A maximum of 64 characters	ID, which comes from the ID in the request.
product_id	String	A maximum of 64 characters	Yearly/monthly product ID.
official_website_amount	BigDecimal	-	Price of a yearly/monthly product on the official website.

Parameter	Type	Value Range	Description
measure_id	Integer	A maximum of 4 characters	Measurement unit ID. <ul style="list-style-type: none">● 1: USD

Table 4-24 OptionalDiscountRatingResult

Parameter	Type	Value Range	Description
discount_id	String	A maximum of 64 characters	Discount ID.
amount	BigDecimal	-	Final price after the discount. amount= official_website_amount - discountAmount
official_website_amount	BigDecimal	-	Price of a yearly/monthly product on the official website.
discount_amount	BigDecimal	-	Amount of an available discount, such as commercial discounts, partner discounts, promotion discounts, and coupons.
measure_id	Integer	A maximum of 4 characters	Measurement unit ID. 1: USD
discount_type	Integer	A maximum of 32 characters	Discount type. <ul style="list-style-type: none">● Commercial discounts:<ul style="list-style-type: none">- 605: Contract commercial discount in the HUAWEI CLOUD BE scenario- 606: Contract commercial discount in the reseller BE scenario● Partner discounts:<ul style="list-style-type: none">607: Partner authorized discount

Parameter	Type	Value Range	Description
discount_name	String	A maximum of 256 characters	Discount name.
best_offer	Integer	-	<p>Optimal discount.</p> <ul style="list-style-type: none">• 0: No (default value)• 1: Yes <p>Optimal discount: The system selects a discount from the commercial discount and partner discount. The discount with the maximum discount amount is the optimal discount. If the discount amounts are the same, the system uses the commercial discount first. The promotional discount and coupon are not in the calculation of the optimal discount.</p>
product_rating_results	List<PeriodProductRatingResult>	-	Product price query result. For details, see Table 4-25 .

Table 4-25 PeriodProductRatingResult

Parameter	Type	Value Range	Description
id	String	A maximum of 64 characters	ID, which comes from the ID in the request.
product_id	String	A maximum of 64 characters	Yearly/monthly product ID.
amount	BigDecimal	-	Final price after the discount. $\text{amount} = \text{official_website_amount} - \text{discountAmount}$
official_website_amount	BigDecimal	-	Price of a yearly/monthly product on the official website.

Parameter	Type	Value Range	Description
discount_amount	BigDecimal	-	Amount of an available discount, such as commercial discounts, partner discounts, promotion discounts, and coupons.
measure_id	Integer	A maximum of 4 characters	Measurement unit ID. 1: USD

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "official_website_rating_result": {
        "official_website_amount": 3022.8,
        "measure_id": 1,
        "product_rating_results": [
            {
                "id": "3",
                "product_id": "90301-755002-0--0",
                "official_website_amount": 0.0,
                "measure_id": 1
            },
            {
                "id": "4",
                "product_id": "90301-686009-0--0",
                "official_website_amount": 2915.0,
                "measure_id": 1
            },
            {
                "id": "1",
                "product_id": "00301-290407480-0--1",
                "official_website_amount": 107.8,
                "measure_id": 1
            },
            {
                "id": "2",
                "product_id": "90301-686010-0--0",
                "official_website_amount": 0.0,
                "measure_id": 1
            }
        ],
        "optional_discount_rating_results": [],
        "currency": "USD"
    }
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99006006	Product not found.
400	CBC.99006055	The queried amount exceeds the upper limit.
403	CBC.0151	Access denied.
429	CBC.0250	Connection request control triggered.
500	CBC.0999	Other errors.

4.2.3 Querying the Renewal Price of a Yearly/Monthly Resource

Function

Customers can query the renewal price of a yearly/monthly resource by criteria on the partner sales platform.

NOTE

- If a primary resource has resources attached, the renewal price will include the price of the primary resource and that of the attached. The information of the attached resources can also be accessed through [7.4.1 Querying Customer's Yearly/Monthly Resources](#).
- Note: When a newly purchased EVS disk is attached to an ECS, the EVS disk is not necessarily an attached resource of the ECS. The precise information of the attached resources can only be accessed through [7.4.1 Querying Customer's Yearly/Monthly Resources](#).

Constraints

Only customer AK/SK can be used to call the API. Since partners are not allowed to buy products with their own accounts, let alone yearly/monthly products.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug SDK code samples.

URI

POST /v2/bills/ratings/period-resources/renew-rate

Request

Request parameters

Parameter	Mandatory	Parameter Type	Value Range	Description
resource_ids	Yes	List<String>	[1-10]	Primary resource IDs A maximum of 10 resource IDs are supported. Determine whether a resource is a primary resource or not by the is_main_resource , a response parameter described in 7.4.1 Querying Customer's Yearly/Monthly Resources .
period_type	Yes	Integer	[2 3]	Period type: • 2: Month • 3: Year
period_num	Yes	Integer	[1-11]	Number of periods: • Month: 1 to 11 • Year: 1 to 3

Request Sample

POST https://bss-intl.myhuaweicloud.com/v2/bills/ratings/period-resources/renew-rate HTTP/1.1

Content-Type: application/json

X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ

```
{  
    "resource_ids": ["230221_169ee*****9d5b8af6a38f099abea"],  
    "period_type": 2,  
    "period_num": 1  
}
```

Response

Response Parameters

Parameter	Parameter Type	Value Range	Description
error_code	String	A maximum of 20 characters	Status code For details, see Status Codes .
error_msg	String	A maximum of 1,000 characters	Error description
currency	String	A maximum of 20 characters	Currency USD If the parameter is left blank, USD is used.
renew_inquiry_results	List<RenewInquiryResultInfo>	--	Renew price inquiry result of the primary resources and their attached resources For details, see Table 4-26 .
official_web_site_rating_result	OfficialWebsiteRatingResult Object	--	For list price of a primary resource and its attached resources, see Table 4-27 .
optional_discount_rating_results	List<OptionalDiscountRatingResult>	--	Price inquiry result with an optional discount applied. If there are multiple optional discounts, different price inquiry results can be returned with a different discount applied each time. For details, see Table 3 OptionalDiscountRating-Result .
fail_resource_infos	List<FailResourceInfo>	--	List of resources which the renewal prices failed to be queried for For details, see Table FailResourceInfo .

Table 4-26 RenewInquiryResultInfo

Parameter	Parameter Type	Description
resource_id	String	Resource ID.
amount	String	Renewal price of primary resources and their attached resources Unit: USD

Table 4-27 OfficialWebsiteRatingResult

Parameter	Parameter Type	Value Range	Description
official_website_amount	String	A maximum of 64 characters	List price Unit: USD

Table 4-28 OptionalDiscountRatingResult

Parameter	Parameter Type	Value Range	Description
discount_id	String	A maximum of 64 characters	Discount ID.
amount	String	A maximum of 64 characters	Final price after the discount Unit: USD amount= official_website_amount - discount_amount
official_website_amount	String	A maximum of 64 characters	List price Unit: USD
discount_amount	String	A maximum of 64 characters	Amount of an available discount, such as commercial discounts, partner discounts, promotion discounts, and coupons Unit: USD
discount_type	Integer	A maximum of 32 characters	Discount type <ul style="list-style-type: none">● Commercial discounts:<ul style="list-style-type: none">- 605: Contract commercial discount in the Huawei Cloud BE scenario- 606: Contract commercial discount in the reseller BE scenario● Partner discounts:<ul style="list-style-type: none">607: Partner authorized discount - discount rate

Parameter	Parameter Type	Value Range	Description
discount_name	String	A maximum of 256 characters	Discount name
best_offer	Integer	-	<p>Optimal discount or not</p> <ul style="list-style-type: none">• 0: No (default value)• 1: Yes <p>Optimal discount is a discount selected from the commercial discount and partner discount. The discount with the maximum discount amount is the optimal discount. If the discount amounts are the same, the system uses the commercial discount first. The promotional discount and coupon are not in the calculation of the optimal discount.</p>

Table FailResourceInfo

Parameter	Parameter Type	Description
error_code	String	Status code For details, see Table Status Codes .
error_msg	String	Error description
resource_id	String	Resource ID.

Status code: 200

Response Sample

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "currency": "CNY",
    "renew_inquiry_results": [
        {
            "resource_id": "230221_169ee*****9d5b8af6a38f099abea",
            "amount": "800.0"
        }
    ],
    "official_website_rating_result": {
        "official_website_amount": "800.0",
        "installment_official_website_amount": null,
        "installment_period_type": null
    },
    "optional_discount_rating_results": []
}
```

```
        "fail_resource_infos": []  
    }
```

Status Codes

NOTE

- **4xx**: indicates an error resulting from client, such as the request contains bad syntax or an invalid parameter. You need to check the statement and its format and make a request again.
- **5xx**: indicates an error to the Huawei Cloud system, which prevented the system from fulfilling the request from client. You can contact Huawei Cloud customer service to handle the issue.

HTTP Status Code	Error Code	Description
200	CBC.30050007	Renewal price inquiry is not applicable to non-primary resources.
200	CBC.30050008	The period type or number of periods for the resource does not exist.
200	CBC.30050009	The resources have expired and been deleted or do not exist.
200	CBC.30050010	This operation is not allowed because some resources included in your orders are to be paid.
200	CBC.30050011	Resources are being unsubscribed from or changed.
200	CBC.30050013	Renewal not supported.
400	CBC.0100	Incorrect parameter
400	CBC.99006006	The required product cannot be found.
400	CBC.99006024	Failed to query product information.
400	CBC.99006016	Failed to query coupon information.
400	CBC.99006017	Failed to query customer information.
400	CBC.99006050	Incorrect usage unit
400	CBC.99006055	The queried amount exceeds the upper limit.
400	CBC.99006066	Billing query failed

HTTP Status Code	Error Code	Description
400	CBC.990060 73	Project not found
400	CBC.300500 12	There are duplicate resource IDs.
403	CBC.0151	Access denied
403	CBC.0154	Invalid or expired token
500	CBC.0999	Other errors

5 Customer Management

5.1 Customer Registration

5.1.1 Verifying Customer Registration Information

Function

This API is used to check whether the account name, and mobile number or email address entered by the customer can be used for registration.

NOTE

For the registration with mobile numbers, whether the number of registered mobile numbers exceeds the upper limit will be checked.

Constraints

This API can be invoked using the partner AK/SK or token only.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/partners/sub-customers/users/check-identity

Request

Request parameters

Parameter	Mandatory	Type	Value Range	Description
search_type	Yes	String	[email mobile name]	The options are email, mobile, or name.
search_value	Yes	String	A maximum of 64 characters	Mobile number, email address, or account name. <ul style="list-style-type: none">The mobile number must comply with the regular expression "<code>^\d{4}-\d+\$</code>". The value contains the country code and starts with 00. The format is "00XX-XXXXXXX".The email address must consist of an email prefix and an email domain, as well as the (@) symbol.name: The value must comply with the regular expression "<code>^([a-zA-Z]([a-zA-Z0-9_-]){4,31})\$</code>" and contains 5 to 32 characters. The value cannot start with op_ or shadow_ and cannot contain only digits. It must start with a letter (case-insensitive) or a hyphen (-).

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers/users/check-identity HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

```
{
  "search_type": "name",
  "search_value": "ceshiyonghu001"
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.

Parameter	Type	Value Range	Description
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
check_result	String	A maximum of 32 characters	<ul style="list-style-type: none">• available: The account name, mobile number, or email address is valid.• used_by_user: The account name, mobile number, or email address is in use.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "error_code": "CBC.0000",
    "error_msg": "success",
    "check_result": "available"
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

5.1.2 Sending a Verification Code

Function

If a customer enters an email address during registration, the system sends a registration verification code to the email address to verify the information.

Constraints

This API can be invoked only by the partner AK/SK or token.

The verification codes are sent only during registration. After invoking this API, you need to invoke the API in [5.1.3 Creating a Customer](#) to create the registered customers.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/bases/verificationcode/send

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
receiver_type	Yes	Integer	[2]	Verification code type. 2: Send an email verification code.
timeout	No	Integer	[1-3000]	Timeout of sending a verification code. If this parameter is not included in the request parameters or is set to null , the default timeout interval 10 minutes is used. If the value of this parameter is greater than 60 , the value is fixed to 5 minutes. Unit: minutes
email	Yes	String	A maximum of 64 characters	Email that receives the verification code.

Parameter	Mandatory	Type	Value Range	Description
lang	No	String	A maximum of 16 characters	<p>Language in which the email verification code is sent. The default value is zh-cn.</p> <ul style="list-style-type: none">• zh-cn: Chinese• en-us: English <p>If this parameter is not included in the request parameters, is set to "", or is set to null, the default value is zh-cn.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/bases/verificationcode/send HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
```

```
{  
    "receiver_type":2,  
    "timeout": 5,  
    "email":"****@163.com",  
    "lang":"en-us"  
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.

Example Response

```
HTTP/1.1 204 No Content
```

```
Content-Type: application/json;charset=UTF-8
```

```
Content-Length: length
```

```
Date: response time
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0 100	Parameter error.
400	CBC.9 9000 035	You are not a customer of a partner yet.
400	CBC.9 9004 002	Failed to generate the verification code.
400	CBC.9 9004 003	The verification code is successfully generated but fails to be sent.
400	CBC.9 9004 004	Empty email address./Invalid format.
400	CBC.9 9004 015	The number of verification code sending times has reached the upper limit (15 times per hour, 60 times per day).
401	CBC.0 154	Invalid or expired token.
403	CBC.0 151	Access denied.
500	CBC.0 999	Other errors.

5.1.3 Creating a Customer

Function

This API is used to create a Huawei Cloud account for a customer when the customer creates an account on your sales platform, and bind the customer account on the partner sales platform to the HUAWEI CLOUD account. In addition, the Huawei Cloud account is bound to the partner account.

 CAUTION

- After a HUAWEI CLOUD account is created for a customer, SAML authentication is required if the customer wants to switch from the partner sales platform to the Huawei Cloud official website. For details, see "SAML Authentication" in [Web UI Mode](#).
- If you do not enter the email address when creating a customer, the customer cannot receive any email notification from Huawei Cloud. The customer needs to log in to the Huawei Cloud to add the email address by themselves.
- When the API for creating a customer is invoked, Huawei Cloud will synchronously create a Huawei Cloud customer account and send the customer ID and account name to the partner platform. Then, Huawei Cloud associates the customer with the partner asynchronously. To query the association result, you can invoke the API described in [5.3.1 Querying Customers](#).
- Newly created customers are associated in the reseller model by default.

Constraints

- This API can be invoked using the partner AK/SK or token only.
- [Privacy Statement](#) must be displayed on the page for creating a customer on the partner sales platform.
- This API is used to replace the partner token with the customer token to allow the partner to provide or query resources as a customer. Therefore, the partner must obtain the customer authorization before invoking this API.
- Obtain the verification code using the API in [5.1.2 Sending a Verification Code](#) and then invoke this API if you enter the email address when creating a customer.
- The password must contain at least eight characters, which will take effect since August 1, 2022.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/partners/sub-customers

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
domain_area	Yes	String	A maximum of 2 characters	Two-letter ID representing the country/region of the customer. The ID complies with the ISO 3166 standard. Example: MX for Mexico
xaccount_id	Yes	String	A maximum of 128 characters	Unique user ID on the partner sales platform. The ID is allocated by the partner.
xaccount_type	Yes	String	A maximum of 64 characters	Platform ID assigned by Huawei to a partner. This value is assigned by Huawei. For details about how to obtain the platform ID, see How Do I Obtain the xaccountType Value?
domain_name	No	String	[5-32]	HUAWEI CLOUD username of the customer. If this parameter is left blank, the value is generated randomly. The value cannot start with op_ or shadow_ and cannot contain only digits. The verification length is 5 to 32 digits and the verification rules are $^([a-zA-Z_-]([a-zA-Z0-9_-])^*)$$. If this parameter is not included in the request parameters, is set to "", or is set to null , the value is randomly generated.
email	No	String	A maximum of 64 characters	Email address. Format: The value must contain @. If this parameter is not included in the request parameters or is set to null , no value is returned. If this parameter is set to "", "" is returned.

Parameter	Mandatory	Type	Value Range	Description
verification_code	No	String	[6]	<p>Verification code.</p> <p>Invoke the API described in 5.1.2 Sending a Verification Code to obtain the verification code.</p> <p>If no email address is available, you do not need to enter the verification code.</p> <p>If this parameter is not included in the request parameters or is set to null, this parameter will not be used. It cannot be set to "".</p>
password	No	String	The value can be a string of 8 to 32 characters .	<p>The password must meet the following rules:</p> <ul style="list-style-type: none">Contains at least two of the following character types: uppercase letters, lowercase letters, digits, and special characters.Differs from the account name or the account name in reverse order.Does not contain the email address. <p>If this parameter is left blank, a user does not have a password and cannot directly log in to HUAWEI CLOUD. In this case, the user can only switch to HUAWEI CLOUD from the partner system using SSO.</p> <p>If this parameter is not included in the request parameters or is set to null, the password is randomly generated. This parameter cannot be set to "".</p>

Parameter	Mandatory	Type	Value Range	Description
is_close_marketing_ms	No	String	A maximum of 10 characters	<p>Whether to disable the marketing message sending function.</p> <ul style="list-style-type: none">• true: Disable this function.• false: Retain this function enabled (default). <p>If this parameter is not included in the request parameters, is set to "", or is set to null, false is returned.</p>
indirect_partner_id	No	String	A maximum of 64 characters	<p>Reseller ID. For details about how to obtain such IDs, see 6.1.1 Querying the List of Huawei Cloud Resellers.</p> <p>This parameter is mandatory for creating a customer for a Huawei Cloud reseller. If this parameter is not included in the request parameters, is set to "", or is set to null, this parameter will not be used.</p>
include_association_result	No	Boolean	-	<p>Whether to return the result of associating a partner and sub-customer.</p> <ul style="list-style-type: none">• true: Returns the association result.• false: Does not return the association result. <p>The default value is false.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, false is returned.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MII...AgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
```

```
{  
    "domain_name": "test",  
    "email": "***@163.com",  
    "verification_code": "253***",  
    "domain_area": "HK",  
    "xaccount_id": "35rey***",  
    "xaccount_type": "***_IDP",  
}
```

```
"password": "*****",
"is_close_market_ms": "true",
"indirect_partner_id": "a0d736*****aab6502d1a828c1809",
"include_association_result": "false"
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
domain_id	String	A maximum of 64 characters	Customer ID. This parameter is returned only when the operation is successful or an error whose code is CBC.99000050 occurs.
domain_name	String	A maximum of 64 characters	HUAWEI CLOUD username of the customer. <ul style="list-style-type: none">If the request contains this parameter, the response must contain the same parameter value as the request.If the request does not contain this parameter, the response contains a 32-bit character string randomly generated by the system. This parameter is returned only when the operation is successful or an error whose code is CBC.99000050 occurs.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "domain_id": "06a7969058802f0c0f01c00b91846780",
    "domain_name": "a0d736359ada40aab6502d1a828c1809"
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error. Check whether the input parameters meet the requirements according to the request parameter descriptions.
400	CBC.0101	Invalid parameter.
400	CBC.50010059	Customer association not allowed for Partner Service Provider.
400	CBC.99000038	The account name already exists.
400	CBC.99000028	The email address already exists.
400	CBC.99000031	Invalid account name.
400	CBC.5016	Invalid email address format.
400	CBC.99000039	Duplicate xAccountId.
400	CBC.99000004	An exception occurred when the customer authorized rights to the partner.
400	CBC.99000036	Invalid password.
400	CBC.99000034	Currently, registration with HUAWEI CLOUD is not available for users in this country.
400	CBC.99000037	You do not have the permission to operate this Huawei Cloud reseller.
500	CBC.99000050	Query for the result of associating partner and its sub-customer timed out. Refer to 5.3.1 Querying Customers to check the association result.
400	CBC.99000051	Customer creation failed because this mobile number or email address has been preregistered by Huawei.

HTTP Value	Error Code	Description
400	CBC.9900400 7	Invalid email address.
400	CBC.9900400 8	Invalid verification code.
400	CBC.9900400 9	The verification code is available, but the number of verification failures is greater than 3.
400	CBC.9900401 0	The verification code entered by the client is incorrect.
400	CBC.9900503 5	This API cannot be used by a sandbox account.
401	CBC.0154	Invalid or expired token.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.
400	CBC.5001008 5	Customer association not allowed. The account of this partner has been restricted.
400	CBC.5001008 6	Customer association not allowed. This partner is a Huawei Cloud reseller, and the account of its associated distributor has been restricted.
400	CBC.5001012 0	Customer development not supported. There are no credits granted for the partner.

5.2 Real-Name Authentication

5.2.1 Requesting an Individual Real-Name Authentication

Function

This API can be used to submit an individual real-name authentication application.

An individual customer can refer to the instructions described in [Overall Process](#) to complete the real-name authentication.

Constraints

- This API can be invoked only by the partner account's AK/SK or token.
- To use this API, partners need to enable [Upload Photos of Handheld ID Cards Required for Real-Name Authentication](#) on the [Benefits and Support > API Configuration > Configure](#) page.
- Images for real-name authentication must be uploaded to the [download](#) directory of the bucket.

- Only individual certificate authentication can be performed using APIs.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/customers/realname-auths/individual

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	A maximum of 64 characters	Customer account ID. You can call the API in 5.3.1 Querying Customers to obtain the customer ID.
identify_type	Yes	Integer	-	Authentication method. 0: Using the individual certificate

Parameter	Mandatory	Type	Value Range	Description
verified_file_url	Yes	List<String>	A maximum of 4 characters	<ol style="list-style-type: none">Attachment URL for individual certificate authentication. The URL must be entered in sequence. Assume that the name of the picture for the passport profile page is abc023 and that for the customer holding the passport profile page is def004. abc023 def004 Enter the URL in the preceding sequence. The file name is case sensitive.Currently, certificate attachments must be in .jpg, .jpeg, .bmp, .png, .gif, or .pdf format. The maximum size of a single file is 10 MB.The URL is a relative URL and does not need to contain the bucket name or download directory. It only needs to contain the subdirectory and corresponding file name in the download directory. Example:<ul style="list-style-type: none">If the uploaded attachments are stored in the following location of the bucket, enter abc023.jpg: <code>https://<i>bucketname</i>.obs.<i>Endpoint</i>.myhuaweicloud.com/download/abc023.jpg</code>If the uploaded attachments are stored in the following location of the bucket, enter test/abc023.jpg: <code>https://<i>bucketname</i>.obs.<i>Endpoint</i>.</code>

Parameter	Mandatory	Type	Value Range	Description
				myhuaweicloud.com/download/test/abc023.jpg
name	Yes	String	A maximum of 255 characters	Name.
verified_number	Yes	String	A maximum of 32 characters	Certificate number.
xaccount_type	Yes	String	A maximum of 64 characters	Platform ID assigned by Huawei to a partner. This value is assigned by Huawei. For details about how to obtain the platform ID, see How Do I Obtain the xaccountType Value?

Parameter	Mandatory	Type	Value Range	Description
verified_type	No	Integer	-	<p>Certificate type.</p> <p>3: Passport. Two attachments need to be uploaded: the picture of the profile page, and the picture of the customer holding the passport in hands (the profile page on the front side).</p> <p>5: Exit-Entry Permit for Traveling to and from Hong Kong and Macao. Three attachments need to be uploaded: the picture of the front side of Exit-Entry Permit (profile page), the picture of the back side of Exit-Entry Permit, and the picture of the customer holding Exit-Entry Permit in hands (profile page on the front side).</p> <p>6: Mainland Travel Permit for Taiwan Residents. Three attachments need to be uploaded: the picture of the front side of Mainland Travel Permit (profile page), the picture of the back side of Mainland Travel Permit, and the picture of the customer holding Mainland Travel Permit in hands (profile page on the front side).</p> <p>9: Residence Permit for Hong Kong and Macao Residents. Three attachments need to be uploaded: the picture of the profile side of Residence Permit for Hong Kong and Macao Residents, the picture of the national emblem side of Residence Permit for Hong Kong and Macao Residents, and the picture of the customer holding Residence Permit for Hong Kong and Macao Residents in hands (profile side on the front side).</p>

Parameter	Mandatory	Type	Value Range	Description
				<p>10: Residence Permit for Taiwan Residents. Three attachments need to be uploaded: the picture of the profile side of Residence Permit for Taiwan Residents, the picture of the national emblem side of Residence Permit for Taiwan Residents, and the picture of the customer holding Residence Permit for Taiwan Residents in hands (profile side on the front side).</p> <p>This parameter needs to be specified only when identify_type is set to 0.</p>
change_type	No	Integer	[-1]	<p>Change type.</p> <p>-1: First time real-name authentication</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/customers/realname-auths/individual HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ
{
    "verified_number": "949826*****2922",
    "verified_file_url": [
        "shimingrenzheng/zhengmian001.jpg",
        "shimingrenzheng/fanmian002.jpg"
    ],
    "name": "wangx_***_001",
    "change_type": -1,
    "customer_id": "068a6d*****288536b6ba57d1ffae",
    "verified_type": 3,
    "identify_type": 0,
    "xaccount_type": "***_IDP"
}
```

Response

Response Parameters

Status code: 200

Parameter	Type	Value Range	Description
is_review	Integer	-	Whether to transfer to manual review. This parameter is returned only when the status code is 200. <ul style="list-style-type: none">• 0: No• 1: Yes

Status code: 400

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
is_review	Integer	-	Whether to transfer to manual review. This parameter is returned only when the status code is 200. <ul style="list-style-type: none">• 0: No• 1: Yes
fail_check_items	List<String>	-	Error list.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
Date: response time
{
  "is_review": "1"
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.990 00027	Expired verification code.
400	CBC.990 00035	You are not a customer of a partner yet.
400	CBC.990 05030	The partner did not complete real-name authentication or bucket authentication.
400	CBC.990 07188	This customer has completed real-name authentication or is currently being authenticated.
400	CBC.990 07189	The number of users who used the certificate ID for real-name authentication has reached the maximum limit.
400	CBC.990 07191	The maximum number of real-name authentication times has been reached.
400	CBC.990 07193	The certificate ID is from an invalid certificate and cannot be used for real-name authentication.
400	CBC.990 07202	Real-name authentication failed.
400	CBC.990 07261	The bank card is not supported. Try another bank card.
400	CBC.010 0	Parameter error.
400	CBC.706 00026	Huawei Cloud cannot review the information you submitted for real-name authentication. Contact your account manager.
403	CBC.015 1	Access denied.
500	CBC.099 9	Other errors.

5.2.2 Requesting an Enterprise Real-Name Authentication

Function

This API can be used to submit an enterprise real-name authentication application.

An enterprise customer can refer to the instructions described in [Overall Process](#) to complete the real-name authentication.

Constraints

- This API can be invoked only by the partner account's AK/SK or token.
- To use this API, partners need to enable **Upload Photos of Handheld ID Cards Required for Real-Name Authentication** on the **Benefits and Support > API Configuration > Configure** page.
- Images for real-name authentication must be uploaded to the **download** directory of the bucket.
- Only enterprise certificate authentication can be performed using APIs.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/customers/realname-auths/enterprise

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	A maximum of 64 characters	Customer account ID. You can call the API in 5.3.1 Querying Customers to obtain the customer ID.
identify_type	Yes	Integer	-	Authentication method. 1: Using the enterprise's certificate scanned copy

Parameter	Mandatory	Type	Value Range	Description
verified_file_url	Yes	List<String>	A maximum of 4 characters	<ol style="list-style-type: none">1. URL of the certificate attachment file used for enterprise certificate authentication. The attachment URL must be entered in sequence. Enter the name of the attachment of the enterprise certificate first. If the enterprise personal information is specified in the request, enter the name of the ID card attachment of the enterprise personal information. The sequence of the enterprise certificate attachments is as follows: First: picture of the front side of the enterprise certificate Second: picture of the back side of the enterprise certificate The sequence of the individual certificate attachments is as follows: First: picture of the profile side of the personal ID card Second: picture of the back side of the personal ID card (national emblem side) If the enterprise does not have a legal entity, and its first attachment is the picture of the front side of the enterprise certificate abc.023, and the second is the back side of the enterprise certificate def004, and then upload the attachments in the following sequence: abc023 def004 The file name is case sensitive.2. Currently, certificate attachments must be

Parameter	Mandatory	Type	Value Range	Description
				<p>in .jpg, .jpeg, .bmp, .png, .gif, or .pdf format. The maximum size of a single file is 10 MB.</p> <p>3. The URL is a relative URL and does not need to contain the bucket name or download directory. It only needs to contain the subdirectory and corresponding file name in the download directory.</p> <p>Example:</p> <ul style="list-style-type: none">• If the uploaded attachments are stored in the following location of the bucket, enter abc023.jpg: <code>https://bucketname.obs.Endpoint.myhuaweicloud.com/download/abc023.jpg</code>• If the uploaded attachments are stored in the following location of the bucket, enter test/abc023.jpg: <code>https://bucketname.obs.Endpoint.myhuaweicloud.com/download/test/abc023.jpg</code>
corp_name	Yes	String	A maximum of 255 characters	Organization name. The value cannot contain only digits, special characters, or spaces.
verified_number	Yes	String	A maximum of 32 characters	Enterprise certificate number.
xaccount_type	Yes	String	A maximum of 64 characters	Platform ID assigned by Huawei to a partner. This value is assigned by Huawei. For details about how to obtain the platform ID, see How Do I Obtain the xaccountType Value?

Parameter	Mandatory	Type	Value Range	Description
certificate_type	No	Integer	-	<p>Enterprise certificate type.</p> <ul style="list-style-type: none">• 0: Enterprise's business license• 1: Legal entity certificate• 2: Legal entity registration certificate• 3: Administrative law enforcement subject certificate• 4: Organization code certificate• 99: Others
reg_country	No	String	A maximum of 10 characters	<p>Registration country entered for real-name authentication. Enter the two-letter code that stands for the country.</p> <p>For example, enter CN for China.</p>
reg_address	No	String	A maximum of 256 characters	Enterprise registration address for real-name authentication.
enterprise_person	No	EnterprisePerson Object	-	Enterprise person information. For details, see Table 5-1 .

Table 5-1 EnterprisePerson

Parameter	Mandatory	Type	Value Range	Description
legal_name	Yes	String	A maximum of 255 characters	Legal entity name.
legal_id_number	Yes	String	A maximum of 32 characters	Legal entity card ID.
certifier_role	No	String	A maximum of 32 characters	Legal entity role. legalPerson: Legal representative

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/customers/realname-auths/enterprise HTTP/1.1
Content-Type: application/json
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
{
    "verified_number": "371812*****8888",
    "verified_file_url": [
        "gerenshiming/zhengmian001.jpg",
        "gerenshiming/fanmian002.jpg",
        "gerenshiming/chizheng003.jpg"
    ],
    "reg_address": "Beijing"
    "reg_country": "CN",
    "customer_id": "4505ce*****de8263e33b57e76abc",
    "certificate_type": 0,
    "corp_name": "test001",
    "enterprise_person": {
        "certifier_role": "legalPerson",
        "legel_name": "wangmoumou",
        "legel_id_number": "371812*****8888"
    },
    "identify_type": 1,
    "xaccount_type": "***_IDP"
}
```

Response

Response Parameters

Status code: 200

Parameter	Type	Value Range	Description
is_review	Integer	-	Whether to transfer to manual review. This parameter is returned only when the status code is 200. • 0: No • 1: Yes

Status code: 400

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.

Parameter	Type	Value Range	Description
is_review	Integer	-	Whether to transfer to manual review. This parameter is returned only when the status code is 200. <ul style="list-style-type: none">● 0: No● 1: Yes
fail_check_items	List<String>	-	Error list. This parameter is displayed only when error code CBC.99007004 is returned. For details, see Table 5-2 .

Table 5-2 failCheckItems list

Item	Description
IS_DEBT	The customer's account is in arrears.
IS_CREDIT_ACCOUNT	The customer has a credit account and has a credit outstanding amount.
IS_ORG_ACCOUNT	The customer account is an enterprise master account or member account.
MEM_OF_ORG	Your account and the associated master account belong to the same legal entity. Please cancel the association before performing real-name authentication.
MEN_ANSWERING_ORG	You have received an invitation to associate with another account as a member account. Please reject the invitation and then perform real-name authentication.
ORG_INVITING_MEM	Your account is a master account and has invited another member account for association. Please cancel the invitation and then perform real-name authentication.
ORG_HAVE_MEM_EQUITY_APPLYING	Your account is a master account. The equity certificate is being reviewed. Please wait for the certificate to be approved, and then perform real-name authentication.
MEM_OF_ORG_EQUITY_APPLYING	Your account is a member account. The equity certificate of the associated master account is being reviewed. Please wait for the certificate to be approved, and then perform real-name authentication.

Item	Description
ORG_HAVE_MEM_EQUITY_APPROVED	Your account is a master account and already has an equity certificate. Please cancel the member account that has the equity certificate and then perform real-name authentication.
MEM_OF_ORG_EQUITY_APPROVED	Your account is a member account and already has an equity certificate. Please cancel the association with the master account and then perform real-name authentication.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
  "is_review": "1"
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99000035	You are not a customer of a partner yet.
400	CBC.99005030	The partner does not enable the option of uploading the attachment for real-name authentication. For details about how to enable the option, click here .
400	CBC.99007004	The initiated service operation does not meet the service check item requirement.
400	CBC.99007188	The customer has passed real-name authentication or is being reviewed.

HTTP Value	Error Code	Description
400	CBC.99 007191	The number of real-name authentication times of the customer exceeds the upper limit.
400	CBC.70 600026	Huawei Cloud cannot review the information you submitted for real-name authentication. Contact your account manager.
403	CBC.01 51	Access denied.
500	CBC.09 99	Unknown error occurred.

5.2.3 Requesting a Real-Name Authentication Change

Function

This API can be used to submit a real-name authentication change application.

For details about how to change an individual account to an enterprise account through real-name authentication, visit [Changing an Individual Account to an Enterprise Account](#).

Constraints

- This API can be invoked only by the partner account AK/SK or token.
- To use this API, partners need to enable **Upload Photos of Handheld ID Cards Required for Real-Name Authentication** on the **Benefits and Support > API Configuration > Configure** page.
- Images for real-name authentication must be uploaded to the **download** directory of the bucket.
- Real-name authentication change through API only supports changing an individual account to an enterprise account.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

PUT /v2/customers/realname-auths/enterprise

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	A maximum of 64 characters	Customer account ID. You can call the API in 5.3.1 Querying Customers to obtain the customer ID.
identify_type	Yes	Integer	-	Authentication method. 1: Using the enterprise's certificate scanned copy

Parameter	Mandatory	Type	Value Range	Description
verified_file_url	Yes	List<String>	A maximum of 4 characters	<p>URL of the certificate attachment file used for enterprise certificate authentication.</p> <p>The attachment URL must be entered in sequence. Enter the name of the attachment of the enterprise certificate first. If the enterprise personal information exists, enter the name of the ID card attachment of the enterprise personal information.</p> <p>The order of the enterprise certificate attachments is as follows:</p> <p>First: Picture of the front side of the enterprise certificate</p> <p>Second: Picture of the back side of the enterprise certificate</p> <p>The order of the individual certificate attachments is as follows:</p> <p>First: Picture of the front side of the personal ID card (profile side)</p> <p>Second: Picture of the back side of the personal ID card (national emblem side)</p> <p>If the enterprise does not have a legal entity, and its first attachment is the picture of the front side of the enterprise certificate abc.023, and the second attachment is the back side of the enterprise certificate def004, then upload the attachments in the following sequence:</p> <p>abc023</p> <p>def004</p> <p>Enter the URL in the preceding sequence. The file name is case sensitive.</p> <p>Currently, certificate attachments can only be in .jpg, .jpeg, .bmp, .png, .gif,</p>

Parameter	Mandatory	Type	Value Range	Description
				<p>or .pdf format. The maximum size of a single file is 10 MB.</p> <p>The URL is a relative URL and does not need to contain the bucket name or download directory. It only needs to contain the subdirectory and corresponding file name in the download directory. Example:</p> <p>If the uploaded attachments are stored in the following location of the bucket, enter abc023.jpg:</p> <p><code>https://bucketname.obs.Endpoint.myhuaweicloud.com/download/abc023.jpg</code></p> <p>If the uploaded attachments are stored in the following location of the bucket, enter test/abc023.jpg:</p> <p><code>https://bucketname.obs.Endpoint.myhuaweicloud.com/download/test/abc023.jpg</code></p>
corp_name	Yes	String	A maximum of 255 characters	Organization name. The value cannot contain only digits, special characters, or spaces.
verified_number	Yes	String	A maximum of 32 characters	Enterprise certificate number.
change_type	Yes	Integer	[1]	Change type. 1: Change individual real-name authentication to enterprise real-name authentication.
xaccount_type	Yes	String	A maximum of 64 characters	Platform ID assigned by Huawei to a partner. This value is assigned by Huawei. For details about how to obtain the platform ID, see How Do I Obtain the xaccountType Value?

Parameter	Mandatory	Type	Value Range	Description
certificate_type	No	Integer	-	<p>Enterprise certificate type.</p> <ul style="list-style-type: none">• 0: Enterprise's business license• 1: Legal entity certificate• 2: Legal entity registration certificate• 3: Administrative law enforcement subject certificate• 4: Organization code certificate• 99: Others <p>If this parameter is not included in the request parameters or is set to null, no value is returned.</p>
reg_country	No	String	A maximum of 10 characters	<p>Registration country entered for real-name authentication. Enter the two-letter code that stands for the country.</p> <p>For example, enter CN for China.</p> <p>If this parameter is not included in the request parameters or is set to null, no value is returned.</p> <p>If this parameter is set to "", "" is returned.</p>
reg_address	No	String	A maximum of 256 characters	<p>Enterprise registration address for real-name authentication.</p> <p>If this parameter is not included in the request parameters or is set to null, no value is returned.</p> <p>If this parameter is set to "", "" is returned.</p>
enterprise_person	No	EnterprisePerson Object	-	<p>Enterprise person information.</p> <p>For details, see Table 5-3. This parameter is reserved.</p>

Table 5-3 EnterprisePerson

Parameter	Mandatory	Type	Value Range	Description
legal_name	Yes	String	A maximum of 255 characters	Legal entity name.
legal_id_number	Yes	String	A maximum of 32 characters	Legal entity card ID.
certifier_role	No	String	A maximum of 32 characters	Legal entity role. legalPerson: Legal representative

Example Request

```
PUT https://bss-intl.myhuaweicloud.com/v2/customers/realname-auths/enterprise HTTP/1.1
Content-Type: application/json
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
{
    "verified_number": "371812*****8888",
    "verified_file_url": [
        "gerenshiming/zhengmian001.jpg",
        "gerenshiming/fanmian002.jpg",
        "gerenshiming/chizheng003.jpg"
    ],
    "reg_address": "Beijing"
    "reg_country": "CN",
    "customer_id": "4505ce*****de8263e33b57e76abc",
    "certificate_type": 0,
    "corp_name": "test001",
    "enterprise_person": {
        "certifier_role": "legalPerson",
        "legal_name": "wangmoumou",
        "legal_id_number": "371812*****8888"
    },
    "identify_type": 1,
    "xaccount_type": "***_IDP",
    "change_type": 1
}
```

Response

Response Parameters

Status code: 200

Parameter	Type	Value Range	Description
is_review	Integer	-	Whether to transfer to manual review. This parameter is returned only when the status code is 200. <ul style="list-style-type: none">● 0: No● 1: Yes

Status code: 400

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
is_review	Integer	-	Whether to transfer to manual review. This parameter is returned only when the status code is 200. <ul style="list-style-type: none">● 0: No● 1: Yes
fail_check_items	List<String >	-	Error list. This parameter is displayed only when error code CBC.99007004 is returned. For details, see Table 5-4 .

Table 5-4 failCheckItems list

Item	Description
IS_DEBT	The customer's account is in arrears.
IS_CREDIT_ACCOUNT	The customer has a credit account and has a credit outstanding amount.
IS_ORG_ACCOUNT	The customer account is an enterprise master account or member account.
MEM_OF_ORG	Your account and the associated master account belong to the same legal entity. Please cancel the association before performing real-name authentication.

Item	Description
MEN_ANSWERING_ORG	You have received an invitation to associate with another account as a member account. Please reject the invitation and then perform real-name authentication.
ORG_INVITING_MEM	Your account is a master account and has invited another member account for association. Please cancel the invitation and then perform real-name authentication.
ORG_HAVE_MEM_EQUITY_APPLYING	Your account is a master account. The equity certificate is being reviewed. Please wait for the certificate to be approved, and then perform real-name authentication.
MEM_OF_ORG_EQUITY_APPLYING	Your account is a member account. The equity certificate of the associated master account is being reviewed. Please wait for the certificate to be approved, and then perform real-name authentication.
ORG_HAVE_MEM_EQUITY_APPROVED	Your account is a master account and already has an equity certificate. Please cancel the member account that has the equity certificate and then perform real-name authentication.
MEM_OF_ORG_EQUITY_APPROVED	Your account is a member account and already has an equity certificate. Please cancel the association with the master account and then perform real-name authentication.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "is_review": "1"
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99000035	You are not a customer of a partner yet.
400	CBC.99007004	The initiated service operation does not meet the service check item requirement.
400	CBC.99007188	The customer has passed real-name authentication or is being reviewed.
400	CBC.99007191	The number of real-name authentication times of the customer exceeds the upper limit.
400	CBC.70600026	Huawei Cloud cannot review the information you submitted for real-name authentication. Contact your account manager.
403	CBC.0151	Access denied.
500	CBC.0999	Unknown error occurred.

5.2.4 Querying the Real-Name Authentication Review Result

Function

If the response to a real-name authentication application or real-name authentication change application indicates that manual review is required, this API can be used to query the review result.

Constraints

This API can be invoked only by the partner AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/customers/realname-auths/result

The following table describes the parameters.

Table 5-5 Query parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	A maximum of 64 characters	Customer account ID. You can call the API in 5.3.1 Querying Customers to obtain the customer ID.

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/customers/realname-auths/result?  
customer_id=06a7969058802f0c0f01c00b91846780 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
review_result	Integer	-	Real-name authentication review result. This parameter is returned only when the status code is 200 and the real-name authentication application has been submitted. <ul style="list-style-type: none">• 0: Under review• 1: Failed• 2: Approved
opinion	String	A maximum of 256 characters	Review comment. This parameter is returned only when the status code is 200 and the review is not approved.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "review_result": 2,
    "opinion": null
}
```

Returned Values

NOTE

- **4xx**: This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx**: This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0151	Access denied.
500	CBC.0999	Unknown error occurred.

5.3 Customer Management

5.3.1 Querying Customers

Function

This API is used to query your customers.

Visit [Querying Customers](#) to learn about how to query customers in Partner Center.

Constraints

This API can be invoked only by the partner AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/partners/sub-customers/query

Request

Request parameters

Parameter	Mandatory	Type	Value Range	Description
account_name	No	String	A maximum of 64 characters	<p>Account name. If the customer has created an IAM user, enter the account name of the master account. For details about the two concepts, see "Account" and "IAM User" in Basic Concepts.</p> <p>Fuzzy search is supported. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>
customer	No	String	A maximum of 64 characters	<p>Name used by customer for real-name authentication, which can be queried using fuzzy search. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>

Parameter	Mandatory	Type	Value Range	Description
offset	No	Integer	0 to 40,000,000	<p>Offset, which starts from 0. The default value is 0.</p> <p>NOTE</p> <p>This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	Integer	Maximum value: 100	Number of customers queried each time. The default value is 10 .
label	No	String	A maximum of 64 characters	<p>Tag. Fuzzy search is supported. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces. The letters entered for search are case-sensitive.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>
association_type	No	String	A maximum of 2 characters	<p>Association type.</p> <ul style="list-style-type: none">● 1: Referral● 3: Reseller <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>

Parameter	Mandatory	Type	Value Range	Description
associated_on_begin	No	String	A maximum of 20 characters	Start time of the association time range (UTC time). Value format: YYYY-MM-DD'T'hh:mm:ss'Z', for example, 2019-05-06T08:05:01Z . If this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion.
associated_on_end	No	String	A maximum of 20 characters	End time of the association time range (UTC time). Value format: YYYY-MM-DD'T'hh:mm:ss'Z', for example, 2019-05-06T08:05:01Z . If this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion.
indirect_partner_id	No	String	A maximum of 64 characters	Reseller ID. For details about how to obtain the ID, see 6.1.1 Querying the List of Huawei Cloud Resellers . This parameter is mandatory for querying the list of customers of a Huawei Cloud reseller.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers/query HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
{
    "account_name": "betahc_kehu107",
    "customer": "sun***01",
    "offset": "0",
    "limit": "10",
    "label": "sunny",
    "association_type": "1",
    "associated_on_begin": "2019-05-06T08:05:01Z",
    "associated_on_end": "2019-05-06T08:05:01Z",
    "indirect_partner_id": "si3fjg8ugf*****"
}
```

Response

Response parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. This parameter is returned only when a failure occurs. For details, see Returned Values .
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
customer_infos	List<CustomerInfo>	-	Customer list. For details, see Table 5-6 .
count	Integer	-	Total number of records.

Table 5-6 Customer information

Parameter	Type	Value Range	Description
customer	String	A maximum of 128 characters	Name that has passed the real-name authentication.
account_name	String	A maximum of 128 characters	Account name. If the customer has created an IAM user, the account name of the master account is returned.
customer_id	String	A maximum of 64 characters	Customer account ID.
associated_on	String	A maximum of 20 characters	Time when a customer is associated with a partner. The value is UTC time in "yyyy-MM-dd 'T' HH:mm:ss 'Z'" format, such as 2019-05-06T08:05:01Z . <i>HH</i> ranges from 0 to 23, and <i>mm</i> and <i>ss</i> ranges from 0 to 59.
association_type	String	A maximum of 2 characters	Association type. <ul style="list-style-type: none">• 1: Referral• 3: Reseller
label	String	A maximum of 64 characters	Tag.
telephone	String	A maximum of 20 characters	Customer phone number.

Parameter	Type	Value Range	Description
verified_status	String	A maximum of 5 characters	Real-name authentication status. <ul style="list-style-type: none">• -1: The real name is not authenticated.• 0: Real-name authentication is under review.• 1: The real-name authentication is not passed.• 2: The real name is authenticated.
country_code	String	A maximum of 10 characters	Country code, which is the country code prefix of a phone number. Example: 0086 for China
customer_type	Integer	-	Customer type. <ul style="list-style-type: none">• -1: None• 0: Individual• 1: Enterprise When a customer is registered, customerType is -1. The customer can set customerType in the account center or select the enterprise or individual real-name authentication to determine the customer type.
is_frozen	Integer	-	Whether to freeze the account. <ul style="list-style-type: none">• 0: No• 1: Only account• 2: Account and resources
account_managers	List<AccountManager>	A maximum of 10 managers	Customer manager list. Only 1 account manager can be configured at present. For details, see Table 5-7 .
xaccount_id	String	A maximum of 128 characters	Unique user ID on the partner sales platform. The ID is allocated by the partner.
xaccount_type	String	A maximum of 64 characters	Platform ID assigned by Huawei to a partner. This value is assigned by Huawei. For details about how to obtain the platform ID, see How Do I Obtain the xaccountType Value?

Parameter	Type	Value Range	Description
customer_level	String	A maximum of 64 characters	Customer tier. <ul style="list-style-type: none">• V0• V1• V2• V3• V4• V5

Table 5-7 AccountManager

Parameter	Type	Value Range	Description
account_name	String	A maximum of 128 characters	Name of the account manager.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
  "customer_infos": [
    {
      "customer": "sun***01",
      "account_name": "betahc_kehu107",
      "customer_id": "0b11fa*****870f20c003f6a53940",
      "associated_on": "2021-01-05T06:35:51Z",
      "association_type": "1",
      "label": "sunny",
      "telephone": "134****6666",
      "verified_status": "2",
      "country_code": "0086",
      "customer_type": "0",
      "is_frozen": "0",
      "account_managers": [
        {
          "account_name": "tan_ma"
        }
      ],
      "xaccount_id": "98**9707",
      "xaccount_type": "***_IDP",
      "customer_level": "V0"
    },
    {
      "count": "1"
    }
  ]
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99000037	You do not have the permission to operate this Huawei Cloud reseller.
401	CBC.0154	Invalid or expired token.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

5.3.2 Freezing a Customer Account

Function

A partner can freeze an account of a customer associated with the partner by reseller model.

Visit [Freezing a Customer Account](#) to learn about how to freeze a customer account.

Constraints

This API can be invoked using the partner AK/SK or token only.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/partners/sub-customers/freeze

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customer_ids	Yes	List<String>	A maximum of 10 IDs	IDs of customers whose accounts are to be frozen. You can call the API in 5.3.1 Querying Customers to obtain the customer ID.
reason	Yes	String	A maximum of 256 characters	Account freezing reason.
indirect_partner_id	No	String	Maximum length: 64 characters	Reseller ID. For details about how to obtain the ID, see 6.1.1 Querying the List of Huawei Cloud Resellers . This parameter is mandatory for freezing the customers of a reseller.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers/freeze HTTP/1.1
Content-Type: application/json
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
{
    "customer_ids": [
        "0bb8e9*****760f6fc010ebfd95e1"
    ],
    "reason": "Arrears",
    "indirect_partner_id": "0b5e9b*****0c0f0fc00874a9e000"
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. This field is not returned when the operation is successful or partially failed. For details, see Returned Values .
error_msg	String	A maximum of 2,000 characters	Error description. This field is not returned when the operation is successful or partially failed.
error_details	List<ErrorDetail>	-	Error cause description. This field is returned only when the operation is partially failed. For details, see Table 5-8 .

Table 5-8 ErrorDetail

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . The returned status code is 200.
error_msg	String	A maximum of 2,000 characters	Error message.
id	String	A maximum of 256 characters	ID. This parameter corresponds to customer_ids .

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "error_details": []
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99000000	You do not have the operation permission to this customer.
400	CBC.99000035	You are not a customer of a partner yet.
400	CBC.99000037	You do not have the permission to operate this Huawei Cloud reseller.
200	CBC.99005024	This API cannot be invoked because the association type of the customer is incorrect.
403	CBC.0150	Invalid operation.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

5.3.3 Unfreezing a Customer Account

Function

A partner can unfreeze an account of a customer associated with the partner by reseller model.

Visit [Unfreezing a Customer Account](#) to learn about how to unfreeze a customer account.

Constraints

This API can be invoked using the partner AK/SK or token only.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/partners/sub-customers/unfreeze

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customer_ids	Yes	List<String>	A maximum of 10 IDs	IDs of customers whose accounts are to be unfrozen. You can call the API in 5.3.1 Querying Customers to obtain the customer ID.
reason	Yes	String	A maximum of 256 characters	Account unfreezing reason.
indirect_partner_id	No	String	Maximum length: 64 characters	Reseller ID. For details about how to obtain the ID, see 6.1.1 Querying the List of Huawei Cloud Resellers . This parameter is mandatory for unfreezing the customers of a reseller.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers/unfreeze HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
```

```
{
  "customer_ids": [
    "065024*****e90f44c01cbccfa280",
    "065faa*****ce0fddc007a6cb6f40"
  ],
  "reason": "The customer has topped up its account.",
  "indirect_partner_id": "0b5e9b*****0c0f0fc00874a9e000"
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. This field is not returned when the operation is successful or partially failed. For details, see Returned Values .
error_msg	String	A maximum of 2,000 characters	Error description. This field is not returned when the operation is successful or partially failed.
error_details	List<ErrorDetail>	-	Error cause description. This field is returned only when the operation is partially failed. For details, see Table 5-9 .

Table 5-9 ErrorDetail

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . The returned status code is 200.
error_msg	String	A maximum of 2,000 characters	Error message.
id	String	A maximum of 256 characters	ID. This parameter corresponds to customer_ids .

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
```

```
Date: response time
{
    "error_details": []
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99000000	You do not have the operation permission to this customer.
400	CBC.99000035	You are not a customer of a partner yet.
400	CBC.99000037	You do not have the permission to operate this Huawei Cloud reseller.
200	CBC.99005024	API access failed. The association type of the customer is not supported.
403	CBC.0150	Invalid operation.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

6

Managing Huawei Cloud Resellers

6.1 Querying Huawei Cloud Resellers

6.1.1 Querying the List of Huawei Cloud Resellers

Function

A Huawei Cloud distributor can query its associated Huawei Cloud resellers.

Constraints

This API can only be invoked using the AK/SK or token of Huawei Cloud distributors.

Debugging

You can debug this API [API Explorer](#).

URI

POST /v2/partners/indirect-partners/query

Request

Request parameters

Parameter	Mandatory	Type	Maximum Length of Characters/Value Range	Description
account_name	No	String	64 characters	Account name of a reseller. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
associate_d_on_begin	No	String	20 characters	Start time of the association between a reseller and a distributor. The time is in the UTC format (time zone is required), for example, 2016-03-28T00:00:00Z . If this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion.
associate_d_on_end	No	String	20 characters	End time of the association between a reseller and a distributor. The time is in the UTC format (time zone is required), for example, 2016-03-28T00:00:00Z . If this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion.
indirect_partner_id	No	String	64 characters	Reseller ID. For details about how to obtain such IDs, see 6.1.1 Querying the List of Huawei Cloud Resellers . This parameter is mandatory if you want to query a specific reseller.

Parameter	Mandatory	Type	Maximum Length of Characters/Value Range	Description
offset	No	Integer	0 to 40,000,000	<p>Offset, starting from 0. The default value is 0.</p> <p>NOTE</p> <p>This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	Integer	[1, 100]	Maximum number of records in each query. The default value is 10 .

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/indirect-partners/query HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ
```

```
{  
    "account_name": "account_name",  
    "associated_on_begin": "2017-12-17T10:32:02Z",  
    "associated_on_end": "2017-12-17T10:32:02Z",  
    "offset": "0",  
    "limit": "10",  
    "indirect_partner_id": "c9e731c4663646988ef4cdb3122837b6"  
}
```

Response

Response Parameters

Parameter	Type	Maximum Length of Characters/Value Range	Description
error_code	String	20 characters	Status code. For details, see Status Codes . This parameter is returned only when the query failed.

Parameter	Type	Maximum Length of Characters/Value Range	Description
error_msg	String	1000 characters	Error description. This parameter is returned only when the query failed.
count	Integer	[0, Maximum integer]	Number of records that meet the search conditions. This parameter is returned only when the operation is successful.
indirect_partners	List<IndirectPartnerInfo>	-	Reseller list. For details, see Table 6-1 .

Table 6-1 IndirectPartnerInfo

Parameter	Type	Maximum Length of Characters/Value Range	Description
indirect_partner_id	String	64 characters	Reseller ID.
mobile_phone	String	20 characters	Mobile number of a reseller.
email	String	200 characters	Email address of a reseller.
account_name	String	64 characters	Account name of a reseller.
name	String	255 characters	Reseller name.

Parameter	Type	Maximum Length of Characters/Value Range	Description
associated_on	String	20 characters	Time when a reseller is associated with a Huawei Cloud distributor. The time is in the UTC format (time zone is required), for example, <code>2016-03-28T00:00:00Z</code> .
account_manager_id	String	64 characters	Account name of an account manager for login
account_manager_name	String	255 characters	Account manager name.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
  "count": 1,
  "indirect_partners": [
    {
      "indirect_partner_id": "c9e731c4663646988ef4cdb3122837b6",
      "mobile_phone": "186xxxxxxxx",
      "email": "xxx@huawei.com",
      "account_name": "account_name",
      "name": "account_name2",
      "associated_on": "2017-12-17T10:32:02Z",
      "account_manager_id": "manager_id",
      "account_manager_name": "manager_name"
    }
  ]
}
```

Status Codes

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Incorrect parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7 Transaction Management

7.1 Managing Customers' Budgets

7.1.1 Querying Customers' Budgets

Function

This API is used to query the budget of a customer for the partner to determine whether to adjust the budget. Currently, you can query monthly budgets, rather than one-time budgets.

Click [here](#) to learn about how to query the budget of a customer.

Constraints

This API can be invoked only by the partner account AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/partners/sub-customers/budget

The following table describes the parameters.

Table 7-1 Query parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	Maximum length: 64 characters	Customer account ID. You can call the API in 5.3.1 Querying Customers to obtain the customer ID.
indirect_partner_id	No	String	Maximum length: 64 characters	Reseller ID. For details about how to obtain the ID, see 6.1.1 Querying the List of Huawei Cloud Resellers . This parameter is mandatory to query the list of customers of a Huawei Cloud reseller.

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers/budget?  
customer_id=06ffbcd46880d3f30f62c001a49be460&indirect_partner_id=0b5e9bb21980d20c0f0fc00874a9e00  
0 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	Maximum length: 20 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	Maximum length: 2000 characters	Error description. This parameter is returned only when a failure occurs.
budget_amount	BigDecimal	-	Initial budget.
used_amount	BigDecimal	-	Used budget. The data displayed in the system may have certain deviation and latency.

Parameter	Type	Value Range	Description
measure_id	Integer	-	Unit: 1: dollar
currency	String	Maximum length: 4 characters	Currency: USD

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "budget_amount": 50.0,
    "used_amount": 1.0,
    "measure_id": 1,
    "currency": "USD"
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99000037	You do not have the permission to operate this Huawei Cloud reseller.
400	CBC.99005024	This API cannot be invoked because the association type of the customer is incorrect.
403	CBC.0151	Access denied.
403	CBC.0150	Invalid operation.
500	CBC.0999	Other errors.

7.1.2 Setting Customers' Budgets

Function

This API is used to set or adjust a customer's budget. Currently, you can set monthly budgets for customers, rather than one-time budgets.

Click [here](#) to learn about how to query the budget of a customer.

Constraints

This API can be invoked only by the partner account AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/partners/sub-customers/budget

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	Maximum length: 64 characters	Customer account ID. You can call the API in 5.3.1 Querying Customers to obtain the customer ID.
budget_amount	Yes	BigDecimal	(0-2147483647]	Target amount, which can be accurate to two decimal places. Unit: USD
cancel_partner_frozen	No	String	-	Whether to unfreeze the account when setting the customer budget. <ul style="list-style-type: none">• 0: No• 1: Yes The default value is 0 . If this parameter is not included in the request parameters, is set to "", or is set to null , the default value 0 is used.

Parameter	Mandatory	Type	Value Range	Description
indirect_partner_id	No	String	Maximum length: 64 characters	Reseller ID. For details about how to obtain the ID, see 6.1.1 Querying the List of Huawei Cloud Resellers . This parameter is mandatory for querying the list of customers of a Huawei Cloud reseller. If this parameter is not included in the request parameters, is set to "", or is set to null , this parameter will not be used.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers/budget HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
{
    "customer_id": "053a48736500d5f40ffec01689b88480",
    "budget_amount": 100,
    "cancel_partner_frozen": 0,
    "indirect_partner_id": "0b5e9b*****0c0f0fc00874a9e000"
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	Maximum length: 20 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	Maximum length: 2000 characters	Error description. This parameter is returned only when a failure occurs.

Example Response

```
HTTP/1.1 204 No Content
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
```

Returned Values

 NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99000037	You do not have the permission to operate this Huawei Cloud reseller.
400	CBC.99005024	This API cannot be invoked because the association type of the customer is incorrect.
403	CBC.0151	Access denied.
403	CBC.0150	Invalid operation.
500	CBC.0999	Other errors.

7.2 Coupons Management

7.2.1 Querying Coupons

Function

Partners can query information about their coupons.

Partners can follow the instructions described in [Viewing Cash Coupons](#) to view the issued cash coupons in Partner Center, and view details about a cash coupon.

 NOTE

Huawei Cloudinternational website does not provide flexi-purchase coupons or discount coupons.

Constraints

This API can be used to query only the coupons of the partner. To query the coupon list of a customer on the partner sales platform, the customer token is used.

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/promotions/benefits/coupons

The following table describes the parameters.

Table 7-2 Request parameters

Parameter	Mandatory	Type	Value Range	Description
coupon_id	No	String	A maximum of 64 characters	Coupon ID. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.
order_id	No	String	A maximum of 64 characters	Order ID. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.
promotion_plan_id	No	String	A maximum of 64 characters	Promotion plan ID. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.
coupon_type	No	Integer	[1-4]	Coupon type. <ul style="list-style-type: none">• 1: Cash coupon If this parameter is not included in the request parameters, is left empty, or is set to null , it cannot be used as a filter criterion. It cannot be set to "".
status	No	Integer	[1-4]	Customer coupon status. <ul style="list-style-type: none">• 1: Inactivated• 2: To be used• 3: Used• 4: Expired If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.

Parameter	Mandatory	Type	Value Range	Description
active_start_time	No	String	A maximum of 64 characters	Activation time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null .
active_end_time	No	String	A maximum of 64 characters	End time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null .
offset	No	Integer	0 to maximum integer	Offset, which starts from 0. The default value is 0 . This parameter must be used together with limit . NOTE This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1 , the second and subsequent data records are returned. For example, there are 10 data records, and if you set limit to 10 and offset to 1 , the second to the tenth data records are returned.
limit	No	Integer	[1-100]	Number of coupons queried each time. The default value is 10 .

Parameter	Mandatory	Type	Value Range	Description
source_id	No	String	A maximum of 255 characters	Coupon source. If the coupon is sent by a partner, the parameter value is the partner ID. To query coupons issued by a partner, enter the partner ID. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If it is set to "", it can be used as a filter criterion.

Request Message

Request Parameters

No.

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/promotions/benefits/coupons HTTP/1.1
Content-Type: application/json
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIIINPXdG9rZ
```

Response Message

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values .
error_msg	String	A maximum of 1024 characters	Error description.
count	Integer	-	Total number of records that meet the search criteria.
user_coupons	List<IQueryUserCouponsResult>	-	Coupon records. For details, see Table 7-3 .

Table 7-3 IQueryUserCouponsResult

Parameter	Type	Description
coupon_id	String	Coupon ID.
coupon_code	String	Coupon code.
status	Integer	Coupon status <ul style="list-style-type: none">• 1: Inactivated• 2: To be used• 3: Used• 4: Expired• 5: Withdrawn
customer_id	String	Customer account ID.
coupon_type	Integer	Coupon type. <ul style="list-style-type: none">• 1: Cash coupon
measure_id	Integer	Measurement unit. 1: Dollar
face_value	Double	Coupon amount.
valid_time	String	Effective time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z
expire_time	String	Expiration time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z
order_id	String	Order ID.
promotion_plan_id	String	Promotion plan ID.
plan_name	String	Promotion plan name.
plan_desc	String	Promotion plan description.
media_type	Integer	Medium type. <ul style="list-style-type: none">• 1: E-coupon• 2: Paper coupon
fetch_method	Integer	Obtaining method. <ul style="list-style-type: none">• 1: Claimed online• 2: Redeemed online• 3: Issued online• 4: Obtained offline• 5: Rewarded based on events

Parameter	Type	Description
use_limits	List<ICouponUseLimitInfoV2>	Coupon usage limits. For details, see Table 7-4 .
active_time	String	Activation time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z
reserve_time	String	Usage time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z
promotion_id	String	Promotion ID.
create_time	String	Creation time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z
coupon_version	Integer	Coupon version. <ul style="list-style-type: none">• 2: Coupons can be used repeatedly.
balance	Double	Coupon balance. Unit: USD
lock_order_id	String	ID of the order for the coupon.
coupon_usage	String	Coupon usage.
is_frozen	String	Whether a coupon is frozen. <ul style="list-style-type: none">• 0: No• 1: Yes
currency	String	Currency. The options are as follows: USD
extend_param1	String	Extended field.

Parameter	Type	Description
source_id	String	<p>Coupon source.</p> <ul style="list-style-type: none">If the coupon is sent by a partner, the parameter value is the partner ID.If the coupon is issued for an activity, the parameter value is the activity ID.<ul style="list-style-type: none">Coupons redeemed by cloud beans: Cloud bean IDCoupons issued as rewards of accumulated consumption: Consumption accumulation reward IDCoupons issued as rewards for lucky draw: Lucky draw IDCoupons issued based on events: Event IDCustomized coupons: Creator ID

Table 7-4 ICouponUseLimitInfoV2

Parameter	Type	Description
use_limiti_info_id	String	Usage limit ID.
limit_key	String	Usage limit. For details about the value, see Table 7-5 .
value1	String	Value 1.
value2	String	Value 2.
value_unit	String	Value unit.
limit_type	String	Limit type.
promotion_plan_id	String	Promotion plan ID.

Table 7-5 limit_key requirements for ICouponUseLimitInfo

Key	Meaning	Description	Remarks
baseValue	Order amount.	value1 specifies the lower limit of the order amount, and value2 specifies the upper limit of the order amount.	Cash coupons, flexi-purchase coupons, and discount coupons are supported.

Key	Meaning	Description	Remarks
serviceType	Cloud service type.	Only value1 is valid. To obtain a specific cloud service type, call the API in 4.1.1 Querying Cloud Service Types .	Cash coupons, flexi-purchase coupons, and discount coupons are supported.
regionCode	Region code.	value1 specifies the region code, and value2 specifies the region name.	Cash coupons, flexi-purchase coupons, and discount coupons are supported.
productId	Product ID	You can configure multiple product IDs. Separate them using commas (,).	Cash coupons, flexi-purchase coupons, and discount coupons are supported.
subscribeType	Order type.	Only value1 is valid. The value can be: <ul style="list-style-type: none">• new: Order placement• renew: Order renewal• change: Order change	Cash coupons, flexi-purchase coupons, and discount coupons are supported.
firstOrderInService	Restriction for the first-time purchase.	Only value1 is valid.	Cash coupons, flexi-purchase coupons, and discount coupons are supported.
cycleNum	Number of periods.	Only value1 is valid.	Cash coupons, flexi-purchase coupons, and discount coupons are supported.

Key	Meaning	Description	Remarks
cycleType	Trial use period type.	<ul style="list-style-type: none"> ● 0: Yearly/monthly (unlimited) ● 1: Yearly/monthly (yearly) ● 2: Yearly/monthly (monthly) ● 3: Yearly/monthly (daily) ● 4: Yearly/monthly (hourly) ● 5: Pay-per-use ● 6: General purpose ● 7: One-off payment ● 8: Reserved instance ● 11: Savings plan 	Cash coupons, flexi-purchase coupons, and discount coupons are supported. Discount coupons support only the yearly/monthly mode.
simultaneousUseWithEmpowerDiscount	Whether cash coupons can be used together with authorized discounts.	<p>Whether cash coupons can be used with authorized discounts (including commercial discounts and discounts authorized by partners).</p> <ul style="list-style-type: none"> ● 0: No ● 1: Yes 	Cash coupons, flexi-purchase coupons, and discount coupons are supported. The value for discount coupons can only be 0.

Key	Meaning	Description	Remarks
usageTimes	Whether coupons can be used for multiple times.	<p>The value is specified in value1. The value can be:</p> <ul style="list-style-type: none">• 0: Used for unlimited times• 1: Used for only once• N: Used for N times. (For cash coupons of the old version, N is fixed at 1.)	<ul style="list-style-type: none">• When CouponType is set to 2 (discount coupons), this parameter can only be set to 1, and if this parameter is not specified or is set to a non-1 value, the parameter value is 1.• When CouponType is set to 1 (cash coupons) (or 4 (flexi-purchase coupons)), if this parameter is not specified or is set to a value other than 0 or 1, the parameter value is 0.
isOnlyForStrictSelected	Whether the coupons can only be used for Featured Products on KooGallery .	<p>The value is specified in value1. The value can be:</p> <ul style="list-style-type: none">• 0: No• 1: Yes <p>If there is no such restriction, the value is 0. This restriction applies only to flexi-purchase coupons.</p>	Flex-purchase coupons are supported.

Key	Meaning	Description	Remarks
isRebate	Whether coupons are counted in to the partner incentive rebates.	The value is specified in value1 . The value can be: <ul style="list-style-type: none">• 0: No• 1: Yes This restriction applies only to flexi-purchase coupons.	Flex-purchase coupons are supported.
serviceTypeBlackList	Service type blacklist.	Service type blacklist. The service type code is specified in value1 . This restriction applies only to flexi-purchase coupons.	Flex-purchase coupons are supported.
minConsumeDiscount	Minimum customer consumption discount.	The value is specified in value1 . The value ranges from 0 to 1 (excluding 0 and 1).	Cash coupons and flexi-purchase coupons are supported.
isForAnnualContracts	Whether coupons can only be used for yearly/monthly (one-year) orders.	The value can be: <ul style="list-style-type: none">• 0: No• 1: Yes	Cash coupons and discount coupons are supported.
simultaneousUseWithPromotionProduct	Whether cash coupons can be used together with promotional products.	The value is specified in value1 . The value can be: <ul style="list-style-type: none">• 0: No• 1: Yes	Cash coupons and discount coupons are supported.
simultaneousUseWithPromotionDiscount	Whether cash coupons can be used together with promotion discounts.	The value is specified in value1 . The value can be: <ul style="list-style-type: none">• 0: No• 1: Yes	Cash coupons are supported.

Key	Meaning	Description	Remarks
simultaneousUseWithDiscountCoupon	Whether cash coupons can be used together with discount coupons.	The value is specified in value1 . The value can be: <ul style="list-style-type: none">● 0: No● 1: Yes	Cash coupons are supported.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
  "count": "1",
  "user_coupons": [
    {
      "coupon_id": "CP19092406014086E3",
      "coupon_code": "CP19092406014086E3",
      "status": "2",
      "customer_id": "c9e731c4663646988ef4cdb3122837b6",
      "coupon_type": "1",
      "measure_id": "1",
      "face_value": "100",
      "valid_time": "2019-09-16T16:00:00Z",
      "expire_time": "2019-09-16T16:00:00Z",
      "order_id": "CS1904011928GIBHC",
      "promotion_plan_id": "promotionPlanId5322584",
      "plan_name": "532USDCoupon name",
      "plan_desc": "532USDCoupon desc",
      "media_type": "1",
      "fetch_method": "1",
      "use_limits": [
        {
          "use_limit_info_id": "CP19092406014086E3",
          "limit_key": "simultaneousUseWithDiscountCoupon",
          "value1": "1",
          "value2": "",
          "value_unit": "",
          "limit_type": "=",
          "promotion_plan_id": "promotionPlanId5322584"
        }
      ],
      "active_time": "2019-09-16T16:00:00Z",
      "reserve_time": "2019-09-16T16:00:00Z",
      "promotion_id": "promotionPlanId5322584",
      "create_time": "2019-09-16T16:00:00Z",
      "coupon_version": "2",
      "balance": "100",
      "lock_order_id": "CS1904011928GIBHC",
      "coupon_usage": "170719190603338056FEH60VIRWEP",
      "is_frozen": "0",
      "currency": "USD",
      "extend_param1": "2019091702368200",
      "source_id": "c9e731c4663646988ef4cdb3122837b6"
    }
  ]
}
```

Returned Values

 NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors

7.3 Managing Yearly/Monthly Orders

7.3.1 Querying Orders

Function

After a customer purchases yearly/monthly resources, it can query the orders in different statuses, such as in the pending approval, processing, canceled, completed, and pending payment statuses.

A partner can log in to Partner Center and follow the instructions described in [Viewing a Customer's Orders](#) to view orders of a customer.

 NOTE

If you want to query the resource information of a specified order, invoke this API to obtain the order ID and then invoke the API described in [7.4.1 Querying Customer's Yearly/Monthly Resources](#). Enter the order ID in the request to query the resource information.

Constraints

This API can be invoked using the AK/SK or token of the partner or of the partner's customer. If partner's AK/SK or token is used, the orders paid by all customers of the partner can be queried.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/orders/customer-orders

Table 7-6 Query parameters

Parameter	Mandatory	Type	Value Range	Description
order_id	No	String	A maximum of 64 characters	<p>Order ID.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.</p> <p>NOTE</p> <p>When special characters are used for query, perform the URL code conversion. For example, % should be converted to %25.</p>
customer_id	No	String	A maximum of 64 characters	<p>Customer account ID. To obtain the customer ID, call the API in 5.3.1 Querying Customers.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.</p>
create_time_begin	No	String	A maximum of 20 characters	<p>Start time of order creation.</p> <p>UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z</p> <p>The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.</p>
create_time_end	No	String	A maximum of 20 characters	<p>End time of order creation.</p> <p>UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z</p> <p>The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.</p>
service_type_code	No	String	A maximum of 64 characters	<p>Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs. To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.</p>

Parameter	Mandatory	Type	Value Range	Description
status	No	Integer	-	<p>Order status. The value can be:</p> <ul style="list-style-type: none"> • 1: Pending approval • 3: Processing • 4: Canceled • 5: Completed • 6: Pending payment • 9: To be confirmed <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.</p>
order_type	No	String	A maximum of 64 characters	<p>Order type. The value can be:</p> <ul style="list-style-type: none"> • 1: New purchase • 2: Renewal • 3: Change • 4: Unsubscription • 10: Yearly/monthly to pay-per-use • 11: Pay-per-use to yearly/monthly • 13: Trial • 14: Commercial use • 15: Price adjustment <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.</p>
limit	No	Integer	1 to 100	<p>Number of orders queried each time. The default value is 10.</p>
offset	No	Integer	0 to a maximum integer	<p>Offset, which starts from 0. The default value is 0.</p> <p>NOTE This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned. For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>

Parameter	Mandatory	Type	Value Range	Description
order_by	No	String	A maximum of 36 characters	Sorting order of the orders. You can sort the orders by creation time. If you set the value to createTime , the system sorts orders by creation time in ascending order. If you set the value to -createTime , the system sorts orders by creation time in descending order. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.
payment_time_begin	No	String	A maximum of 20 characters	Start time of order payment. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.
payment_time_end	No	String	A maximum of 20 characters	End time of order payment. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.
indirect_partner_id	No	String	A maximum of 64 characters	Reseller ID. For details about how to obtain such IDs, see Query Huawei Cloud Resellers .

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/orders/customer-orders?  
order_id=CS1905251035OA1AF&customer_id=c9e731c4663646988ef4cdb3122837b6&create_time_begin=202
```

```
0-05-06T08:05:01Z&create_time_end=2020-05-07T08:05:01Z&service_type_code=hws.service.type.obs&status=5&order_type=1&limit=10&offset=0&order_by=-  
createTime&payment_time_begin=2020-05-06T08:05:01Z&payment_time_end=2020-05-07T08:05:01Z&indirect_partner_id=646988ef4cdb3122834feswrygfd HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Maximum Length	Description
error_code	String	20	Status code. For details, see Returned Values .
error_msg	String	2000	Error description.
total_count	Integer	An integer greater than or equal to 0. Number of records that match the query conditions.	An integer greater than or equal to 0. Number of records that match the query conditions.
order_infos	List<CustomerOrderV2>	-	- Order details. For details, see Table 7-7 .

Table 7-7 CustomerOrderV2

Parameter	Type	Maximum Length	Description
order_id	String	64	Order ID
customer_id	String	A maximum of 64 characters	Customer account ID.
service_type_code	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
service_type_name	String	A maximum of 200 characters	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .

Parameter	Type	Maximum Length	Description
source_type	Integer	-	Customer order source type. The value can be: <ul style="list-style-type: none">• 1: Customer• 2: Agent• 3: Contract• 4: Distributor
status	Integer	-	Order status. The value can be: <ul style="list-style-type: none">• 1: Pending approval• 2: Pending refund• 3: Processing• 4: Canceled• 5: Completed• 6: Pending payment• 9: To be confirmed• 10: To be shipped• 11: To be received• 12: Pending pick-up• 13: Exchange in progress
order_type	Integer	-	Order type. The value can be: <ul style="list-style-type: none">• 1: New purchase• 2: Renewal• 3: Change• 4: Unsubscription• 10: Yearly/monthly to pay-per-use• 11: Pay-per-use to yearly/monthly• 13: Trial• 14: Commercial use• 15: Price adjustment
official_amount	Double	-	Order amount (list price). In the unsubscription order, this amount equals the value of amount_after_discount .
amount_after_discount	Double	-	Order amount after a discount (excluding the vouchers or cards).
measure_id	Integer	-	Order amount unit. <ul style="list-style-type: none">• 1: 1 Yuan/Dollar

Parameter	Type	Maximum Length	Description
create_time	String	A maximum of 20 characters	Creation time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
payment_time	String	A maximum of 20 characters	Payment time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
currency	String	A maximum of 4 characters	Currency code.
contract_id	String	A maximum of 64 characters	Contract ID.
amount_info	AmountInfoV2 Object	-	Order details For details, see Table 7-8 .

Table 7-8 AmountInfoV2

Parameter	Type	Value Range	Description
discounts	List<DiscountItemV2>	-	Item For details, see Table 7-9 .
flexipurchase_coupon_amount	Double	-	Flexi-purchase coupon amount (reserved).
coupon_amount	Double	-	Cash coupon amount.
stored_card_amount	Double	-	Stored-value card amount (reserved).

Parameter	Type	Value Range	Description
commission_amount	Double	-	Handling fee (only for unsubscription orders).
consumed_amount	Double	-	Consumptions (only for unsubscription orders).

Table 7-9 DiscountItemV2

Parameter	Type	Value Range	Description
discount_type	String	A maximum of 8 characters	<p>Discount type.</p> <ul style="list-style-type: none">● 200: Promotion product discount● 300: Promotion discount coupon● 301: Promotion coupon● 302: Promotion flexi-purchase coupon● 500: Specified discount for agent subscription● 501: Specified exemption for agent subscription● 502: Specified buy-it-now price for agent subscription● 600: Discount specified in the discount and rebate contract● 601: Discount specified in the channel frame contract● 602: Discount specified in the designated-purpose fund contract● 603: Discount specified in the directly signed offline contract● 604: Discount specified in the authorized telemarketing contract● 605: Discount specified in the commercial contract● 606: Discount specified in the channel commercial contract● 607: Partner authorized discount● 609: Discount for order price adjusting● 610: Discount amount● 700: Promotion discount● 800: Top-up account discount
discount_amount	Double	-	Discounted amount.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
```

```
"total_count": 1,
"order_infos": [
  {
    "order_id": "CS1905251035OA1AF",
    "customer_id": "17a80a9f9d3949ddb60ee73a5b3c9618",
    "service_type_code": "hws.service.type.rds",
    "source_type": 1,
    "status": 5,
    "order_type": 1,
    "amount_after_discount": 0,
    "official_amount": 100,
    "measure_id": 1,
    "create_time": "2020-05-06T09:08:03Z",
    "payment_time": "2020-05-06T09:08:03Z",
    "currency": "USD",
    "contract_id": null,
    "amount_info": {
      "discounts": [
        {
          "discount_type": "700",
          "discount_amount": 15
        },
        {
          "discount_type": "302",
          "discount_amount": 85
        }
      ],
      "flexipurchase_coupon_amount": 85,
      "coupon_amount": 0,
      "stored_card_amount": 0,
      "commission_amount": null,
      "consumed_amount": null
    }
  }
]
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.0101	Invalid parameter.
400	CBC.990000 37	You do not have the permission to operate this reseller.
403	CBC.0151	Access denied.
403	CBC.0155	Request denied. The possible causes are as follows: The account authentication information is incorrect. The account or member account does not have the permission to call the API.

HTTP Value	Error Code	Description
500	CBC.0999	Other errors.

7.3.2 Querying Order Details

Function

Customers can view order details on the partner sales platform.

For details about how to view order details in Billing Center, see [Viewing Order Details](#).



If you want to query the resource information of a specified order, invoke the API described in [7.4.1 Querying Customer's Yearly/Monthly Resources](#) and enter the order ID in the request to query the resource information.

Constraints

This API can be invoked using the AK/SK or token of the partner or AK/SK or token of the partner's customer.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/orders/customer-orders/details/{order_id}

The following table describes the parameters.

Table 7-10 Path parameters

Parameter	Mandatory	Value Range	Description
order_id	Yes	A maximum of 64 characters	Order ID. The system will return the orders if the orders are queried.

Table 7-11 Query parameters

Parameter	Mandatory	Value Range	Description
offset	No	0 to a maximum integer	<p>Offset, which starts from 0. The default value is 0.</p> <p>NOTE</p> <p>This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	1 to 100	Number of records displayed per page. The default value is 10 .
indirect_partner_id	No	A maximum of 64 characters	<p>Reseller ID. For details about how to obtain such IDs, see Query Huawei Cloud Resellers.</p> <p>This parameter is mandatory only when a distributor queries order details of customers associated with its resellers. Otherwise, the order details of the distributor's own customers will be queried.</p>

Table 7-12 Message header parameter

Parameter	Mandatory	Type	Value Range	Description
X-Language	No	String	A maximum of 10 characters	<p>Language.</p> <ul style="list-style-type: none">• zh_CN: Chinese• en_US: English <p>Default value: zh_CN</p>

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/orders/customer-orders/details/CS19040119281JMYC?  
limit=10&offset=0&indirect_partner_id=c9e731c4663646988ef4cdb3122837b6 HTTP/1.1
```

Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZlhcNAQcCo...ggg1BBIINPXsidG9rZ

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Status code. For details, see Returned Values .
error_msg	String	A maximum of 2,000 characters	Error description.
order_info	Customer OrderEntityV2 Object	-	Order details. For details, see Table 7-13 .
total_count	Integer	-	Order item ID array.
order_line_items	List<Order LineItemEntityV2>	-	ID of the primary order item mapping the order item. For details, see Table 7-14 .

Table 7-13 CustomerOrderEntityV2

Parameter	Type	Maximum Length	Description
order_id	String	64	Order ID.
customer_id	String	A maximum of 64 characters	Customer account ID.
service_type_code	String	-	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
service_type_name	String	A maximum of 200 characters	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .

Parameter	Type	Maximum Length	Description
source_type	Integer	-	Customer order source type. The value can be: <ul style="list-style-type: none">• 1: Customer• 2: Agent• 3: Contract• 4: Distributor
status	Integer	-	Order status. The value can be: <ul style="list-style-type: none">• 1: Pending approval• 2: Pending refund• 3: Processing• 4: Canceled• 5: Completed• 6: Pending payment• 9: To be confirmed• 10: To be shipped• 11: To be received• 12: Pending pick-up• 13: Exchange in progress
order_type	Integer	-	Order type. The value can be: <ul style="list-style-type: none">• 1: New purchase• 2: Renewal• 3: Change• 4: Unsubscription• 10: Yearly/monthly to pay-per-use• 11: Pay-per-use to yearly/monthly• 13: Trial• 14: Commercial use• 15: Price adjustment
official_amount	Double	-	Order amount (list price). In the unsubscription order, this amount equals the value of amount_after_discount .
amount_after_discount	Double	-	Order amount after a discount (excluding the vouchers or cards).
measure_id	Integer	-	Order amount unit. <ul style="list-style-type: none">• 1: 1 Yuan/Dollar

Parameter	Type	Maximum Length	Description
create_time	String	A maximum of 20 characters	<p>Creation time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z</p> <p>The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p>
payment_time	String	A maximum of 20 characters	<p>Payment time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z</p> <p>The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p>
amount_info	AmountInfoV2 Object	-	<p>Order deduction details. For details, see Table 7-15.</p>
currency	String	A maximum of 4 characters	Currency code.
contract_id	String	A maximum of 64 characters	Contract ID.
user_name	String	A maximum of 64 characters	<p>Order creator name</p> <ul style="list-style-type: none">• If the order is placed by the customer, the login name of the operator who places the order is returned.• If the order is placed by the operation personnel at the background, Operation personnel is returned.• If the order is automatically placed by the operation system, Operation system is returned.

Table 7-14 OrderLineItemEntityV2

Parameter	Type	Value Range	Description
order_line_item_id	String	A maximum of 64 characters	Order ID.
service_type_code	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
service_type_name	String	A maximum of 200 characters	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .
product_id	String	A maximum of 64 characters	Product ID.
product_spec_desc	String	A maximum of 512 characters	Product specification description.
period_type	Integer	-	Period type. The options are as follows: <ul style="list-style-type: none">• 0: Day• 1: Week• 2: Month• 3: Year• 4: Hour• 5: One-off• 6: Pay-per-use (reserved)• 7: By usage report (reserved)
period_num	Integer	-	Number of periods. NOTE The value of this parameter is null for an unsubscription order.
effective_time	String	A maximum of 20 characters	Effective time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.

Parameter	Type	Value Range	Description
expire_time	String	A maximum of 20 characters	Expiration time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
subscription_num	Integer	-	Number of subscriptions.
amount_after_discount	Double	-	Order amount after a discount (excluding the vouchers or cards).
official_amount	Double	-	Order amount (list price). In the unsubscription order, the amount is equal to the value of currencyAfterDiscount .
amount_info	AmountInfoV2 Object	-	Order deduction details. For details, see Table 7-15 .
currency	String	A maximum of 4 characters	Currency code.
category_code	String	A maximum of 64 characters	Product catalog code.
product_owner_service	String	A maximum of 64 characters	Type code of a cloud service. Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
commercial_resource	string	A maximum of 64 characters	Type code of a commercial resource. Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .

Table 7-15 AmountInfoV2

Parameter	Type	Value Range	Description
discounts	List<Disco untItemV2 >	-	Fee item. For details, see Table 7-16 .
flexipurchas e_coupon_a mount	Double	-	Flexi-purchase coupon amount (reserved).
coupon_am ount	Double	-	Cash coupon amount.
stored_card _amount	Double	-	Stored-value card amount (reserved).
commission _amount	Double	-	Handling fee (only for unsubscription orders).
consumed_ amount	Double	-	Consumption amount (only for unsubscription orders).

Table 7-16 DiscountItemV2

Parameter	Type	Value Range	Description
discount_type	String	A maximum of 8 characters	<p>Discount type.</p> <ul style="list-style-type: none">● 200: Promotion product discount● 300: Promotion discount coupon● 301: Promotion coupon● 302: Promotion flexi-purchase coupon● 500: Specified discount for agent subscription● 501: Specified exemption for agent subscription● 502: Specified buy-it-now price for agent subscription● 600: Discount specified in the discount and rebate contract● 601: Discount specified in the channel frame contract● 602: Discount specified in the designated-purpose fund contract● 603: Discount specified in the directly signed offline contract● 604: Discount specified in the authorized telemarketing contract● 605: Discount specified in the commercial contract● 606: Discount specified in the channel commercial contract● 607: Partner authorized discount● 609: Discount for order price adjusting● 610: Discount amount● 700: Promotion discount● 800: Top-up account discount
discount_amount	Double	-	Discounted amount.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
```

```
"total_count": 2,
"order_info": {
    "order_id": "CS18122203217MRPB",
    "customer_id": "982f05775ec94da390c3f174b058fb46",
    "service_type_code": "hws.service.type.obs",
    "source_type": 1,
    "status": 5,
    "order_type": 4,
    "amount_after_discount": -277.92,
    "official_amount": -277.92,
    "measure_id": 1,
    "create_time": "2018-12-21T19:21:03Z",
    "payment_time": null,
    "currency": "USD",
    "contract_id": null,
    "amount_info": {
        "discounts": [],
        "flexipurchase_coupon_amount": null,
        "coupon_amount": null,
        "stored_card_amount": null,
        "commission_amount": 30.88,
        "consumed_amount": 0.0
    },
    "user_name": "h*****55"
},
"order_line_items": [
    {
        "order_line_item_id": "CS18122203217MRPB-000001",
        "service_type_code": "hws.service.type.ebs",
        "product_id": "00301-01026-0--1",
        "product_spec_desc": "High I/O|40.0GB",
        "period_type": 3,
        "period_num": null,
        "effective_time": "2018-12-21T19:21:03Z",
        "expire_time": "2019-12-22T15:59:59Z",
        "subscription_num": 1,
        "amount_after_discount": -33.12,
        "official_amount": -33.12,
        "amount_info": {
            "discounts": [],
            "flexipurchase_coupon_amount": null,
            "coupon_amount": null,
            "stored_card_amount": null,
            "commission_amount": 3.68,
            "consumed_amount": 0.0
        },
        "currency": "USD",
        "category_code": "hws.resource.storage1.evs",
        "product_owner_service": null,
        "commercial_resource": null
    },
    {
        "order_line_item_id": "CS18122203217MRPB-000002",
        "service_type_code": "hws.service.type.ec2",
        "product_id": "00301-02019-0--1",
        "product_spec_desc": "General Computing|s2.medium.4|1vCPUs|4GB|linux",
        "period_type": 3,
        "period_num": null,
        "effective_time": "2018-12-21T19:21:03Z",
        "expire_time": "2019-12-22T15:59:59Z",
        "subscription_num": 1,
        "amount_after_discount": -244.8,
        "official_amount": -244.8,
        "amount_info": {
            "discounts": [],
            "flexipurchase_coupon_amount": null,
            "coupon_amount": null,
            "stored_card_amount": null,
            "commission_amount": 27.2,
```

```
        "consumed_amount": 0.0
    },
    "currency": "USD",
    "category_code": "hws.resourcecomputing.ecs",
    "product_owner_service": null,
    "commercial_resource": null
}
]
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.0101	Invalid parameter.
400	CBC.9900000 37	You do not have the permission to operate this reseller.
403	CBC.0151	Access denied.
403	CBC.0155	Request denied. The possible causes are as follows: The account authentication information is incorrect. The account or member account does not have the permission to call the API.
500	CBC.0999	Other errors.

7.3.3 Paying Yearly/Monthly Product Orders

Function

A customer can invoke this API to pay yearly-monthly product orders in the pending payment status.

Customers can follow the instructions described in [Payment](#) to pay yearly/monthly product orders in the pending payment status in Billing Center.

NOTE

- This API supports both monthly settlement and balance payment. Monthly settlement is preferred.
- Balance payment includes cash account payment and credit account payment. If both accounts have balance, the cash account payment is preferred.
- Restrictions for using a discount and coupon at the same time:
 - If the restriction attribute of a coupon contains field **simultaneousUseWithEmpowerDiscount** with a value of **0**, the coupons, commercial discounts, and partner-authorized discounts cannot be used together.
 - If the restriction attribute of a coupon contains field **minConsumeDiscount** and the values of **discount_ratio** for all the order items are less than the value of **minConsumeDiscount**, the discount and coupon cannot be used at the same time.
 - If the restriction attribute of a coupon contains field **simultaneousUseWithPromotionDiscount** with a value of **0**, the discount and coupon cannot be used at the same time.
- When this API is invoked by a unified accounting member or a resource management account to pay orders, if their enterprise master account has coupons available for the orders, the coupons are automatically applied. Starting from mid-November 2023, if you need to pay bills with a coupon, the coupon ID must be specified in the API parameters.

Constraints

This API can be invoked only by the customer AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v3/orders/customer-orders/pay

Request

Request Parameters

Parameter	Mandatory	Type	Maximum Length of Characters	Description
order_id	Yes	String	A maximum of 64 characters	<p>Order ID.</p> <p>The value is the same as the order_id value in the response message of invoking the API described in 7.3.1 Querying Orders or the order_ids value in the response message of API described in 7.4.2 Renewing Subscription to Yearly/Monthly Resources.</p>
use_coupon	Yes	String	[YES NO]	<p>Whether coupons are used for order payment. If this parameter is set to YES, the coupon_infos field is mandatory. If this parameter is set to NO, the value of coupon_infos is ignored.</p> <ul style="list-style-type: none">• YES: indicates that the coupons are used for payment.• NO: indicates that the coupons are not used for payment.
use_discount	Yes	String	[YES NO]	<p>Whether a discount is used for the order payment. If this parameter is set to YES, the discount_infos field is mandatory. If this parameter is set to NO, the value of discount_infos is ignored.</p> <ul style="list-style-type: none">• YES: indicates that the discount is used for payment.• NO: indicates that the discount is not used for payment.

Parameter	Mandatory	Type	Maximum Length of Characters	Description
coupon_infos	No	List<CouponSimpleInfo>	A maximum of 3 IDs are supported.	<p>For details, see Table 7-17.</p> <p>This parameter is reserved.</p> <p>If use_coupon is set to YES, this parameter is mandatory. If use_coupon is set to NO, this parameter can be left empty.</p> <p>Otherwise, a message indicating parameter error is displayed.</p> <p>CAUTION</p> <p>When this API is invoked by a unified accounting member or a resource management account to pay orders, if their enterprise master account has coupons available for the orders, the coupons are automatically applied when the orders are paid. Starting from mid-November 2023, if you need to pay bills with a coupon, the coupon ID must be specified in the API parameters.</p>
discount_infos	No	List<DiscountSimpleInfo>	Only one discount ID is allowed.	<p>For details, see Table 7-18.</p> <p>Discount ID list.</p> <p>If use_discount is set to YES, this parameter is mandatory. If use_discount is set to NO, this parameter can be left empty.</p> <p>Otherwise, a message indicating parameter error is displayed.</p>

Table 7-17 CouponSimpleInfo

Parameter	Mandatory	Type	Maximum Length of Characters	Description
id	Yes	String	A maximum of 64 characters	Coupon ID.

Parameter	Mandatory	Type	Maximum Length of Characters	Description
type	Yes	Integer	[300-303]	Coupon type. <ul style="list-style-type: none">● 300: Discount coupon (reserved)● 301: Promotion coupon● 302: Promotion flexi-purchase coupon (reserved)● 303: Promotion stored-value card (reserved)

Table 7-18 DiscountSimpleInfo

Parameter	Mandatory	Type	Maximum Length of Characters	Description
id	Yes	String	A maximum of 64 characters	Discount ID.
type	Yes	Integer	[0,2,3]	Discount type. <ul style="list-style-type: none">● 0: promotion discount●● 2: commercial discount● 3: discount granted by a partner

Example Request

POST https://bss-intl.myhuaweicloud.com/v3/orders/customer-orders/pay HTTP/1.1

Content-Type: application/json

X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIIINPxidG9rZ

{
 "use_coupon":"YES",
 "use_discount":"YES",
 "coupon_infos": [
 {
 "id": "CP200527025610NGSC",
 "type": 301
 }
],

```
"discount_infos": [
    {
        "id": "PDP2011260815047721TYT48G0BA02EI",
        "type": 1
    }
],
"order_id": "CS20052715001E4CR"
}
```

Response

Response Parameters

Status code: 204

Success is returned by default.

Status code: 400

Parameter	Type	Maximum Length of Characters	Description
error_code	String	A maximum of 10 characters	Error code. For details, see Returned Values .
error_msg	String	A maximum of 256 characters	Error description.
quota_infos	List<QuotaInfo>	-	List of the resources whose quota or capacity is insufficient. For details, see Table 7-19 . This parameter is valid only when error_code is set to CBC.99003141 . <ul style="list-style-type: none">• If the quota is insufficient, notify the customer to submit a service ticket on the HUAWEI CLOUD official website to increase the quota and then pay the order.• If the capacity is insufficient, notify the customer to place an order again.• If the specifications have changed, notify the customer to place an order again.

Parameter	Type	Maximum Length of Characters	Description
enterprise_project_auth_result	List<EnterpriseProject>	-	<p>Information about the enterprise project whose fund is insufficient.</p> <p>For details, see Table 7-20.</p> <p>This parameter is valid only when error_code is set to CBC.99003155.</p>

Table 7-19 QuotaInfo

Parameter	Type	Description
region	String	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .
service_type_code	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
resource_type_code	String	<p>Resource type code. For example, the resource type code of VM is hws.resource.type.vm.</p> <p>The relationship between ResourceType and CloudServiceType is as follows: A resource type represents a resource contained in the cloud service type, and the cloud service type is a combination of multiple resource types.</p>
resource_spec_code	String	<p>Resource specifications of the subscribed cloud service products.</p> <p>For example, the resource specification of a small-scale VM is s2.small.1.linux.</p>
service_type_name	String	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .
resource_type_name	String	Resource type. For example, the resource type of ECS is Cloud Host .

Parameter	Type	Description
auth_result	Integer	<p>Verification result of the change of the cloud service quota, capacity, or specifications.</p> <ul style="list-style-type: none">• 1: The quota is insufficient.• 2: The capacity is insufficient.• 3: The resource specifications are incorrect. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order.• 4: The associated resource information is incorrect. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order.• 99: Other errors. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order.
available_zone	String	<p>AZ ID.</p> <p>For details, see the AZ names of regions listed on the Regions and Endpoints, for example, cn-north-1a.</p>

Table 7-20 EnterpriseProject

Parameter	Type	Description
enterprise_project_id	String	<p>ID of the enterprise project where an order belongs.</p> <ul style="list-style-type: none">• 0: ID of a default project• -1 or null: Non-project ID
enterprise_project_name	String	Enterprise project name.
auth_status	Integer	<p>Verification result of the enterprise project's fund quota.</p> <p>10: The fund quota is insufficient./The project is invalid.</p> <p>11: The organization budget quota is insufficient.</p>

Example Response

HTTP/1.1 204 No Content
Content-Type: application/json;charset=UTF-8

Content-Length: *length*
Date: *response time*

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.99000046	Insufficient budget.
500	CBC.30000010	Operation not allowed because the order is invalid or does not exist.
400	CBC.99003106	The order status has changed and no payment can be made.
400	CBC.99003108	This discount cannot be used for this order.
400	CBC.99003110	The order has not been paid before the expiration time. Please re-submit the order.
400	CBC.99003112	The coupon or stored-value card has been used.
400	CBC.99003116	The restriction to selected coupon regulates that the coupon cannot be used with the discount at the same time.
400	CBC.99003117	The selected discount is less than the minimum discount rate configured for the selected coupon. Note: For example, if the minimum discount rate configured for a coupon is 90% and the selected discount is less than 90% in all order lines, the discount cannot be used.
400	CBC.99003141	The cloud service quota or capacity is insufficient, or the resource specifications have changed.
400	CBC.99003147	Discounts and cash coupons cannot be both used.
400	CBC.99003155	The enterprise project's fund quota is insufficient, or the project is invalid.
400	CBC.99003156	Coupons applicable to KooGallery products cannot be used together with dedicated coupons.
400	CBC.99003162	The payment time must be earlier than the specified effective time.

HTTP Status Code	Error Code	Description
400	CBC.99003198	Insufficient budget of the organization.
400	CBC.99005003	Insufficient balance.
400	CBC.99005036	Payment via API not allowed for this customer. (Payment by balance and monthly-settled payment are not allowed.)
400	CBC.99006093	Failed to obtain the tax rate.
400	CBC.7281	Renewal, unsubscription, or payment not supported. Your account has been frozen.
400	CBC.99008040	Too many attempts.
500	CBC.0999	Other errors.
400	CBC.99000088	Your payment is being processed.
400	CBC.99000089	Operation failed. Sub orders of a combine order cannot be processed independently.

7.3.4 Canceling Orders in the Pending Payment Status

Function

A customer can invoke this API to cancel orders in the pending payment status.

Customers can follow the instructions described in [Cancellation](#) to cancel yearly/monthly product orders in the pending payment status in Billing Center.



Only the orders in the pending payment status can be canceled.

Constraints

This API can be invoked only by the customer AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

PUT /v2/orders/customer-orders/cancel

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
order_id	Yes	String	A maximum of 64 characters	Order ID. The value is the same as the value of order_id in the response of the API described in 7.3.1 Querying Orders .

Example Request

```
PUT https://bss-intl.myhuaweicloud.com/v2/orders/customer-orders/cancel HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIIINPXsidG9rZ
{
    "order_id": "CS170926155954NO7"
}
```

Response

Response Parameters

Table 7-21 Response parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 10 characters	Status code. For details, see Returned Values .
error_msg	String	A maximum of 256 characters	Error description.

Example Response

```
HTTP/1.1 204 No Content
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99005010	Orders in this state cannot be canceled.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.
400	CBC.99000089	Operation failed. Sub orders of a combine order cannot be processed independently.

7.3.5 Querying the Amount of Unsubscription Orders

Function

A customer can query the resources and original orders of the unsubscription amount for an unsubscription order or degrade order on the partner sales platform.

NOTE

- After you invoke the API in [7.4.3 Unsubscribing from Yearly/Monthly Resources](#) to generate an unsubscription order ID, you can invoke this API to query the resources and amount of an unsubscription order. For example, after you invoke the API in [7.4.3 Unsubscribing from Yearly/Monthly Resources](#), you can invoke this API to query the original order ID and original subscription renewal order ID.
- You can query original order IDs for only unsubscription orders generated after May 2018.

Constraints

This API can be invoked using the customer token replaced by the partner token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/orders/customer-orders/refund-orders

Table 7-22 Query parameters

Parameter	Mandatory	Type	Value Range	Description
order_id	Yes	String	A maximum of 64 characters	ID of an unsubscription or degrade order.

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/orders/customer-orders/refund-orders?  
order_id=CS1904190917GIBHC HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Status code. For details, see Status Code .
error_msg	String	Error description.
total_count	Integer	Total queries.
refund_infos	List<OrderRefundInfoV2>	Resource list. For details, see Table 7-23 .

Table 7-23 OrderRefundInfoV2

Parameter	Type	Description
id	String	Record ID.

Parameter	Type	Description
amount	BigDecimal	Amount. <ul style="list-style-type: none">A negative number indicates the unsubscription amount.A positive number indicates the handling fee for unsubscription.
measure_id	String	Fee unit. <ul style="list-style-type: none">1: 1 Yuan/Dollar
customer_id	String	Customer account ID.
resource_type_code	String	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm .
service_type_code	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
resource_type_name	String	Resource type. For example, the resource type of ECS is Cloud Host .
service_type_name	String	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .
region_code	String	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .
base_order_id	String	ID of the original order corresponding to the unsubscription amount, consumption amount, or unsubscription handling fee.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "total_count": 1,
    "refund_infos": [
        {
            "id": "ccefa7ff-****-****-99f5-bb25a2551217",
            "amount": -3,
            "measure_id": "1",
            "customer_id": "075a5d*****ffb75c20a82d228130",
            "resource_type_code": "hws.resource.type.volume",
            "service_type_code": "hws.service.type.ebs",
            "resource_type_name": "EVS",
            "service_type_name": "EVS",
            "region_code": "ap-southeast-1",
            "base_order_id": "CS2006*****1F8CI"
        }
    ]
}
```

Status Code

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.99005026	The order is not a degrade or unsubscription order.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.4 Managing Yearly/Monthly Resources

7.4.1 Querying Customer's Yearly/Monthly Resources

Function

A customer can query one or all yearly/monthly resources on the partner sales platform.

NOTE

If you need to renew resources that already take effect after you successfully invoke this API, you can invoke the API described in [4.2.2 Querying the Price of a Yearly/Monthly Product](#) to query the price for the yearly/monthly resources and then invoke the API described in [7.4.2 Renewing Subscription to Yearly/Monthly Resources](#) to renew the subscription.

Constraints

- This API can be invoked using the customer AK/SK or token only.
- This API queries resources successfully provisioned only.
- If the parameter is left empty, for example, no parameter is transferred, the value is **null**, the value is an empty JSON array, or the value is an empty string, a specified number of resources (specified by **limit**, which is **10** by default) are returned for the user.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/orders/suscriptions/resources/query

Request

Request Parameters

Table 7-24 Request parameters

Parameter	Mandatory	Type	Value Range	Description
resource_ids	No	list<String>	[0-50]	<p>Resource IDs.</p> <p>Queries resources with the specified resource IDs. When only_main_resource is 0, the system queries the specified resources and their auxiliary resources. A maximum of 50 IDs can be used at the same time.</p> <p>If this parameter is not included in the request parameters, is left empty, or is set to null, it cannot be used as a filter criterion. Records that meet other search criteria are returned.</p> <p>NOTE A resource ID is allocated by a cloud service after the resource is provisioned, such as server_id for ECS.</p>
order_id	No	String	A maximum of 64 characters	<p>Order ID. This parameter can be used for querying the resources in a specified order.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion. Records that meet other search criteria are returned.</p> <p>NOTE When special characters are used for query, perform the URL code conversion. For example, % should be converted to %25.</p>

Parameter	Mandatory	Type	Value Range	Description
only_main_resource	No	Integer	0, 1	<p>Whether to query only the primary resources. This parameter is invalid when resource_ids are IDs of attached resources. In this case, the system queries the attached resources.</p> <ul style="list-style-type: none">• 0: Queries both the primary resources and attached resources.• 1: Queries only the primary resources. <p>The default value is 0.</p> <p>If this parameter is not included in the request parameters or is set to null, the default value 0 is used.</p> <p>NOTE</p> <p>A primary resource takes the primary position in the associated resources.</p> <ul style="list-style-type: none">• For ECS, ECS is the primary resource, and EVS is the attached resource.• For VPC, if the shared bandwidth is used, the bandwidth is the primary resource, and EIPs are the attached resource. If the exclusive bandwidth is used, EIPs are the primary resources, and the bandwidth is the attached resource.
status_list	No	list<Integer>	[0-10]	<p>Resource status.</p> <p>Queries resources in a specified status. If there are multiple statuses, separate them using commas (,).</p> <ul style="list-style-type: none">• 2: Provisioned• 4: Frozen• 5: Expired <p>If this parameter is not included in the request parameters, is left empty, or is set to null, it cannot be used as a filter criterion. Resources in all statuses are returned.</p>

Parameter	Mandatory	Type	Value Range	Description
offset	No	Integer	0 to 2147483646	<p>Offset, starting from 0. The default value is 0.</p> <p>NOTE</p> <p>This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	Integer	1 to 500	Number of records queried each time. The default value is 10 .
expire_time_begin	No	String	20	<p>Start time of a period during which there are expired resources. The time is in the UTC format <i>yyyy-MM-dd'T'HH:mm:ss'Z</i>, for example, 2019-05-06T08:05:01Z. The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion. Records that meet other search criteria are returned.</p>
expire_time_end	No	String	20	<p>End time of a period during which there are expired resources. The time is in the UTC format <i>yyyy-MM-dd'T'HH:mm:ss'Z</i>, for example, 2019-05-06T08:05:01Z. The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion. Records that meet other search criteria are returned.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/orders/suscriptions/resources/query HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZlhcNAQcCo...ggg1BBIINPXsidG9rZ
```

```
{
```

```
    "resource_ids": [
```

```
        "0A063A*****BC8548E65D0089A905"
```

```
    ],
```

```
    "order_id": "CS1905251035OA***",
```

```
"only_main_resource":1,  
"status_list":[  
    2  
],  
"offset":0,  
"limit":10,  
"expire_time_begin":"2021-09-01T08:05:01Z",  
"expire_time_end":"2021-09-03T08:05:01Z"  
}
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Error code. For details, see Returned Values .
error_msg	String	Error description.
data	List<OrderInstanceV2>	Resource list. For details, see Table 7-25 .
total_count	Integer	Total number of records

Table 7-25 OrderInstanceV2

Parameter	Type	Description
id	String	Internal ID of the resource to be provisioned. The ID generated after the resource is provisioned is resource_id .
resource_id	String	Resource ID.
resource_name	String	Resource instance name.
region_code	String	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .
service_type_code	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .

Parameter	Type	Description
resource_type_code	String	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm .
resource_spec_code	String	Specification of a cloud service resource. For example, a VM resource specification is s2.small.1.linux (.win or .linux should be added at the end of the specification).
service_type_name	String	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .
resource_type_name	String	Resource type. For example, the resource type of ECS is Cloud Host .
project_id	String	Resource project ID.
product_id	String	Product ID.
parent_resource_id	String	Parent resource ID
is_main_resource	Integer	Primary resource or not. <ul style="list-style-type: none">• 0: Attached resource• 1: Primary resource
status	Integer	Resource status. <ul style="list-style-type: none">• 2: Provisioned• 3: Closed (not visible to customers)• 4: Frozen• 5: Expired
effective_time	String	Effective time of a resource. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z
expire_time	String	Expiration time of a resource. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z

Parameter	Type	Description
expire_policy	Integer	<p>Billing policy after a resource expires.</p> <ul style="list-style-type: none">• 0: Entering the grace period upon expiration• 1: Yearly/monthly to pay-per-use• 2: Automatically deleted upon expiration (directly deleted from resources that take effect)• 3: Automatically renewed upon expiration• 4: Automatically frozen upon expiration• 5: Automatically deleted upon expiration (deleted from resources in the retention period) <p>NOTE Only 3 indicates that the resource is automatically renewed. In other cases, the expiration policy for non-automatic renewal is used.</p>

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
  "data": [
    {
      "id": "01154-54600027-0",
      "resource_id": "0A063A11905F42BC8548E65D0089A905",
      "resource_name": "0A063A11905F42BC8548E65D0089A905name",
      "region_code": "ap-southeast-1",
      "service_type_code": "hws.service.type.ebs",
      "resource_type_code": "hws.resource.type.volume",
      "resource_spec_code": "SSD",
      "project_id": "1dd89a5fe99e4cca80edca61e737477a",
      "product_id": "2fd338aca5ae4a01aac81deaa900e441",
      "parent_resource_id": "9ad02e1ad3394d1bb3da48890fbc4c06",
      "is_main_resource": 1,
      "status": 2,
      "effective_time": "2020-05-03T09:11:10Z",
      "expire_time": "2020-06-03T09:11:10Z",
      "expire_policy": 0
    }
  ],
  "total_count": 1
}
```

Returned Values



- NOTE**
- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
 - **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.4.2 Renewing Subscription to Yearly/Monthly Resources

Function

A customer can renew subscription to yearly/monthly resources on the partner sales platform.

When subscription to yearly/monthly resources of a customer is about to expire, the customer can renew the subscription to the resources.

Customers can follow the instructions described in [Manually Renewing a Resource](#) to renew the subscription to the yearly/monthly resources in Billing Center.

NOTE

- If a primary resource has resources attached, the system renews the subscription to both the primary resource and its attached ones after this API is invoked. You can invoke [7.4.1 Querying Customer's Yearly/Monthly Resources](#) to obtain the details of the attached resources.
- If a newly purchased EVS disk is attached to an ECS, but this disk is not attached to any of the ECS primary resources, you must invoke [7.4.1 Querying Customer's Yearly/Monthly Resources](#) to obtain the details of the ECS primary resources and its attached ones.
- This API supports automatic payment. For details about how to use discounts or coupons during payment, see [12.6 Support for Discounts or Coupons](#).

Constraints

This API can be invoked only by the customer AK/SK or token. This is because that partners cannot buy products by themselves.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/orders/subscriptions/resources/renew

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
resource_ids	Yes	List<String>	[1-10]	<p>Resource IDs.</p> <p>Only the primary resource ID is supported. A maximum of 10 resource IDs can be configured.</p> <p>To determine the primary resources, query is_main_resource in the response of the API described in 7.4.1 Querying Customer's Yearly/Monthly Resources.</p>
period_type	Yes	Integer	2, 3	<p>Period type. The value can be:</p> <ul style="list-style-type: none">• 2: month• 3: year
period_num	Yes	Integer	1 to 11	<p>Number of periods.</p> <ul style="list-style-type: none">• Month: 1 to 11• Year: 1 to 3
expire_policy	Yes	Integer	0 to 3	<p>Expiration policy. This field has been discarded. Do not use this field. This parameter cannot be left empty and needs to be carried. The carried enumeration does not take effect.</p> <ul style="list-style-type: none">• 0: Entering a grace or retention period• 1: Yearly/monthly to pay-per-use• 2: Automatic unsubscription• 3: Automatic renewal
is_auto_pay	No	Integer	0, 1	<p>Whether enable automatic payment.</p> <ul style="list-style-type: none">• 0: No• 1: Yes <p>If this parameter is not included in the request parameters or is set to null, the default value is 0 indicating not to enable the automatic payment.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/orders/subscriptions/resources/renew HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXdG9rZ
```

```
{  
    "resource_ids": [  
        "96308d5efd7841b9a4dac673d84d0e14"  
    ],  
    "period_type": 2,  
    "period_num": 1,  
    "expire_policy": 1,  
}
```

```
        "is_auto_pay": 0
    }
```

Response

Response Parameters

Status code: 200

Table 7-26 Response body parameters

Parameter	Type	Description
order_ids	List<String>	List of order IDs generated when resource subscription is renewed.
fail_resource_infos	List<FailResourceInfo>	List of resources that failed to be renewed. This parameter has a value only when there are resources that fail to be renewed. For details, see Table 7-27 . This parameter is reserved.

Table 7-27 FailResourceInfo

Parameter	Type	Description
error_code	String	Error code. For details, see Error Codes . This parameter is reserved.
error_msg	String	Error description. This parameter is reserved.
resource_id	String	Resource ID. This parameter is reserved.

Status code: 400

Table 7-28 Response body parameters

Parameter	Type	Description
error_code	String	Status code. For details, see Returned Values .
error_msg	String	Error description.
order_ids	List<String>	List of order IDs generated when resource subscription is renewed.

Parameter	Type	Description
expiredResourceIds	List<String>	List of expired or non-existent resources. This parameter has a value only when the error code is CBC.99003016 .

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
Date: response time
{
    "order_ids": [
        "CS19040119281JMYC"
    ],
    "fail_resource_infos": []
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.300100 36	Renewal is only supported for primary resources.
400	CBC.300500 06	Automatic order payment failed.
400	CBC.990031 00	This operation is not allowed because some resources are included in your orders to be paid.
400	CBC.7281	Renewal, payment, or unsubscription not supported. Your account has been frozen.
400	CBC.990030 16	The resources have expired and been deleted or do not exist.
400	CBC.990031 44	Resources have been unsubscribed from or changed.
400	CBC.990031 54	The sum of the existing and renewal durations has exceeded the maximum allowed. Select another renewal duration.

HTTP Value	Error Code	Description
400	CBC.990036 31	The unsubscribed, deleted, or released resource cannot be renewed.
400	CBC.990036 34	Resources in discount packages must be renewed as a whole and cannot be renewed together with other resources.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.4.3 Unsubscribing from Yearly/Monthly Resources

Function

If a customer has subscribed to a yearly/monthly resource, the customer can use this API to unsubscribe from the resource, including the renewed part and currently used part. The customer cannot use the resources after unsubscription.

Customers can follow the instructions described in [Unsubscription](#) to unsubscribe from the yearly/monthly resources in Billing Center.

NOTE

- A yearly/monthly resource can be unsubscribed from only after it has been successfully paid and provisioned.
- If a primary resource has resources attached, the system cancels the subscription to both the primary resource and its attached ones after this API is invoked. You can invoke [7.4.1 Querying Customer's Yearly/Monthly Resources](#) to obtain the details of the attached resources.
- If a newly purchased EVS disk is attached to an ECS, but this disk is not the attached to any of the ECS primary resources, you must invoke [7.4.1 Querying Customer's Yearly/Monthly Resources](#) to obtain the details of the ECS primary resources and its attached ones.
- After invoking this API, you can also invoke the API described in [7.3.5 Querying the Amount of Unsubscription Orders](#) to query the orders corresponding to the unsubscription order amounts.
- Confirm the resource information and the refund before unsubscribing from in-use resources. After being unsubscribed from, the resources not in the recycle bin cannot be restored. If you want to continue using these resources, unsubscribe from the subscription term renewed but not used yet.

Constraints

This API can be invoked only by the customer AK/SK or token. This is because that partners cannot buy products by themselves.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/orders/subscriptions/resources/unsubscribe

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
resource_ids	Yes	List<String>	A maximum of 10 resource IDs	<p>Resource IDs.</p> <p>A maximum of 10 resource IDs can be entered at a time. Only the primary resource IDs can be entered.</p> <p>Determine whether a resource is a primary resource based on is_main_resource in the response of the API described in 7.4.1 Querying Customer's Yearly/Monthly Resources.</p>
unsubscribe_type	Yes	Integer	1, 2	<p>Unsubscription type. The value can be:</p> <ul style="list-style-type: none">• 1: Unsubscribe from the resource and its renewal periods.• 2: Unsubscribe from only the resource renewal periods.
unsubscribe_reason_type	No	Integer	1 to 5	<p>Unsubscription cause. The value can be:</p> <ul style="list-style-type: none">• 1: The product is of poor usability.• 2: The product functions cannot meet the requirements.• 3: Customers do not know how to use the product, or the product operations are complex.• 4: Customers are not satisfied with the service.• 5: Others
unsubscribe_reason	No	String	A maximum of 512 characters	Unsubscription reason, which is generally specified by the customer.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/orders/subscriptions/resources/unsubscribe HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

```
{
```

```
"resource_ids": [  
    "21e09f37c5c9420c8746ad5c71fb3aab"  
,  
    "unsubscribe_type": 1,  
    "unsubscribe_reason_type": 5,  
    "unsubscribe_reason": "test"  
}
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Status code. For details, see Returned Values .
error_msg	String	Error description.
order_ids	List<String>	Unsubscription order IDs.
fail_resource_infos	List<FailResourceInfo>	List of resources that failed to be unsubscribed from. This parameter has a value only when there are resources that fail to be unsubscribed from. For details, see #api_order_00019/table173001375312 . This parameter is reserved.

Table FailResourceInfo

Parameter	Type	Description
error_code	String	Status code. For details, see Returned Values . This parameter is reserved.
error_msg	String	Error description. This parameter is reserved.
resource_id	String	Resource ID. This parameter is reserved.

Example Response

```
HTTP/1.1 200 OK  
Content-Type: application/json;charset=UTF-8  
Content-Length: length  
Date: response time  
{  
    "order_ids": [  
        "21e09f37c5c9420c8746ad5c71fb3aab"  
,  
        "unsubscribe_type": 1,  
        "unsubscribe_reason_type": 5,  
        "unsubscribe_reason": "test"  
    }  
}
```

```
        "CS19040119281JMYC"
    ],
    "fail_resource_infos": []
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.30000052	The resources or account has been frozen.
400	CBC.30010035	Resource deleted.
400	CBC.99003012	The resource ID does not exist.
400	CBC.99003100	This operation is not allowed because some resources are included in your orders to be paid.
400	CBC.99003128	The resource does not have renewed periods or the renewed periods have taken effect, and the renewal periods cannot be unsubscribed.
400	CBC.99003144	Resources are being unsubscribed from or changed.
400	CBC.99003185	The associated resources of a cloud service cannot be operated independently.
400	CBC.99003643	For cloud services for which invoices have been issued, unsubscription is not supported.
400	CBC.99003645	Unsubscription not supported for this cloud service type.
400	CBC.99003649	Unsubscription not supported for cloud services in trial use.
400	CBC.99003652	Unsubscription is not supported for DevCloud packages.
400	CBC.99003654	If there is a bandwidth add-on package, you cannot unsubscribe from the renewal period.

HTTP Value	Error Code	Description
400	CBC.990036 56	Unsubscription not supported for resources frozen due to security reasons.
400	CBC.990050 42	The resource cannot be found or unsubscribed from.
400	CBC.990060 66	An error occurred during the query of the fee information.
403	CBC.0151	Access denied.
400	CBC.990036 51	Unsubscription not supported. An operation associated with this instance is in progress.
500	CBC.0999	Other errors.

7.4.4 Enabling Automatic Subscription Renewal for Yearly/Monthly Resources

Function

A customer can use this API to enable automatic subscription renewal for its long-term yearly/monthly resources to prevent the resources from being deleted when they are expired.

Customers can follow the instructions described in [Enabling Auto-Renewal](#) to enable automatic subscription renewal for yearly/monthly resources in Billing Center.

NOTE

- The customer can enable automatic subscription renewal only after the customer successfully pays its yearly/monthly resource order.
- For details about the yearly/monthly products supporting automatic subscription renewal, see [Auto-Renewal Rules](#).
- Before invoking this API, you can invoke the API described in [7.4.1 Querying Customer's Yearly/Monthly Resources](#) to query the resource ID, resource expiration date, and deduction policy after the resource is expired.
- After you enable automatic subscription renewal, the fee will be deducted at 03:00 7 days before the product expiration date. Ensure that your budget is sufficient. If the first attempt to deduct the fee fails due to the insufficient budget, the system will continue the attempts at 03:00 every day until the fee is deducted successfully, or will retain the product resources till the last allowed day.
- The renewed period is the same as the original resource subscription period.

Constraints

This API can be invoked only by the customer AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/orders/subscriptions/resources/autorenew/{resource_id}

The following table describes the parameters.

Table 7-29 Path parameters

Parameter	Mandatory	Value Range	Description
resource_id	Yes	A maximum of 64 characters	<p>Resource ID.</p> <p>You can obtain the resource ID by invoking the API described in 7.4.1 Querying Customer's Yearly/Monthly Resources.</p> <p>The attached resource IDs will be configured together when you configure primary resource IDs.</p> <ul style="list-style-type: none">For example, ECS is the primary resource, and EVS is the attached resource.If the shared bandwidth is used, the bandwidth is the primary resource, and EIPs are the attached resource.If the exclusive bandwidth is used, EIPs are the primary resources, and the bandwidth is the attached resource. <p>If automatic renewal is enabled for the secondary resource, the primary resource will also be renewed.</p>

Request

Request Parameters

None

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/orders/subscriptions/resources/autorenew/  
eb1cac79-773b-414b-8915-6c3eed8ddf24 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Status code. For details, see Returned Values .
error_msg	String	Error description.

Example Response

```
HTTP/1.1 204 No Content
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
```

Returned Values



NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99003012	The resource ID does not exist.
400	CBC.99003602	Automatic renewal is not supported for expired or frozen resources.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.4.5 Disabling Automatic Subscription Renewal for Yearly/Monthly Resources

Function

A customer can disable automatic subscription renewal when needed. After disabling this function, the customer needs to manually renew the subscription to the resources before they expire.

Customers can follow the instructions described in [Disabling Auto-Renewal](#) to disable automatic subscription renewal for yearly/monthly resources in Billing Center.

 NOTE

- The prerequisite is that you have invoked the API described in [7.4.4 Enabling Automatic Subscription Renewal for Yearly/Monthly Resources](#) to enable automatic subscription renewal, or have configured the expiration policy to automatic renewal when you invoke the API described in [7.4.2 Renewing Subscription to Yearly/Monthly Resources](#).
- Yearly/monthly resources supporting the disabling of automatic subscription renewal are same as those supporting the enabling of automatic subscription renewal.
- Before invoking this API, you can invoke the API described in [7.4.1 Querying Customer's Yearly/Monthly Resources](#) to query the resource ID, resource expiration date, and deduction policy after the resource is expired.

Constraints

This API can be invoked only by the customer AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

DELETE /v2/orders/subscriptions/resources/autorenew/{resource_id}

The following table describes the parameters.

Table 7-30 Path parameters

Parameter	Mandatory	Value Range	Description
resource_id	Yes	A maximum of 64 characters	<p>Resource ID. You can obtain the resource ID by invoking the API described in 7.4.1 Querying Customer's Yearly/Monthly Resources.</p> <p>The attached resource IDs will be configured together when you configure primary resource IDs.</p> <ul style="list-style-type: none">• For example, ECS is the primary resource, and EVS is the attached resource.• If the shared bandwidth is used, the bandwidth is the primary resource, and EIPs are the attached resource.• If the exclusive bandwidth is used, EIPs are the primary resources, and the bandwidth is the attached resource.

Request

Request Parameters

None

Example Request

```
DELETE https://bss-intl.myhuaweicloud.com/v2/orders/subscriptions/resources/autorenew/  
eb1cac79-773b-414b-8915-6c3eed8ddf24 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Status code. For details, see Returned Values .
error_msg	String	Error description.

Example Response

```
HTTP/1.1 204 No Content  
Content-Type: application/json; charset=UTF-8  
Content-Length: length  
Date: response time
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99003012	The resource ID does not exist.
400	CBC.99003605	Automatic renewal has been canceled and you cannot perform the current operation.

HTTP Value	Error Code	Description
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.4.6 Enabling/Canceling the Change from Yearly/Monthly to Pay-per-Use upon Expiration

Function

A customer can change the billing mode of resources from yearly/monthly to pay-per-use after the resources expire. The pay-per-use mode takes effect upon a yearly/monthly expiration.

Customers can follow the instructions described in [From Yearly/Monthly to Pay-per-Use](#) to enable the change from yearly/monthly to pay-per-use upon expiration in Billing Center.

NOTE

- The customer can enable the change from yearly/monthly to pay-per-use only after it has paid the yearly/monthly subscription.
- The billing mode of solution portfolio products cannot be changed from yearly/monthly to pay-per-use.
- Before invoking this API, you can invoke the API described in [7.4.1 Querying Customer's Yearly/Monthly Resources](#) to query the resource ID, resource expiration date, and deduction policy after the resource is expired.
- With the change from yearly/monthly to pay-per-use enabled, after a yearly/monthly package expires, you will be billed for subsequently used resources on a pay-per-use basis.
- To cancel the change from yearly/monthly to pay-per-use, you must enable the change by calling the API described in [7.4.6 Enabling/Canceling the Change from Yearly/Monthly to Pay-per-Use upon Expiration](#) or set the expiration policy to Pay-per-Use After Expiration by calling the API described in [7.4.2 Renewing Subscription to Yearly/Monthly Resources](#).

REST API

This API can be invoked only by the customer AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/orders/subscriptions/resources/to-on-demand

The following table describes the parameters.

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
operation	Yes	String	A maximum of 64 characters	Used to enable or cancel the change from yearly/monthly to pay-per-use. <ul style="list-style-type: none">• SET_UP: Enable• CANCEL: Cancel
resource_ids	Yes	list<string>	[0-100]	<p>Resource ID.</p> <p>You can obtain the resource ID by invoking the API described in 7.4.1 Querying Customer's Yearly/Monthly Resources.</p> <p>A maximum of 100 IDs of only primary resources can be set. After this parameter is set, both the primary resource and its attached resources are changed to pay-per-use resources.</p> <p>You can refer to parameter is_main_resource in the response of the API described in 7.4.1 Querying Customer's Yearly/Monthly Resources to check whether the resource is primary.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/orders/subscriptions/resources/to-on-demand HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
{
    "operation":"SET_UP",
    "resource_ids":["0c3248018ed54b1e8e3ecbab1b0989ce"]
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values .
error_msg	String	A maximum of 1000 characters	Error description.
error_details	List<Error Detail>	A maximum of 100 records	This parameter is returned when HTTP 200 is displayed. If some operations fail, only failure records are returned. If all the operations succeed, the record is empty. For details, see Table 7-31 .

Table 7-31 ErrorDetail

Parameter	Type	Value Range	Description
id	String	A maximum of 128 characters	ID of a batch processing message.
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values .
error_msg	String	A maximum of 1000 characters	Error description.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
Date: response time
```

```
{  
    "error_details": []  
}
```

Returned Values



NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99003609	The billing mode of this product type cannot be changed to pay-per-use.
200	CBC.99003610	The billing mode of resources in the grace or retention period cannot be changed to pay-per-use.
400	CBC.99003611	The billing mode of pay-per-usage packages cannot be changed to pay-per-use.
400	CBC.99003012	The resource ID does not exist.
400	CBC.99003622	The billing mode of solutions cannot be changed to pay-per-use.
400	CBC.99003623	Cannot be changed to the pay-per-use billing mode because there are transactions being processed.
400	CBC.99003624	Cannot be changed to the pay-per-use billing mode because the resource has been frozen due to security reasons.
400	CBC.99003626	Cannot be changed to the pay-per-use billing mode because this account has been frozen.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.5 Managing Resource Packages

7.5.1 Querying Resource Packages

Function

This API is used to query resource packages.

Constraints

This API can be invoked only by the customer AK/SK or token.



If a resource package has expired for more than 18 months, its information cannot be queried.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v3/payments/free-resources/query

Table 7-32 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	No	A maximum of 8 characters	Language. • zh_CN: Chinese • en_US: English Default value: zh_CN

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
region_code	No	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints . If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
order_id	No	String	A maximum of 64 characters	Order ID. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
product_id	No	String	A maximum of 64 characters	Resource package ID. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
product_name	No	String	A maximum of 256 characters	Resource package name. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
enterprise_project_id	No	String	A maximum of 64 characters	Enterprise project ID. This parameter is mandatory if you want to query the resources of an enterprise project. If this parameter is not included in the request parameters, is set to "", or is set to null , the resources not included in the enterprise project are queried.

Parameter	Mandatory	Type	Value Range	Description
status	No	Integer	(0, 4)	<p>Status:</p> <ul style="list-style-type: none">• 0: Not effective• 1: In effect• 2: Used up• 3: Expired• 4: Unsubscribed <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>
offset	No	Integer	(0, 999999)	<p>Offset, starting from 0. The default value is 0.</p> <p>NOTE This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	Integer	(1, 1000)	Number of records queried each time. The default value is 10 .

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v3/payments/free-resources/query HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

```
{  
    "region_code": "cn-north-7",  
    "order_id": "CS21043011259RWXXTA",  
    "product_id": "90301-296014-0--0",  
    "product_name": "HUAWEI CLOUD WeLink",  
    "enterprise_project_id": null,  
    "status": 1,  
    "offset": 0,  
    "limit": 10  
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	20	Error code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	1000	Error description. This parameter is returned only when the query failed.
free_resource_packages	List<FreeResourcePackage>	-	Resource package list. For details, see Table 7-33 .
total_count	Integer	-	Total number of records

Table 7-33 FreeResourcePackage

Parameter	Type	Value Range	Description
order_instance_id	String	A maximum of 64 characters	Identifier of a subscribed resource package.
order_id	String	A maximum of 64 characters	Order ID. If the value of source_type is 1, this parameter is left empty.
product_id	String	A maximum of 64 characters	Resource package ID.
product_name	String	A maximum of 256 characters	Resource package name.

Parameter	Type	Value Range	Description
enterprise_project_id	String	A maximum of 64 characters	Enterprise project ID.
enterprise_project_scope	Integer	(0, 1)	Enterprise projects for which resource packages are used: <ul style="list-style-type: none">● 0: All enterprise projects● 1: Specific enterprise projects
effective_time	String	A maximum of 20 characters	Time when a resource package is purchased. The value is in UTC format.
expire_time	String	A maximum of 20 characters	Expiration time of a resource package. The value is in UTC format.
status	Integer	(0, 4)	Status: <ul style="list-style-type: none">● 0: Not effective● 1: In effect● 2: Used up● 3: Expired● 4: Unsubscribed
service_type_code	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
service_type_name	String	A maximum of 200 characters	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .

Parameter	Type	Value Range	Description
region_code	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints .
source_type	Integer	(0, 1)	Source of a resource package. The options are as follows: <ul style="list-style-type: none">• 0: Order• 1: Gifted by DevCloud
bundle_type	String	[ATOMI C_PKG] BUNDL E_PKG]	Bundle binding type. The options are as follows: <ul style="list-style-type: none">• ATOMIC_PKG: Atomic package• BUNDLE_PKG: Combined package
quota_reuse_mode	Integer	(1,2)	Use model. The options are as follows: <ul style="list-style-type: none">• 1: Resettable<ul style="list-style-type: none">Indicates that the purchased pay-per-use resource package can be reset at a specified period. For example, if you purchase a 1-year 40 GB pay-per-use resource package with quota_reuse_mode set to 1 and quota_reuse_cycle to 4, then the resource package will be reset each month (you will get 40 GB resource each month) within the year.• 2: Not resettable<ul style="list-style-type: none">Indicates that the purchased resource package will not be reset. For example, if you purchase a 1-year 40 GB pay-per-use resource package with quota_reuse_mode set to 2, the resource package will not be reset, and you will get 40 GB resource within the year.
free_resources	List<FreeResource>	-	For details about resource items (ID-specific) in a resource package, see Table 7-34 .

Table 7-34 FreeResource

Parameter	Type	Value Range	Description
free_resource_id	String	A maximum of 64 characters	Resource ID. A resource package contains multiple resources, and each resource has a usage type.
usage_type_name	String	A maximum of 1024 characters	Usage type name.
amount	String	A maximum of 32 characters	Remaining resource quota of a package whose quota_reuse_mode is Resettable , that is, the remaining resource quota in the current reset period.
original_amount	String	A maximum of 32 characters	Original resource quota of a package whose quota_reuse_mode is Resettable , that is, the total resource quota in each reset period.
measure_id	Integer	-	Measurement unit of the quota of a free resource package. You call the API in 4.1.5 Querying Measurement Units to obtain the value.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "total_count": 1,
    "free_resource_packages": [
        {
            "order_instance_id": "01154-228300268-0",
            "order_id": "CS21043011259RWXXTA",
            "product_id": "90301-296014-0--0",
            "product_name": "HUAWEI CLOUD WeLink",
            "enterprise_project_id": null,
            "enterprise_project_scope": 0,
            "effective_time": "2021-04-30T03:30:56Z",
            "expire_time": "2021-05-31T15:59:59Z",
            "status": 1,
            "service_type_code": "hws.service.type.cpts",
            "region_code": "cn-north-7",
            "source_type": 0,
            "bundle_type": "ATOMIC_PKG",
            "quota_reuse_mode": 2,
```

```
        "free_resources": [
            {
                "free_resource_id": "d4463497-991b-439d-9ab6-23f9ed197fe9",
                "usage_type_name": "Duration",
                "amount": 100,
                "original_amount": 100,
                "measure_id": 34
            }
        ]
    }
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Incorrect parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.5.2 Viewing Resource Package Usage

Function

Partners can query the resource package usage of customers on the partner sales platform by resource.

Constraints

This API can be invoked only by the customer AK/SK or token.

CAUTION

If a resource package has expired for more than 18 months, its information cannot be queried.

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/payments/free-resources/usages/details/query

Table 7-35 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	No	A maximum of 8 characters	Language. • zh_CN: Chinese • en_US: English Default value: zh_CN

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
free_resource_ids	Yes	List<string>	A maximum of 100 records	List of resource item IDs. Each ID contains a maximum of 64 bytes. Resource ID. A resource package contains multiple resources, and a resource has a usage type. The resource ID is obtained from the response of the API in 7.5.1 Querying Resource Packages .

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/payments/free-resources/usages/details/query HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ
```

```
{
  "free_resource_ids": [
    "d4463497-991b-439d-9ab6-23f9ed197fe9"
  ]
}
```

Response

Response Parameters

Parameter	Type	Maximum Length of Characters	Description
error_code	String	20	Error code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	1000	Error description. This parameter is returned only when the query failed.
free_resources	List<FreeResourceDetail>	-	Resource information (resource details) in a resource package. For details, see Table 7-36 .

Table 7-36 FreeResourceDetail

Parameter	Type	Maximum Length of Characters	Description
free_resource_id	String	A maximum of 64 characters	Resource ID. A resource package contains multiple resources, and a resource has a usage type.
free_resource_type_name	String	-	Resource type name.
quota_reuse_cycle	Integer	-	Reset period. This parameter is valid only when quota_reuse_mode is set to 1 (Resettable). <ul style="list-style-type: none">• 1: Hour• 2: Day• 3: Week• 4: Month• 5: Year

Parameter	Type	Maximum Length of Characters	Description
quota_reuse_cycle_type	Integer	-	<p>Reset period type. This field is valid only when quota_reuse_mode is set to 1 (Resettable).</p> <ul style="list-style-type: none">• 1: Reset by calendar period Indicates that the resource package is reset by calendar month or calendar year. For example, if you set quota_reuse_cycle to 4 (month) and quota_reuse_cycle_type to 1, the resource package is reset on the first day of each month.• 2: Reset by order period Indicates that the resource package is reset by order period. For example, if you set quota_reuse_cycle to 4 (month), quota_reuse_cycle_type to 2, and you purchase this resource package on the 15th day of the month, then the resource package will be reset on the 15th day of each month.
usage_type_name	String	-	Usage type name.
start_time	String	-	<p>Start time. The value is in UTC format.</p> <ul style="list-style-type: none">• If quota_reuse_mode is set to 1, the value is the start time of the reset period for the current time.• If quota_reuse_mode is set to 2, the value is the time when the purchased instance takes effect.
end_time	String	-	<p>End time. The value is in UTC format.</p> <ul style="list-style-type: none">• If quota_reuse_mode is set to 1, the value is the end time of the reset period for the current time.• If quota_reuse_mode is set to 2, the value is the time when the purchased instance becomes invalid.
amount	BigDecimal	-	Remaining resource quota of a package whose quota_reuse_mode is Resettable , that is, the remaining resource quota in the current reset period.

Parameter	Type	Maximum Length of Characters	Description
original_amount	BigDecimal	-	Original resource quota of a package whose quota_reuse_mode is Resettable , that is, the total resource quota in each reset period.
measure_id	Integer	-	Measurement unit of the quota of a free resource package. Call the API in 4.1.5 Querying Measurement Units to obtain the value.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "free_resources": [
        {
            "free_resource_id": "d4463497-991b-439d-9ab6-23f9ed197fe9",
            "free_resource_type_name": "test1",
            "quota_reuse_cycle": 4,
            "quota_reuse_cycle_type": 1,
            "usage_type_name": "Duration",
            "start_time": "2021-04-30T03:30:56Z",
            "end_time": "2021-05-31T15:59:59Z",
            "amount": 100,
            "original_amount": 100,
            "measure_id": 37
        }
    ]
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Incorrect parameter.

HTTP Status Code	Error Code	Description
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.5.3 Querying Resource Package Usage Details

Function

Customers can query the resource usage details on the partner sales platform.

Constraints

This API can be invoked only by the customer AK/SK or token.

URI

GET /v2/bills/customer-bills/free-resources-usage-records

Table 7-37 Request parameters

Parameter	Mandatory	Type	Value Range	Description
free_resource_id	No	String	A maximum of 64 characters	Resource ID. A resource package contains multiple resources, and a resource has a usage type. The resource ID is obtained from the response of the API in 7.5.1 Querying Resource Packages . If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.
product_id	No	String	A maximum of 64 characters	Product ID, that is, resource package ID. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.

Parameter	Mandatory	Type	Value Range	Description
resource_type_code	No	String	A maximum of 64 characters	<p>Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm. To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion.</p>
deduct_time_begin	Yes	String	A maximum of 10 characters	Start time of resources deduction, which is in <i>YYYY-MM-DD</i> format (GMT+08:00).
deduct_time_end	Yes	String	A maximum of 10 characters	<p>End time of resource deduction, which is in <i>YYYY-MM-DD</i> format (GMT+08:00).</p> <p>NOTE The gap between the start time and end time must be less than or equal to 90 days.</p>
offset	No	Integer	0 to maximum integer	<p>Offset, starting from 0. The default value is 0.</p> <p>NOTE This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>
limit	No	Integer	[1-1000]	Maximum number of records in each query. The default value is 10 .

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/bills/customer-bills/free-resources-usage-records?  
free_resource_id=free_resource_id&product_id=product_id&resource_type_code=resource_type_code&deduct_<br/>time_begin=2021-10-01&deduct_time_end=2021-10-31&offset=0&limit=10 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZlhcNAQcCo...ggg1BBIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	20	Error code. For details, see Returned Values . This parameter is returned only when the query failed.
error_msg	String	1000	Error description. This parameter is returned only when the query failed.
free_resource_records	List<FreeResourceRecord>	Maximum number : 1000	Resource package usage details. For details, see Table 7-38 .
total_count	Integer	-	Total number of records that meet the conditions.

Table 7-38 FreeResourceRecord

Parameter	Type	Value Range	Description
deduct_time	String	A maximum of 20 characters	Time when a resource is deducted. UTC time. The format is <i>yyyy-MM-dd'T'HH:mm:ss'Z'</i> , for example, 2021-10-13T10:01:49Z.
free_resource_id	String	A maximum of 64 characters	Resource ID. A resource package contains multiple resources, and a resource has a usage type.

Parameter	Type	Value Range	Description
resource_id	String	A maximum of 64 characters	Resource ID.
resource_type_code	String	A maximum of 64 characters	Resource type code. For example, the resource type code of VM is hws.resource.type.vm .
resource_type_name	String	A maximum of 200 characters	Resource type. For example, the resource type of ECS is Cloud Host .
resource_tag	String	A maximum of 10,240 characters	Resource tag.
product_id	String	A maximum of 64 characters	Product ID, that is, resource package ID.
product_name	String	A maximum of 256 characters	Product name, that is, resource package name.
usage_type_code	String	A maximum of 64 characters	Usage type

Parameter	Type	Value Range	Description
available_amount	String	A maximum of 64 characters	Available resources before deduction
remaining_amount	String	A maximum of 64 characters	Available resources after deduction.
used_amount	String	A maximum of 64 characters	Deducted resource amount.
measure_id	Integer	-	Measurement unit of the quota of a free resource package. Call the API in 4.1.5 Querying Measurement Units to obtain the value.
effective_time	String	A maximum of 20 characters	Start time of using a resource (UTC time).
expire_time	String	A maximum of 20 characters	End time of resource usage (UTC time).

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "free_resource_records": [
        {
            "deduct_time": "2021-10-19T08:04:25Z",
            "free_resource_id": "43248428-8409-47cd-b115-6a5872e2200b",
            "resource_id": "resourceInstanceId_north1_obs_10120001112",
            "resource_type_code": ""
        }
    ]
}
```

```
"resource_tag": "--",
"product_id": "90301-247012-0--0",
"product_name": "OBS storeage package 10 TB Monthly subscription Beijing7",
"usage_type_code": "",
"available_amount": "10190",
"remaining_amount": "10140",
"used_amount": "50",
"measure_id": 10,
"effective_time": "2021-10-13T10:01:49Z",
"expire_time": "2021-10-13T11:00:00Z"
},
],
"total_count": 1
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Incorrect parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

7.6 Managing Pay-Per-Use Resources

7.6.1 Querying Customer's Pay-Per-Use Resources

Function

A partner can query the pay-per-use resources that have been provisioned for customers associated with the partner in the Reseller model.

Constraints

- This API can be invoked using the partner AK/SK or token only.
- The data obtained using this API is for reference only because it has a delay, and the delay for each cloud service is different.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

POST /v2/partners/sub-customers/on-demand-resources/query

Table 7-39 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	No	A maximum of 8 characters	Language. <ul style="list-style-type: none">• zh_CN: Chinese• en_US: English Default value: zh_CN

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	A maximum of 64 characters	Customer account ID. To obtain the customer ID, call the API in 5.3.1 Querying Customers .
region_code	No	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints . If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
service_type_code	No	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types . If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.

Parameter	Mandatory	Type	Value Range	Description
resource_ids	No	List<String>	A maximum of 50 IDs	<p>Uses IDs to query resources in a batch. It is used to query the resources corresponding to specified resource IDs. A maximum of 50 IDs can be transferred at the same time.</p> <p>If this parameter is not included in the request parameters, is left empty, or is set to null, it cannot be used as a filter criterion.</p>
effective_time_begin	No	String	A maximum of 20 characters	<p>Start time of the validity period. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z.</p> <p>The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>
effective_time_end	No	String	A maximum of 20 characters	<p>End time of the validity period. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z.</p> <p>The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>
offset	No	Integer	0 to maximum integer	<p>Offset, which starts from 0. The default value is 0.</p> <p>NOTE This parameter is used for pagination. Retain its default value 0 if pagination is not required. offset indicates the offset relative to the first data record among all that meets the conditions configured. If you set offset to 1, the second and subsequent data records are returned.</p> <p>For example, there are 10 data records, and if you set limit to 10 and offset to 1, the second to the tenth data records are returned.</p>

Parameter	Mandatory	Type	Value Range	Description
limit	No	Integer	1 to 100	Number of records queried each time. The default value is 10 .
status	No	Integer	1 to 6	<p>Resource status.</p> <ul style="list-style-type: none">• 1: Normal (provisioned)• 2: Grace period• 3: Freezing• 4: Changing• 5: Canceling <p>If this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion.</p>
indirect_partner_id	No	String	A maximum of 64 characters	Reseller ID. For details about how to obtain such IDs, see Query Huawei Cloud Resellers . This parameter is mandatory only when a distributor queries pay-per-use resources of customers associated with its resellers. Otherwise, the pay-per-use resources of the distributor's own customers will be queried.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/partners/sub-customers/on-demand-resources/query HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
X-Language: zh_CN
{
    "indirect_partner_id": "051a8a834180d3fb0f25c006b1998800",
    "offset": 0,
    "limit": 10,
    "effective_time_begin": "2020-04-02T08:56:26Z",
    "effective_time_end": "2020-05-02T08:56:26Z",
    "customer_id": "0846606cf580d45f0fd6c01e10c07540",
    "service_type_code": "hws.service.type.ebs",
    "resource_ids": [
        "batch-volume-16380-00024604"
    ],
    "region_code": "cn-east-2",
    "status": 1
}
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Status code. For details, see Returned Values .
error_msg	String	Error description.
resources	List<CustomerResourceV2>	Customer resources. For details, see Table 7-40 .
total_count	Integer	Total number of query records.

Table 7-40 CustomerResourceV2

Parameter	Type	Description
customer_id	String	Customer account ID.
region_code	String	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints .
availability_zone_code	String	AZ code.
service_type_code	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
resource_type_code	String	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm .
service_type_name	String	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .
resource_type_name	String	Resource type. For example, the resource type of ECS is Cloud Host .
resource_id	String	Resource ID.
resource_name	String	Resource instance name.

Parameter	Type	Description
effective_time	String	Effective time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
expire_time	String	Expiration time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, such as 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
status	Integer	Resource status. <ul style="list-style-type: none">• 1: Normal (provisioned)• 2: Grace period• 3: Freezing• 4: Changing• 5: Canceling• 6: Canceled
resource_spec_code	String	Specification of a cloud service resource. For example, a VM resource specification is s2.small.1.linux (.win or .linux should be added at the end of the specification).
resource_info	String	Capacity of pay-per-use resources. The value is in "resourceInfo": "{\"specSize\":40.0}" format.
product_spec_desc	String	Product specification description. Example: <ul style="list-style-type: none">• ECS: General computing-plus c6.2xlarge.4 8 vCPUs 32 GB Linux• Disk: EVS_SATA_LXH01 40.0 GB

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
```

```
"resources": [
  {
    "customer_id": "0846606cf580d45f0fd6c01e10c07540",
    "region_code": "cn-east-2",
    "availability_zone_code": "cn-east-2-a",
    "service_type_code": "hws.service.type.ebs",
    "resource_type_code": "hws.resource.type.volume",
    "resource_id": "batch-volume-16380-00024604",
    "resource_name": "batch-volume",
    "effective_time": "2020-04-02T08:56:26Z",
    "expire_time": "2020-05-02T08:56:26Z",
    "status": 1,
    "resource_spec_code": "SATA",
    "resource_info": "{\"specSize\":2235.0}",
    "product_spec_desc": "High IO|40.0GB"
  }
],
"total_count": 1
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
400	CBC.99000000	You do not have the operation permission to the customer.
400	CBC.99000037	You do not have the permission to operate this reseller.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

8 Bill Management

8.1 Managing Customer Consumptions

8.1.1 Querying Customer Resource Usage

Function

This API is used to query customer resource usage.

NOTICE

The resource usage data has a latency. Therefore, the data cannot be used when there are high requirements on data accuracy, such as for usage monitoring or budget control.

File

A partner can subscribe to the customer resource usage in HUAWEI CLOUD Partner Center to learn the resource usage of the customer. For details, see [File Subscription](#).

NOTE

- The system generates the customer resource usage file containing the data generated till the previous day from 12:00 to 20:00 (GMT+8:00) (not later than 24:00) every day. Therefore, the partner needs to configure a schedule task in the partner sales platform to obtain the customer resource usage file at 24:00 every day.
 - The partner who subscribes to the customer resource usage in Partner Center can obtain the resource usage details file as of the following day (GMT+08:00).
1. Link to obtain the file

`https://bucketname.obs.Endpoint.myhuaweicloud.com/customerUsage/
filename`

Table 8-1 Parameter description

Parameter	Description
bucketname	Name of the OBS bucket created by the partner. Only OBS buckets purchased on Huawei Cloud in the Hong Kong region can be used. For details about how to create a bucket, see Creating a Bucket .
Endpoint	Domain name or IP address of the server bearing the REST service endpoint. Obtain this value from Regions and Endpoints .
customerUsage	Name of the folder for storing the customer resource usage details uploaded by the system.
filename	<p>File name.</p> <p>The file name format is customerUsageV2_YYYYMM_YYYYMMDD.tar.gz.</p> <ul style="list-style-type: none">• The file is a compressed package.• <i>YYYYMM</i> indicates the month of the data to be exported. For example, if the data for February 2019 is exported, <i>YYYYMM</i> should be 201902.• <i>YYYYMMDD</i> specifies the date when the customer resource usage data is exported. For example, if the file name is customerUsageV2_201902_20190301.tar.gz, the data generated from February 1, 2019 to February 28, 2019 is exported on March 1, 2019. <p>Files in the package are in the format of customerUsageV2_YYYYMM_YYYYMMDD_XXXXXXX.csv. Each .csv file contains 100,000 records.</p>

2. Generation time of the resource usage details

The resource usage data is summarized by month. The monthly usage details contain incremental data starting from the first day of each month. The usage details may change after being generated. Therefore, obtain the latest data.

- The system generates the resource usage details from 12:00 to 20:00 (GMT+8:00) (not later than 24:00) every day.
- The usage details of each month are generated on the first day of the following month. For example, the usage details of July are generated on August 1.
- The month-to-date usage details of the current month and all usages details of the last month are generated on the second to fourth day of the current month. For example, the usage details of August 1 and August 2 and of July are generated on August 3.
- The usage details of this month are generated on the fifth day to the end of this month. For example, the usage details from August 1 to August 5 are generated on August 6.

3. File fields

File: **customerUsageV2_YYYYMM_YYYYMMDD_XXXXXXX.csv**

Parameter	Type	Maximum Length of Characters	Description
Billing Cycle	String	256	Billing cycle of the consumption record
Customer ID	String	256	Domain ID of a customer
Transaction Time	String	256	Transaction time in the format of UTC
Billing Mode	String	8	Billing mode. The options are as follows: <ul style="list-style-type: none">● 1: Yearly/monthly● 3: Pay-per-use● 10: Reserved instances● 11: Savings plan

Parameter	Type	Maximum Length of Characters	Description
Bill Type	String	8	<p>Bill type:</p> <ul style="list-style-type: none">● 1: Expenditure - purchase● 2: Expenditure - renewal● 3: Expenditure - change● 4: Refund - unsubscription● 5: Expenditure - use● 8: Expenditure - auto-renewal● 9: Adjustment - compensation● 12: Expenditure - hourly billing● 13: Expenditure - unsubscription handling fee● 14: Expenditure - month-end deduction for support plan● 15: Expenditure - tax● 16: Adjustment - deduction● 17: Expenditure - difference amount (min. guaranteed-actual) <p>NOTE</p> <p>Expenditure-difference amount (min. guaranteed-actual) determines the fees that a customer needs to pay if the customer does not reach the minimum expenditure limit stipulated in the signed contract. This rule is applicable to direct sales customers and referral customers who use postpaid method.</p> <ul style="list-style-type: none">● 20: Refund - change● 23: Expenditure-savings plans● 24: Refund-changing to Pay-Per-Use● 100: Refund - unsubscription tax● 101: Adjustment - tax compensation● 102: Adjustment - tax deduction
Resource ID	String	256	Resource instance ID If the resource is a reserved instance, the value is the reserved instance ID.

Parameter	Type	Maximum Length of Characters	Description
Resource Name	String	256	<p>Resource name entered when a customer creates a resource instance.</p> <p>NOTE</p> <p>If the entered character strings are risky, such as {"=", "+", "-", "@"}, followed by non-pure numbers, then double quotation marks will be added for that field, one at the beginning of the field and the other at the end.</p>
Resource Tag	String	11,000	<p>Resource tag. Customers can set tags when managing resources.</p> <p>If a customer purchases a resource package product that is not specific to a certain resource, this field is left empty.</p> <p>NOTE</p> <p>If the entered character strings are risky, such as {"=", "+", "-", "@"}, followed by non-pure numbers, then double quotation marks will be added for that field, one at the beginning of the field and the other at the end.</p>
Service Type Code	String	64	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
Resource Type Code	String	100	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
Product ID	String	256	Product ID.
Product Name	String	256	Product name
Specifications	String	256	Product specifications. Example: General Computing s2.small.1 1vCPUs 1GB linux
Region Code	String	64	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .
Project ID	String	256	ID of the project to which a resource belongs. You can select a project when purchasing a resource.

Parameter	Type	Maximum Length of Characters	Description
Order ID/ Transaction ID	String	256	Order ID generated when a customer places the order. This parameter is available only for yearly/monthly products. In other cases, this parameter is left empty.
Order Type	String	256	Order type. This parameter is available only for yearly/monthly products. This parameter is left empty in the following cases: <ul style="list-style-type: none">● 1: New purchase● 2: Renewal● 3: Change● 4: Unsubscription● 10: Yearly/monthly to pay-per-use● 11: Pay-per-use to yearly/monthly● 13: Trial● 14: Commercial use● 15: Price adjustment
Period Number	String	256	Duration of a yearly/monthly subscription. NOTE <ul style="list-style-type: none">● This parameter is available only for yearly/monthly products. In other cases, this parameter is left empty.● The value can be an integer, or a decimal.
Period Type	String	256	Period type for yearly/monthly products. This parameter is available only for yearly/monthly products. In other cases, this parameter is left empty. <ul style="list-style-type: none">● 0: Daily● 2: Monthly● 3: Yearly● 4: Hourly● 99: Unknown
Usage Type	String	256	Usage type, which can be obtained by calling the API described in 4.1.4 Querying Usage Types .
Usage	String	256	Total resource usage

Parameter	Type	Maximum Length of Characters	Description
Usage Unit	String	256	Usage unit To obtain the unit, call the API in 4.1.5 Querying Measurement Units .
Package Usage	String	256	Used amount of the package. The used resources are not calculated using the pay-per-use price.
Unit (Package Usage)	String	256	Unit of the usage in the package To obtain the unit, call the API in 4.1.5 Querying Measurement Units .
Reserved Instance Usage	String	256	Used reserved instance. The used resources are not calculated using the pay-per-use price.
Unit (Reserved Instance Usage)	String	256	Usage unit for reserved instance To obtain the unit, call the API in 4.1.5 Querying Measurement Units .
Expenditure Amount	String	256	Transaction price listed on the HUAWEI CLOUD official website, excluding the commercial discount provided by HUAWEI CLOUD for partners Unit: USD NOTE If HUAWEI CLOUD writes off the outstanding amount as required or refunds the over-deducted amount, a record with the negative amount will be generated.
Unit Price	String	256	Unit price of a pay-per-use product. This parameter has a value only when the price is the same. For tiered billing, this parameter is left empty.

Parameter	Type	Maximum Length of Characters	Description
Unit	String	256	<p>Unit of the product.</p> <ul style="list-style-type: none">The unit of linear products is USD/{linear unit}/month or USD/{linear unit}/hour.The unit of non-linear products is USD/month or USD/hour. <p>NOTE</p> <p>The linear unit is the unit of linear products (those come in sizes). For example, the linear unit of the hard disk is GB, and that of the bandwidth is Mbit/s.</p> <p>For example, 0.6 USD/10,000 times. The unit price is 0.6, the price unit is dollar, and the step is 10,000 times. The unit price is 0.6 and the price unit is USD/10,000 times.</p>
Combined Order No.	String	256	<p>The combined order number generated when a customer places orders. This parameter is available only for yearly/monthly products. In other cases, this parameter is left empty.</p> <p>This parameter is reserved.</p>

4. File example

Billing Cycle,Customer ID,Transaction Time,Billing Mode,Bill Type,Resource ID,Resource Name,Resource Tag,Service Type Code,Resource Type Code,Product ID,Product Name,Specifications,Region Code,Project ID,Order ID/Transaction ID,Order Type,Period Number,Period Type,Usage Type,Usage,Usage Unit,Package Usage,Unit (Package Usage),Reserved Instance Usage,Unit (Reserved Instance Usage),Expenditure Amount,Unit Price,Unit,Combined Order No.

Apr-21,4FB84D6C27DB4C768B0940560C2AB2CE,2021-04-26 16:13:35 GMT
+08:00,1,1,34ae3e78-d93e-4d46-9bc7-
aa8532e44d18, FALSE, 111, hws.service.type.ebs, hws.resource.type.volume, 57974
03154426640, GD3 linear EVS Monthly package, GD3 linear EVS Monthly
package1,cn-
north-1, ab7eb17368654ff4b1bb3c63c6a478e0, CS20012416121ADNL2, 1, 1, 99,
Duration-1, 12312.125, 1, 123, 3, 120, 1, 8400, 12312.123, 1, CS20012416121ADNL3

8.2 Managing Partner Bill

8.2.1 Querying Monthly Bills

Function

You can query your monthly bills that cover amount due, expenditures, refunds, and adjustments.

For details about how to query monthly bills in the Partner Center, click [here](#).



The partner bill for each month is generated before 12:00 (Beijing Time) on the fifth day of the next month.

Constraints

This API can be invoked only by the partner account AK/SK or token.

Debugging

You can debug the API in [API Explorer](#) which supports automatic authentication. API Explorer can automatically generate and debug example SDK code.

URI

GET /v2/bills/partner-bills/postpaid-bill-summary

The following table describes the parameters.

Table 8-2 Query parameters

Parameter	Mandatory	Type	Value Range	Description
bill_cycle	Yes	String	A maximum of 10 characters	Month when a bill is generated. Format: YYYY-MM

Request

Request parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/bills/partner-bills/postpaid-bill-summary?bill_cycle=2020-12
HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ
```

Response

Response parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
bill_cycle	String	A maximum of 10 characters	Month when a bill is generated. This parameter is returned only when the query is successful. Format: YYYY-MM
initial_amount_due	BigDecimal	-	Amount due (tax included) in a bill. Amount due (output tax included) = Expenditures + Refunds + Adjustments
consume_amount	BigDecimal	-	Expenditures in a bill.
refunds	BigDecimal	-	Refunds in a bill.
adjustments	BigDecimal	-	Partner's adjustments in a billing cycle, for example, arrears write-offs.
tax_amount	BigDecimal	-	Output tax in a bill, which is not included in the amount due.
currency	String	A maximum of 8 characters	This parameter is returned only when the query is successful. USD

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "bill_cycle": "2020-12",
    "initial_amount_due": 90,
    "consume_amount": 140,
    "refunds": -30,
    "adjustments": -20,
    "tax_amount": 10,
```

```
        "currency": "USD"  
    }
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Invalid parameter
403	CBC.0151	Access denied.
500	CBC.0999	Other errors

8.2.2 Querying Bill Details of Monthly Expenditures

Function

This API is used to query bill details of monthly expenditures.

For details about how to query the bill details of monthly expenditures in the Partner Center, click [here](#).

Bill File

A partner can subscribe to the partner bill (customer resource usage) in the HUAWEI CLOUD Partner Center. For details, see [File Subscription](#). Your sales platform will calculate the customer expenditures and generate the customer bills based on this bill and then you can perform reconciliation with HUAWEI CLOUD.

1. Link to Obtain the File

<https://bucketname.obs.Endpoint.myhuaweicloud.com/customerBill/filename>

Table 8-3 Parameter descriptions

Parameter	Description
bucketname	Indicates the name of the OBS bucket created by the partner. Only OBS buckets purchased on Huawei Cloud in the Hong Kong region can be used. For details about how to create a bucket, see Creating a Bucket .

Parameter	Description
Endpoint	Domain name or IP address of the server bearing the REST service endpoint. Obtain this value from Regions and Endpoints .
customerBill	Name of the folder for storing the partner bill details file uploaded by the system.
filename	File name. <ul style="list-style-type: none">• The name of a bill details file is in customerBill_YYYYMM.tar.gz format. In the preceding command, customerBill_YYYYMM.tar.gz is a compressed package. The files contained in the package are named in customerBill_YYYYMM_xxxx.csv format. Each CSV file contains 100,000 records.

2. File Generation Cycle

The file is generated each natural month.

The system automatically creates the file of previous month before 12:00 (Beijing Time) at the fifth day of each month and uploads the file to the created OBS bucket. If the upload fails on the current day, the system uploads the file again next day. If the upload still fails, the system uploads the file the day after that day. The system can try a maximum of five times. Every time when the upload fails, the system sends a failure notification email to the email address of the partner.

3. File Fields

Parameter	Type	Value Range	Description
Customer ID	String	A maximum of 64 characters	Domain ID of a customer.
Product ID	String	A maximum of 64 characters	Product ID
Product type code	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .

Parameter	Type	Value Range	Description
Resource type code	String	A maximum of 100 characters	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
Cloud service region code	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .
Billing mode	String	A maximum of 2 characters	0: Yearly/monthly 1: Pay-per-use 2: Reserved instance-upfront payment 3: Reserved instance-hourly billing 4: Savings plan-subscription 5: Savings plan-hourly billing 6: Savings plan-discount
Official website price	BigDecimal	-	List price or promotional price at which customers purchased Huawei Cloud products, in USD.
Fee generation time	String	A maximum of 32 characters	Time when fees are generated. The format is <i>YYYY-MM</i> , indicating year-month.
Order ID	String	A maximum of 64 characters	Order ID. This field is available only for yearly/monthly subscriptions.
Usage	BigDecimal	-	Usage (usage of packages and reserved instances not included). This field is available only for pay-per-use subscriptions.
Usage Unit	Integer	-	Usage unit. You can call the API in 4.1.5 Querying Measurement Units to obtain the value.

Parameter	Type	Value Range	Description
Whether a spot ECS	String	A maximum of 1 character	2: Yes
Cash coupon amount	BigDecimal	-	Cash coupon amount, in USD. It specifies the amount deducted using cash coupons.
Flexi-purchase coupon amount	BigDecimal	-	Flexi-purchase coupon amount (reserved).
Stored-value card amount	BigDecimal	-	Stored-value card amount (reserved).
Settlement product type	Integer	-	0: List-price offering 1: Promotional offering 2: Hybrid hosting products 5: Stored-value card 6: Marketplace products 7: Spot ECSs 8: FCS (reserved) 11: Special price request 60: KooGallery product discounts in resales
Partner preference ratio	BigDecimal	-	Discount percentage for each settlement type. Leave this parameter empty when Partner Preferential Type is set to 1 .
Currency	String	A maximum of 3 characters	USD
Billing cycle	String	A maximum of 32 characters	Billing cycle, in the <i>YYYY-MM</i> format.

Parameter	Type	Value Range	Description
Customer account	String	A maximum of 64 characters	HUAWEI CLOUD username of the customer.
Customer name	String	A maximum of 192 characters	Name used by the customer for real-name authentication. If the customer does not perform real-name authentication, this field is left blank.
Product name	String	A maximum of 576 characters	Product name.
Product type name	String	A maximum of 192 characters	Cloud service name, which can be obtained by calling the API in 4.1.1 Querying Cloud Service Types .
Resource type name	String	A maximum of 192 characters	Resource type name, which can be obtained by calling the API in 4.1.2 Querying Resource Types .
Cloud service region name	String	A maximum of 96 characters	Cloud service region. Obtain the value from the Region column in Regions and Endpoints .
Package Usage	BigDecimal	-	Used amount of the package. The used resources are not calculated using the pay-per-use price.
Unit (Package Usage)	Integer	-	Package usage unit. For details, see Usage Unit . If the package usage is 0, this field is left blank.
Reserved Instance Usage	BigDecimal	-	Used reserved instance. The used resources are not calculated using the pay-per-use price.

Parameter	Type	Value Range	Description
Unit (Reserved Instance Usage)	Integer	-	Reserved instance usage unit. For details, see Usage Unit . If the reserved instance usage is 0, this field is left blank.
Bill Type	String	A maximum of 1 character	Type of a bill item. <ul style="list-style-type: none">• 0: Expenditure• 1: Unsubscription• 2: Huawei write-off
BizID	String	A maximum of 64 characters	Business ID.
BizItemID	String	A maximum of 64 characters	Business item ID.
Amount After Coupons	BigDecimal	-	Consumption amount of a customer, excluding the amount of flexi-purchase coupons, cash coupons, and stored-value cards.
Amount Due	BigDecimal	-	Bill amount that a partner must pay.
Specifications	String	A maximum of 256 characters	Product specifications, such as General Computing s2.small.1 1vCPUs 1GB linux . General Computing s2.small.1 1vCPUs 1GB linux

Parameter	Type	Value Range	Description
Billing item	String	A maximum of 256 characters	<p>Billing item To obtain a specific billing item, call the API in 4.1.4 Querying Usage Types.</p> <p>The value is the same as the usage type in SDRs. The mappings between cloud services and usage types are as follows:</p> <ul style="list-style-type: none">• ECS: Duration• EVS: Duration• EIP: Duration• Bandwidth: Duration (by bandwidth) or upflow (by traffic)• Marketplace image: Duration
Unit Price	BigDecimal	-	<p>Unit price.</p> <ul style="list-style-type: none">• For the unit price of a pay-per-use product, this parameter has a value only when the price is the same. For tiered billing, this parameter is left empty.• Unit price of a yearly/monthly product is returned only in the following scenarios:<ul style="list-style-type: none">- Yearly/monthly subscription, renewal, specification downsizing, specification upgrade, and capacity expansion- Simple pricing• Unit price of a reserved instance is returned only in the following scenarios:<ul style="list-style-type: none">- Subscription, renewal, specification downsizing, specification upgrade, capacity expansion, and pay-per-use- Simple pricing
Unit	String	A maximum of 256 characters	<p>Price unit</p> <p>For example, the price is 0.6 yuan/10,000 times. The unit price is 0.6, the price unit is yuan, and the step is 10,000 times. The unit price is 0.6 and the price unit is yuan/10,000 times.</p>

Parameter	Type	Value Range	Description
Payment	BigDecimal	-	<ul style="list-style-type: none">When Partner Preferential Type is set to 0, the settlement amount is calculated as follows: Settlement amount = List price x (1 – Partner discount ratio).When Partner Preferential Type is set to 1, the settlement amount is calculated based on the fixed unit price. The settlement amount includes the cash coupon amount and does not include the tax amount. <p>Unit: USD (\$) This parameter is returned only when a partner uses coupons.</p>
Partner cash coupon amount	BigDecimal	-	Amount of the cash coupon that is deducted after a discount is used. Unit: USD (\$)
Whether to Refund Coupons	String	-	Whether to refund partner's cash coupon generated during the refund. Unit: USD (\$) <ul style="list-style-type: none">Y: yesN: no <p>This parameter is returned only when a coupon quota has been converted for partner use only.</p>
Cash Payment	BigDecimal	-	Amount that needs to pay after partner's cash coupons are deducted. Unit: USD (\$) This parameter is returned only when a partner uses coupons. NOTE <ul style="list-style-type: none">If Scene is set to Y, this parameter value is calculated as follows: Partner amount without tax = Settlement amount – Partner couponIf Scene is set to N, the partner amount without tax equals the settlement amount.
Tax Amount	BigDecimal	-	Tax amount. If tax determination is not involved or the tax base is 0, the tax amount is 0. Unit: USD (\$) This parameter is returned only when a coupon quota has been converted for partner use only.

Parameter	Type	Value Range	Description
Billing Item Name	String	-	Usage type name. To obtain a specific type, call the API in 4.1.4 Querying Usage Types .
Partner Preferential Type	String	-	Partner preferential type. The options are as follows: <ul style="list-style-type: none">• 0: Discount• 1: Fixed unit price
Combined Order No.	String	A maximum of 256 characters	The combined order number generated when a customer places orders. This parameter is available only for yearly/monthly products. In other cases, this parameter is left empty.

NOTE

- When **Partner Preferential Type** is set to **0**, Amount due = List price x (1 – Partner discount ratio) – Partner coupon + Tax amount.
- When **Partner Preferential Type** is set to **1**, Amount due = Settlement amount - Partner coupon + Tax amount.

4. Sample File

Customer ID, Product ID, Product type code, Resource type code, Cloud service region code, Billing mode, Official website price, Fee generation time, Order ID, Usage, Usage Unit, Whether a spot ECS, Coupon amount, Flexi-purchase coupon amount, Stored-value card amount, Settlement product type, Partner preference ratio, Currency, Billing cycle, Customer account, Customer name, Product name, Product type name, Resource type name, Cloud service region name, Package Usage, Unit (Package Usage), Reserved Instance Usage, Reserved Instance Usage Unit, Bill Type, Biz ID, Biz Item ID, Amount after Coupons, Amount Due, Specifications, Billing item, Unit Price, Unit, Settlement Amount, Partner Coupon, Scene, Partner Amount Without Tax, Tax Amount, Usage Type Name,, Partner Preferential Type, Combined Order No.

05876442ca80d5cc0f2dc01c66d6d0c0, 00301-25435-0--0,
hws.service.type.ebs, hws.resource.type.volume, cn-east-2, 0, 30.3, Jan-21,
CS2008210926C178U, 2664000, 6, 2, 0, 0, 0, 11, 0.75, USD, Jan-21,
xajing_zs_hff, 艾*****公司, GD3 linear EVS Ondemand, Elastic Volume
Service, Volume, CN North- Ulanqab3, 0, 6, 0, 6, 0, 1100886031001,
0310015570361001_ONDEMAND, 210.1008, 147.07056, mon IO|
4056.000000GB, Duration, 0.00007, Dollar/GB/Hour, 147.07056, 0, N,
147.07056, 0, Duration, 0, BO2023050900011

9 Invoice Management

9.1 Invoice Management

9.1.1 Querying the Invoice List

Function

Partners can query the invoice list.

Log in to Partner Center, and choose **Financial Information > Invoices** in the left navigation pane. The invoice list is displayed.

Constraints

This API can be invoked using the partner AK/SK or token.

Debugging

You can debug the API in [API Explorer](#). Automatic authentication is supported. API Explorer can automatically generate and debug example SDK code.

URI

GET /v1.0/{domain_id}/payments/intl-invoices

Parameter	Mandatory	Value Range	Description
domain_id	Yes	A maximum of 64 characters	Partner ID. For details, see How Do I Check the Partner ID?

Table 9-1 Request parameters

Parameter	Mandatory	Type	Value Range	Description
start_time	Yes	String	A maximum of 64 characters	Invoice application start time UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z .
end_time	Yes	String	A maximum of 64 characters	Invoice application end time UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z .
offset	Yes	Integer	[1-99999]	Page number.
limit	Yes	Integer	[1-100]	Number of records displayed per page.

Request Message

Request parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/payments/intl-invoices?  
start_time=2019-01-28T11:48:41Z&end_time=2019-12-28T11:48:41Z&offset=1&limit=10  
Content-Type: application/json  
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response Message

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Returned Values . This parameter is returned only when the query failed.

Parameter	Type	Value Range	Description
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
count	Integer	-	Number of records. This parameter is returned only when the query is successful.
invoices	List<IntlInvoiceRequestInfo>	-	Invoice list. For details, see Table 9-2 .

Table 9-2 IntlInvoiceRequestInfo

Parameter	Type	Value Range	Description
requestId	String	A maximum of 64 characters	Request ID
cancelReason	String	A maximum of 256 characters	Rejection reason
titleType	Integer	[0-1]	Title type <ul style="list-style-type: none">• 0: Individual customer• 1: Corporate customer
channelType	Integer	-	Channel type 0: HUAWEI CLOUD
invoiceType	Integer	[0-1]	Invoice type <ul style="list-style-type: none">• 0: Special VAT invoice• 1: General VAT invoice

Parameter	Type	Value Range	Description
invoiceTitle	String	A maximum of 1024 characters	Invoice title
invoiceAmount	Number	-	Invoiced amount (USD)
invoiceMethod	Integer	[0-2]	Invoicing method <ul style="list-style-type: none">• 0: Invoicing by bill• 1: Invoicing by payment• 2: Invoicing by order
invoiceClass	Integer	[0-1]	Invoice type <ul style="list-style-type: none">• 0: Tax invoice• 1: Business invoice
invoiceState	Integer	-	Invoicing state <ul style="list-style-type: none">• 0: Draft• 1: Waiting for the first trial• 4: Waiting for the export invoice file• 5: Waiting for the invoice file backfile• 6: Waiting for the mail confirmation• 7: Waiting for receipt confirmation• 8: Complete• 9: Refunded• 11: Waiting for rebut audit• 13: Invoice return audit• 14: Waiting return cis notify• 15: Invoice return failed
applyOpera	String	A maximum of 32 characters	Invoice applicant
addressInfo	PostAddressInfoIntl	-	Address information. For details, see Table 9-3 .

Parameter	Type	Value Range	Description
applyTime	String	A maximum of 64 characters	Application time (UTC time)
invoiceMode	String	0	Invoice type 0: Paper invoice
email	String	A maximum of 400 characters	Email receiving the electronic invoice
requestMode	String	[0-2]	Application type <ul style="list-style-type: none">• 0: Invoice creation application• 1: Invoice return application• 2: Invoice change application
srcRequestId	String	A maximum of 64 characters	Original application ID when the invoice is returned
salesId	String	A maximum of 64 characters	Signing entity ID
invoiceNo	String	A maximum of 32 characters	Invoice number

Parameter	Type	Value Range	Description
tradeType	Integer	-	Transaction type <ul style="list-style-type: none">● 3: Settlement by credit card● 4: Settlement by billing● 5: Invoicing by payment● 6: BP settle by billing● 7: Invoicing by recharge● 8: Order payment online● 10: Invoicing by refund
billCycle	String	A maximum of 64 characters	Billing cycle
taxList	List<TaxInfo>	-	Tax information list. For details, see Table 9-4 .

Table 9-3 PostAddressInfoIntl

Parameter	Type	Value Range	Description
address	String	A maximum of 1024 characters	Recipient address
recipients	String	A maximum of 1024 characters	Recipient
zipCode	String	A maximum of 256 characters	Post code of the recipient address

Parameter	Type	Value Range	Description
mobilePhone	String	A maximum of 256 characters	Recipient mobile number

Table 9-4 TaxInfo

Parameter	Type	Value Range	Description
taxClass	String	A maximum of 64 characters	Tax type <ul style="list-style-type: none">• VAT• ISS• WHT• GST
taxRate	String	A maximum of 64 characters	Tax rate
subTaxClass	String	A maximum of 64 characters	Tax subtype <ul style="list-style-type: none">• PIS• COFINS• CGST• SGST• IGST• ISS• WHT• VAT
taxAmount	Number	-	Tax amount Unit: USD (\$)

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
```

```
"count": 2,
"invoices": [
  {
    "requestId": "IV19122807N6S5",
    "cancelReason": null,
    "titleType": 1,
    "channelType": 0,
    "invoiceType": 1,
    "invoiceTitle": "Dream666",
    "invoiceAmount": 102.0,
    "invoiceMethod": 1,
    "invoiceClass": 1,
    "invoiceState": 8,
    "applyOpera": "*****",
    "addressInfo": {
      "address": "*****",
      "recipients": "Wang**",
      "zipCode": "10****",
      "mobilePhone": "188***8888"
    },
    "applyTime": "2019-12-28T07:02:03Z",
    "invoiceMode": "1",
    "email": "***@163.com",
    "requestMode": "0",
    "srcRequestId": null,
    "salesId": "1351",
    "invoiceNo": "CSER191001322",
    "tradeType": 5,
    "billCycle": "201912",
    "taxList": [
      {
        "taxClass": "WHT",
        "taxRate": "0.01",
        "subTaxClass": "WHT",
        "taxAmount": 1.0
      },
      {
        "taxClass": "VAT",
        "taxRate": "0.01",
        "subTaxClass": "VAT",
        "taxAmount": 1.0
      }
    ]
  },
  {
    "requestId": "IV19122806VJF8",
    "cancelReason": null,
    "titleType": 1,
    "channelType": 0,
    "invoiceType": 1,
    "invoiceTitle": "Dream666",
    "invoiceAmount": 384.4,
    "invoiceMethod": 1,
    "invoiceClass": 1,
    "invoiceState": 8,
    "applyOpera": "*****",
    "addressInfo": {
      "address": "*****",
      "recipients": "Wang**",
      "zipCode": "10****",
      "mobilePhone": "188***8888"
    },
    "applyTime": "2019-12-28T06:20:41Z",
    "invoiceMode": "1",
    "email": "***@163.com",
    "requestMode": "0",
    "srcRequestId": null,
    "salesId": "1351",
    "invoiceNo": "CSER191001321",
  }
]
```

```
"tradeType": 7,  
"billCycle": "201912",  
"taxList": [  
    {  
        "taxClass": "WHT",  
        "taxRate": "0.15",  
        "subTaxClass": "WHT",  
        "taxAmount": 54.4  
    },  
    {  
        "taxClass": "VAT",  
        "taxRate": "0.06",  
        "subTaxClass": "VAT",  
        "taxAmount": 21.76  
    }  
]
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

10 Managing Service Tickets

Partners and customers can submit HUAWEI CLOUD service tickets on the partner sales platform. When receiving the service tickets, the HUAWEI CLOUD after-sales service team will assist the customers to handle the problems related to HUAWEI CLOUD usage.

Related APIs

API	API Definition
Creating a service ticket	https://support.huaweicloud.com/intl/en-us/api-ticket/ticket_api_10001.html
Querying templates	https://support.huaweicloud.com/intl/en-us/api-ticket/ticket_api_10011.html
Querying service ticket list	https://support.huaweicloud.com/intl/en-us/api-ticket/ticket_api_10002.html
Querying service ticket details	https://support.huaweicloud.com/intl/en-us/api-ticket/ticket_api_10003.html
Performing operations on a service ticket	https://support.huaweicloud.com/intl/en-us/api-ticket/ticket_api_10009.html
Adding messages	https://support.huaweicloud.com/intl/en-us/api-ticket/ticket_api_10007.html

For details, see [Service Ticket Open APIs](#).

11 API to Be Brought Offline

11.1 Product Management

11.1.1 Querying Product Information

11.1.1.1 Querying Cloud Service Types (Old)

Function

This API is used to query cloud service types on the partner sales platform.

NOTE

This API will be brought offline soon. For details about the API for querying cloud service types, see [Querying Cloud Service Types](#).

Constraints

This API can be invoked using the partner AK/SK or token.

URI

GET /v2/bases/service-types

Table 11-1 Header parameter

Parameter	Mandatory	Maximum Length of Characters	Description
X-Language	No	A maximum of 8 characters	Language. • zh_CN : Chinese • en_US : English Default value: zh_CN

Table 11-2 Request parameters

Parameter	Mandatory	Type	Maximum Length of Characters	Description
service_type_code	No	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null , it can be used as a filter criterion.

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/bases/service-types?
service_type_code=hws.service.type.workplace HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
X-Language: zh_CN
```

Response

Response Parameters

Parameter	Type	Maximum Length of Characters	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Status Codes . This parameter is returned only when the query failed.
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
service_types	List<ServiceType>	-	Returned cloud service type. For details, see Table 11-3 .

Table 11-3 ServiceType

Parameter	Type	Maximum Length of Characters	Description
service_type_name	String	A maximum of 200 characters	Cloud service type name.
service_type_code	String	A maximum of 64 characters	Cloud service type code.
abbreviation	String	A maximum of 200 characters	Abbreviation of the cloud service type.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "service_types": [
        {
            "service_type_name": "HUAWEI CLOUD WeLink",
            "service_type_code": "hws.service.type.workplace",
            "abbreviation": "WeLink"
        }
    ]
}
```

Status Codes

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Invalid parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

11.1.1.2 Querying Resource Types (Old)

Function

This API is used to query the resource types on the partner sales platform.

NOTE

This API will be brought offline soon. For details about the API for querying resource types, see [Querying Resource Types](#).

Constraints

This API can be invoked using the partner AK/SK or token.

URI

GET /v2/bases/resource-types

Table 11-4 Header parameter

Parameter	Mandatory	Maximum Length of Characters	Description
X-Language	No	A maximum of 8 characters	Language. • zh_CN : Chinese • en_US : English Default value: zh_CN

Table 11-5 Request parameters

Parameter	Mandatory	Type	Maximum Length of Characters	Description
resource_type_code	No	String	A maximum of 64 characters	Resource type code. For example, the resource type code of ECS is hws.resource.type.vm . If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null , it can be used as a filter criterion.

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v2/bases/resource-types?  
resource_type_code=hws.resource.type.workplace.basic HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MII/PAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ  
X-Language: zh_CN
```

Response

Response Parameters

Parameter	Type	Maximum Length of Characters	Description
error_code	String	A maximum of 20 characters	Error code. For details, see Status Codes . This parameter is returned only when the query failed.
error_msg	String	A maximum of 1000 characters	Error description. This parameter is returned only when the query failed.
resource_types	List<ResourceType>	-	Resource type information. For details, see Table 11-6 .

Table 11-6 ResourceType

Parameter	Type	Maximum Length of Characters	Description
resource_type_code	String	A maximum of 64 characters	Resource type code. For example, the resource type code of ECS is hws.resource.type.vm .
resource_type_name	String	A maximum of 200 characters	Resource type name.
resource_type_desc	String	A maximum of 200 characters	Resource type description.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "resource_types": [
        {
            "resource_type_code": "hws.resource.type.workplace.basic",
            "resource_type_name": "Basic package",
            "resource_type_desc": "Basic package"
        }
    ]
}
```

Status Codes

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Invalid parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

11.1.2 Querying Product Price

11.1.2.1 Querying Resource Provisioning Details of an Order

Function

A customer can query resource details and provisioning status of an order on the partner sales platform.

Note:

This API can be invoked only by the customer AK/SK or token. This is because that partners cannot buy products by themselves.

NOTE

This API will be taken offline soon. The new API will be provided by cloud services later.

URI

GET /v1.0/{domain_id}/common/order-mgr/orders-resource/{order_id}

The following table describes the parameters.

Table 11-7 URI parameters

Parameter	Mandatory	Maximum Length of Characters	Description
domain_id	Yes	A maximum of 64 characters	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?
order_id	Yes	A maximum of 64 characters	Order ID. The system will generate an order ID when the customer places an order of yearly/monthly products.

Table 11-8 Request parameters

Parameter	Mandatory	Type	Value Range	Description
offset	Yes	Integer	[1-2147483647]	Page number. The default value is 1.
limit	Yes	Integer	[1-50]	Number of records per page. The default value is 10.

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/common/order-mgr/orders-resource/CS****YE?  
offset=1&limit=10 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Error code. This parameter is returned only when the operation fails. For details, see Status Code .
error_msg	String	Error description. This parameter is returned only when the operation fails.
totalSize	Integer	Total resources. This parameter is returned only when the operation is successful.
resources	List<Resource>	Resource list. This parameter is returned only when the operation is successful. For details, see Table 11-9 .

Table 11-9 Resource

Parameter	Type	Description
resourceId	String	Resource instance ID. This parameter is returned only for resources that have resource instance IDs and are successfully provisioned.
cloudServiceType	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
regionCode	String	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints .
resourceType	String	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
resourceSpecCode	String	Specification of a cloud service resource. For example, a VM resource specification is s2.small.1.linux (.win or .linux should be added at the end of the specification).
resourceSize	Double	Resource capacity. The parameter is used with resourceSizeMeasureId . For example, it can be the size of the purchased disk or bandwidth.

Parameter	Type	Description
resourceSizeMeasureId	Integer	<p>Resource capacity measurement ID. The options are as follows:</p> <ul style="list-style-type: none"> • 15: Mbit/s (used when the bandwidth is subscribed) • 17: GB (used when an EVS disk is subscribed to)
status	Integer	<p>Resource provisioning status.</p> <ul style="list-style-type: none"> • 1: Successful. • 2: Failed. • 3: Processing • 4: Canceled • 6: Pending payment • 7: Pending approval • 8: Unsubscribed

Example Response

```

HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "totalSize": 5,
    "resources": [
        {
            "resourceId": "01c*****5f7",
            "cloudServiceType": "hws.service.type.ec2",
            "regionCode": "cn-north-1",
            "resourceType": "hws.resource.type.vm",
            "resourceSpecCode": "h1.8xlarge.4.gwc01",
            "resourceSize": null,
            "resourceSizeMeasureId": null,
            "status": 1
        },
        {
            "resourceId": "df1*****def",
            "cloudServiceType": "hws.service.type.vpc",
            "regionCode": "cn-north-1",
            "resourceType": "hws.resource.type.ip",
            "resourceSpecCode": "5_bgp",
            "resourceSize": null,
            "resourceSizeMeasureId": null,
            "status": 1
        },
        {
            "resourceId": "3d*****585",
            "cloudServiceType": "hws.service.type.ebs",
            "regionCode": "cn-north-1",
            "resourceType": "hws.resource.type.volume",
            "resourceSpecCode": "SATA",
            "resourceSize": 40,
            "resourceSizeMeasureId": 17,
            "status": 1
        },
        {
            "resourceId": "23b*****3321",

```

```
        "cloudServiceType": "hws.service.type.ebs",
        "regionCode": "cn-north-1",
        "resourceType": "hws.resource.type.volume",
        "resourceSpecCode": "SATA",
        "resourceSize": 100,
        "resourceSizeMeasureId": 17,
        "status": 1
    },
    {
        "resourceId": "3e00****d779",
        "cloudServiceType": "hws.service.type.vpc",
        "regionCode": "cn-north-1",
        "resourceType": "hws.resource.type.bandwidth",
        "resourceSpecCode": "19_bgp",
        "resourceSize": 1,
        "resourceSizeMeasureId": 15,
        "status": 1
    }
]
```

Status Code

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Succeeded.
500	CBC.0999	Other errors.
400	CBC.0100	Incorrect parameter.
403	CBC.0151	Access denied.
400	CBC.99000 083	The resource provisioning details of this order cannot be queried.

11.2 Managing Customers

11.2.1 Customer Registration

11.2.1.1 Verifying Customer Registration Information (Old)

Function

This API is used to check whether the account name, and mobile number or email address entered by the customer can be used for registration.

Note:

This API can be invoked only by the partner AK/SK or token.

NOTE

This API will be brought offline. For details about the new API for verifying customer registration information, see [5.1.1 Verifying Customer Registration Information](#).

URI

POST /v1.0/{partner_id}/partner/customer-mgr/check-user

The following table describes the parameters.

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID?

Request

Request parameters

Parameter	Mandatory	Type	Value Range	Description
searchType	Yes	String	[email mobile name]	The options are email, mobile, or name.

Parameter	Mandatory	Type	Value Range	Description
searchKey	Yes	String	A maximum of 64 characters	<p>Mobile number, email address, or account name.</p> <ul style="list-style-type: none">The mobile number must comply with the regular expression "$^{\d}\d\{4\}-\d+\$". The value contains the country code and starts with 00. The format is "00XX-XXXXXXX".name: The value must comply with the regular expression "$^([a-zA-Z-]([a-zA-Z0-9_-])\{4,31\})\$" and contains 5 to 32 characters. The value cannot start with op_ or shadow_ and cannot contain only digits. It must start with a letter (case-insensitive) or a hyphen (-).

Example request

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/customer-mgr/check-user HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ

{
  "searchType": "mobile",
  "searchKey": "0086-xxxxxxxxxx"
}
```

Response

Response parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values .
error_msg	String	A maximum of 1024 characters	Error description.

Parameter	Type	Value Range	Description
status	String	A maximum of 16 characters	<ul style="list-style-type: none">• 0: The account name, mobile number, or email address does not exist.• 1: The account name, mobile number, or email address already exists.
uplimit	String	A maximum of 1 character	Whether the upper limit has been reached. <ul style="list-style-type: none">• 0: The upper limit has not been reached.• 1: The upper limit has been reached.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "error_code": "CBC.0000",
    "error_msg": "success",
    "status": "0",
    "uplimit": "0"
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Success.
200	CBC.0100	Invalid input parameter.
400	CBC.5001	You are not a partner yet.
500	CBC.0999	Other errors.
403	CBC.0151	Access denied.

11.2.1.2 Sending a Verification Code(Old)

Function

If customers enter email addresses for registration, this API is used to send a registration verification code to the email addresses to verify the registration information.

Note:

This API can be invoked using the partner AK/SK or token only.

The verification codes are sent only during registration. After invoking this API, you need to invoke the API in [11.2.1.3 Creating a Customer \(Old\)](#) to create the registered customers.



This API will be brought offline. For details about the new API for sending a verification code, see [5.1.2 Sending a Verification Code](#).

URI

POST /v1.0/{partner_id}/partner/common-mgr/verificationcode

The following table describes the parameters.

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum 64 characters	Partner ID (assigned by Huawei). For details about how to obtain partner IDs, see How Do I Check the Partner ID?

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
receiverType	Yes	Integer	[2]	Settings. 2: Send an email verification code

Parameter	Mandatory	Type	Value Range	Description
timeout	No	Integer	[0-Maximum allowed integer]	<p>Timeout duration of a verification code.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, the default timeout interval 10 minutes is used.</p> <p>If the value of this parameter exceeds 60 minutes, a fixed value 5 minutes will be used.</p> <p>Unit: minutes</p>
email	Yes	String	A maximum 64 characters	The sender email address.
lang	No	String	A maximum of 128 characters	<p>If no template information is found for the selected language, the template information for the default language is used.</p> <ul style="list-style-type: none"> • zh-cn: Chinese • en-us: English <p>If this parameter is not included in the request parameters, is set to "", or is set to null, the default language is used.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/common-mgr/verificationcode
HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
{
    "receiverType":2,
    "email":"xxxxxx@xxxxxxx",
    "lang":"xxx"
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.

Example Response

```
HTTP/1.1 204 No Content
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Value	Error Code	Description
400	CBC.0100	Invalid input parameter.
401	CBC.0154	Invalid or expired token.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.
500	CBC.4002	Failed to generate the verification code.
500	CBC.4003	The verification code is successfully generated but fails to be sent.
500	CBC.4004	Empty email address./Invalid format.
500	CBC.4015	The number of verification code sending times has reached the upper limit (15 times per hour, 60 times per day).

11.2.1.3 Creating a Customer (Old)

Function

This API is used to create a HUAWEI CLOUD account for a customer when the customer creates an account on your sales platform, and bind the customer account on the partner sales platform to the HUAWEI CLOUD account. In addition, the HUAWEI CLOUD account is bound to the partner account.

Note:

- This API can be invoked only by the partner AK/SK or token.
- [HUAWEI CLOUD Customer Agreement](#) and [Privacy Statement](#) must be displayed on the page for creating a customer on the partner sales platform.
- This API is used to replace the partner token with the customer token to allow the partner to provide or query resources as a customer. Therefore, the partner must obtain the customer authorization before invoking this API.
- Obtain the verification code using the API in [11.2.1.2 Sending a Verification Code\(Old\)](#) and then invoke this API if you enter the email address when creating a customer.
- After a HUAWEI CLOUD account is created for a customer, SAML authentication is required if the customer wants to switch from the partner sales platform to the HUAWEI CLOUD official website. For details, see "SAML Authentication" in [Web UI Mode](#).
- If you do not enter the email address when creating a customer, the customer cannot receive any email notification from HUAWEI CLOUD. The customer needs to log in to the HUAWEI CLOUD to add the email address by itself.
- When the API for creating a customer is invoked, HUAWEI CLOUD will synchronously create a HUAWEI CLOUD customer account and send the customer ID and account name to the partner platform. Then, HUAWEI CLOUD associates the customer with the partner asynchronously. To query the association result, you can invoke the API described in [11.2.3.1 Querying Customers \(Old\)](#).
- The customer created using this API is a reseller customer for a partner.
- The password must contain at least eight characters, which will take effect as of August 1, 2022.

NOTE

This API will be brought offline soon. For details about the API for creating a customer, see [5.1.3 Creating a Customer](#).

URI

POST /v1.0/{partner_id}/partner/customer-mgr/customer

The following table describes the parameters.

Parameter	Mandatory	Maximum Length of Characters	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain partner IDs, see How Do I Check the Partner ID?

Request

Request Parameters

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
domainName	No	String	A maximum of 32 characters A minimum of 5 characters	HUAWEI CLOUD username of the customer. If this parameter is left blank, the value is generated randomly. The value cannot start with op_ or shadow_ and cannot contain only digits. The verification length is 5 to 32 digits and the verification rules are $^([a-zA-Z_-]([a-zA-Z0-9_-])^*)$$. If this parameter is not included in the request parameters, is set to "", or is set to null , the value is randomly generated.
email	No	String	A maximum of 64 characters	Email address. The value must contain @. If this parameter is not included in the request parameters or is set to null , no value is returned. If this parameter is set to "", "" is returned.

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
verificationCode	No	String	[1-10]	<p>Verification code.</p> <p>Invoke the API described in 11.2.1.2 Sending a Verification Code(Old) to obtain the verification code.</p> <p>If no email address is available, you do not need to enter the verification code.</p> <p>If this parameter is not included in the request parameters or is set to null, this parameter will not be used. It cannot be set to "".</p>
domainArea	Yes	String	A maximum of 2 characters	<p>Two-letter ID representing the country/region of the customer. The ID complies with the ISO 3166 standard.</p> <p>Example: MX for Mexico</p>
xAccountId	Yes	String	A maximum of 128 characters	Unique user ID on the partner sales platform. The ID is allocated by the partner.
xAccountType	Yes	String	A maximum of 64 characters	<p>Platform ID assigned by Huawei to a partner.</p> <p>This value is assigned by Huawei. For details about how to obtain the platform ID, see How Do I Obtain the xaccountType Value?</p>

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
password	No	String	The value can be a string of 8 to 32 characters.	<p>The password must meet the following rules:</p> <ul style="list-style-type: none">Contains at least two of the following character types: uppercase letters, lowercase letters, digits, and special characters.Differs from the account name or the account name in reverse order.Does not contain the email address. <p>If this parameter is left blank, the value is generated randomly.</p> <p>If this parameter is not included in the request parameters or is set to null, the password is randomly generated. This parameter cannot be set to "".</p>
isCloseMarketMs	No	String	A maximum of 10 characters	<p>Whether to disable the marketing message sending function.</p> <p>true: Disable this function.</p> <p>false: Retain this function enabled (default).</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, false is returned.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/customer-mgr/customer HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIIINPxidG9rZ
```

```
{  
    "domainName": "xxxxxx",  
    "email": "xxxxxx@xxxxxx",  
    "domainArea": "xx",  
    "verificationCode": "xxxxxx",  
    "xAccountId": "xxxxxx",  
    "xAccountType": "xxxxxx"  
}
```

Response

Response Parameters

Parameter	Type	Maximum Length of Characters	Description
error_code	String	A maximum of 16 characters	Error code. For details, see Status Codes . This parameter is returned only when a failure occurs.
error_msg	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
domainId	String	A maximum of 64 characters	Customer ID. This parameter is returned only when the customer is successfully created or the customer fails to authorize rights for the partner (with the error code CBC.5025).
domainName	String	A maximum of 64 characters	HUAWEI CLOUD username of the customer. <ul style="list-style-type: none">If the request contains this parameter, the response must contain the same parameter value as the request.If the request does not contain this parameter, the response contains a 32-bit character string randomly generated by the system. This parameter is returned only when the customer is successfully created or the customer fails to authorize rights for the partner (with the error code CBC.5025).

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "domainId": "xxxxxx",
    "domainName": "xxxxxx"
}
```

Status Codes

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Incorrect parameter. Check whether the input parameters meet the requirements according to the request parameter descriptions.
400	CBC.50010059	Customer association not allowed for Partner Service Provider.
401	CBC.0154	Invalid or expired token.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.
500	CBC.4007	Invalid email address.
500	CBC.4008	Invalid verification code.
500	CBC.4009	The verification code is available, but the number of verification failures is greater than 3.
400	CBC.0101	Invalid parameter.
500	CBC.5012	The account name already exists.
500	CBC.5013	The email address already exists.
500	CBC.5015	Invalid account name.
500	CBC.5016	Invalid email address.
500	CBC.5018	Duplicate xAccountId .
500	CBC.5019	The number of customers exceeds the license limit.
500	CBC.5025	An exception occurred when the customer authorized rights to the partner.
500	CBC.7228	Invalid password.
500	CBC.7254	Currently, registration with HUAWEI CLOUD is not available for users in this country.

HTTP Status Code	Error Code	Description
400	CBC.9900 0051	Customer creation failed because this mobile number or email address has been preregistered by Huawei.
400	CBC.5001 0085	Customer association not allowed. The account of this partner has been restricted.
400	CBC.5001 0086	Customer association not allowed. This partner is a Huawei Cloud reseller, and the account of its associated distributor has been restricted.

11.2.2 Real-Name Authentication

11.2.2.1 Querying the Real-Name Authentication Review Result (Old)

Function

If the response to a real-name authentication application or real-name authentication change application indicates that manual review is required, this API can be used to query the review result.

Note:

This API can be invoked only by the partner AK/SK or token.



This API will be brought offline. For details about the new API for querying the real-name authentication review result, see [5.2.4 Querying the Real-Name Authentication Review Result](#).

URI

GET /v1.0/{partner_id}/partner/customer-mgr/realname-auth/result

The following table describes the parameters.

Table 11-10 Path parameters

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID?

Table 11-11 Query parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	A maximum of 64 characters	For details, see How Do I Obtain Customer's customer_id and domain_id Values?

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/customer-mgr/realname-auth/result?  
customerId=45*****122 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Mandatory	Type	Value Range	Description
error_code	No	String	A maximum of 16 characters	Error code. For details, see Returned Values . This parameter is returned only when a failure occurs.
error_msg	No	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.

Parameter	Mandatory	Type	Value Range	Description
reviewResult	No	Integer	[0-2]	Real-name authentication review result. This parameter is returned only when the status code is 200 and the real-name authentication application has been submitted. <ul style="list-style-type: none">• 0: Under review• 1: Failed• 2: Approved
opinion	No	String	A maximum of 256 characters	Review comment. This parameter is returned only when the status code is 200 and the review is not approved.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
Date: response time

{
    "reviewResult": 2,
    "opinion": null
}
```

Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Succeeded.
400	CBC.0100	Invalid input parameter.

HTTP Status Code	Error Code	Description
403	CBC.0151	Access denied.
500	CBC.0999	Unknown error occurred.

11.2.3 Customer Management

11.2.3.1 Querying Customers (Old)

Function

This API is used to query your customers.



This API will be brought offline soon. For details about the API for querying the customer list, see [5.3.1 Querying Customers](#).

Web UI

You can log in to the Partner Center to query your customers.

Step 1 Choose **Customer Business > My Customers**.

Step 2 Set search criteria to search for customers.

You can search for customers by the association type, association time, customer name, salesperson name, expenditure this month, resource expiration date, mobile number, or customer tag.

----End

REST API

This API is used to query your customers on the partner sales platform.



This API can be invoked only by the partner account AK/SK or token.

If a customer queried does not exist, the HTTP code **200** is returned by the API and an empty list is returned in the response.

1. URI

POST /v1.0/{partner_id}/partner/customer-mgr/query

The following table describes the parameters.

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID? The system does not verify this parameter.

2. Request

Request parameters

Parameter	Mandatory	Type	Value Range	Description
domainName	No	String	A maximum of 128 characters	Account name. If the customer has created an IAM user, enter the account name of the master account. For details about the two concepts, see "Account" and "IAM User" in Identity Management . Fuzzy search is supported. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
name	No	String	A maximum of 128 characters	Real-name authentication name. Fuzzy search is supported. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.

Parameter	Mandatory	Type	Value Range	Description
offset	No	Intger	[1- Maximum allowed integer]	Page to be queried. By default, the first page is queried.
limit	No	Intger	[1-100]	Number of records on each page. The default value is 10, and the maximum value is 100.
label	No	String	A maximum of 64 characters	Tag. Fuzzy search is supported. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces. The letters entered for search are case-sensitive.
cooperationType	No	String	A maximum of 1 character	Association type. <ul style="list-style-type: none"> • 1: Referral • 2: Authorized Distributor • 3: indicates Reseller. Note: Currently, only Referral and Reseller are supported. If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.

Parameter	Mandatory	Type	Value Range	Description
cooperationTimeStart	No	String	A maximum of 20 characters	<p>Start time of the association time range (UTC time). The value is in "yyyy-MM-dd 'T' HH:mm:ss 'Z'" format, such as 2019-05-06T08:05:01Z. This parameter must be used together with cooperationTimeEnd. If this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion. It cannot be set to "".</p>
cooperationTimeEnd	No	String	A maximum of 20 characters	<p>End time of the association time range (UTC time). The value is in "yyyy-MM-dd 'T' HH:mm:ss 'Z'" format, such as 2019-05-06T08:05:01Z. This parameter must be used together with cooperationTimeStart. If this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion. It cannot be set to "".</p>

Request Example

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/customer-mgr/query HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

3. Response

Response parameters

Parameter	Mandatory	Type	Value Range	Description
error_code	No	String	A maximum of 16 characters	Error code. For details, see 4 .

Parameter	Mandatory	Type	Value Range	Description
error_msg	No	String	A maximum of 1024 characters	Error description.
customerInfoList	No	List<CustomerInfo>	-	Customer list. For details, see Table 11-12 .
count	No	Integer	-	Total number of records.

Table 11-12 CustomerInfo

Parameter	Mandatory	Type	Value Range	Description
name	No	String	A maximum of 128 characters	Real-name authentication name.
domainName	Yes	String	A maximum of 128 characters	Account name. If the customer has created an IAM user, the account name of the master account is returned.
customerId	Yes	String	A maximum of 64 characters	Customer ID.
cooperationTime	No	String	A maximum of 20 characters	Time when a customer is associated with a partner. The value is UTC time in "yyyy-MM-dd 'T' HH:mm:ss 'Z'" format, such as 2019-05-06T08:05:01Z . <i>HH</i> ranges from 0 to 23, and <i>mm</i> and <i>ss</i> ranges from 0 to 59.

Parameter	Mandatory	Type	Value Range	Description
cooperationType	No	String	A maximum of 1 character	<p>Association type.</p> <ul style="list-style-type: none"> ● 1: Referral ● 2: Authorized Distributor ● 3: indicates Reseller. <p>Note:</p> <p>Currently, only Referral and Reseller are supported.</p>
label	No	String	A maximum of 64 characters	Tag. Fuzzy search is supported.
telephone	No	String	A maximum of 20 characters	Customer phone number.
verifiedStatus	No	String	A maximum of 5 characters	<p>Real-name authentication status.</p> <ul style="list-style-type: none"> ● -1: The real name is not authenticated. ● 0: Real-name authentication is under review. ● 1: The real-name authentication is not passed. ● 2: The real name is authenticated.
countryCode	No	String	A maximum of 10 characters	<p>Country code, which is the country code prefix of a phone number.</p> <p>Example: 0086 for China</p>

Parameter	Mandatory	Type	Value Range	Description
customerType	No	Integer	[-1,0,1]	<p>Customer type.</p> <ul style="list-style-type: none"> • -1: None • 0: Individual • 1: Enterprise <p>When a customer is registered, customerType is -1. The customer can set customerType in the account center or select the enterprise or individual real-name authentication to determine the customer type.</p>
isFrozen	No	Integer	[0,1]	<p>Whether to freeze the account.</p> <ul style="list-style-type: none"> • 0: No • 1: Yes

Example response

```

HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "count": 2,
    "customerInfoList": [
        {
            "name": "xxx",
            "domainName": "a9ca*****b96",
            "customerId": "05ad*****4ea0",
            "cooperationTime": "2019-07-19T06:40:53Z",
            "cooperationType": "3",
            "label": null,
            "telephone": "17729386686",
            "verifiedStatus": "2",
            "countryCode": null,
            "customerType": 1
        },
        {
            "name": "xxx",
            "domainName": "a65b*****89d",
            "customerId": "059e*****c6da0",
            "cooperationTime": "2019-07-13T11:39:27Z",
            "cooperationType": "3",
            "label": null,
            "telephone": null,
            "verifiedStatus": "2",
            "countryCode": null,
            "customerType": 1,
            "isFrozen": 0
        }
    ]
}

```

4. Returned Values

 NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.00 00	Success.
500	CBC.09 99	Other errors.
400	CBC.01 00	Incorrect parameter.
403	CBC.01 51	Access denied.

11.2.3.2 Querying Customers (Old)

Function

This API is used to query your customers.

 NOTE

This API will be brought offline soon. For details about the API for querying the customer list, see [5.3.1 Querying Customers](#).

Web UI

You can log in to the Partner Center to query your customers.

Step 1 Choose **Customer Business > My Customers**.

Step 2 Set search criteria to search for customers.

You can search for customers by the association type, association time, customer name, salesperson name, mobile number, or customer tag.

----End

REST API

This API is used to query your customers on the partner sales platform.

 NOTE

This API can be invoked only by the partner account AK/SK or token.

If a customer queried does not exist, the HTTP code **200** will be returned by the API and nothing is returned in the response.

1. URI

GET /v1.0/{partner_id}/partner/customer-mgr/detail

The following table describes the parameters.

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID?

2. Request

Request parameters

Parameter	Mandatory	Type	Value Range	Description
domain_name	No	String	A maximum of 128 characters	Account. If the customer has created an IAM user, enter the account name. For details about the two concepts, see "Account" and "IAM User" in Identity Management . Fuzzy search is supported. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null , it can be used as a filter criterion.

Parameter	Mandatory	Type	Value Range	Description
corp_name	No	String	A maximum of 128 characters	<p>Enter the enterprise name if it is used for real-name authentication.</p> <p>For an individual who uses real name for authentication, enter the individual name.</p> <p>Fuzzy search is supported. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null, it can be used as a filter criterion.</p>
page_no	No	Intger	-	<p>Page to be queried.</p> <p>By default, the first page is queried.</p> <p>If this parameter is not included in the request parameters, is left empty, or is set to null, the value 1 is used. This parameter cannot be set to "".</p>
page_size	No	Intger	[1-100]	<p>Number of records on each page.</p> <p>The default value is 10, and the maximum value is 100.</p> <p>If this parameter is not included in the request parameters, is left empty, or is set to null, the value 10 is used. This parameter cannot be set to "".</p>

Parameter	Mandatory	Type	Value Range	Description
label	No	String	A maximum of 64 characters	<p>Tag. Fuzzy search is supported. Only prefix, suffix, or middle part can be used for fuzzy search. The content you enter for fuzzy search cannot contain spaces. The letters entered for search are case-sensitive.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null, it can be used as a filter criterion.</p>
cooperationType	No	String	[1 3]	<p>Association type.</p> <ul style="list-style-type: none"> • 1: Referral • 2: Authorized Distributor • 3: Reseller <p>Note:</p> <p>Currently, only Referral and Reseller are supported.</p> <p>If this field is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null.</p>
cooperationStartTime	No	String	A maximum 20 characters	<p>Start time of the association time range (UTC time).</p> <p>The value is in "yyyy-MM-dd 'T' HH:mm:ss 'Z'" format, such as 2019-05-06T08:05:01Z.</p> <p>This parameter must be used together with cooperationTimeEnd.</p> <p>If this parameter is not included in the request parameters, it cannot be used as a filter criterion. It cannot be left empty or set to "" or null.</p>

Parameter	Mandatory	Type	Value Range	Description
cooperationTimeEnd	No	String	A maximum 20 characters	<p>End time of the association time range (UTC time)</p> <p>The value is in the following format: yyyy-MM-dd'T'HH:mm:ss'Z', such as 2019-05-06T08:05:01Z</p> <p>This parameter must be used together with cooperationTimeStart.</p> <p>If this parameter is not included in the request parameters, it cannot be used as a filter criterion. It cannot be left empty or set to "" or null.</p>

Request Example

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/customer-mgr/detail HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ
```

3. Response

Response parameters

Parameter	Mandatory	Type	Value Range	Description
error_code	Yes	String	A maximum of 16 characters	Error code. For details, see 4 .
error_msg	Yes	String	A maximum of 1024 characters	Error description.
customer_info_list	No	List<CustomerInfo>	-	Customer list. For details, see Table 11-13 .
count	No	Integer	-	Total number of records.

Table 11-13 CustomerInfo

Parameter	Mandatory	Type	Value Range	Description
corp_name	Yes	String	A maximum of 128 characters	Enterprise name.
domain_name	Yes	String	A maximum of 128 characters	Account. If the customer has created an IAM user, the account name is returned.
customer_id	Yes	String	A maximum of 64 characters	Customer account ID.
start_time	No	String	A maximum 20 characters	Time when an enterprise is registered. The value is UTC time in <i>yyyy-MM-ddTHH:mm:ssZ</i> format. The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
cooperation_type	No	String	Length: 1	Association type. 1: Referral 2: Authorized Distributor 3: Reseller Note: Currently, only Referral and Reseller are supported.
label	No	String	A maximum of 64 characters	Tag. Fuzzy search is supported.
telephone	No	String	A maximum 20 characters	Customer phone number

Parameter	Mandatory	Type	Value Range	Description
verifiedStatus	No	String	A maximum of 5 characters	<p>Real-name authentication status.</p> <ul style="list-style-type: none"> • -1: The real name is not authenticated. • 0: Real-name authentication is under review. • 1: The real-name authentication is not passed. • 2: The real name is authenticated.
countryCode	No	String	A maximum of 10 characters	<p>Country code, which is the country code prefix of a phone number. Example: 0086 for China</p>

Example response

```

HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
Date: response time

{
  "count": 2,
  "error_code": "CBC.0000",
  "error_msg": "success",
  "customer_info_list": [
    {
      "customer_id": "7ff331de7af7457d8331de0bfe7a42b7",
      "corp_name": null,
      "domain_name": "mingcheng",
      "start_time": "2018-10-11T02:28:34Z",
      "cooperation_type": "1",
      "label": "xxx",
      "telephone": "139xxxxxxxx",
      "verifiedStatus": "-1",
      "countryCode": "xxxx"
    },
    {
      "customer_id": "67b5223d4f6e4cc18d8dfd2da9d01db8",
      "corp_name": null,
      "domain_name": "ambrosiaxu",
      "start_time": "2018-06-25T11:15:20Z",
      "cooperation_type": "1",
      "label": "xxx",
      "telephone": "139xxxxxxxx",
      "verifiedStatus": "-1",
      "countryCode": "xxxx"
    }
  ]
}

```

4. Returned Values

 NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Success.
500	CBC.0999	Other errors.
400	CBC.0100	Incorrect parameter.
403	CBC.0151	Access denied.

11.2.3.3 Freezing a Customer Account

Function

A partner can freeze an account of a customer associated with the partner by reseller model.

 NOTE

This API will be unavailable soon. For details about how to freeze a customer account, see [5.3.2 Freezing a Customer Account](#).

Web UI

When a customer is associated with a partner by reseller model, the customer account is frozen by default. When the account is frozen, the customer cannot purchase, renew the subscription to, change, or properly use the resources. The partner can select **Unfreeze Account** when setting the budget for the customer to unfreeze the account.


Alternatively, partners can switch to the **My Customers** page to unfreeze accounts of reseller customers.

Step 1 Use your account to log in to [HUAWEI CLOUD](#).

Step 2 In the drop-down list of your account name, click **Partner Center** to go to the Partner Center.

Step 3 In the navigation tree, choose **Customer Business > My Customers**.

Step 4 Click **Freeze Account** in the **Operation** column in the row of the target customer.

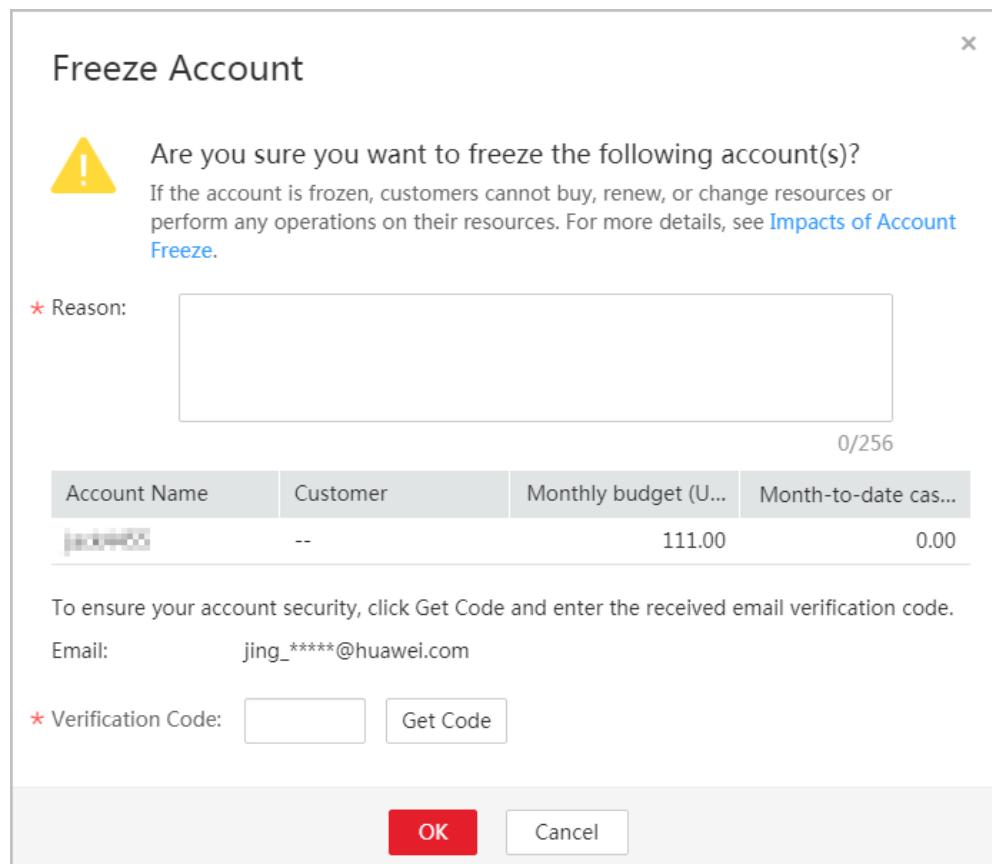

Step 5 Enter the reason.

Step 6 Click **Get Code** and enter the obtained verification code.

Step 7 Click **OK**.

A message is displayed indicating that the account is frozen.

BOOK NOTE

To unfreeze the customer's account, click **Unfreeze Account** in the **Operation** column.

----End

REST API

Partners can freeze accounts of customers associated with the partners in reseller model on the partner sales platform. When the accounts are frozen, the customers cannot purchase, renew the subscription to, change, or properly use the resources.

BOOK NOTE

This API can be invoked using the partner AK/SK or token only.

1. URI

POST /v1.0/{partner_id}/partner/customer-mgr/frozens

The following table describes the parameters.

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID? The system does not verify this parameter.

2. Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customer_ids	Yes	List<String>	A maximum of 10 IDs	IDs of customers whose accounts are to be frozen Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?
reason	Yes	String	A maximum of 256 characters	Account freezing reason.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/customer-mgr/frozens HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ

{
    "customerIds": [
        "06502440a080d5e90f44c01cbccfa280",
        "065faa30c880d5ce0fddc007a6cb6f40"
    ],
    "reason": "Arrears"
}
```

3. Response

Response Parameters

Parameter	Mandatory	Type	Value Range	Description
error_code	No	String	A maximum of 16 characters	Error code. This field is not returned when the operation is successful or partially failed. For details, see 4 .
error_msg	No	String	A maximum of 1024 characters	Error description. This field is not returned when the operation is successful or partially failed.
failDetail	No	list<Error Detail>	-	Error cause description. This field is returned only when the operation is partially failed. For details, see Table 11-14 .
failNum	No	Integer	-	Number of failures. This field is returned only when the operation is successful or partially failed.
successNum	No	Integer	-	Number of successful operations. This field is returned only when the operation is successful or partially failed.

Table 11-14 ErrorDetail

Parameter	Mandatory	Type	Value Range	Description
error_code	Yes	String	A maximum of 16 characters	Error code. For details, see Table 11-15 .
error_msg	Yes	String	A maximum of 1024 characters	Error message.
id	Yes	String	A maximum of 256 characters	ID. The value corresponds to customerId .

Table 11-15 Error codes (partial)

Error Code	Description
CBC.0999	Other errors.
CBC.5004	You do not have the operation permission to the customer.
CBC.5024	This API cannot be invoked because the association type of the customer is incorrect.

Example response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "failNum": 0,
    "successNum": 2,
    "failDetail": []
}
```

4. Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
500	CBC.0999	Other errors.
400	CBC.0100	Invalid input parameter.
403	CBC.0150	Invalid operation.
400	CBC.5004	You do not have the operation permission to the customer.

11.2.3.4 Unfreezing a Customer Account

Function

A partner can unfreeze an account of a customer associated with the partner by reseller model.


 NOTE

This API will be brought offline. For details about the new API for unfreezing a customer Account, see [5.3.3 Unfreezing a Customer Account](#).

Web UI

Alternatively, partners can switch to the **My Customers** page to unfreeze accounts of reseller customers.

- Step 1** Use your account to log in to [Huawei Cloud](#).
- Step 2** In the drop-down list of your account name, click **Partner Center** to go to the Partner Center.
- Step 3** In the navigation tree, choose **Customer Business > My Customers**.
- Step 4** Click **Unfreeze Account** in the **Operation** column in the row of the target customer.

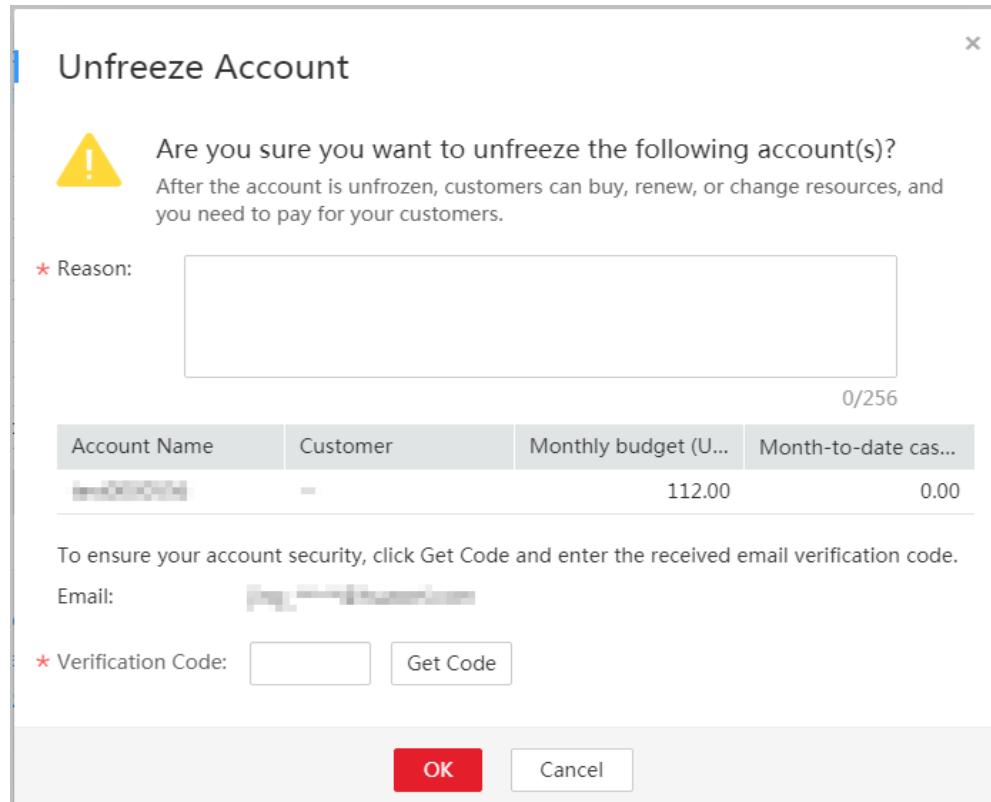

- Step 5** Enter the reason.

- Step 6** Click **Get Code** and enter the obtained verification code.

- Step 7** Click **OK**.

A message is displayed indicating that the account is unfrozen.

----End

REST API

Partners can unfreeze accounts of customers associated with the partners in reseller model on the partner sales platform. After the accounts are unfrozen, fees generated when the customers purchase, renew the subscription to, and change resources are paid by the partners.

NOTE

This API can be invoked using the partner AK/SK or token only.

1. URI

POST /v1.0/{partner_id}/partner/customer-mgr/unfrozens

The following table describes the parameters.

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID? The system does not verify this parameter.

2. Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customerIds	Yes	List<String>	A maximum of 10 IDs	IDs of customers whose accounts are to be unfrozen For details, see How Do I Obtain Customer's customer_id and domain_id Values?
reason	Yes	String	A maximum of 256 characters	Account unfreezing reason.

Request Example

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/customer-mgr/unfrozens HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
{
    "customerIds": [
        "06502440a080d5e90f44c01cbccfa280",
        "065faa30c880d5ce0fddc007a6cb6f40"
    ],
}
```

```
        "reason": "The customer has topped up its account."  
    }
```

3. Response

Response Parameters

Parameter	Mandatory	Type	Value Range	Description
error_code	No	String	A maximum of 16 characters	Error code. This field is not returned when the operation is successful or partially failed. For details, see 4 .
error_msg	No	String	A maximum of 1024 characters	Error description. This field is not returned when the operation is successful or partially failed.
failDetail	No	list<Error Detail>	-	Error cause description. This field is returned only when the operation is partially failed. For details, see Table 11-16 .
failNum	No	Integer	-	Number of failures. This field is returned only when the operation is successful or partially failed.
successNum	No	Integer	-	Number of successful operations. This field is returned only when the operation is successful or partially failed.

Table 11-16 ErrorDetail

Parameter	Mandatory	Type	Value Range	Description
error_code	Yes	String	A maximum of 16 characters	Error code. For details, see Table 11-17 .
error_msg	Yes	String	A maximum of 1024 characters	Error message.

Parameter	Mandatory	Type	Value Range	Description
id	Yes	String	A maximum of 256 characters	ID. The value corresponds to customerId .

Table 11-17 Error codes (partial)

Error Code	Description
CBC.0999	Other errors.
CBC.5004	You do not have the operation permission to the customer.
CBC.5024	This API cannot be invoked because the association type of the customer is incorrect.

Example response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "failNum": 0,
    "successNum": 2,
    "failDetail": []
}
```

4. Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0150	Invalid operation.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

11.3 Transaction Management

11.3.1 Managing Customer' Budgets

11.3.1.1 Querying Customers' Budgets

Function

This API is used to query the budget of a customer for the partner to determine whether to adjust the budget.


NOTE

This API will be brought offline. For details about the new API for querying customers' budgets, see [Querying Customers' Budgets](#).

Web UI

You can log in to the Partner Center to query the budgets of your customers.

- Step 1** Use your partner account to log in to [Huawei Cloud](#).
- Step 2** In the upper right corner, choose **Partner Center** from the drop-down list of your account name to go to the Partner Center.
- Step 3** In the navigation pane, choose **Customer Business > Customer Management**.
- Step 4** On the displayed page, select the target customer, and click **Set Monthly Budget** in the **Operation** column.

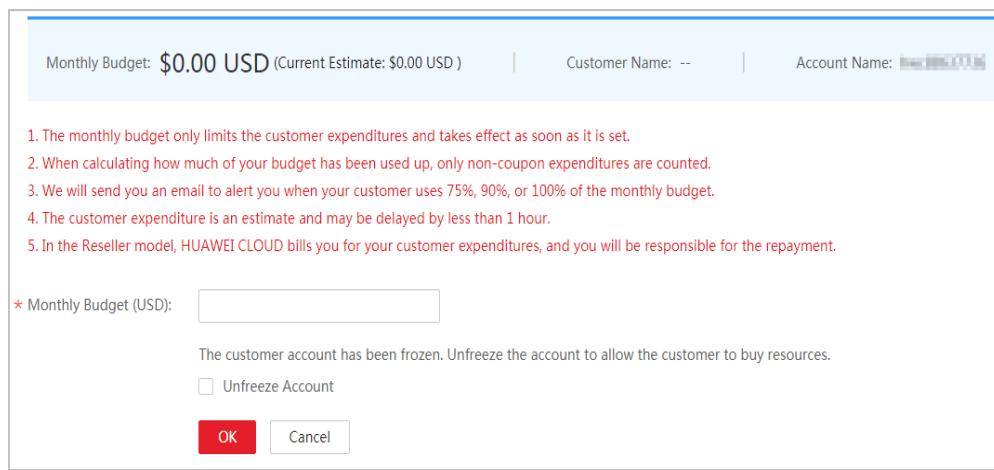

----End

REST API

You can use REST APIs to query customers' budgets on your sales platform.

 NOTE

This API can be invoked only by the partner account AK/SK or token.

1. URI

GET /v1.0/{partner_id}/partner/account-mgr/credit

The following table describes the parameters.

Table 11-18 Path parameters

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID?

Table 11-19 Query parameters

Parameter	Mandatory	Type	Value Range	Description
customer_id	Yes	String	A maximum of 64 characters	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?

2. Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/account-mgr/credit?  
customer_id=c8c346e9d924403c9e87c1fce9b0b13f HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

3. Response

Response Parameters

Parameter	Mandatory	Type	Value Range	Description
error_code	No	String	A maximum of 16 characters	Error code. For details, see 4 . This parameter is returned only when the query fails.

Parameter	Mandatory	Type	Value Range	Description
error_msg	No	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
creditAmount	No	Double	-	Budget.
usedAmount	No	Double	-	Used budget. The data displayed on the system may have certain deviation and latency.
measureId	No	Integer	-	Unit: 1: dollar
currency	No	String	A maximum of 8 characters	Currency: USD

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "creditAmount": 1000,
    "usedAmount": 526,
    "measureId": 1,
    "currency": "USD"
}
```

4. Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0150	Access denied.

HTTP Status Code	Error Code	Description
403	CBC.0151	Other errors.
500	CBC.0999	This API cannot be invoked because the association type of the customer is incorrect.
500	CBC.5024	Invalid operation.

11.3.1.2 Setting Customers' Budgets

Function

This API is used to set or adjust a customer's budget.




NOTE

This API will be brought offline. For details about the new API for setting customers' budgets, see [Setting Customers' Budgets](#).

Web UI

You can log in to the Partner Center to set the budgets your customers.

- Step 1** Use your partner account to log in to [Huawei Cloud](#).
- Step 2** In the upper right corner, choose **Partner Center** from the drop-down list of your account name to go to the Partner Center.
- Step 3** In the navigation pane, choose **Customer Business > Customer Management**.
- Step 4** On the displayed page, select the target customer, and click **Set Monthly Budget** in the **Operation** column.

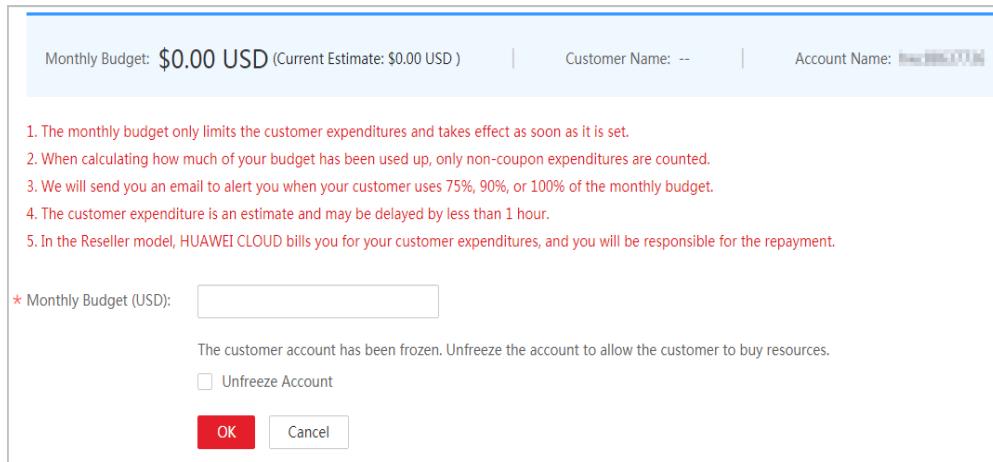

- Step 5** Enter a value and click **OK**.

A message indicating that the monthly budget has been set successfully is displayed.

 **NOTE**

If partners have enabled the verification code function, a verification code is required.

Step 6 Click OK.

----End

REST API

You can use REST APIs to set customers' budgets on your sales platform.

 **NOTE**

This API can be invoked only by the partner account AK/SK or token.

1. URI

POST /v1.0/{partner_id}/partner/account-mgr/credit

The following table describes the parameters.

Parameter	Mandatory	Value Range	Description
partner_id	Yes	A maximum 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID?

2. Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
customerId	Yes	String	A maximum 64 characters	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?
adjustmentAmount	Yes	Double	-	New budget, which can be accurate to two decimal places.
measureId	Yes	Integer	-	Unit: 1: dollar

Parameter	Mandatory	Type	Value Range	Description
cancelPartne rFrozen	No	String	1	<p>Whether to unfreeze the account when setting the customer budget.</p> <p>0: No 1: Yes</p> <p>The default value is 0.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, the default value 0 is used.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/account-mgr/credit HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ

{
    "customerId": "c8c346e9d924403c9e87c1cfe9b0b13f",
    "adjustmentAmount": 2000,
    "measureId": 1
}
```

3. Response

Response Parameters

Parameter	Manda tory	Type	Value Range	Description
error_code	No	String	A maximum of 16 characters	Error code. For details, see 4 . This parameter is returned only when a failure occurs.
error_msg	No	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.

Example Response

```
HTTP/1.1 204 No Content
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
```

4. Returned Values

 NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0151	Access denied.
403	CBC.0150	Invalid operation.
500	CBC.0999	Other errors.
500	CBC.5024	This API cannot be invoked because the association type of the customer is incorrect.
500	CBC.50000036	Setting budgets for customers is not allowed because the partner is now in the credit control state.

11.3.2 Yearly/monthly Order Management

11.3.2.1 Querying Orders

Function

After a customer purchases yearly/monthly resources, it can query the orders in different statuses, such as in the pending approval, processing, canceled, completed, and pending payment statuses.

 NOTE

This API will be brought offline soon. For details about the API for querying orders, see [7.3.1 Querying Orders](#).

Web UI

Log in to the Billing Center and switch to the **Orders** page. On the displayed page, click the **All** tab to view the orders in different statuses, such as pending approval, processing, canceled, completed, and pending payment.

Orders									Help Center
Your credit limit is set by your associated reseller and is used to control your service usage within the limit. When you enable a service, HUAWEI CLOUD deducts the official price from your credit limit. This deduction is used only to meter your usage and is not equal to the final payment. If you are associated with a reseller by resale, the reseller provides your bill and amount due information.									
Pending Payment		All							
Export									
Order No.	Service Type	Created On	Paid On	Order Status	Order Type	Subtotal (U..)	Total	Operation	
CS1905250936CN067	Elastic Volume Servi...	May 25, 2019 09:36:31 GM...	-	Completed	Unsubscription	-0.09	-0.09	Details	
CS1905201648A2WAB	Elastic Cloud Server	May 20, 2019 16:48:40 GM...	-	Canceled	New purchase	14.88	--	Details	
CS1905101022R4X66	Elastic Volume Servi...	May 10, 2019 10:22:42 GM...	-	Canceled	New purchase	0.92	--	Details	
CS1904291817W00F	Elastic Volume Servi...	Apr 29, 2019 18:17:54 GM...	Apr 29, 2019 18:18:15 GM...	Completed	New purchase	0.58	0.58	Details	
CS1904011629L5RW5	Elastic Volume Servi...	Apr 01, 2019 16:29:00 GM...	-	Canceled	New purchase	0.92	--	Details	
CS1902011136BUHF6	Elastic Volume Servi...	Feb 01, 2019 11:36:09 GM...	Feb 01, 2019 11:36:16 GM...	Completed	New purchase	0.58	0.58	Details	

REST API

After a customer purchases yearly/monthly resources, it can query the orders in different status on the partner sales platform, such as in the pending approval, processing, canceled, completed, and pending payment statuses.

NOTE

- This API can be invoked using the AK/SK or token of the partner or of the partner's customer. If the partner AK/SK or token is used, orders of only the customers associated in the Reseller model can be queried.
- If you want to query the resource information of a specified order, invoke this API to obtain the order ID and then invoke the API described in [11.3.3.1 Querying Customer's Yearly/Monthly Resources](#). Enter the order ID in the request to query the resource information.

1. URI

GET /v1.0/{domain_id}/common/order-mgr/orders/detail

The following table describes the parameters.

Table 11-20 URI parameters

Parameter	Mandatory	Maximum Length of Characters	Description
domain_id	Yes	A maximum of 64 characters	<ul style="list-style-type: none">A partner id should be entered if the partner's AK/SK or token is used. For details about how to obtain the partner ID, see How Do I Check the Partner ID?A customer account ID should be entered if the customer AK/SK or token is used. For details, see How Do I Obtain Customer's customer_id and domain_id Values?

Table 11-21 Request parameters

Parameter	Mandatory	Type	Maximum Length of Characters/Value Range	Description
order_id	No	String	A maximum of 64 characters	Order ID. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null , it can be used as a filter criterion.
customer_id	No	String	A maximum of 64 characters	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values? If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null .
create_time_begin	No	String	A maximum of 64 characters	Start time of order creation. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null .
create_time_end	No	String	A maximum of 64 characters	End time of order creation. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null .

Parameter	Mandatory	Type	Maximum Length of Characters/Value Range	Description
service_type	No	String	A maximum of 64 characters	<p>Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs. To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null, it can be used as a filter criterion.</p>
status	No	String	A maximum of 64 characters	<p>Order status. The value can be:</p> <ul style="list-style-type: none"> • 1: Pending approval • 3: Processing • 4: Canceled • 5: Completed • 6: Pending payment • 9: To be confirmed <p>If this parameter is not included in the request parameters, is left empty, or is set to null, it cannot be used as a filter criterion. It cannot be set to "".</p>

Parameter	Mandatory	Type	Maximum Length of Characters/Value Range	Description
order_type	No	String	A maximum of 64 characters	<p>Order type. The value can be:</p> <ul style="list-style-type: none"> • 1: New purchase • 2: Renewal • 3: Change • 4: Unsubscription • 10: Yearly/monthly to pay-per-use • 11: Pay-per-use to yearly/monthly • 13: Trial • 14: Commercial use • 15: Price adjustment <p>If this parameter is not included in the request parameters, is left empty, or is set to null, it cannot be used as a filter criterion. It cannot be set to "".</p>
page_size	Yes	Integer	[1-100]	Number of rows on a page.
page_index	Yes	Integer	[1-Maximum integer]	Current page number. If the value of this parameter exceeds 1000000 , the default value 1 is used.

Parameter	Mandatory	Type	Maximum Length of Characters/Value Range	Description
sort	No	String	A maximum of 36 characters	<p>Sorting order of the orders.</p> <p>You can sort the orders by creation time.</p> <p>If you set the value to createTime, the system sorts orders by creation time in ascending order. If you set the value to -createTime, the system sorts orders by creation time in descending order.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null.</p>
paymen t_time_b egin	No	String	A maximum of 64 characters	<p>Start time of order payment.</p> <p>UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z.</p> <p>The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null.</p>
paymen t_time_e nd	No	String	A maximum of 64 characters	<p>End time of order payment.</p> <p>UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z.</p> <p>The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. It cannot be set to "" or null.</p>

2. Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/common/order-mgr/orders/detail?  
page_size=5&page_index=1 HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

3. Response

Response Parameters

Parameter	Type	Description
error_code	String	Error code. For details, see 4 .
error_msg	String	Error description.
data	Result	Order list For details, see Table 11-22 .

Table 11-22 Result

Parameter	Type	Description
pageSize	Integer	Number of rows on a page.
pageIndex	Integer	Current page number.
totalSize	Integer	Number of records that match the query conditions.
orderInfos	List<CustomerOrder>	Order details. For details, see Table 11-23 .

Table 11-23 CustomerOrder

Parameter	Type	Description
orderId	String	Order ID.
baseOrderId	String	Parent order ID (order ID before splitting). When a cloud service is renewed or changed or a cloud service is unsubscribed, a new order ID (orderId value) is generated. In this case, baseOrderId indicates the original ID before the renewal, change, or unsubscription. This field has been discarded.
beld	String	Partner business entity ID.

Parameter	Type	Description
customerId	String	Customer ID.
sourceType	Integer	Customer order source type. The value can be: <ul style="list-style-type: none"> ● 1: Customer ● 2: Agent ● 3: Contract ● 4: Distributor
status	Integer	Order status. The value can be: <ul style="list-style-type: none"> ● 1: Pending approval ● 3: Processing ● 4: Canceled ● 5: Completed ● 6: Pending payment ● 9: To be confirmed
orderType	Integer	Order Type: <ul style="list-style-type: none"> ● 1: New purchase ● 2: Renewal ● 3: Change ● 4: Unsubscription ● 10: Yearly/monthly to pay-per-use ● 11: Pay-per-use to yearly/monthly ● 13: Trial ● 14: Commercial use ● 15: Price adjustment
currency	Double	Order amount (original price). In the unsubscription order, the amount is equal to the value of currencyAfterDiscount .
currencyAfterDiscount	Double	Order amount after a discount (excluding the vouchers or cards)
measureId	Integer	Order amount unit. <ul style="list-style-type: none"> ● 1: Dollar ● 2: Dime ● 3: Cent
measureName	String	Amount unit name.

Parameter	Type	Description
createTime	String	Creation time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z"" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
paymentTime	String	Payment time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z"" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
lastUpdateTime	String	Latest status update time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z"" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
needAudit	Boolean	Whether the approval is required.
currencyType	String	Currency code.
contractId	String	Contract ID.
currencyOfficial	Double	Order amount (list price). In the unsubscription order, the amount is equal to the value of currencyAfterDiscount .
amountInfo	AmountInfo	Order deduction details. For details, see Table 11-24 .
serviceType	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .

Table 11-24 AmountInfo

Parameter	Type	Description
discountList	List<DiscountItem>	Fee item. For details, see Table 11-25 .
cashcouponAmount	Double	Flexi-purchase coupon amount (reserved).

Parameter	Type	Description
couponAmount	Double	Cash coupon amount.
cardAmount	Double	Stored-value card amount (reserved).
commissionAmount	Double	Handling fee (only for unsubscription orders).
consumedAmount	Double	Consumption amount (only for unsubscription orders).

Table 11-25 DiscountItem

Parameter	Type	Description
discountType	String	<p>Discount type.</p> <p>200: Promotion product discount</p> <p>300: Promotion discount coupon</p> <p>301: Promotion coupon</p> <p>302: Promotion flexi-purchase coupon</p> <p>500: Specified discount for agent subscription</p> <p>501: Specified exemption for agent subscription</p> <p>502: Specified buy-it-now price for agent subscription</p> <p>600: Discount specified in the discount and rebate contract</p> <p>601: Discount specified in the channel frame contract</p> <p>602: Discount specified in the designated-purpose fund contract</p> <p>603: Discount specified in the directly signed offline contract</p> <p>604: Discount specified in the authorized telemarketing contract</p> <p>605: Discount specified in the commercial contract</p> <p>606: Discount specified in the channel commercial contract</p> <p>607: Partner authorized discount</p> <p>609: discount for adjusting an order price</p> <p>610: Discount amount</p> <p>700: Promotion discount</p> <p>800: Top-up account discount</p>

Parameter	Type	Description
discountAmount	Double	Discounted amount.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "error_code": "CBC.0000",
    "error_msg": "success",
    "data": {
        "pageSize": 10,
        "pageIndex": 1,
        "totalSize": 1,
        "orderInfos": [
            {
                "orderId": "9Lw9b****mqK5k",
                "baseOrderId": null,
                "beld": "0",
                "customerId": "L3BnG****jBdD",
                "sourceType": 1,
                "status": 4,
                "orderType": 1,
                "currency": 30,
                "currencyAfterDiscount": 30,
                "measureId": 1,
                "measureName": null,
                "createTime": "2019-04-01T11:28:20Z",
                "paymentTime": null,
                "lastUpdateTime": "2019-04-02T11:29:42Z",
                "needAudit": false,
                "currencyType": "USD",
                "contractId": null,
                "currencyOfficial": 30,
                "amountInfo": {
                    "discountList": [
                        {
                            "discountType": "901",
                            "discountAmount": 100
                        }
                    ],
                    "cashcouponAmount": 1,
                    "couponAmount": null,
                    "cardAmount": null,
                    "commissionAmount": 4,
                    "consumedAmount": 5
                },
                "serviceType": "hws.service.type.ebs"
            }
        ]
    }
}
```

4. Status Code

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.000	Succeeded.
400	CBC.0100	Incorrect parameter.
400	CBC.0101	Invalid parameter.
403	CBC.0151	Access denied.
403	CBC.0155	Request denied. The possible causes are as follows: The account authentication information is incorrect. The account or member account does not have the permission to call the API.
500	CBC.0999	Other errors.

11.3.2.2 Querying Order Details

Function

A customer can invoke this API to query order bills.



NOTE

This API will be brought offline soon. For details about the API for querying order details, see [7.3.2 Querying Order Details](#).

Web UI

A customer can switch to the **Orders** page in the Billing Center to query order details.

Step 1 Go to the [My Orders](#) page.

Step 2 To view a cloud service order, click the **Cloud Services** tab.

Step 3 You can filter orders by creation time, order number, or product name.

The screenshot shows the 'Orders' page with the 'Cloud Services' tab selected. There are two orders listed:

Order No.	Service Type	Order Type	Created On	Paid On	Order Status	Subtotal (USD)	Total	Operation
CS2010131423QM44N	Elastic Volume Service	New purchase	Oct 13, 2020 14:23:4...	--	Pending Payment	10.80	--	Pay Details Cancel
CS2010091009K0297	Elastic Cloud Server	New purchase	Oct 09, 2020 10:09:0...	--	Pending Payment	6.00	--	Pay Details Cancel

Step 4 Click Details for the target order.

Order No.	Service Type	Order Type	Created On	Paid On	Order Status	Subtotal (USD)	Total	Operation
CS2010131423QA44N	Elastic Volume Service	New purchase	Oct 13, 2020 14:23:4...	--	Pending Payment	10.80	--	Pay Details Cancel
CS2010091009K0297	Elastic Cloud Server	New purchase	Oct 09, 2020 10:09:0...	--	Pending Payment	6.00	--	Pay Details Cancel

NOTE

If the order status is **Processing**, ⓘ indicates that resources are being created and indicates that the order contains a resource that failed to be created.

- If the cloud service order status is **Pending Payment**, you can pay or cancel the order on the order details page.

Name/ID	Region	Service Type	Current Configuration	Enterprise Pr...	Billing Mode	Resource Period	Quantity	Subtotal (USD)
GD3 linear EVS Monthly 00301-28212-0--0	CN North-Beijing1	Elastic Volume Service	Common IO	default	Yearly/Monthly 1 Month	Jun 17, 2020 16:48:22 GMT+08:00 Jul 17, 2020 23:59:59 GMT+08:00	1	4.60

- If your cloud service order has any resources that fail to be provisioned, you will be automatically unsubscribed from the resources.

NOTE

When an account manager places an order on behalf of the customer in accordance with the contract, the contract information will be displayed on the order details page. The account manager can then click the contract name to go to the contract details page.

----End

REST API

A customer can query order details on the partner sales platform.

NOTE

- This API can be invoked using the AK/SK or token of the partner or AK/SK or token of the partner's customer.
- If you want to query the resource information of a specified order, invoke the API described in [11.3.3.1 Querying Customer's Yearly/Monthly Resources](#) and enter the order ID in the request to query the resource information.

1. URI

GET /v1.0/{domain_id}/common/order-mgr/orders/{order_id}

The following table describes the parameters.

Table 11-26 URI parameters

Parameter	Mandatory	Maximum Length of Characters	Description
domain_id	Yes	A maximum of 64 characters	<ul style="list-style-type: none">The value will be Partner ID if the partner's AK/SK or token is used. For details about how to obtain the partner ID, see How Do I Check the Partner ID?A customer account ID should be entered if the customer AK/SK or token is used. For details, see How Do I Obtain Customer's customer_id and domain_id Values?
order_id	Yes	A maximum of 64 characters	Order ID. The system will return the orders if the orders are queried.

Table 11-27 Request parameters

Parameter	Mandatory	Value Range	Description
offset	No	[1-Maximum integer]	Page number. If this parameter is not input, the default value is 1 . If the value of this parameter exceeds 1000000 , the default value 1 is used. If this parameter is not included in the request parameters, the value 1 is used. It cannot be set to "" . If this parameter is left empty or is set to null , the value of orderInfo in the response is null .
limit	No	[1-100]	Number of records displayed on each page. If this parameter is not input, the default value is 10 . If this parameter is not included in the request parameters, is left empty , or is set to null , the value 10 is used. This parameter cannot be set to "" .

2. Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/common/order-mgr/orders/CS****O7
HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZlhcNAQcCo...ggg1BBIINPXsidG9rZ
```

3. Response

Response Parameters

Parameter	Type	Description
error_code	String	Error code. For details, see 4 .
error_msg	String	Error description.
orderInfo	Customer OrderEntity	Order details. This parameter is available only when offset is set to 1 . For details, see Table 11-28 .
count	Integer	Number of order items
orderLineItems	List<Order LineItemEntity>	Order items in an order For details, see Table 11-29 .

Table 11-28 CustomerOrderEntity

Parameter	Type	Description
orderId	String	Order ID
baseOrderId	String	Parent order ID (order ID before splitting).
beld	String	Partner business entity ID.
customerId	String	Customer ID
sourceType	Integer	Customer order source type. The value can be: <ul style="list-style-type: none">● 1. Customer● 2. Agent● 3: Contract● 4: Distributor

Parameter	Type	Description
status	Integer	<p>Order status. The value can be:</p> <ul style="list-style-type: none"> • 1: Pending approval • 3: Processing • 4: Canceled • 5: Completed • 6: Pending payment • 9: To be confirmed
orderType	Integer	<p>Order type. The value can be:</p> <ul style="list-style-type: none"> • 1: New purchase • 2: Renewal • 3: Change • 4: Unsubscription • 10: Yearly/monthly to pay-per-use • 11: Pay-per-use to yearly/monthly • 13: Trial • 14: Commercial use • 15: Price adjustment
currency	Double	<p>Order amount (original price). In the unsubscription order, the amount is equal to the value of currencyAfterDiscount.</p>
currencyAfterDiscount	Double	Order amount after a discount (excluding the vouchers or cards)
measureId	Integer	<p>Order amount unit.</p> <ul style="list-style-type: none"> • 1: Dollar • 2: Dime • 3: Cent
measureName	String	Amount unit name.
createTime	String	<p>Creation time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z"" format, for example, 2019-05-06T08:05:01Z. The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p>
paymentTime	String	<p>Payment time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z"" format, for example, 2019-05-06T08:05:01Z. The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.</p>

Parameter	Type	Description
lastUpdateTime	String	Latest status update time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
needAudit	Boolean	Whether the approval is required.
currencyOfficial	Double	Order amount (list price). In the unsubscription order, the amount is equal to the value of currencyAfterDiscount .
amountInfo	AmountInfo	Order deduction details. For details, see Table 11-30 .
currencyType	String	Currency code.
contractId	String	Contract ID.
serviceType	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .

Table 11-29 OrderLineItemEntity

Parameter	Type	Description
orderLineItemId	String	Order item ID.
cloudServiceType	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
productId	String	Product ID.
productSpecDesc	String	Product specification description.

Parameter	Type	Description
periodType	Integer	Period type. <ul style="list-style-type: none">● 0: Day● 1: Week● 2: Month● 3: Year● 4: Hour● 5: One-off● 6: Pay-per-use (reserved)● 7: By usage report (reserved)
periodNum	Integer	Number of periods.
validTime	String	Effective time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
expireTime	String	Expiration time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
subscription Num	Integer	Number of subscriptions.
currency	Double	Order amount (original price). In the unsubscription order, the amount is equal to the value of currencyAfterDiscount .
currencyAfterDiscount	Double	Order amount after a discount (excluding the vouchers or cards).
currencyOfficial	Double	Order amount (list price). In the unsubscription order, the amount is equal to the value of currencyAfterDiscount .
amountInfo	AmountInfo	Order deduction details. For details, see Table 11-30 .
currencyType	String	Currency code.
categoryCode	String	Product catalog code.

Table 11-30 AmountInfo

Parameter	Type	Description
discountList	List<DiscountItem>	Fee item. For details, see Table 11-31 .
cashcouponAmount	Double	Flexi-purchase coupon amount (reserved).
couponAmount	Double	Cash coupon amount.
cardAmount	Double	Stored-value card amount (reserved).
commissionAmount	Double	Handling fee (only for unsubscription orders).
consumedAmount	Double	Consumption amount (only for unsubscription orders).

Table 11-31 DiscountItem

Parameter	Type	Description
discountType	String	Discount type. 200: Promotion product discount 300: Promotion discount coupon 301: Promotion coupon 302: Promotion flexi-purchase coupon 500: Specified discount for agent subscription 501: Specified exemption for agent subscription 502: Specified buy-it-now price for agent subscription 600: Discount specified in the discount and rebate contract 601: Discount specified in the channel frame contract 602: Discount specified in the designated-purpose fund contract 603: Discount specified in the directly signed offline contract 604: Discount specified in the authorized telemarketing contract 605: Discount specified in the commercial contract 606: Discount specified in the channel commercial contract 607: Partner authorized discount 609: Discount for adjusting an order price 610: Discount amount 700: Promotion discount 800: Top-up account discount
discountAmount	Double	Discounted amount.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "error_code": "CBC.0000",
    "error_msg": "success",
    "orderInfo": {
        "orderId": "CS1****LZ2",
        "baseOrderId": null,
        "beld": "9689",
```

```
"customerId": "d75****298",
"sourceType": 1,
"status": 5,
"orderType": 1,
"currency": 3,
"currencyAfterDiscount": 0,
"measureId": 1,
"measureName": null,
"createTime": "2019-06-20T16:09:52Z",
"paymentTime": "2019-06-20T16:10:11Z",
"lastUpdateTime": "2019-06-20T16:11:07Z",
"needAudit": false,
"contractId": null,
"currencyType": "USD",
"currencyOfficial": 3,
"amountInfo": {
    "discountList": [
        {
            "discountType": "301",
            "discountAmount": 3
        }
    ],
    "cashcouponAmount": 0,
    "couponAmount": 3,
    "cardAmount": 0,
    "commissionAmount": null,
    "consumedAmount": null
},
"serviceType": "hws.service.type.ebs"
},
"count": 1,
"orderLineItems": [
{
    "orderLineItemId": "CS1****3LZ2-000001",
    "cloudServiceType": "hws.service.type.ebs",
    "productId": "d5d****3d24",
    "productSpecDesc": "Common I/O",
    "categoryCode": "hws.resource.storage1.evs",
    "periodType": 2,
    "periodNum": 1,
    "validTime": "2019-06-20T16:10:30Z",
    "expireTime": "2019-07-21T15:59:59Z",
    "subscriptionNum": 1,
    "currency": 3,
    "currencyAfterDiscount": 0,
    "currencyOfficial": 3,
    "amountInfo": {
        "discountList": [
            {
                "discountType": "301",
                "discountAmount": 3
            }
        ],
        "cashcouponAmount": 0,
        "couponAmount": 3,
        "cardAmount": 0,
        "commissionAmount": null,
        "consumedAmount": null
    },
    "currencyType": "USD"
}
]
```

4. Status Code

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.000	Succeeded.
400	CBC.0100	Incorrect parameter.
400	CBC.0101	Invalid parameter.
403	CBC.0151	Access denied.
403	CBC.0155	Request denied. The possible causes are as follows: The account authentication information is incorrect. The account or member account does not have the permission to call the API.
500	CBC.0999	Other errors.

11.3.2.3 Paying Yearly/Monthly Product Orders (Old)

Function

A customer can invoke this API to pay yearly/monthly product orders in the pending payment status.



NOTE

This API will be brought offline. For details about how to pay yearly/monthly product orders, see [11.3.2.4 Paying Yearly/Monthly Product Orders](#).

Web UI

A customer can switch to the **Orders** page in the Billing Center to pay yearly-monthly product orders in the pending payment status.

- Step 1** Go to the [Orders](#) page.
- Step 2** Click the **Pending Payment** tab.
- Step 3** Select a payment option.
 - **Single payment:** Click **Pay** for a desired order.

- **Combine payment:** Select desired orders and click **Combine Payment**.

Orders												
Pending Payment		All										
Export	Combine Payment	Total Amount Pending Payment: \$1.84 USD	Created On: All								Enter an order No.	Search
Order No.	Service Ty...	Suppl...	Created On	Order Expires On	Order Status	Ord...	Sub-tot...	Payable...	Operation			
<input checked="" type="checkbox"/> CS18112809036TRDJ	Elastic Volume ...	-	Nov 28, 2018 09:03:36...	Dec 28, 2018 09:0...	Pending Paym...	New purc...	0.92	0.92	Pay Cancel			
<input checked="" type="checkbox"/> CS1811280903XKIGN	Elastic Volume ...	-	Nov 28, 2018 09:03:18...	Dec 28, 2018 09:0...	Pending Paym...	New purc...	0.92	0.92	Pay Cancel			

Step 4 Select preferences and a payment option, and click **Pay**.

NOTE

For customers who enable protection for sensitive operations, a secondary authentication is required for order payment.

- Preferences include discounts and coupons.
 - Discounts include commercial discounts, partner authorized discounts, partner adjusted discounts, offline contract discounts, and discount coupons. These types of discounts are mutually exclusive to each other.

NOTE

- When a customer places an order using a promotional discount or discount coupon, if the promotional or discount coupon is about to expire before the order expiration time (7 days later), the order expiration time is changed to be the same as the coupon expiration time.

For example:

A customer places an order at 2018/11/26 23:12:32 using a discount coupon, which is valid between 2018-11-01 00:00:00 and 2018-11-30 23:59:59. In this case, the order expiration time is changed to 2018/11/30 23:59:59. (In normal circumstances, an order is valid for 7 days and the order in this example will expire 7 days later, that is, at 2018/12/03 23:12:32.)

- When a customer places an order using a commercial discount or a partner authorized discount, this discount will be always valid until the order expires, even if the discount expiration time is earlier than the order expiration time.

For example:

A customer places an order at 2018/11/26 23:12:32 using a commercial discount, which is originally valid between 2018-11-01 00:00:00 and 2018-11-30 23:59:59. In this circumstance, this commercial discount will be still valid before the order expiration time, 2018/12/03 23:12:32.

- Coupons include cash coupons and flexi-purchase coupons.

NOTE

For specification changes of ECS, EVS, and VPC, select available discounts on the order confirmation page. Discounts cannot be changed later on the payment page, but cash coupons and flexi-purchase coupons can be added to the payment.

After a partner sets a discount for an associated customer's order, the customer cannot reset it when paying the order.

- Three payment methods are supported: payment from balance, online payment, and monthly settlement.

----End

REST API

A customer can pay yearly/monthly product orders in the pending payment status on the partner sales platform.

NOTE

- This API can be invoked only by the customer AK/SK or token.
- Only coupons can be used for payment.
- This API cannot be invoked by unified accounting members or resource management accounts.

1. URI

POST /v1.0/{domain_id}/customer/order-mgr/order/pay

The following table describes the parameters.

Table 11-32 URI parameters

Parameter	Mandatory	Maximum Length of Characters	Description
domain_id	Yes	64	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?

2. Request

Request Parameters

Parameter	Mandatory	Type	Maximum Length of Characters/Value Range	Description
orderId	Yes	String	A maximum of 64 characters	Order ID. The value is the same as the orderId value in the response message of invoking the API described in 11.3.2.1 Querying Orders or the order_ids value in the response message of API described in 11.3.3.2 Renewing Subscription to Yearly/Monthly Resources .

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
payAccountType	No	Integer	[1 2]	<p>Payment account type.</p> <ul style="list-style-type: none"> • 1: HUAWEI CLOUD account that the customer directly tops up. • 2: Account that the customer receives the budget configured by the partner. <p>For customers associated to the partner in the Reseller mode, do not configure this parameter or set the value to 2.</p> <p>For customers associated with the partner in the Referral model, do not configure this parameter or set the value to 1.</p> <p>If this parameter is not included in the request parameters or is set to null, the system makes payment based on the account type.</p>
couponIds	No	List<String>	[0-3]	<p>This parameter is reserved.</p> <p>If this parameter is not included in request parameters, is set to null, or is set to an empty array, no coupons are used in payment.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/customer/order-mgr/order/pay HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIPAgYJKoZlhvcNAQcCo...ggg1BBINPXsidG9rZ

{
    "orderId": "CS1712271317IT8C4",
    "payAccountType": 2
}
```

3. Response

Response Parameters

Parameter	Type	Maximum Length of Characters	Description
error_code	String	A maximum of 10 characters	Error code. For details, see 4 .
error_msg	String	A maximum of 256 characters	Error description.
tradeNo	String	A maximum of 64 characters	Payment SN corresponding to the order.
quotaInfos	List<QuotaInfo>	-	<p>List of the resources whose quota or capacity is insufficient.</p> <p>For details, see Table 11-33.</p> <p>This parameter is valid only when error_code is set to CBC.3141.</p> <p>If the quota is insufficient, notify the customer to submit a service ticket on the HUAWEI CLOUD official website to increase the quota and then pay the order.</p> <p>If the capacity is insufficient, notify the customer to place an order again.</p> <p>If the specifications have changed, notify the customer to place an order again.</p>
enterpriseProjectAuthResult	List<EnterpriseProject>	-	<p>Information about the enterprise project whose fund is insufficient.</p> <p>For details, see Table 11-34.</p> <p>This parameter is valid only when error_code is set to CBC.3155.</p>

Table 11-33 QuotaInfo

Parameter	Type	Description
regionCode	String	Cloud service region code, for example, cn-north-1 . Obtain the value from the Region column in Regions and Endpoints .
cloudServiceType	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
resourceType	String	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
resourceSpecCode	String	Resource specifications of the subscribed cloud service products. For example, the resource specification of a VM is s2.small.1.linux .
authResult	Integer	Verification result of the change of the cloud service quota, capacity, or specifications. 1: The quota is insufficient. 2: The capacity is insufficient. 3: The resource specifications are incorrect. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order. 4: The associated resource information is incorrect. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order. 99: Other errors. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order.
availableZoneId	String	AZ ID. For details, see the AZ names of regions listed on the Regions and Endpoints , for example, cn-north-1a .

Table 11-34 EnterpriseProject

Parameter	Type	Description
enterpriseProjectId	String	ID of the enterprise project to which the order belongs.
enterpriseProjectName	String	Enterprise project name.
authStatus	Integer	Verification result of the enterprise project's fund quota. 10: The fund quota is insufficient or the project is invalid.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "error_code": "CBC.0000",
    "error_msg": "success",
    "quotaInfos": [],
    "enterpriseProjectAuthResult": [],
    "tradeNo": "f141b****0fe6"
}
```

4. Status Code

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Succeeded.
400	CBC.0100	Incorrect parameter.
403	CBC.0151	Access denied.

HTTP Status Code	Error Code	Description
500	CBC.0999	Other errors.
400	CBC.3106	The order status has changed and no payment can be made.
400	CBC.3112	The coupon or stored-value card has been used.
400	CBC.3141	The cloud service quota or capacity is insufficient, or the resource specifications have changed.
400	CBC.3155	Insufficient enterprise project fund quota.
400	CBC.99003156	Coupons applicable to KooGallery products cannot be used together with dedicated coupons.
400	CBC.99003198	Insufficient organization budget.
400	CBC.3162	The validity period set for the bandwidth add-on package cannot be earlier than the system time.
400	CBC.5003	Insufficient balance.
400	CBC.7281	Renewal, unsubscription, or payment not supported. Your account has been frozen.
200	CBC.5023	The account type does not match the association type. Change the value of payAccountType based on the description of request parameter payAccountType in 2 , or do not configure the parameter.
500	CBC.3000010	Operation not allowed because the order is invalid or does not exist.
400	CBC.99000089	Operation failed. Sub orders of a combine order cannot be processed independently.

11.3.2.4 Paying Yearly/Monthly Product Orders

Function



NOTE

This API will be brought offline soon. For details about the API for paying yearly/monthly product orders, see [7.3.3 Paying Yearly/Monthly Product Orders](#).

A customer can invoke this API to pay yearly-monthly product orders in the pending payment status.

Customers can follow the instructions described in [Payment](#) to pay yearly/monthly product orders in the pending payment status in Billing Center.

NOTE

- This API supports both monthly settlement and balance payment. Monthly settlement is preferred.
- Balance payment includes cash account payment and credit account payment. If both accounts have balance, the cash account payment is preferred.
- Restrictions for using a discount and coupon at the same time:
 - If the restriction attribute of a coupon contains field **simultaneousUseWithEmpowerDiscount** with a value of **0**, the coupons, commercial discounts, and partner-authorized discounts cannot be used together.
 - If the restriction attribute of a coupon contains field **minConsumeDiscount** and the values of **discount_ratio** for all the order items are less than the value of **minConsumeDiscount**, the discount and coupon cannot be used at the same time.
 - If the restriction attribute of a coupon contains field **simultaneousUseWithPromotionDiscount** with a value of **0**, the discount and coupon cannot be used at the same time.
- When this API is invoked by a unified accounting member or a resource management account to pay orders, if their enterprise master account has coupons available for the orders, the coupons are automatically applied. Starting from mid-November 2023, if you need to pay bills with a coupon, the coupon ID must be specified in the API parameters.

Constraints

This API can be invoked only by the customer AK/SK or token.

URI

POST /v2/orders/customer-orders/pay

Request

Request Parameters

Parameter	Mandatory	Type	Maximum Length of Characters	Description
order_id	Yes	String	A maximum of 64 characters	<p>Order ID.</p> <p>The value is the same as the order_id value in the response message of invoking the API described in 7.3.1 Querying Orders or the order_ids value in the response message of API described in 7.4.2 Renewing Subscription to Yearly/Monthly Resources.</p>
coupon_infos	No	List<CouponSimpleInfoOrderPay>	[0-3]	<p>This parameter is reserved. For details, see Table 11-35. If this parameter is not included in request parameters, is set to null, or is set to an empty array, no coupons are used in payment.</p> <p>CAUTION When this API is invoked by a unified accounting member or a resource management account to pay orders, if their enterprise master account has coupons available for the orders, the coupons are automatically applied. Starting from mid-November 2023, if you need to pay bills with a coupon, the coupon ID must be specified in the API parameters.</p>
discount_infos	No	List<DiscountSimpleInfo>	[0-1]	<p>Discount ID list. For details, see Table 11-36. If this parameter is not included in request parameters, is set to null, or is set to an empty array, no discount is used in payment.</p>

Table 11-35 CouponSimpleInfoOrderPay

Parameter	Mandatory	Type	Maximum Length of Characters	Description
id	Yes	String	A maximum of 64 characters	Coupon ID.
type	Yes	Integer	[300-303]	Coupon type. <ul style="list-style-type: none"> ● 300: Discount coupon (reserved) ● 301: Promotion coupon ● 302: Promotion flexi-purchase coupon (reserved) ● 303: Promotion stored-value card (reserved)

Table 11-36 DiscountSimpleInfo

Parameter	Mandatory	Type	Maximum Length of Characters	Description
id	Yes	String	A maximum of 64 characters	Discount ID.

Parameter	Mandatory	Type	Maximum Length of Characters	Description
type	Yes	Integer	[0,2,3,609]	<p>Discount type.</p> <ul style="list-style-type: none"> • 0: promotion discount • • 2: commercial discount • 3: discount granted by a partner • 609: discount for adjusting an order price <p>NOTE Once the discount 609 (discount for adjusting an order price) is used during order payment, the discount must be used and the discount type cannot be changed.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/orders/customer-orders/pay HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

```
{
  "coupon_infos": [
    {
      "id": "CP200527025610NGSC",
      "type": 301
    }
  ],
  "discount_infos": [
    {
      "id": "PDP2011260815047721TYT48G0BA02EI",
      "type": 1
    }
  ],
  "order_id": "CS20052715001E4CR"
}
```

Response

Response Parameters

Status code: 204

Success is returned by default.

Status code: 400

Parameter	Type	Maximum Length of Characters	Description
error_code	String	A maximum of 10 characters	Error code. For details, see Status Codes .
error_msg	String	A maximum of 256 characters	Error description.
quota_infos	List<QuotaInfo>	-	List of the resources whose quota or capacity is insufficient. For details, see Table 11-37 . This parameter is valid only when error_code is set to CBC.99003141 . <ul style="list-style-type: none">• If the quota is insufficient, notify the customer to submit a service ticket on the HUAWEI CLOUD official website to increase the quota and then pay the order.• If the capacity is insufficient, notify the customer to place an order again.• If the specifications have changed, notify the customer to place an order again.
enterprise_project_auth_result	List<EnterpriseProject>	-	Information about the enterprise project whose fund is insufficient. For details, see Table 11-38 . This parameter is valid only when error_code is set to CBC.99003155 .

Table 11-37 QuotaInfo

Parameter	Type	Description
region	String	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints .

Parameter	Type	Description
service_type_code	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs .
resource_type_code	String	Resource type code. For example, the resource type code of VM is hws.resource.type.vm . The relationship between ResourceType and CloudServiceType is as follows: A resource type represents a resource contained in the cloud service type, and the cloud service type is a combination of multiple resource types.
resource_spec_code	String	Resource specifications of the subscribed cloud service products. For example, the resource specification of a small-scale VM is s2.small.1.linux .
service_type_name	String	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .
resource_type_name	String	Resource type. For example, the resource type of ECS is Cloud Host .
auth_result	Integer	Verification result of the change of the cloud service quota, capacity, or specifications. <ul style="list-style-type: none">• 1: The quota is insufficient.• 2: The capacity is insufficient.• 3: The resource specifications are incorrect. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order.• 4: The associated resource information is incorrect. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order.• 99: Other errors. This value is valid only when the resource specifications change between the time when a customer places an order and the time when the customer pays the order.
available_zone	String	AZ ID. For details, see the AZ names of regions listed on the Regions and Endpoints , for example, cn-north-1a .

Table 11-38 EnterpriseProject

Parameter	Type	Description
enterprise_project_id	String	ID of the enterprise project where an order belongs. <ul style="list-style-type: none">• 0: ID of a default project• -1 or null: Non-project ID
enterprise_project_name	String	Enterprise project name.
auth_status	Integer	Verification result of the enterprise project's fund quota. 10: The fund quota is insufficient or the project is invalid. 11: The organization budget quota is insufficient.

Example Response

```
HTTP/1.1 204 No Content
Content-Type: application/json;charset=UTF-8
Content-Length: length
Date: response time
```

Status Codes

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.99000046	Insufficient budget.
500	CBC.30000010	Operation not allowed because the order is invalid or does not exist.
400	CBC.99003106	The order status has changed and no payment can be made.
400	CBC.99003108	This discount cannot be used for this order.
400	CBC.99003110	The order has not been paid before the expiration time. Please re-submit the order.
400	CBC.99003112	The coupon or stored-value card has been used.

HTTP Status Code	Error Code	Description
400	CBC.99003116	The restriction to selected coupon regulates that the coupon cannot be used with the discount at the same time.
400	CBC.99003117	The selected discount is less than the minimum discount rate configured for the selected coupon. Note: For example, if the minimum discount rate configured for a coupon is 90% and the selected discount is less than 90% in all order lines, the discount cannot be used.
400	CBC.99003141	The cloud service quota or capacity is insufficient, or the resource specifications have changed.
400	CBC.99003147	Discounts and cash coupons cannot be both used.
400	CBC.99003151	This discount cannot be used together with other discounts.
400	CBC.99003155	Insufficient enterprise project fund quota, or invalid project.
400	CBC.99003156	Coupons applicable to KooGallery products cannot be used together with dedicated coupons.
400	CBC.99003162	The validity period set for the bandwidth add-on package cannot be earlier than the system time.
400	CBC.99003198	Insufficient budget of the organization.
400	CBC.99005003	Insufficient balance.
400	CBC.99006093	Failed to obtain the tax rate.
400	CBC.99005036	Payment via API not allowed for this customer. (Payment by balance and monthly-settled payment are not allowed.)
400	CBC.99008040	Too many attempts.
400	CBC.7281	Renewal, unsubscription, or payment not supported. Your account has been frozen.
500	CBC.0999	Other errors.
400	CBC.99000089	Operation failed. Sub orders of a combine order cannot be processed independently.

11.3.2.5 Canceling Orders in the Pending Payment Status

Function

A customer can invoke this API to cancel orders in the pending payment status.

NOTE

This API will be brought offline. For details about the new API for canceling orders in the pending payment status, see [7.3.4 Canceling Orders in the Pending Payment Status](#).


Web UI

A customer can switch to the **Orders** page in the Billing Center to cancel orders in the pending payment status.

Step 1 Go to the [Orders](#) page.

Step 2 Click the **Pending Payment** tab.

Step 3 Click **Cancel** for the target order.

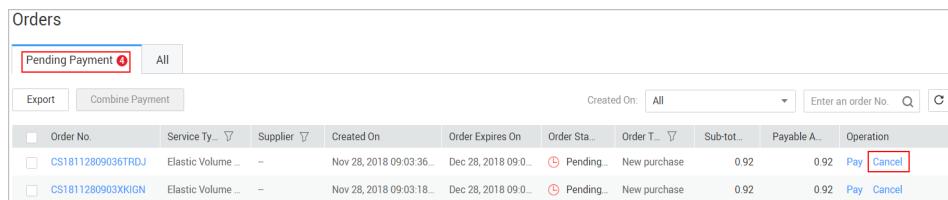

Order No.	Service Ty...	Supplier	Created On	Order Expires On	Order Sta...	Order T...	Sub-tot...	Payable A...	Operation
CS18112809036TRDJ	Elastic Volume ...	-	Nov 28, 2018 09:36...	Dec 28, 2018 09:0...	 Pending...	New purchase	0.92	0.92	Pay Cancel
CS1811280903XKIGN	Elastic Volume ...	-	Nov 28, 2018 09:318...	Dec 28, 2018 09:0...	 Pending...	New purchase	0.92	0.92	Pay Cancel

Step 4 In the **Confirm** dialog box, click **OK**.

----End

REST API

A customer can cancel subscription to yearly-monthly product orders in the pending payment status on the partner sales platform.

NOTE

- Only the orders in the pending payment status can be canceled.
- This API can be invoked using the customer AK/SK or token only.

1. URI

PUT /v1.0/{domain_id}/customer/order-mgr/orders/actions

The following table describes the parameters.

Table 11-39 Path parameters

Parameter	Mandatory	Value Range	Description
domain_id	Yes	A maximum 64 characters	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?

Table 11-40 Query parameters

Parameter	Mandatory	Value Range	Description
action_id	Yes	[cancel]	Cancels orders: cancel

2. Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
orderId	Yes	String	A maximum 64 characters	Order ID. The value is the same as the value of orderId in the response of the API described in 11.3.2.1 Querying Orders .

Example Request

```
PUT https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/customer/order-mgr/orders/actions?  
action_id=cancel HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ  
  
{  
    "orderId":"CS170926155954NO7"  
}
```

3. Response

Response Parameters

Table 11-41 Response parameters

Parameter	Type	Value Range	Description
error_code	String	A maximum of 10 characters	Status code. For details, see 4 .
error_msg	String	A maximum of 256 characters	Error description.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "error_code": "CBC.0000",
    "error_msg": "success"
}
```

4. Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Success.
200	CBC.0100	Invalid input parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

HTTP Status Code	Error Code	Description
200	CBC.5010	The order in this status cannot be canceled.
400	CBC.99000089	Operation failed. Sub orders of a combine order cannot be processed independently.

11.3.2.6 Querying the Amount of Unsubscription Orders

Function

A customer can query the resources and original orders of the unsubscription amount for an unsubscription order or degrade order on the partner sales platform.

Notes:

- This API can be invoked using the AK/SK or token of the partner's customer.
- After you invoke the API in [11.3.3.3 Unsubscribing from Yearly/Monthly Resources](#) to generate an unsubscription order ID, you can invoke this API to query the resources and amount of an unsubscription order. For example, after you invoke the API in [11.3.3.3 Unsubscribing from Yearly/Monthly Resources](#), you can invoke this API to query the original order ID and original subscription renewal order ID.
- You can query original order IDs for only unsubscription orders generated after May 2018.

NOTE

This API is about to be brought offline. For details about how to query the amount of unsubscription orders, see [7.3.5 Querying the Amount of Unsubscription Orders](#).

URI

GET /v1.0/{domain_id}/common/order-mgr/orders/refund-order

The following table describes the parameters.

Table 11-42 URI parameters

Parameter	Mandatory	Maximum Length of Characters	Description
domain_id	Yes	A maximum of 64 characters	<ul style="list-style-type: none">• A customer account ID should be entered if the customer AK/SK or token is used. For details, see How Do I Obtain Customer's customer_id and domain_id Values.

Table 11-43 Request parameters

Parameter	Mandatory	Type	Maximum Length of Characters	Description
order_id	Yes	String	A maximum of 64 characters	ID of an unsubscription or degrade order.

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/common/order-mgr/orders/refund-order?  
order_id=CS1*****GT HTTP/1.1  
Content-Type: application/json  
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBINPXdG9rZ
```

Response

Response Parameters

Parameter	Mandatory	Type	Description
error_code	Yes	String	Error code. For details, see Status Code .
error_msg	Yes	String	Error description.
total_count	No	Integer	Total number of queries.

Parameter	Mandatory	Type	Description
resource_info_list	No	List<ResourceInfo>	Resource list. For details, see Table 11-44 .

Table 11-44 ResourceInfo

Parameter	Mandatory	Type	Description
id	Yes	String	Record ID.
resource_id	No	String	Resource ID. If the resource does not have an ID, this field is left empty. Currently, this field is reserved and no value is returned.
amount	Yes	BigDecimal	Amount. <ul style="list-style-type: none">A negative number indicates the unsubscription amount.A positive amount indicates the consumption amount or the unsubscription handling fee.
measure_id	Yes	String	Measurement unit. <ul style="list-style-type: none">1: Dollar2: Dime3: Cent
customer_id	Yes	String	Customer ID.
resourceType	Yes	String	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
cloudServiceType	Yes	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
regionCode	Yes	String	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints .

Parameter	Mandatory	Type	Description
preOrderId	No	String	ID of the original order corresponding to the unsubscription amount, consumption amount, or unsubscription handling fee.

Example Response

```

HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "error_code": "CBC.0000",
    "error_msg": "success",
    "total_count": 3,
    "resource_info_list": [
        {
            "id": "0b8**c**f3",
            "amount": -288,
            "resourceType": "hws.resource.type.volume",
            "cloudServiceType": "hws.service.type.ebs",
            "regionCode": "cn-north-1",
            "preOrderId": "CS1806201614MS037",
            "resource_id": null,
            "measure_id": "3",
            "customer_id": "f8*****231d"
        },
        {
            "id": "2ba****2a9",
            "amount": 28,
            "resourceType": "hws.resource.type.volume",
            "cloudServiceType": "hws.service.type.ebs",
            "regionCode": "cn-north-1",
            "preOrderId": "CS18062016100U54J",
            "resource_id": null,
            "measure_id": "3",
            "customer_id": "f80*****31d"
        },
        {
            "id": "abe3****5312",
            "amount": -260,
            "resourceType": "hws.resource.type.volume",
            "cloudServiceType": "hws.service.type.ebs",
            "regionCode": "cn-north-1",
            "preOrderId": "CS18062016100U54J",
            "resource_id": null,
            "measure_id": "3",
            "customer_id": "f80*****31d"
        }
    ]
}

```

Status Code

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Succeeded.
500	CBC.0999	Other errors.
400	CBC.0100	Incorrect parameter.
403	CBC.0151	Access denied.
200	CBC.5026	The order is not a degrade or unsubscription order.

11.3.3 Yearly/Monthly Resource Management

11.3.3.1 Querying Customer's Yearly/Monthly Resources

Function

A customer can query one or all yearly/monthly resources on the partner sales platform.

Note:

- This API can be invoked by the customer AK/SK or token.
- This API can only be used to query resources successfully provisioned.
- If you need to renew resources that already take effect after you successfully invoke this API, you can invoke the API described in [4.2.2 Querying the Price of a Yearly/Monthly Product](#) to query the price for the yearly/monthly resources and then invoke the API described in [11.3.3.2 Renewing Subscription to Yearly/Monthly Resources](#) to renew the subscription.

NOTE

This API will be brought offline. For details about the API for querying yearly/monthly resources of a customer, see [7.4.1 Querying Customer's Yearly/Monthly Resources](#).

URI

GET /v1.0/{domain_id}/common/order-mgr/resources/detail

The following table describes the parameters.

Table 11-45 URI parameters

Parameter	Mandatory	Maximum Length of Characters	Description
domain_id	Yes	A maximum of 64 characters	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?

Table 11-46 Request parameters

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
resource_ids	No	String	A maximum of 4096 characters	<p>Resource IDs.</p> <p>Queries resources with the specified resource IDs. When only_main_resource is 0, the system queries the specified resources and their auxiliary resources. A maximum of 50 IDs can be queried at the same time. Use commas (,) to separate multiple IDs.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null, it can be used as a filter criterion.</p> <p>NOTE A resource ID is allocated by a cloud service after the resource is provisioned, such as server_id in ECS.</p>

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
order_id	No	String	A maximum of 64 characters	<p>Order ID.</p> <p>This parameter can be used for querying the resources in a specified order.</p> <p>If this parameter is not included in the request parameters or is left empty, it cannot be used as a filter criterion. If this parameter is set to "" or null, it can be used as a filter criterion.</p>
only_main_resource	No	Integer	[0 1]	<p>Whether to query only the primary resources. This parameter is invalid when resource_ids are IDs of attached resources. In this case, the system queries the attached resources.</p> <ul style="list-style-type: none"> • 0: Queries both the primary resources and attached resources. • 1: Queries only the primary resources. <p>The default value is 0.</p> <p>If this parameter is not included in the request parameters, is left empty, or is set to null, the default value 0 is used. This parameter cannot be set to "".</p> <p>NOTE</p> <p>A primary resource takes the primary position in the associated resources.</p> <ul style="list-style-type: none"> • For ECS, ECS is the primary resource, and EVS is the attached resource. • For VPC, if the shared bandwidth is used, the bandwidth is the primary resource, and EIPs are the attached resource. If the exclusive bandwidth is used, EIPs are the primary resources, and the bandwidth is the attached resource.

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
status_list	No	String	-	<p>Resource status.</p> <p>Queries resources in a specified status. If there are multiple statuses, separate them using commas (,).</p> <ul style="list-style-type: none"> ● 2: Provisioned ● 4: Frozen ● 5: Expired <p>If this parameter is not included in the request parameters or is left empty, resources in all statuses will be returned. This parameter cannot be set to "" or null.</p>
page_no	No	Integer	An integer greater than or equal to 1	<p>Page number.</p> <p>The default value is 1.</p> <p>If this parameter is not included in the request parameters, is left empty, or is set to null, the default value 1 is used. This parameter cannot be set to "".</p>
page_size	No	Integer	[1-500]	<p>Number of records on each page.</p> <p>The default value is 10. The maximum value is 500.</p> <p>If this parameter is not included in the request parameters, is left empty, or is set to null, the default value 10 is used. This parameter cannot be set to "".</p>

Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/common/order-mgr/resources/detail?
resource_ids=b38****62e,249****c07&only_main_resource=1&page_no=1&page_size=100 HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Error code. For details, see Status Code .
error_msg	String	Error description.
data	List<ResourceInstance>	Resource list. For details, see Table 11-47 .
total_count	Integer	Total number of records. The default value is 0 .

Table 11-47 ResourceInstance

Parameter	Type	Description
id	String	Internal ID of the resource to be provisioned. The ID generated after the resource is provisioned is resourceID .
resource_id	String	Resource ID.
resource_name	String	Resource instance name.
region_code	String	Region code.
cloud_service_type_code	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
resource_type_code	String	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
resource_spec_code	String	Specification of a cloud service resource. For example, a VM resource specification is s2.small.1.linux (.win or .linux should be added at the end of the specification).
project_code	String	Resource project ID.
product_id	String	Product ID.

Parameter	Type	Description
main_resource_id	String	Primary resource ID.
is_main_resource	Integer	Primary resource or not. <ul style="list-style-type: none">• 0: No• 1: Yes
status	Integer	Resource status. <ul style="list-style-type: none">• 2: Provisioned• 3: Closed (not visible to customers)• 4: Frozen• 5: Expired
valid_time	String	Effective time of a resource. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z .
expire_time	String	Expiration time of a resource. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z .
next_operation_policy	Integer	Next billing policy. <ul style="list-style-type: none">• 0: Entering the grace period upon expiration• 1: Yearly/monthly to pay-per-use• 2: Automatically deleted upon expiration (directly deleted from resources that take effect)• 3: Automatically renewed upon expiration• 4: Automatically frozen upon expiration• 5: Automatically deleted upon expiration (deleted from resources in the retention period) <p>NOTE Only 3 indicates that the resource is automatically renewed. In other cases, the expiration policy for non-automatic renewal is used.</p>

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
  "data": [
    {
      "id": "01154-21800069-0",
```

```
"status": 2,
"resource_id": "249****c07",
"resource_name": "114.115.169.185",
"region_code": "cn-north-1",
"cloud_service_type_code": "hws.service.type.vpc",
"resource_type_code": "hws.resource.type.ip",
"resource_spec_code": "5_sbgp",
"project_code": "3f****400",
"product_id": "c1****55",
"main_resource_id": "249****c07",
"is_main_resource": 1,
"valid_time": "2018-04-26T18:03:03Z",
"expire_time": "2018-06-27T15:59:59Z",
"next_operation_policy": 3
},
{
"id": "01154-21800073-0",
"status": 2,
"resource_id": "b3****62e",
"resource_name": "ecs-9f88-0001",
"region_code": "cn-north-1",
"cloud_service_type_code": "hws.service.type.ec2",
"resource_type_code": "hws.resource.type.vm",
"resource_spec_code": "s3.medium.2.linux",
"project_code": "3f****400",
"product_id": "00301-62057-0--0",
"main_resource_id": "b38****62e",
"is_main_resource": 1,
"valid_time": "2018-04-26T18:02:33Z",
"expire_time": "2018-06-27T15:59:59Z",
"next_operation_policy": 3
}
],
"error_code": "CBC.0000",
"error_msg": "success",
"total_count": 2
}
```

Status Code

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Succeeded.
400	CBC.0100	Incorrect parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

11.3.3.2 Renewing Subscription to Yearly/Monthly Resources

Function

When subscription to yearly/monthly resources of a customer is about to expire, the customer can renew the subscription to the resources.



This API will be brought offline. For details about the new API for renewing subscription to yearly/monthly resources, see [7.4.2 Renewing Subscription to Yearly/Monthly Resources](#).

Web UI

Customers can manually renew subscription to yearly/monthly resources when the subscription is about to expire in the Billing Center.

Step 1 Go to the [Renewals](#) page.

Step 2 Set the search criteria.



- Customers who have enabled enterprise project management can set the search criteria to filter an enterprise project and query its resources that are to be renewed.
- You can click **Set Renewal Date** to set the expiration date of resources. For details, see [Setting a Renewal Date](#).
- Under the **Manual Renewals**, **Auto Renewals**, **Pay-per-Use After Expiration**, and **Renewals Canceled** tabs, you can query all resources to be renewed.
- You can manually renew resources under the **Manual Renewals**, **Auto Renewals**, **Pay-per-Use After Expiration**, and **Renewals Canceled** tabs.

Step 3 All resources that need to be manually renewed can be moved to the **Manual Renewals** tab. For details, see [Restoring to Manual Renewal](#).

Step 4 Renew resources separately or in batches.

- Separate renewal: Click **Renew** in the **Operation** column for the desired resource.

The screenshot shows the 'Renewals' page with two resources listed:

- hws.service.type.ec2name**: Elastic Cloud Server, Current Configuration: FPGA High Performance(f1c.8xlarge.11|...), Region: CN South-Guangzhou, Status: Provisioned, Validity Period: 10 days (Dec 06, 2020 23:59...). The 'Renew' button is highlighted with a red box.
- hws.service.type.ebsname**: Elastic Volume Service, Current Configuration: High IO, Region: CN South-Guangzhou, Status: Provisioned, Validity Period: 10 days (Dec 06, 2020 23:59...). The 'Renew' button is also present here.

- Batch renewal: Select the check boxes for the desired resources, and click **Renew** in the upper left corner.

The screenshot shows the 'Renewals' page with both resources selected:


- hws.service.type.ec2name**: Selected (checkbox checked).
- hws.service.type.ebsname**: Selected (checkbox checked).

The 'Renew' button in the top left corner is highlighted with a red box.

NOTE

- On the **Renewals** page, resources that have orders pending payment are hidden by default. You can unselect **Do not show resources that have orders pending payment** to show them.
- When you renew a resource that has an order pending payment, the following message will be displayed: "The resource has an order pending payment. You can renew it only after you pay or cancel the order." You can click the order number in the dialog box to go to the order details page. After you pay or cancel the order, the resource becomes renewable.

Step 5 Select a renewal duration and click **Pay**.

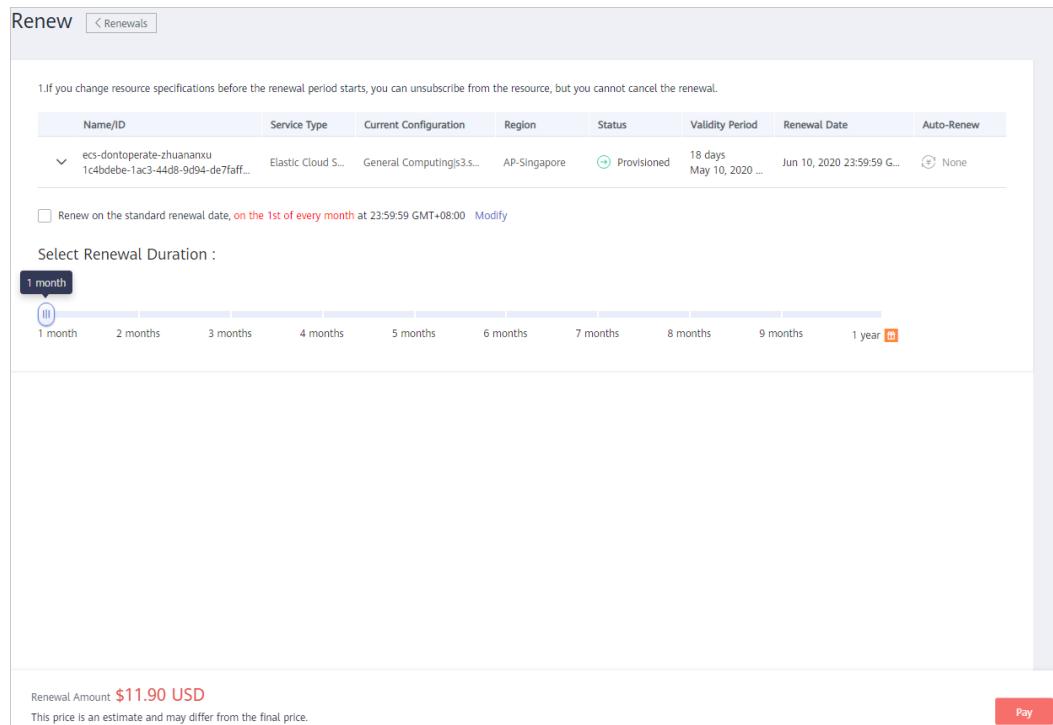

Step 6 Select discounts and a payment option, and click **Pay**.

----End

REST API

A customer can renew subscription to yearly/monthly resources on the partner sales platform.

NOTE

- This API can be invoked only by the customer AK/SK or token. This is because that partners cannot buy products by themselves.
- After you invoke this API, if a primary resource ID has an attached resource ID, the system will renew the subscription to both the primary resource and attached resource.
 - For example, ECS is the primary resource, and EVS is the attached resource.
 - If the shared bandwidth is used, the bandwidth is the primary resource, and EIPs are the attached resource.
 - If the exclusive bandwidth is used, EIPs are the primary resources, and the bandwidth is the attached resource.
- This API supports automatic payment. Discounts can be used during automatic payment, but coupons cannot be used. For details about how to use discounts or coupons during payment, see [12.6 Support for Discounts or Coupons](#).

1. URI

POST /v1.0/{domain_id}/common/order-mgr/resources/renew

The following table describes the parameters.

Table 11-48 URI parameter description

Parameter	Mandatory	Value Range	Description
domain_id	Yes	A maximum 64 characters	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?

2. Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
resource_ids	Yes	List<String>	[1-10]	Resource IDs. Only the primary resource ID is supported. A maximum of 10 resource IDs can be configured. To determine the primary resources, query is_main_resource in the response of the API described in 11.3.3.1 Querying Customer's Yearly/Monthly Resources .
period_type	Yes	Integer	[2 3]	Period type. The value can be: <ul style="list-style-type: none">• 2: Month• 3: Year
period_num	Yes	Integer	[1-11]	Number of periods. <ul style="list-style-type: none">• Month: 1 to 11• Year: 1 to 3
expire_mode	Yes	Integer	[0-3]	Expiration policy (This field has been discarded. Do not use it.) <ul style="list-style-type: none">• 0: Enter the grace period.• 1: Change billing mode to pay-per-use.• 2: Automatic unsubscription• 3: Automatic renewal

Parameter	Mandatory	Type	Value Range	Description
isAutoPay	No	Integer	[0-1]	<p>Whether enable automatic payment.</p> <ul style="list-style-type: none">• 0: No• 1: Yes <p>If this parameter is left empty, default value 0 is used (automatic payment disabled).</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, the value 0 is used. This parameter cannot be left empty.</p>

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/common/order-mgr/resources/renew
HTTP/1.1
Content-Type: application/json
X-Auth-Token: MII/PAgYKoZlhvcNAQcCo...ggg1BBIINPXsidG9rZ

{
    "resource_ids": ["53fe****068b"],
    "period_type":2,
    "period_num":2,
    "expire_mode":0
}
```

3. Response

Response Parameters

Parameter	Type	Description
error_code	String	Status code. For details, see 4.
error_msg	String	Error description.
order_ids	List<String>	List of order IDs generated when resource subscription is renewed.
expiredResources	List<string>	List of resources that cannot be renewed due to expiration. This parameter has a value only when the error code is 3016.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
```

```
Date: response time
{
    "error_code": "CBC.0000",
    "error_msg": "success",
    "order_ids": ["xxxxxxxxx"],
    "expiredResourceIds": []
}
```

4. Returned Values

 **NOTE**

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Success.
400	CBC.0100	Invalid input parameter.
500	CBC.0999	Other errors.
403	CBC.0151	Access denied.
200	CBC.7281	You cannot renew or cancel subscription because your account has been frozen.
200	CBC.3016	Expired resources exist.
200	CBC.3144	Resources have being unsubscribed from or changed.
200	CBC.99003631	The unsubscribed, deleted, or released resource cannot be renewed.

11.3.3.3 Unsubscribing from Yearly/Monthly Resources

Function

If a customer has subscribed to a yearly/monthly resource, the customer can use this API to unsubscribe from the resource, including the renewed part and currently used part. The customer cannot use the resources after unsubscription.

 **NOTE**

This API will be brought offline. For details about the new API for unsubscribing from yearly/monthly resources, see [7.4.3 Unsubscribing from Yearly/Monthly Resources](#).

Web UI

If a customer has subscribed to a yearly/monthly resource, the customer can use this API to unsubscribe from the resource in the Billing Center.

Step 1 Go to the [Unsubscriptions](#) page.

Step 2 Click the [Succeeded Resources](#) tab.

Step 3 Unsubscribe from resources separately or in batches.

- Unsubscribe from a single resource: Click **Unsubscribe** for a resource from which you want to unsubscribe.

Unsubscribe							
Name/ID	Service Type	Current Configuration	Region	Enabled On	Expiration ...	Operation	
volume-T1-edit 6ddebf2d-43be-497...	Elastic Volume S...	High IO 10GB	Region: Hong Kong	Nov 07, 2018 19:45:08	41 days	Unsubscribe	More

- Batch unsubscribe from resources: Select the target resources from the resource list and click **Unsubscribe** in the upper left corner of the resource list.

Unsubscribe							
Name/ID	Service Type	Current Configuration	Region	Enabled On	Expiration Time	Operation	
volume-B1 34f20978-c3dd-4ae...	Elastic Volume S...	High IO 10GB	Region: Hong Kong	Nov 07, 2018 19:55:47	10 days	Unsubscribe	
volume-T3 3cc5f6ae-498d-400...	Elastic Volume S...	High IO 30GB	Region: Hong Kong	Nov 07, 2018 19:48:21	10 days	Unsubscribe	

Step 4 View the unsubscription information, select **I have confirmed that a handling fee will be charged for this unsubscription**, and click **Unsubscribe**.

Name/ID	Service Type	Current Configuration	Region	Period	Consumed(USD)	Handling Fee...	Unscript...
ljjie20181123 49dd1802-ec07-4fc5-83d7-701...	Elastic Volum...	HongKong-[REDACTED]	[REDACTED]	Nov 23, 2018 20:58:55 Nov 23, 2019 23:59:59	0.32	3.84	34.24

* Select Reason for Unsubscription

Incorrect parameter selection during purchase More services purchased than deployment requirement

Service tests completed Poor service

Service deployment requirements not met Irreparable fault

Other

Actual Payment	\$38.40 USD
Consumed	-\$0.32 USD
Handling Fee	-\$3.84 USD
Unsubscription	\$34.24 USD

Balance Returned \$34.24 USD

I have confirmed that a handling fee will be charged for this unsubscription. [View Details](#)

Unsubscribe

----End

REST API

A customer can unsubscribe from its yearly/monthly resources on the partner sales platform.

A yearly/monthly resource can be unsubscribed from only after it has been successfully paid and provisioned.

 NOTE

- This API can be invoked only by the customer AK/SK or token. This is because that partners cannot buy products by themselves.
- After you invoke this API, if a primary resource ID has an attached resource ID, the system will unsubscribe from both the primary resource and attached resource.
 - For example, ECS is the primary resource, and EVS is the attached resource.
 - If the shared bandwidth is used, the bandwidth is the primary resource, and EIPs are the attached resource.
 - If the exclusive bandwidth is used, EIPs are the primary resources, and the bandwidth is the attached resource.
- After invoking this API, you can also invoke the API described in [11.3.2.6 Querying the Amount of Unsubscription Orders](#) to query the orders corresponding to the unsubscription order amounts.

1. URI

POST /v1.0/{domain_id}/common/order-mgr/resources/delete

The following table describes the parameters.

Table 11-49 URI parameter description

Parameter	Mandatory	Value Range	Description
domain_id	Yes	A maximum 64 character s	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?

2. Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
resourceIds	Yes	List<String>	[1-10]	Resource IDs. A maximum of 10 resource IDs can be entered at a time. Only the primary resource IDs can be entered. Determine whether a resource is a primary resource based on is_main_resource in the response of the API described in 11.3.3.1 Querying Customer's Yearly/Monthly Resources .

Parameter	Mandatory	Type	Value Range	Description
unSubType	Yes	Integer	[1-2]	<p>Unsubscription type. The value can be:</p> <ul style="list-style-type: none"> • 1: Unsubscribe from the resource and its renewal periods. • 2: Unsubscribe from only the resource renewal periods.
unsubscribeReasonType	No	Integer	[1-5]	<p>Unsubscription cause. The value can be:</p> <ul style="list-style-type: none"> • 1: The product is of poor usability. • 2: The product functions cannot meet the requirements. • 3: Customers do not know how to use the product, or the product operations are complex. • 4: Customers are not satisfied with the service. • 5: Others <p>If this parameter is not included in the request parameters, is set to "", or is set to null, no value is returned.</p>
unsubscribeReason	No	String	A maximum of 512 characters	<p>Unsubscription reason, which is generally specified by the customer.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, no value is returned.</p>

Example Request

```

POST https://bss-intl.myhuaweicloud.com/v1.0/{domain_id}/common/order-mgr/resources/delete
HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ

{
    "resourceIds": ["53fa7828774df68b", "72a256456xdf45g"],
    "unSubType": 2,
    "unsubscribeReasonType": 2,
}

```

```
        "unsubscribeReason": "xxxxxx"
    }
```

3. Response

Response Parameters

Parameter	Type	Description
error_code	String	Status code. For details, see 4.
error_msg	String	Error description.
orderIds	List<String>	Unsubscription order IDs.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: length
Date: response time

{
    "error_code": "CBC.0000",
    "error_msg": "unsubscribe success",
    "orderIds": ["xxxxxxxxxx"]
}
```

4. Returned Values

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Success.
400	CBC.0100	Invalid input parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.
200	CBC.30010035	Resources cannot be found.
200	CBC.7281	You cannot renew or cancel subscription because your account has been frozen.

HTTP Status Code	Error Code	Description
400	CBC.99003012	Resource ID not found.
400	CBC.99003100	This operation is not allowed because some resources are included in your orders to be paid.
400	CBC.99006066	An error occurred during fee inquiry.
400	CBC.99003650	Unsubscription not allowed for this cloud service in the Marketplace.
400	CBC.30000052	Operation not allowed. Your account has been frozen.

11.3.4 Managing Resource Packages

11.3.4.1 Querying Resource Packages

Function

This API is used to query resource packages.



This API will be taken offline. For details about the API for querying resource packages, see [Querying Resource Packages](#).

Constraints

This API can be invoked only by the customer AK/SK or token.

URI

POST /v2/payments/free-resources/query

Table 11-50 Header parameter

Parameter	Mandatory	Value Range	Description
X-Language	Yes	A maximum of 8 characters	<p>Language.</p> <ul style="list-style-type: none">• zh_CN: Chinese• en_US: English <p>Default value: zh_CN</p> <p>If this parameter is not included in the request parameters or is left empty, the value zh_CN is used. This parameter cannot be set to "" or null.</p>

Request

Request Parameters

Parameter	Mandatory	Type	Value Range	Description
region_code	No	String	A maximum of 64 characters	<p>Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>
order_id	No	String	A maximum of 64 characters	<p>Order ID.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>
product_id	No	String	A maximum of 64 characters	<p>Resource package ID.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>
product_name	No	String	A maximum of 256 characters	<p>Resource package name.</p> <p>If this parameter is not included in the request parameters, is set to "", or is set to null, it cannot be used as a filter criterion.</p>

Parameter	Mandatory	Type	Value Range	Description
enterprise_project_id	No	String	A maximum of 64 characters	Enterprise project ID. This parameter is mandatory if you want to query the resources of an enterprise project. If this parameter is not included in the request parameters, is set to "", or is set to null , the resources not included in the enterprise project are queried.
status	No	Integer	[0, 4]	Status: <ul style="list-style-type: none">• 0: Not effective• 1: In effect• 2: Used up• 3: Expired• 4: Unsubscribed If this parameter is not included in the request parameters, is set to "", or is set to null , it cannot be used as a filter criterion.
offset	No	Integer	[0, 9999]	Page number. Enter <i>N</i> if you want to query the <i>N</i> page, for example, enter 1 to query the first page. If you enter 0 , the first page is queried by default. If this parameter is not included in the request parameters, is set to "", or is set to null , the first page is queried by default. This parameter cannot be left empty.
limit	No	Integer	[1, 1000]	Number of records queried each time. The default value is 10 . If this parameter is not included in the request parameters, is set to "", or is set to null , the value 10 is used. This parameter cannot be left empty.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v2/payments/free-resources/query HTTP/1.1
```

```
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZlhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

```
{  
    "region_code": "cn-north-7",
```

```
"order_id": "CS21043011259RWXXTA",
"product_id": "90301-296014-0--0",
"product_name": "HUAWEI CLOUD WeLink",
"enterprise_project_id": null,
"status": 1,
"offset": 0,
"limit": 10
}
```

Response

Response Parameters

Parameter	Type	Value Range	Description
error_code	String	20	Error code. For details, see Status Codes . This parameter is returned only when the query failed.
error_msg	String	1000	Error description. This parameter is returned only when the query failed.
free_resource_packages	List<FreeResourcePackage>	-	Resource package list. For details, see Table 11-51 .
total_count	Integer	-	Total number of records.

Table 11-51 FreeResourcePackage

Parameter	Type	Value Range	Description
order_instance_id	String	A maximum of 64 characters	Identifier of a subscribed resource package.
order_id	String	A maximum of 64 characters	Order ID. If the value of source_type is 1, this parameter is left empty.

Parameter	Type	Value Range	Description
product_id	String	A maximum of 64 characters	Resource package ID.
product_name	String	A maximum of 256 characters	Resource package name.
enterprise_project_id	String	A maximum of 64 characters	Enterprise project ID.
enterprise_project_scope	Integer	[0, 1]	Enterprise projects for which resource packages are used: <ul style="list-style-type: none">• 0: All enterprise projects• 1: Specific enterprise projects
effective_time	String	A maximum of 20 characters	Time when a resource package is purchased. The value is in UTC format.
expire_time	String	A maximum of 20 characters	Expiration time of a resource package. The value is in UTC format.
status	Integer	[0, 4]	Status: <ul style="list-style-type: none">• 0: Not effective• 1: In effect• 2: Used up• 3: Expired• 4: Unsubscribed

Parameter	Type	Value Range	Description
service_type_code	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
service_type_name	String	A maximum of 200 characters	Cloud service type. For example, the cloud service type of ECS is Elastic Cloud Server .
region_code	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints .
source_type	Integer	[0, 1]	Source of a resource package. The options are as follows: <ul style="list-style-type: none">● 0: Order● 1: Gifted by DevCloud
bundle_type	String	[ATOMI C_PKG BUNDL E_PKG]	Bundle binding type. The options are as follows: <ul style="list-style-type: none">● ATOMIC_PKG: Atomic package● BUNDLE_PKG: Combined package

Parameter	Type	Value Range	Description
quota_reuse_mode	Integer	[1, 2]	<p>Use model. The options are as follows:</p> <ul style="list-style-type: none">• 1: Resettable Indicates that the purchased pay-per-use resource package can be reset at a specified period. For example, if you purchase a 1-year 40 GB pay-per-use resource package with quota_reuse_mode set to 1 and quota_reuse_cycle to 4, then the resource package will be reset each month (you will get 40 GB resource each month) within the year.• 2: Not resettable Indicates that the purchased resource package will not be reset. For example, if you purchase a 1-year 40 GB pay-per-use resource package with quota_reuse_mode set to 2, the resource package will not be reset, and you will get 40 GB resource within the year.
free_resources	List<FreeResource>	-	For details about resource items (ID-specific) in a resource package, see Table 11-52 .

Table 11-52 Free resources

Parameter	Type	Value Range	Description
free_resource_id	String	A maximum of 64 characters	Resource ID. A resource package contains multiple resources, and each resource has a usage type.
usage_type_name	String	A maximum of 1024 characters	Usage type name.

Parameter	Type	Value Range	Description
amount	String	A maximum of 64 characters	Remaining resource quota of a package whose quota_reuse_mode is Resettable , that is, the remaining resource quota in the current reset period.
original_amount	String	A maximum of 64 characters	Original resource quota of a package whose quota_reuse_mode is Resettable , that is, the total resource quota in each reset period.
measure_id	Integer	-	Measurement unit of the quota of a free resource package. You call the API in 4.1.5 Querying Measurement Units to obtain the value.

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time
{
    "total_count": 1,
    "free_resource_packages": [
        {
            "order_instance_id": "01154-228300268-0",
            "order_id": "CS21043011259RWXXTA",
            "product_id": "90301-296014-0--0",
            "product_name": "HUAWEI CLOUD WeLink",
            "enterprise_project_id": null,
            "enterprise_project_scope": 0,
            "effective_time": "2021-04-30T03:30:56Z",
            "expire_time": "2021-05-31T15:59:59Z",
            "status": 1,
            "service_type_code": "hws.service.type.cpts",
            "region_code": "cn-north-7",
            "source_type": 0,
            "bundle_type": "ATOMIC_PKG",
            "quota_reuse_mode": 2,
            "free_resources": [
                {
                    "free_resource_id": "d4463497-991b-439d-9ab6-23f9ed197fe9",
                    "usage_type_name": "Duration",
                    "amount": 100,
                    "original_amount": 100,
                    "measure_id": 34
                }
            ]
        }
    ]
}
```

Status Codes

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Parameter error.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

11.3.5 Managing Pay-Per-Use Resources

11.3.5.1 Querying Customer's Pay-Per-Use Resources

Function

A customer can query its provisioned pay-per-use resources on the partner sales platform. The data obtained using this API is for reference only because it has a delay, and the delay for each cloud service is different.

Note:

This API can be invoked only by the partner AK/SK or token.

NOTE

This API will be brought offline. For details about the API for querying a customer's pay-per-use resources, see [7.6.1 Querying Customer's Pay-Per-Use Resources](#).

URI

POST /v1.0/{partner_id}/partner/customer-mgr/customer-resource/query-resources

[Table 11-53](#) describes the parameters.

Table 11-53 URI parameters

Parameter	Mandatory	Maximum Length of Characters	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID?

Request

Request Parameters

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
customerResourceId	No	String	[1-64]	Customer resource ID. Queries information about a specified resource. If this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion. It cannot be set to "".
customerId	Yes	String	[1-64]	Customer account ID. For details, see How Do I Obtain Customer's customer_id and domain_id Values?
regionCode	No	String	[1-64]	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints . If this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion. It cannot be set to "".

Parameter	Mandatory	Type	Maximum Length of Characters/Value Range	Description
cloudServiceTypeCode	No	String	[1-64]	<p>Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs. To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types.</p> <p>If this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion. It cannot be set to "".</p>
resourceTypeCode	No	String	[1-64]	<p>Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm. To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types.</p> <p>If this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion. It cannot be set to "".</p>
resourceIds	No	List<String>	[0-50]	<p>Resource ID query in batches. This parameter is used to query the resource of a specified ID. A maximum of 50 IDs can be configured at a time.</p> <p>If this parameter is not included in the request parameters, is set to an empty array, or is set to null, it cannot be used as a filter criterion.</p>
resourceName	No	String	[1-64]	<p>Resource instance name. If this parameter is not included in the request parameters or is set to null, it cannot be used as a filter criterion. It cannot be set to "".</p>

Parameter	Mandatory	Type	Maximum Length of Characters/ Value Range	Description
startTimeBegin	No	String	[1-64]	Start time of the validity period. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. If this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion. It cannot be set to "".
startTimeEnd	No	String	[1-64]	End time of the validity period. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59. If this parameter is not included in the request parameters or is set to null , it cannot be used as a filter criterion. It cannot be set to "".
pageNo	No	Integer	An integer greater than or equal to 1	Current page number The default value is 1 . If this parameter is not included in the request parameters, is set to "", or is set to null , the value 1 is used.
pageSize	No	Integer	[1-100]	Number of records displayed on the current page. The default value is 10 . If this parameter is not included in the request parameters, is set to "", or is set to null , the value 10 is used.

Example Request

```
POST https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/customer-mgr/customer-resource/query-resources
Content-Type: application/json
```

```
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBINPXsidG9rZ
{
    "customerId": "3d2c6b3ab1fd4e26846b0f2c46e67bda",
    "regionCode": "cn-north-1",
    "cloudServiceTypeCode": "hws.service.type.ebs",
    "resourceTypeCode": "hws.resource.type.volume",
    "resourceIds": ["71e3eeb5-4b77-44ae-9c42-119ee7976cf7", "39d90d01-4774-4af6-8136-83ba5732bccf"],
    "startTimeBegin": "2018-06-01T11:00:00Z",
    "startTimeEnd": "2018-06-30T11:00:00Z"
}
```

Response

Response Parameters

Parameter	Type	Description
error_code	String	Error code. For details, see Status Code .
error_msg	String	Error description.
customerResources	List<CustomerResource>	Customer resources. For details, see Table 11-54 .
totalCount	Integer	Total number of queries.

Table 11-54 CustomerResource

Parameter	Type	Description
customerResourceId	String	Customer resource ID.
customerId	String	Customer ID.
regionCode	String	Cloud service region code, for example, ap-southeast-1 . Obtain the value from the Region column in Regions and Endpoints .
azCode	String	AZ code.
cloudServiceTypeCode	String	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
resourceTypeCode	String	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
resourceId	String	Resource ID.
resourceName	String	Resource instance name.

Parameter	Type	Description
startTime	String	Effective time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
endTime	String	Expiration time. UTC time in "yyyy-MM-dd'T'HH:mm:ss'Z'" format, for example, 2019-05-06T08:05:01Z . The range of <i>HH</i> is 0-23, and the range of <i>mm</i> and <i>ss</i> is 0-59.
status	Integer	Resource status. <ul style="list-style-type: none">● 1: Normal (provisioned)● 2: Grace period● 3: Freezing● 4: Changing● 5: Canceling● 6: Canceled
resourceSpecCode	String	Specification code of the pay-per-use resource.
resourceInfo	String	Resource capacity Format: "resourceInfo": "{\"specSize\":40.0}"
chargingModeChangeFlag	String	Whether the pay-per-use billing can be changed to yearly/monthly billing. <ul style="list-style-type: none">● 0: No● 1: Yes <p>NOTE This parameter has been discarded.</p>
lastDeductType	String	Account type of the last deduction for the resource. The value can be: <ul style="list-style-type: none">● 0: HUAWEI CLOUD account that the customer directly tops up.● 1: Account that the customer receives the budget configured by the partner.● If this parameter is left empty, no fee is deducted for the resource.

Example Response

HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: *length*

```
Date: response time

{
    "totalCount": 2,
    "customerResources": [
        {
            "customerResourceId": "745b8963bb75409bb35f10d0e9c5cdf0",
            "customerId": "3d2c6b3ab1fd4e26846b0f2c46e67bda",
            "regionCode": "cn-north-1",
            "azCode": null,
            "cloudServiceTypeCode": "hws.service.type.ebs",
            "resourceTypeCode": "hws.resource.type.volume",
            "resourceId": "39d90d01-4774-4af6-8136-83ba5732bccf",
            "resourceName": null,
            "startTime": "2018-06-11T20:00:00Z",
            "endTime": null,
            "status": 3,
            "resourceSpecCode": "SAS",
            "resourceInfo": "{\"specSize\":50.0}",
            "chargingModeChangeFlag": "0",
            "lastDeductType": "1"
        },
        {
            "customerResourceId": "4d46e052379941d3b0d6cf34697b8ce7",
            "customerId": "3d2c6b3ab1fd4e26846b0f2c46e67bda",
            "regionCode": "cn-north-1",
            "azCode": null,
            "cloudServiceTypeCode": "hws.service.type.ebs",
            "resourceTypeCode": "hws.resource.type.volume",
            "resourceId": "71e3eeb5-4b77-44ae-9c42-119ee7976cf7",
            "resourceName": null,
            "startTime": "2018-06-11T20:00:00Z",
            "endTime": null,
            "status": 3,
            "resourceSpecCode": "SATA",
            "resourceInfo": "{\"specSize\":50.0}",
            "chargingModeChangeFlag": "0",
            "lastDeductType": "1"
        }
    ],
    "error_code": "CBC.0000",
    "error_msg": "success"
}
```

Status Code

NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
200	CBC.0000	Succeeded.

HTTP Status Code	Error Code	Description
500	CBC.09 99	Other errors.
400	CBC.01 00	Incorrect parameter.
403	CBC.01 51	Access denied.
200	CBC.50 04	You do not have the operation permission to the customer.

11.4 Bill Management

11.4.1 Querying Customer Resource Usage

Function

This API is used to query customer resource usage.



This API will be taken offline. For details about the API for querying customer resource usage, see [8.1.1 Querying Customer Resource Usage](#).

NOTICE

The resource usage data has a latency. Therefore, the data cannot be used when there are high requirements on data accuracy, such as for usage monitoring or budget control.

File

A partner can subscribe to the customer resource usage in HUAWEI CLOUD Partner Center to learn the partner's resource utilization.



The system generates the customer resource usage file containing the data generated till the previous day from 12:00 to 20:00 (GMT+8:00) (not later than 24:00) every day. Therefore, it is recommended that the partner sales platform obtains the customer resource usage file at 24:00 every day.

1. Link to obtain the file

<https://bucketname.obs.Endpoint.myhuaweicloud.com/customerUsage/filename>

Table 11-55 Parameter description

Parameter	Description
bucketname	Name of the OBS bucket created by the partner. Only OBS buckets purchased on HUAWEI CLOUD in the Hong Kong region can be used. For details about how to create an OBS bucket, see Creating a Bucket .
Endpoint	Domain name or IP address of the server bearing the REST service endpoint. Obtain this value from Regions and Endpoints .
customerUsage	Name of the folder for storing the customer resource usage details uploaded by the system.
filename	<p>Specifies the file name. The file is named in the customerUsage_YYYYMM_YYYYMMDD.tar.gz format. The file is a compressed package. YYYYMM indicates the month of the data to be exported. For example, if the data for February 2019 is exported, YYYYMM should be 201902. YYYYMMDD specifies the date when the customer resource usage data is exported. For example, if the file name is customerUsage_201902_20190301.tar.gz, the data generated from February 1, 2019 to February 28, 2019 is exported on March 1, 2019. The files in the compressed package are named in the format of customerUsage_MonthlyYearly_YYYYMM_YYYYMMDD_XXXXXXXX.csv, customerUsage_PerByUse_YYYYMM_YYYYMM_YYYYMMDD_XXXXXXXXXX.csv, or customerUsage_RI_YYYYMM_YYYYMMDD_XXXXXXXXXX.csv In customerUsage_SP_YYYYMM_YYYYMMDD_XXXXXXXXXX.csv, XXXXXXXXXX indicates the serial number. 100,000 records are stored in each CSV file.</p>

2. Generation time of the resource usage details

The resource usage data is summarized by month. The monthly usage details contain incremental data starting from the first day of each month. The data of usage detail may change after being generated. Use the latest data.

The system generates the resource usage details from 12:00 to 20:00 (GMT +8:00) (not later than 24:00) every day.

- The usage details of each month are generated on the first day of the following month. For example, the usage details of July are generated on August 1.

- The month-to-date usage details of the current month and all usages details of the last month are generated on the second to fourth day of the current month. For example, the usage details of August 1 and August 2 and of July are generated on August 3.
- The usage details of this month are generated on the fifth day to the end of this month. For example, the usage details from August 1 to August 5 are generated on August 6.

3. File fields

- Yearly/monthly resources (usage of reseller customers only)

customerUsage_MonthlyYearly_YYYYMM_YYYYMMDD_XXXXXXXX.csv

Parameter	Type	Maximum Length	Description
Customer ID	String	256	Domain ID of a customer.
Expenditure/ Unsubscription Time	String	256	UTC.
Resource ID	String	256	Resource instance ID.
Resource Name	String	256	Name entered when a customer creates a resource instance. NOTE If the entered character strings are risky, such as {"=", "+", "-", "@"}, followed by non-pure numbers, then double quotation marks will be added for that field, one at the beginning of the field and the other at the end.
Service Type Code	String	64	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
Resource Type Code	String	A maximum of 100 characters	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
Product ID	String	256	Product ID.
Product Name	String	256	Product name.

Parameter	Type	Maximum Length	Description
Specifications	String	256	Product specifications, such as General Computing s2.small.1 1vCPUs 1GB linux
Cloud Service Region Code	String	64	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .
Order No.	String	256	Order ID generated when a customer places the order.
Order Type	String	256	Order Type: <ul style="list-style-type: none">• 1: New purchase• 2: Renewal• 3: Change• 4: Unsubscription• 10: Yearly/monthly to pay-per-use• 11: Pay-per-use to yearly/monthly• 13: Trial• 14: Commercial use• 15: Price adjustment
Duration	String	256	Duration of a yearly/monthly subscription.
Period Type	String	256	Duration type of a yearly/monthly subscription. 0: Daily 1: Weekly 2: Monthly 3: Yearly 4: Hourly 5: One-off
Expenditure Amount	String	256	Transaction price listed on the HUAWEI CLOUD official website, excluding the commercial discount provided by HUAWEI CLOUD for partners. The unit is US Dollar.
Project ID	String	256	ID of the project to which a resource belongs. You can select a project when purchasing a resource.

Parameter	Type	Maximum Length	Description
Resource Tag	String	11,000	<p>Resource tag. Customers can set tags when managing resources. If a yearly/monthly subscription is not intended for a specific resource, leave this field empty.</p> <p>NOTE If the entered character strings are risky, such as {"=", "+", "-", "@"}, followed by non-pure numbers, then double quotation marks will be added for that field, one at the beginning of the field and the other at the end.</p>
Combined Order No.	String	256	<p>The combined order number generated when a customer places orders. This parameter is available only for yearly/monthly products. In other cases, this parameter is left empty.</p> <p>This parameter is reserved.</p>

- Pay-per-use resources (usage of reseller customers only)
customerUsage_PerByUse_YYYYMM/YYYYMMDD_XXXXXXXX.csv

Parameter	Type	Value Range	Description
Customer ID	String	A maximum of 256 characters	Domain ID of a customer.
Expenditure Time	String	A maximum of 256 characters	Transaction time in the format of UTC.
Billing Cycle	String	A maximum of 256 characters	Billing cycle of the consumption record.
Resource ID	String	A maximum of 256 characters	Resource instance ID.

Parameter	Type	Value Range	Description
Resource Name	String	A maximum of 256 characters	<p>Name entered when a customer creates a resource instance.</p> <p>NOTE If the entered character strings are risky, such as {"=", "+", "-", "@"}, followed by non-pure numbers, then double quotation marks will be added for that field, one at the beginning of the field and the other at the end.</p>
Service Type Code	String	A maximum of 64 characters	<p>Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs. To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types.</p>
Resource Type Code	String	A maximum of 100 characters	<p>Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm. To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types.</p>
Product ID	String	A maximum of 256 characters	Product ID.
Product Name	String	A maximum of 256 characters	Product Name.
Specifications	String	A maximum of 256 characters	Product specifications, such as General Computing s2.small.1 1vCPUs 1GB linux
Cloud Service Region Code	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .

Parameter	Type	Value Range	Description
Billing Item	String	A maximum of 256 characters	<p>Usage factor. (Usage type) The value is the same as the usage factor in SDRs. The mappings between cloud services and usage factors are as follows:</p> <ul style="list-style-type: none"> • ECS: Duration • EVS: Duration • EIP: Duration • Bandwidth: Duration (by bandwidth) or upflow (by traffic) • Marketplace image: Duration
Usage	String	A maximum of 256 characters	Total resource usage.
Package Usage	String	A maximum of 256 characters	Used amount of the package. The used resources are not calculated using the pay-per-use price.
Reserved Instance Usage	String	A maximum of 256 characters	Used reserved instance. The used resources are not calculated using the pay-per-use price.

Parameter	Type	Value Range	Description
Usage Unit	String	A maximum of 256 characters	<p>Usage unit. The optional values are as follows:</p> <ul style="list-style-type: none">● 0: DAY (duration)● 1: YUAN (currency)● 2: JIAO (currency)● 3: FEN (currency)● 4: Hour (duration)● 5: MINUTE (duration)● 6: SECOND (duration)● 7: EB (traffic)● 8: PB (traffic)● 9: TB (traffic)● 10: GB (traffic)● 11: MB (traffic)● 12: KB (traffic)● 13: Byte (traffic)● 14: amount (quantity)● 15: Mbps (traffic)● 16: Byte (capacity)● 17: GB (traffic)● 18: KLOC (number of lines)● 19: YEAR (period)● 20: MONTH (period)● 21: MB (traffic)● 22: GHz (frequency)● 23: CORE (quantity)● 24: DAY (period)● 25: HOUR (period)● 30: number (quantity)● 31: Thousand times (quantity)● 32: Million times (quantity)● 33: Billion times (quantity)● 34: bps (bandwidth)● 35: kbps (bandwidth)● 36: Mbps (bandwidth)● 37: Gbps (bandwidth)● 38: Tbps (bandwidth)

Parameter	Type	Value Range	Description
			<ul style="list-style-type: none"> ● 39: GB-seconds (capacity-duration) ● 40: times (quantity) ● 41: PCS (quantity) ● 42: Thousand PCS (quantity) ● 43: PCS (quantity) ● 44: Thousand PCS (quantity) ● 45: Query Per Second (query rate) ● 46: Man/Day (quantity) ● 47: TB (capacity) ● 48: PB (capacity)
Expenditure Amount	String	A maximum of 256 characters	<p>Transaction price listed on the HUAWEI CLOUD official website, excluding the commercial discount provided by HUAWEI CLOUD for partners. The unit is US Dollar.</p> <p>If HUAWEI CLOUD writes off the outstanding amount as required or refunds the over-deducted amount, a record with the negative amount will be generated.</p>
Project ID	String	A maximum of 256 characters	ID of the project to which a resource belongs. You can select a project when purchasing a resource.
Resource Tag	String	A maximum of 11,000 characters	<p>Resource tag. Customers can set tags when managing resources.</p> <p>NOTE If the entered character strings are risky, such as {"=", "+", "-", "@"}, followed by non-pure numbers, then double quotation marks will be added for that field, one at the beginning of the field and the other at the end.</p>
Unit Price	String	A maximum of 256 characters	Unit price of a pay-per-use product. This parameter has a value only when the price is the same. For tiered billing, this parameter is left empty.

Parameter	Type	Value Range	Description
Unit	String	A maximum of 256 characters	Price unit. For example, the price is \$0.6 USD/10,000 times. The unit price is 0.6, the price unit is US Dollar, and the step is 10,000 times. The unit price is 0.6 and the price unit is US Dollar/10,000 times.

- Reserved instances (usage of reseller customers only)
customerUsage_RI_YYYYMM_YYYYMMDD_XXXXXXXX.csv

Parameter	Type	Value Range	Description
Customer ID	String	A maximum of 256 characters	Domain ID of a customer.
Expenditure/Unsubscription Time	String	A maximum of 256 characters	UTC.
Expenditure Type	String	A maximum of 256 characters	1: Subscription 2: Renewal 3: Change 4: Unsubscription 8: Automatic renewal 12: Recurring fee for reserved instances
Reserved Instance ID	String	A maximum of 256 characters	ID of a purchased reserved instance.
Reserved Instance Name	String	A maximum of 256 characters	Name of a reserved instance. NOTE If the entered character strings are risky, such as {"=", "+", "-", "@"}, followed by non-pure numbers, then double quotation marks will be added for that field, one at the beginning of the field and the other at the end.

Parameter	Type	Value Range	Description
Service Type Code	String	A maximum of 64 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
Cloud Service Region Code	String	A maximum of 64 characters	Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints .
Product	String	A maximum of 256 characters	Product ID.
Order No.	String	A maximum of 256 characters	Order ID of a reserved instance order.
Expenditure Amount	String	A maximum of 256 characters	Transaction price listed on the HUAWEI CLOUD official website, excluding the commercial discount provided by HUAWEI CLOUD for partners. The unit is US Dollar.
Project ID	String	A maximum of 256 characters	ID of the project to which a resource belongs. You can select a project when purchasing a resource.
Resource Tag	String	A maximum of 11,000 characters	Resource tag. Customers can set tags when managing resources. Currently, the reserved instance does not belong to a specific resource. This field is left blank (reserved). NOTE If the entered character strings are risky, such as {"=", "+", "-", "@"}, followed by non-pure numbers, then double quotation marks will be added for that field, one at the beginning of the field and the other at the end.

- Savings plan (Only customers in reseller model are included):
customerUsage_SP_YYYYMM_YYYYMMDD_XXXXXXXX.csv

Parameter	Type	Value Range	Description
Customer ID	String	A maximum of 256 characters	Domain ID of a customer.
Expenditure/Unsubscription Time	String	A maximum of 256 characters	UTC.
Expenditure Type	String	A maximum of 256 characters	<p>1: Subscription 4: Unsubscription 12: Save the recurring charge of the plan. 13: Unsubscription handling fee 15: Expenditure tax 23: Savings plan discounts 100: Unsubscription tax</p>
Resource ID	String	256	The IDs of the resources in the billing mode of Savings Plan . The expenditure type, 23 , stands for Savings plan – discount . The IDs of the pay-per-use resources that are charged at discounted Savings Plans prices.
Resource name	String	256	<p>Resource name entered when a customer creates a resource instance. The expenditure type, 23, stands for Savings plan – discount. The names of the pay-per-use resources that are charged at discounted Savings Plans prices.</p> <p>Currently, the field, Resource Name is left empty for the billing mode, Savings plan – discount.</p> <p>NOTE If the strings entered include risky characters, such as {"=", "+", "-", "@"}, and these characters are followed by non-pure numbers, double quotes must be added before and after the field when exported.</p>

Parameter	Type	Value Range	Description
Service Type Code	String	64	<p>Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs. To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types.</p> <p>The expenditure type, 23, stands for Savings plan – discount. The type codes of the pay-per-use products that are charged at discounted Savings Plans prices.</p>
Resource type code	String	100	<p>Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm. To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types.</p> <p>The expenditure type, 23, stands for Savings plan – discount. The type codes of the pay-per-use resources that are charged at discounted Savings Plans prices.</p>
Cloud service region code	String	64	<p>Cloud service region code, for example, ap-southeast-1. Obtain the value from the Region column in Regions and Endpoints.</p> <p>The expenditure type, 23, stands for Savings plan – discount. The region codes of the pay-per-use cloud services that are charged at discounted Savings Plans prices.</p>
Product ID	String	A maximum of 256 characters	<p>Product ID. The expenditure type, 23, stands for Savings plan – discount. The IDs of the pay-per-use products that are charged at discounted Savings Plans prices.</p>
Product name	String	A maximum of 256 characters	<p>Product name. The expenditure type, 23, stands for Savings plan – discount. The names of the pay-per-use products that are charged at discounted Savings Plans prices.</p>

Parameter	Type	Value Range	Description
Product specifications	String	256	Product specification, for example, SP in the s2 specification family. The expenditure type, 23 , stands for Savings plan – discount . The specifications of the pay-per-use products that are charged at discounted Savings Plans prices.
Order No.	String	256	IDs of orders in the billing mode, Savings plan .
Order type	String	A maximum of 256 characters	Order type: <ul style="list-style-type: none"> • 1: New purchase • 4: Unsubscription
Usage	String	A maximum of 256 characters	Total usage. The expenditure type, 23 , stands for Savings plan – discount . The usage of the pay-per-use resources that are charged at discounted Savings Plans prices.
Usage unit	String	256	Usage unit. You can use the API in 4.1.5 Querying Measurement Units to obtain usage units. The expenditure type, 23 , stands for Savings plan – discount . The usage unit of the pay-per-use resources that are charged at discounted Savings Plans prices.
Unit price	String	256	Unit price. The expenditure type, 23 , stands for Savings plan – discount . The unit price of the pay-per-use resources that are charged at discounted Savings Plans prices.
Price unit	String	A maximum of 256 characters	Price unit. <ul style="list-style-type: none"> • USD/year • USD/hour The expenditure type, 23 , stands for Savings plan – discount . The price unit of the pay-per-use resources that are charged at discounted Savings Plans prices.

Parameter	Type	Value Range	Description
Expenditure amount	String	A maximum of 256 characters	Transaction price listed on the Huawei Cloud official website, excluding the commercial discount provided. The unit is US Dollar. The expenditure type, 23 , stands for Savings plan – discount . The expenditure amount of the pay-per-use resources that are charged at discounted Savings Plans prices.
Hourly commitment	String	256	The committed expenditure per hour of a Savings plan . Different discounts are applied based on hourly commitment. The unit of hourly commitment is US Dollar.
Amount deducted from savings plans	String	256	Amount deducted from savings plans. The deducted expenditures of the pay-per-use resources from the savings plan. The unit is US Dollar.
Project ID	String	A maximum of 256 characters	ID of the project to which a resource belongs. You can select a project when purchasing a resource. The expenditure type, 23 , stands for Savings plan – discount . The IDs of the projects to which pay-per-use resources belong and the resources are charged the discounted savings plan price.
Resource tag	String	A maximum of 11,000 characters	Resource tag. You can set tags when managing resources. Currently, this field is left empty for savings plans. The expenditure type, 23 , stands for Savings plan – discount . The tags of the pay-per-use resources that are charged at discounted Savings Plans prices. NOTE If the strings entered include risky characters, such as {"=", "+", "-", "@"}, and these characters are followed by non-pure numbers, double quotes must be added before and after the field when exported.

4. File example

a. **File of yearly/monthly resources**

▪ **Field:**

customerUsage_MonthlyYearly_201905_20190521_232738ebd8d044a
c8006571d694ff05d.csv

▪ **Content:**

Customer,Expenditure or Unsubscription Time,Resource ID,Resource Name,Product Type Code,Resource Type Code,Product ID,Product Name,Product Specifications,Region,Order No.,Order Type,Duration,Period Type,Amount(USD),Project ID,Resource Tag
37be0256053e467ba425d6dd61135370,2019-05-06 14:30:25 GMT
+00:00,57f5faa7-0aa5-4f13-91e7-
b838a6b69178,volume-220f,hws.service.type.ebs,hws.resource.type.volume,00301-03439-0--0,GD3 linear EVS_Monthly,Common IO|10.0|17,cn-north-7,CS1905061430U2BKA,4,,2,0.00,6a4cffd705254584a4386d30b
3e15df9,resourcetag008

b. **File of pay-per-use resources**

▪ **Field:**

customerUsage_PerByUse_201905_20190521_c40692bef76442e688e0
44530d62eb03.csv

▪ **Content:**

Customer,Expenditure Time,Billing Cycle,Resource ID,Resource Name,Product Type Code,Resource Type Code,Product ID,Product Name,Product Specifications,Region,Billing Item,Usage,Package Usage,Reserved Instance Usage,Unit,Amount(USD),Project ID,Resource Tag,Unit,Unit Price
b9965f7fa88a49d3aa571d6ab25543fb,2019-05-01 10:00:00 GMT
+00:00 - 2019-05-01 23:59:59 GMT
+00:00,20190501,bf930731-996d-422e-a2ec-f556d88bc784,ecs-a5d9-volume-0001,hws.service.type.ebs,hws.resource.type.volume,00301-18779-0--0,GD3 linear EVS_On demand,Common IO|duration,cn-north-7,duration,"22,545.00",,0.00,6,0.02,6a4cffd705254584a4386d30b
3e15df9,resourcetag001,0,1

c. **File of reserved instances**

▪ **Field:**

customerUsage_RI_201905_20190521_f5ee75c834494106b39f4511d2
0cb416.csv

▪ **Content:**

Customer,Expenditure or Unsubscription Time,Expenditure Type,Reserved Instance ID,Reserved Instance Name,Product Type Code,Region,Product,Order No.,Amount(USD),Project ID,Resource Tag
37be0256053e467ba425d6dd61135370,2019-05-07 15:01:17 GMT
+00:00,Subscribed Order,01154-3100049-0,,hws.service.type.ec2,cn-north-7,General Computing Enhanced_C3_2U4G_linux
reserve,CS19050715008ZEL8,516.84,6a4cffd705254584a4386d30b3e1
5df9,resourcetag002

11.4.2 Querying Monthly Bills

Function

This API is used to query monthly bills.



This API will be brought offline. For details about how to query the monthly bills, see [Querying Monthly Bills](#).

Web UI

Partners can log in to the Partner Center to query their monthly bills.

Step 1 Choose **Financial Information > Partner Bills**.

Step 2 In the **Amount Due** pane, you can query the amount to be paid, including the unpaid fees of current month and those of previous months.



- Click **Repay** to pay the bill. For details, see [Repayment](#).
- You can click **Unpaid Bills** to see the bills that you need to pay.
- You can click **Payment record** to switch to the **Revenue & Expenditure** page to view the payment records.

The screenshot shows the 'Partner Bills' page. At the top, there is a note: 'Partner bills include only your expenditures on HUAWEI CLOUD and do not include the expenditures of your referred customers. These bills serve as a basis for payment and invoicing.' Below this, there are two bullet points: 'The partner bills use the Beijing time (GMT +08:00) as the standard time. Bills of each month are generated before 12:00 a.m. on the fifth day of the next month.' and 'Would you like to learn how the bill was calculated? [View the bill calculation method](#)'.

In the main area, there is a summary table:

Amount Due	
\$11,344.73 USD	= <small>Unpaid Fees of Current Month</small> \$10,444.73 USD + <small>Unpaid Fees of Previous Months</small> \$900.00 USD
<small>overdue \$10,444.73 USD</small>	

Below the table is a red 'Repay' button.

Step 3 In the **Monthly Bills** pane, select the month and query the bills of this month.

HUAWEI CLOUD Expenditure Summary		\$163.16 USD
^ Elastic Volume Service		\$163.16 USD
^ CN East-Shanghai2		\$87.16 USD
Elastic Volume Service		\$87.16 USD
Pay-per-use	172800 Second	\$73.86 USD
SGST		\$3.33 USD
IGST		\$6.64 USD
CGST		\$3.33 USD
▼ CN North-Beijing1		\$76.00 USD

Step 4 Export partner bills.

- Exporting the bills.

In the **Monthly Bills** area, select **Export Bill Summary to PDF File**. The system displays "Records exported successfully."

- Export bill details.

In the **Monthly Bills** area, select **Export Bill Details to XLSX File**. The system displays "Records exported successfully."

- View the export history.

- a. Select **View Export** to go to the **Export History** page.
- b. Click **Download** in the **Operation** column to download and view the exported bills.

----End

REST API

The partner sales platform displays the monthly bills, and then you can settle the bills with HUAWEI CLOUD.

NOTE

- This API can be invoked only by the partner account AK/SK or token.
- The partner bill for each month is generated before 12:00 (Beijing Time) on the fifth day of the next month.

1. URI

GET /v1.0/{partner_id}/partner/account-mgr/postpaid-bill-summary

The following table describes the parameter.

Table 11-56 URI parameters

Parameter	Mandatory	Maximum Length of Characters	Description
partner_id	Yes	A maximum of 64 characters	Partner ID (assigned by Huawei). For details about how to obtain the partner ID, see How Do I Check the Partner ID?.

Table 11-57 Request parameter

Parameter	Mandatory	Type	Maximum Length of Characters	Description
consume_month	Yes	String	A maximum of 10 characters	Month in the yyyy-MM format.

2. Request

Request Parameters

None

Example Request

```
GET https://bss-intl.myhuaweicloud.com/v1.0/{partner_id}/partner/account-mgr/postpaid-bill-summary?consume_month=2019-01 HTTP/1.1
Content-Type: application/json
X-Auth-Token: MIIIPAgYJKoZIhvcNAQcCo...ggg1BBIIINPXsidG9rZ
```

3. Response

Response Parameters

Parameter	Mandatory	Type	Maximum Length of Characters	Description
error_code	No	String	A maximum of 16 characters	Error code. For details, see 4 . This parameter is returned only when a failure occurs.

Parameter	Mandatory	Type	Maximum Length of Characters	Description
error_msg	No	String	A maximum of 1024 characters	Error description. This parameter is returned only when a failure occurs.
billCycle	No	String	A maximum of 10 characters	Billing cycle. This parameter is returned only when the query is successful. It indicates the month for which the bills are queried. Format: YYYY-MM
creditDebtAmount	No	BigDecimal	-	Bill amount, which is calculated based on the special commercial discount of the partner. This parameter is returned only when the query is successful. The value does not contain the tax.
consumeAmount	No	BigDecimal	-	Consumption amount, which is calculated based on the special commercial discount of the partner. This parameter is returned only when the query is successful. The value does not contain the tax.
writeoffdebt	No	BigDecimal	-	Write-off amount (negative value), which is calculated based on the special commercial discount of the partner. This parameter is returned only when the query is successful. The value does not contain the tax.

Parameter	Mandatory	Type	Maximum Length of Characters	Description
unsubscribeAmount	No	BigDecimal	-	Unsubscription amount (negative value), which is calculated based on the special commercial discount of the partner. This parameter is returned only when the query is successful. The value does not contain the tax.
measureId	No	Integer	-	Unit. This parameter is returned only when the query is successful. 1: Dollar
currency	No	String	A maximum of 8 characters	This parameter is returned only when the query is successful. USD
taxAmount	No	BigDecimal	-	Tax amount, which is the tax amount in the creditDebtAmount field. Currently, this field is reserved and no value is returned.
unclearedAmount	No	BigDecimal	-	Bill amount that is not settled, which is calculated based on the special commercial discount of the partner. This parameter is returned only when the query is successful.
dueDate	No	String	A maximum of 32 characters	Due date for bills. This parameter is returned only when the query is successful.
billList	No	List<PostpaidBillInfo>	-	Bill list. For details, see Table 11-58 . This parameter is returned only when the query is successful.

Table 11-58 PostpaidBillInfo

Parameter	Mandatory	Type	Maximum Length of Characters	Description
billType	Yes	String	A maximum of 1 character	Bill type: <ul style="list-style-type: none">• 0: Expenditure• 1: Unsubscription• 2: Huawei write-off
cloudService TypeCode	Yes	String	A maximum of 100 characters	Cloud service type code. For example, the cloud service type code of OBS is hws.service.type.obs . To obtain a specific service type, call the API in 4.1.1 Querying Cloud Service Types .
resourceType Code	Yes	String	A maximum of 100 characters	Resource type code. For example, the VM resource type code of ECS is hws.resource.type.vm . To obtain a specific resource type, call the API in 4.1.2 Querying Resource Types .
payMethod	Yes	String	A maximum of 1 character	Billing mode. The options are as follows: 0 : Yearly/monthly 1 : Pay-per-use 2 : Reserved instance-upfront payment 3 : Reserved instance-hourly billing

Parameter	Mandatory	Type	Maximum Length of Characters	Description
creditDebtAmount	Yes	BigDecimal	-	<p>Transaction amount/unsubscription amount/refund amount of the customer, including the vouchers, flexi-purchase coupons, reserved flexi-purchase coupons, and stored-value cards.</p> <p>Flexi-purchase coupons and stored-value cards are not supported currently.</p> <p>For bill types with billType being 1 and 2, the value is negative.</p>
customerAmountDue	Yes	BigDecimal	-	<p>Transaction amount/unsubscription amount/refund amount of the customer, not including the vouchers, flexi-purchase coupons, reserved flexi-purchase coupons, or stored-value cards. Flexi-purchase coupons and stored-value cards are not supported currently.</p> <p>For bill types with billType being 1 and 2, the value is negative.</p>
settlementType	Yes	Integer	-	<p>Settlement product type. The optional values are as follows:</p> <ul style="list-style-type: none"> 0: List-price offering 1: Promotional offering 2: Hybrid hosting products 5: Stored-value card 6: KooGallery 7: Spot ECSs 8: FCS (reserved)

Parameter	Mandatory	Type	Maximum Length of Characters	Description
partnerRatio	No	Bigdecimal	-	Partner discount percentage. This parameter is valid only when partnerPreferentialType is set to 0 .
partnerAmount	Yes	Bigdecimal	-	Amount that the partner needs to refund/Amount that the partner has refund For bill types with billType being 1 and 2 , the value is negative.
periodType	No	Integer	-	Yearly/monthly unit. 0: Daily 1: Weekly 2: Monthly 3: Yearly
periodNum	No	Integer	-	Number of yearly/monthly periods.
categoryCode	No	String	64	Product category code.
salePrice	No	BigDecimal	-	Fixed Price This parameter is valid only when partnerPreferentialType is set to 1 .
stepNum	No	Integer	-	Step size of fixed unit price. This parameter is valid only when partnerPreferentialType is set to 1 .
stepNumMeasureId	No	Integer	-	Unit for the step size of fixed unit price. This parameter is valid only when partnerPreferentialType is set to 1 .

Parameter	Mandatory	Type	Maximum Length of Characters	Description
partnerPreferentialType	No	Integer	[0-1]	<p>Partner preferential type. The options are as follows:</p> <ul style="list-style-type: none"> • 0: Discount • 1: Fixed unit price. If this parameter is left empty, the product discount is used by default

Example Response

```

HTTP/1.1 200 OK
Content-Type: application/json; charset=UTF-8
Content-Length: length
Date: response time

{
    "billCycle": "2019-01",
    "creditDebtAmount": 22500,
    "consumeAmount": 22500,
    "writeoffdebt": 0,
    "unsubscribeAmount": 0,
    "measureId": 1,
    "currency": "USD",
    "taxAmount": null,
    "unclearedAmount": 10,
    "dueDate": "2019-02-15",
    "billList": [
        {
            "billType": "0",
            "cloudServiceTypeCode": "hws.service.type.kms",
            "resourceTypeCode": "hws.resource.type.dev.codehub",
            "payMethod": "1",
            "creditDebtAmount": 30000,
            "customerAmountDue": 30000,
            "settlementType": 0,
            "partnerRatio": 0.75,
            "partnerAmount": 22500,
            "periodType": 3,
            "periodNum": 1,
            "categoryCode": "hws.resource.storage1.evs",
            "salePrice": null,
            "stepNum": null,
            "stepNumMeasureId": null,
            "partnerPreferentialType": 0
        }
    ]
}

```

4. Status Code

 NOTE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

HTTP Status Code	Error Code	Description
400	CBC.0100	Invalid input parameter.
403	CBC.0151	Access denied.
500	CBC.0999	Other errors.

12 Appendix

12.1 Switching to the HUAWEI CLOUD Page and Binding the HUAWEI CLOUD Account


The following describes how to bind a customer account on the partner sales platform with the HUAWEI CLOUD account on the web UI. You can create a HUAWEI CLOUD account and bind it with the customer account, or directly bind an existing HUAWEI CLOUD account with the customer account. The following scenarios are involved:

- A customer has created an account on the partner sales platform and does not have a HUAWEI CLOUD account. The customer needs to create such an account and bind it with the account on the partner sales platform.
- Before creating an account on the partner sales platform, a customer has created a HUAWEI CLOUD account. The customer needs to create an account on the partner sales platform and bind it with the HUAWEI CLOUD account.

Subsequent operations, such as product purchasing and subscription query, depend on the customer's HUAWEI CLOUD account in this scenario.

Figure 12-1 shows the procedure for binding a HUAWEI CLOUD account with a customer account on the partner sales platform and notifying the binding result.

Figure 12-1 Binding a HUAWEI CLOUD account

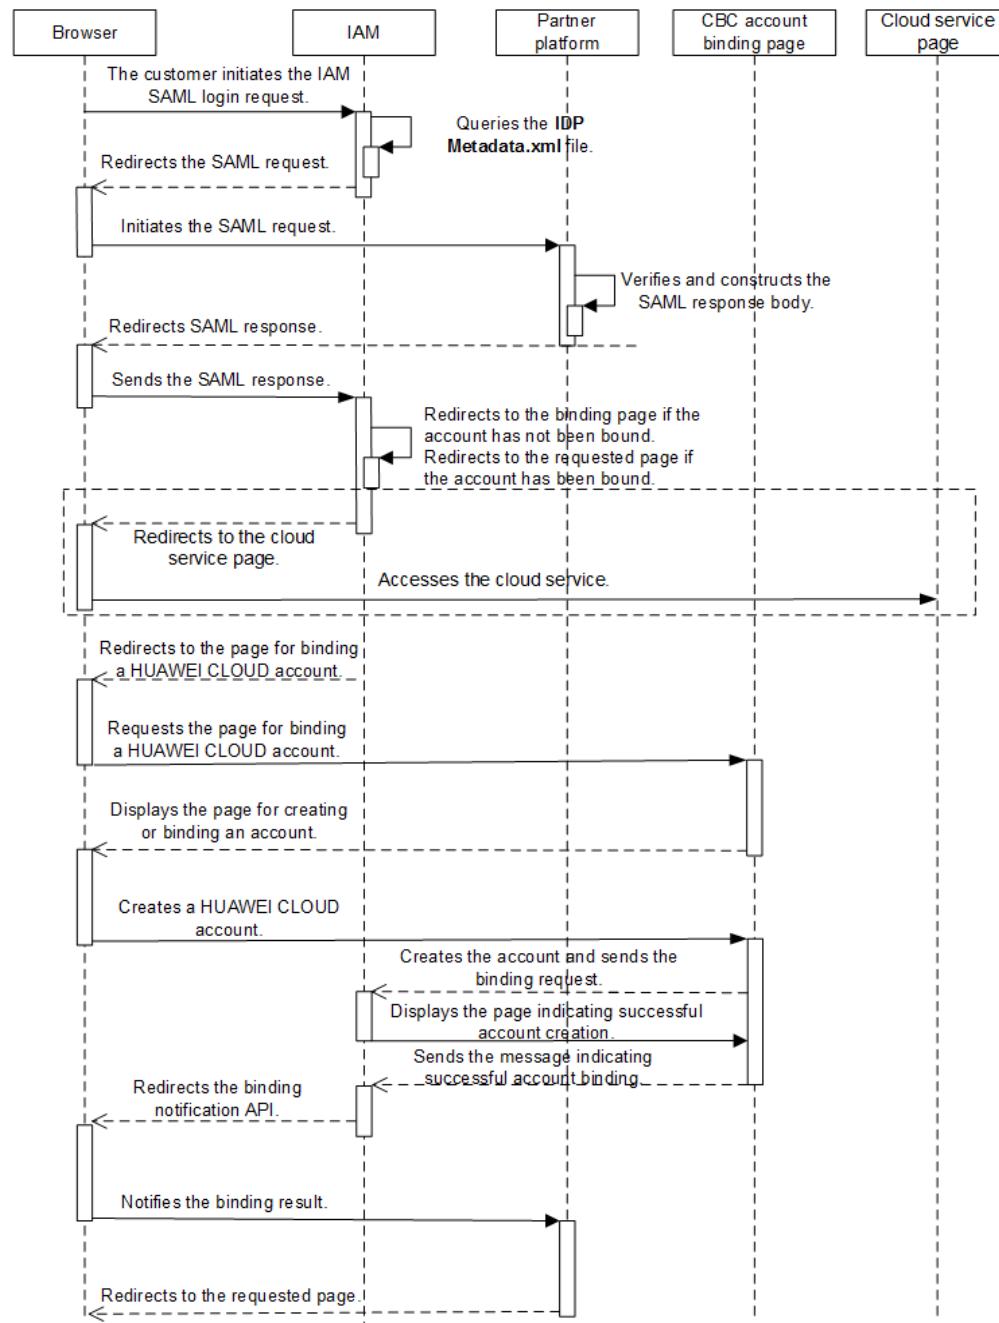

1. A partner's customer uses a browser to call the HUAWEI CLOUD login link. IAM sends the SAML request.
 - a. The customer uses a browser to call the HUAWEI CLOUD login link.

`https://auth-intl.huaweicloud.com/authui/saml/login?xAccountType=ZX7&isFirstLogin=true&service=https%3a%2f%2fconsole-intl.huaweicloud.com%2fiam%2f`

Parameter	Mandatory	Description	Example
xAccountType	Yes	Indicates the identifier of the partner sales platform, which is globally unique. The value is provided by Huawei. After the partner configures the access parameters on the Partner Center page, the partner ID is generated. For details about how to obtain the platform ID, see How Do I Obtain the xaccountType Value?	ZXT
isFirstLogin	No	If no HUAWEI CLOUD account is bound, this parameter is mandatory and must be set to true . Otherwise, the value can be left empty or set to false .	true
service	No	Indicates the redirection address after login. The encodeURIComponent function is used for coding.	https%3a%2f%2fconsole-intl.huaweicloud.com%2fiam%2f

- b. IAM receives the login request of the partner's customer, locates the **SingleSignOnService** configuration item in the **IDP Metadata.xml** file based on the **xAccountType** value, and sends the **samlRequest** request to the required path.

```
▼ Query String Parameters view source view URL encoded
SAMLRequest: jVLLbtswEPvVgnct7BuuyT1wVuQ1kOapepeTQS8FSK4kJRSp8ZK2/vpRstukxGLnuV2Z22hFVzqBdqAHVzLDSRhjBjKpissmwu/lbTDH18uFoZ1le7JytpVbeHfgLPK10pBjJ8N0S6Ko4YII2oEh1pF19eWOpGFMeq2sVkgptD1
0S4gfrXY2ba3tcoog5BQlQh2je+8WkFefTHkkkncyTgh5hXg0BEYn0w3+QGK29PC6pHU86o/KqDlwvQDZfcAbKpGXnVBI1labam1GpInluIeo1u1GyvnZ71mug8Gfzh8XOTTP7Uan+qlNmih7qu+<x>Z7tmHPHmevyKJ2qf68B3Bwzb6wL
Jg01cxJMyNSPTqzCep98xyk92feLy9Wlb38ehwz5X725kn8XJUaPSzj9AD6FR0Z2/Tq1y8D07Ctevi+YRfSa60/PfPXIm3wvBGe/u0i1tb/RQK23xi0Ho8sdZe108VeBfU4Sqm0nCQFqHiH+C/OSp4zUG/94dwTpffvTyz8=
RelayState: _9inckak3sg5Bypjcd3wInzenfuqq44ft2o5d
SigAlg: http://www.w3.org/2001/04/xmldsig-more#rsa-sha256
Signature: fwTqfIy6XQ1AccMqTf50iLgVLU1qdx0X12y025xF42J6a8AYoIFPhNihdcpo7ytJPhvXv8XK70HE112c4L1BR9YlwR6ZGeDOaoNGx9xFNjGVAVh8PbHRQ1gJ3mlac11dYe0Nx2KD7Lr2us134repcrehyn0rq%1+A=
```

Parameter	Description
SAMLRequest	<p>Indicates the response message body.</p> <p>The response message is in XML format. IAM then compresses the message, encodes the message using Base64, and URL encodes the message.</p> <ul style="list-style-type: none">If the partner uses the SAML toolkits, this parameter can be directly used. The partner does not need to parse the XML file.If the partner needs to parse the XML file, the partner needs to URL decode the message, decode the message using Base64, and decompress the message (zip.inflate). For details, see Sample Code for Parsing the SAMLRequest.
RelayState	Indicates the response parameters for SAML.
SigAlg	<p>Indicates the signature algorithm. Huawei uses SHA256 for signatures by default.</p> <p>HTTP://WWW.W3.ORG/2001/04/XMLSIG-MORE#RSA-SHA256</p>
Signature	<p>Indicates the signature. The signature is used to verify the initiator of a request.</p> <p>When initiating a request, HUAWEI CLOUD uses the private key to sign <i>SAMLRequest={ SAMLRequest }&RelayState={ RelayState } &SigAlg={ SigAlg }</i> in request <i>https://www.test.com/saml/login?</i></p> <p><i>SAMLRequest={SAMLRequest }&RelayState={ RelayState } &SigAlg={ SigAlg}&Signature={ Signature }</i> and then performs Base64 coding to obtain the signature value.</p> <p>The signature algorithm is specified by the SigAlg field.</p> <p>When receiving the request, the receiver verifies the signature value using the public key provided by HUAWEI CLOUD (the value in the <ds:X509Certificate></ds:X509Certificate> tag in the SP Metadata.xml file).</p> <p>If the signature verification succeeds, the request is sent by HUAWEI CLOUD, and the follow-up operations can be performed. Otherwise, the request is invalid.</p>

2. The partner sales platform generates the SAML response message and sends it to HUAWEI CLOUD IAM.
 - a. The partner sales platform obtains the HUAWEI CLOUD public key and the response message path of **samlResponse** from the **SP Metadata.xml**

file. For details, see **Example, Public Key, and Response Path in Obtaining the SP Metadata File**.

- b. The partner sales platform constructs the response message body **response.xml** for the SAML response.

The response message body is in XML format. For the correct response message body and its parameter description, see the following displayed content.

NOTICE

The following content is for reference only. The description in the comments must be modified. The time and ID defined by SAML vary depending on the message. Therefore, it is recommended that you should not directly modify the response message content. Instead, you shall use the SAML toolkits to generate the response message.

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Parameter InResponseTo needs to be the same as the ID configuration item of AuthnRequest in the SAML request message. -->
<!-- Parameter Destination needs to be the same as the Location value in the AssertionConsumerService tag in the SP Metadata.xml file. -->
<saml2p:Response Consent="urn:oasis:names:tc:SAML:2.0:consent:unspecified" ID="_d794dc393ae6724e236003bf0b917cf0" Destination="https://auth.huaweicloud.com/authui/saml/SAMLAssertionConsumer" InResponseTo="_dck4mm08qmdhc8k4nuir07hghetdqg8umg5" IssueInstant="2018-10-30T08:21:41.740Z" Version="2.0" xmlns:saml2p="urn:oasis:names:tc:SAML:2.0:protocol">
    <!-- Must be the same as the entityID value in the IDP Metadata.xml file. -->
    <saml2:Issuer Format="urn:oasis:names:tc:SAML:2.0:nameid-format:entity" xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion">https://www.test.com</saml2:Issuer>
    <saml2p:Status>
        <saml2p:StatusCode Value="urn:oasis:names:tc:SAML:2.0:status:Success" />
        <saml2p:StatusMessage>urn:oasis:names:tc:SAML:2.0:status:Success</saml2p:StatusMessage>
    </saml2p:Status>
    <saml2:Assertion ID="_2320c40ac7b5e857b2d0d4ea0c8758c3" IssueInstant="2018-10-30T08:21:41.740Z" Version="2.0" xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion" xmlns:xsd="http://www.w3.org/2001/XMLSchema">
        <!-- Must be the same as the entityID value in the IDP Metadata.xml file. -->
        <saml2:Issuer>https://www.test.com</saml2:Issuer>
        <ds:Signature xmlns:ds="http://www.w3.org/2000/09/xmldsig#">
            <ds:SignedInfo>
                <ds:CanonicalizationMethod Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
                <ds:SignatureMethod Algorithm="http://www.w3.org/2001/04/xmldsig-more#rsa-sha256" />
            </ds:SignedInfo>
            <ds:DigestMethod Algorithm="http://www.w3.org/2001/04/xmlenc#sha256" />
        </ds:Signature>
    <!-- The value after "URI #" must be the same as the ID in the Assertion tag. -->
    <ds:Reference URI="#_2320c40ac7b5e857b2d0d4ea0c8758c3">
        <ds:Transforms>
            <ds:Transform Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-signature" />
            <ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
            <ec:InclusiveNamespaces PrefixList="xsd" xmlns:ec="http://www.w3.org/2001/10/xml-exc-c14n#" />
        </ds:Transforms>
        <ds:DigestMethod Algorithm="http://www.w3.org/2001/04/xmlenc#sha256" />
    <!-- The value of DigestValue is the digest of the Assertion tag object. The digest algorithm is the same as that of DigestMethod. -->
    <ds:DigestValue>rFxrycznfGNYOnprZlFJou4ro0Mz65+43MIR5F0+H4=</ds:DigestValue>
    </ds:Reference>
</ds:SignedInfo>
<!-- Partner signature value. For details about how to obtain the value, see the following description. -->
```

```

<ds:SignatureValue>
YqTWQngAPfGqQmWa610PM7LeefqWdKuveUVINrqL67NoHJIDa2WxLwdVzoJUlh64QiNPr6+ndm
L DCmgIC5F/9juzhICZcc6lHNjjy6EsPKKRjfo9oeoVAqlG/kmvQYeHLBID0y11RNXXpAVY4nhJ
26KiIVGt7wyKAmhichE+eW/UYAGIO15vkgD2gZUGV+yPkv64k7xK4yAH3mL2NaCPuw/90e4enm
iUx0YuazDwM5FIRUSMpcIs0rcNmS6clWAUcCzbOx+y2vJgtTjh7k3UsmpnTop5eYNp94+sDPEat
8FaV4SgafMEL5z54gpe8//9yOWEvIBs1b0RYg==
</ds:SignatureValue>
<ds:KeyInfo>
<ds:X509Data>
<!-- Partner public key certificate. The certificate must be the one specified in the IDP
Metadata.xml file. -->
<ds:X509Certificate>
MIIBIjANBgkqhkiG9w0BAQEAAOCgKCAQEAhK3L160Njp9EhBGQOC2s4r
+Wc62bkRkc nUxhiZwCwdQCykzuLOAoATinfoEamV5W25xtSS5kFs+4OC0mVpKc13SWoydX
+UE5Qik5Ufj8Dt G1AvSEKhSluyO9axrV5Uv089jMxBnlm/R+xND73WcZM11ylbKJEZSTCEDfh
+KnFbMw108umFMden RZCrNWUJoSp/90XeG0V2Nmj7Fkq72skSifwlASLRq9KqLbmh1QwUX
+AoWpHK/jRUBustMBmG1n1i
AqpD4EBjjBOB27k1wXZ30+loJt8IZmfSZRFoNn5VFWXNeEmZ1aQvGSvd3Tyw2/Wr+w/
8Mags69C mpeX6QIDAQAB
</ds:X509Certificate>
</ds:X509Data>
</ds:KeyInfo>
</ds:Signature>
<saml2:Subject>
<!-- The value of NameQualifier must be the same as the entityId value in the SP
Metadata.xml file. -->
<saml2:NameID Format="urn:oasis:names:tc:SAML:2.0:nameid-format:transient"
NameQualifier="https://auth.huaweicloud.com/">Some NameID value</saml2:NameID>
<saml2:SubjectConfirmation Method="urn:oasis:names:tc:SAML:2.0:cm:bearer">
<!-- Parameter InResponseTo needs to be the same as the ID configuration item of
AuthnRequest in the samlRequest message. -->
<saml2:SubjectConfirmationData
InResponseTo="_dck4mm08qmdhc8k4nuir07hghetdqgq8umg5"
NotBefore="2018-10-28T08:21:41.740Z" NotOnOrAfter="2018-11-01T08:21:41.740Z"
Recipient="https://auth.huaweicloud.com/authui/saml/SAMLAssertionConsumer" />
</saml2:SubjectConfirmation>
</saml2:Subject>
<saml2:Conditions NotBefore="2018-10-28T08:21:41.740Z"
NotOnOrAfter="2018-11-01T08:21:41.740Z">
<saml2:AudienceRestriction>
<!-- Must be the same as the entityId value in the SP Metadata.xml file. -->
<saml2:Audience>https://auth.huaweicloud.com/</saml2:Audience>
</saml2:AudienceRestriction>
</saml2:Conditions>
<saml2:AttributeStatement>
<!-- For values between<saml2:AttributeValue> and </saml2:AttributeValue>, see the
following table. -->
<saml2:Attribute FriendlyName="xUserId" Name="xUserId"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri">
<saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string">*****</saml2:AttributeValue>
</saml2:Attribute>
<!-- The values of xAccountId and xUserId must be the same. -->
<saml2:Attribute FriendlyName="xAccountId" Name="xAccountId"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri">
<saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string">*****</saml2:AttributeValue>
</saml2:Attribute>
<saml2:Attribute FriendlyName="bpld" Name="bpld"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri">
<saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string">*****</saml2:AttributeValue>
</saml2:Attribute>
<saml2:Attribute FriendlyName="email" Name="email"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri">
<saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string" />
</saml2:Attribute>

```

```
<saml2:Attribute FriendlyName="name" Name="name">
  NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri">
    <saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string">*****</saml2:AttributeValue>
  </saml2:Attribute>
  <saml2:Attribute FriendlyName="mobile" Name="mobile">
    NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri">
      <saml2:AttributeValue xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="xsd:string">*****</saml2:AttributeValue>
    </saml2:Attribute>
  </saml2:AttributeStatement>
  <saml2:AuthnStatement AuthnInstant="2018-10-30T08:21:41.741Z">
    <!-- Must be the same as the entityId value in the SP Metadata.xml file. -->
    <saml2:SubjectLocality Address="https://auth.huaweicloud.com/" />
    <saml2:AuthnContext>
      <saml2:AuthnContextClassRef>urn:oasis:names:tc:SAML:2.0:ac:classes:unspecified</saml2:AuthnContextClassRef>
    </saml2:AuthnContext>
  </saml2:AuthnStatement>
  </saml2:Assertion>
</saml2p:Response>
```

The partner signature value is in standard XML format, and the signature type is **enveloped-signature**. You are advised to use the SAML library provided by a third party for signature.

The signature procedure is as follows.

i. Obtain the signature object (**Assertion**).

```
<saml2:Assertion ID="_2320c40ac7b5e857b2d0d4ea0c8758c3">
  IssueInstant="2018-10-30T08:21:41.740Z" Version="2.0"
    xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
.....
</saml2:Assertion>
```

ii. Obtain the tag object (**Signature**).

```
<ds:Signature
  xmlns:ds="http://www.w3.org/2000/09/xmldsig#">
  <ds:SignedInfo>
    <ds:CanonicalizationMethod Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
    <ds:SignatureMethod Algorithm="http://www.w3.org/2000/09/xmldsig#rsa-sha256" />
    <ds:Reference URI="#_2320c40ac7b5e857b2d0d4ea0c8758c3">
      <ds:Transforms>
        <ds:Transform Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-signature" />
        <ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
        <ec:InclusiveNamespaces
          xmlns:ec="http://www.w3.org/2001/10/xml-exc-c14n#"
          PrefixList="xs" />
      </ds:Transform>
    </ds:Transforms>
    <ds:DigestMethod Algorithm="http://www.w3.org/2000/09/xmldsig#sha256" />
    <ds:DigestValue>.....</ds:DigestValue>
  </ds:Reference>
  </ds:SignedInfo>
  <!-- Third-party signature value -->
  <ds:SignatureValue>
.....
</ds:SignatureValue>
  <ds:KeyInfo>
    <ds:X509Data>
      <!-- Third-party public key certificate -->
      <ds:X509Certificate>
.....
</ds:X509Certificate>
  </ds:X509Data>
.....
</ds:X509Data>
```

```
</ds:KeyInfo>  
</ds:Signature>
```

- iii. Generate the **DigestValue** value for the signature object **Assertion**.
 - 1) Convert **Assertion** according to the algorithm defined in **Transform of Signature**.
 - 2) Generate a digest for the object obtained in 1) according to the algorithm specified in **DigestMethod**.
 - 3) Place the generated digest value in the **DigestValue** tag.
- iv. Use the private key in **Step 6** in **Generating a Certificate** to generate the **SignatureValue** value for the **SignedInfo** object signature.
 - 1) Convert **SignedInfo** according to the algorithm defined in **CanonicalizationMethod**
 - 2) Generate the signature value for the object obtained in 1) according to the signature algorithm defined in **SignatureMethod**. Place the obtained signature value in **SignatureValue**.
- v. Combine the values of **DigestValue** and **SignatureValue** to form the final **Signature** object. Place the value in **Assertion** as its sub-element.

The signature is displayed as follows.

```
<saml2 Assertion ID="_2320c40ac7b5e857b2d0d4ea0c8758c3"  
IssueInstant="2018-10-30T08:21:41.740Z" Version="2.0"  
xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion"  
xmlns:xsd="http://www.w3.org/2001/XMLSchema">  
.....  
<ds:Signature  
    xmlns:ds="http://www.w3.org/2000/09/xmldsig#">  
.....  
<!-- Third-party signature value -->  
<ds:SignatureValue>  
.....  
</ds:SignatureValue>  
<ds:KeyInfo>  
    <ds:X509Data>  
<!-- Third-party public key certificate -->  
<ds:X509Certificate>  
.....  
</ds:X509Certificate>  
</ds:X509Data>  
</ds:KeyInfo>  
</ds:Signature>  
</saml2:Assertion>
```

Table 12-1 Description of parameters between **<saml2:AttributeValue>** and **</saml2:AttributeValue>**

Parameter	Description
xUserId	Indicates the user ID of the partner's customer on the partner sales platform.
xAccountId	Indicates the account ID of the partner's customer on the partner sales platform.

Parameter	Description
bpld	Indicates the partner ID. For details, see How Do I Check the Partner ID?
email	Indicates the email address. This parameter is optional. The parameter must meet the following requirements: <ul style="list-style-type: none">Must be unique for each customer.A maximum of 64 charactersPasses the verification using the following regular expression: <code>^azA-Z0-9.!#\$%&!*+\`{ \}~-]+@[a-zA-Z0-9](?:[a-zA-Z0-9-]{0,61}[a-zA-Z0-9])?(?:\.[a-zA-Z0-9](?:[a-zA-Z0-9-]{0,61}[a-zA-Z0-9]))?*\$</code>
name	Indicates the HUAWEI CLOUD account name of the partner. This parameter is optional. The parameter must meet the following requirements: <ul style="list-style-type: none">Must be 5 to 32 characters long.Can contain only letters, digits, hyphens (-), and underscores (_), and cannot start with a digit. Can contain spaces in the middle.Passes the verification using the following regular expression: <code>^([a-zA-Z\-_][0-9a-zA-Z\-_]*+\$</code>

NOTE

Table 12-1 involves the account ID and user ID because HUAWEI CLOUD IAM has account and user concepts. For details about the two concepts, see "Account" and "IAM User" in [Basic Concepts](#).

- c. If the customer has logged in to the partner sales platform, the SAML response message is returned directly. Otherwise, the SAML response message is displayed after the login.
Send a POST request to the HUAWEI CLOUD response path **AssertionConsumerService** in [2.a](#). The parameters must be in the Form Data format.

```
TQUq1IFJ7%2FFNMFHFlKQgbKijySzIM8uQqb%2FKSFxN%2B9S6dvim%2BAatPgbxX9hj0pfR%28HEXEPzRNnd5wX6LQaqPQ%2F%28c4IJufmvz7Rue%2FAAA%3D%3D&RelayState=_lidh2rjxc81dnuc72qmpbslf4bm16r9fgtn8nI5twTosXm0NhZDj%2BGnfVbfG9T4X5nis0K843vRqzY1JCPmb0swQwb%2FFHryetP9deoceEBkTgf81xM1HCPUJ%2BNSZc5aUinPUDIn9gxGsEMosv8f%2FcYPe1GL%2F9iMS1ChGElk18Rmj6Y5F3SVrFEsVVYMcKzPPAztL2Ts%2B4BW8YbdqeUyfIKJwruVfx8KoHdC8xC18bRn5mOHqAjCMYTQAjCm%2BBGJVxUXit0gYeqkYH6dYkVfBgdXY1GUeOQqdckhgT36Aiz2GCZwK7lpvhAEFi2xMZGZU4x1KVZNYY1yzfjMB164pMsyd3JDrzZfcbraPnTBa: Upgrade-Insecure-Requests: 1 User-Agent: Mozilla/5.0 (Windows NT 6.1; WOW64) AppleWebKit/537.36 (KHTML, like Gecko)
```

Form Data view source view URL encoded

SAMLResponse: PD94bWwgdmVyc2lvbj0iMS4wIiB1bmNvZGluz0iVVRGLTgiPz4KPHNhbWwyCpSZXNwb25MDAzYmYjKxN2NmMCigSW5SXNwb25zZVRvPSJfZGNrNG1tMDhxblWRoyzhrNG51aXIwN2hnaGV0ZHFXZzh1b1l1czp0YzpTQU1M0jIuMDpwc90b2NvbCI+PHNbWwyOk1zc3V1ci8Gb3JtYXQ9InVybjpvYXNpczpuYw1lczp0Pmh0dHBz0i8vaWRwLmlzzXNvbC5jb20vaWRwL3NoaWJib2xldGg8L3NhbWwyOk1zc3Vlcj48c2FtbDJwOln0YyRhdHVzTWVzc2FnZT51cm46b2FzaXM6bmFtZXM6dGM6U0FNTDoyLjA6c3RhdHVzO1N1Y2Nlc3M8L3NhbWwyCp1IElzc3V1SwSzdgFudD0iMjAxOC0xMC0zMFQwODoyMT0oMS43NDBaIiBWZXJzaW9uPSIyLjAiIHhtbG5zOnNhb1

Parameter	Description
SAMLResponse	Identifies the string obtained by encoding the SAML response message body in 2.b using Base64.
RelayState	The value of this parameter is the same as that in the SAML request message.

3. Create a HUAWEI CLOUD account and bind it with the customer account on the partner sales platform.

After the SAML response message is returned, IAM checks whether there is a HUAWEI CLOUD account already bound with the customer account on the partner sales platform based on the response message. If the required HUAWEI CLOUD account exists, the partner can directly log in to HUAWEI CLOUD. If the required HUAWEI CLOUD account does not exist, the page for creating and binding a HUAWEI CLOUD account is displayed.

- **Figure 12-2** shows the page for creating a HUAWEI CLOUD account. The partner configures the required parameters on the page for creating a HUAWEI CLOUD account and clicks **Create And Bind** to create a HUAWEI CLOUD account and bind the account with the customer account on the partner sales platform.

Figure 12-2 Page for creating a HUAWEI CLOUD account

The screenshot shows a 'Create Account' form. At the top, it says 'Set the following information to create a HUAWEI CLOUD account and bind it.' Below this is a dropdown menu set to 'Hong Kong (China)'. A note in red text says 'Cannot be changed once registered.' There are two input fields: 'Account name' and 'Email'. To the right of the 'Email' field is a 'Verification code' input field with a 'Get Code' button next to it. Below these fields are two checkboxes: one for accepting the 'Privacy Statement' and another for receiving 'Promotional information'. The 'Promotional information' checkbox is checked. At the bottom is a large grey 'Create And Bind' button.


- If the partner's customer already has a HUAWEI CLOUD account, click **Bind Account** on the page shown in [Figure 12-3](#). On the displayed page, configure the required parameters as prompt and click **Bind Account** to bind the HUAWEI CLOUD account with the customer account on the partner sales platform.

 NOTE

The customer cannot bind its customer account on the partner sales platform to its existing HUAWEI CLOUD account if this account is in one of the following conditions:

- In arrears
- Associated to another partner
- Used to sign a special contract with HUAWEI CLOUD, such as offline directly-signed contract, authorized telemarketing contract with discounts, or directly-signed special offer contract) with HUAWEI CLOUD
- A consulting partner account in use or pending approval
- An enterprise subaccount or an enterprise primary account associated with an enterprise subaccount
- Containing consumption records or resource provisioned
- Containing valid reserved instances

Figure 12-3 Page for binding a HUAWEI CLOUD account

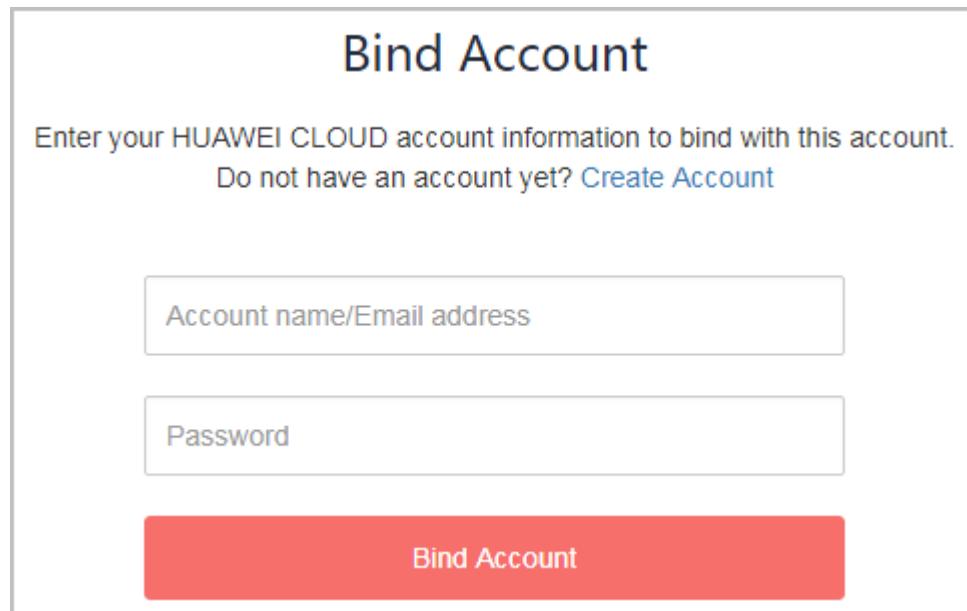

Bind Account

Enter your HUAWEI CLOUD account information to bind with this account.

Do not have an account yet? [Create Account](#)

Account name/Email address

Password

Bind Account

4. HUAWEI CLOUD notifies the account binding result using the binding notification API provided by the partner through browser redirection.
 - a. Obtain the request parameters **bindRequest**, **SigAlg**, and **Signature**.
 - b. Decode the signature using Base64 and use the signature algorithm **SigAlg** to perform signature verification for the **bindRequest** parameters.

 NOTE

HUAWEI CLOUD uses the private key used for SAML interconnection to verify the signature. The partner uses the public key (value of the **<ds:X509Certificate></ds:X509Certificate>** tag in the **SP Metadata.xml** file) used by HUAWEI CLOUD for SAML interconnection to verify the signature.

- c. If the signature verification succeeds, decode the binding request using Base64 to obtain JSON strings and perform required operations based on the JSON data processing procedure. If the signature verification fails, the request is invalid and the processing is terminated.

12.2 How Do I Obtain the **xaccountType** Value?


The **xaccountType** value is the system ID of your partner sales platform. You can obtain the ID of your partner sales platform on the **Configure** page.

NOTICE

To obtain the value of **xaccountType**, you need to configure the access parameters on the **Support Center > API Management** page of Partner Center first.

For details, see [Configuring the Access Parameters](#).

After you configure the access parameters, you can obtain the **xaccountType** value (**Partner Platform ID** value) on the **Configure** page.

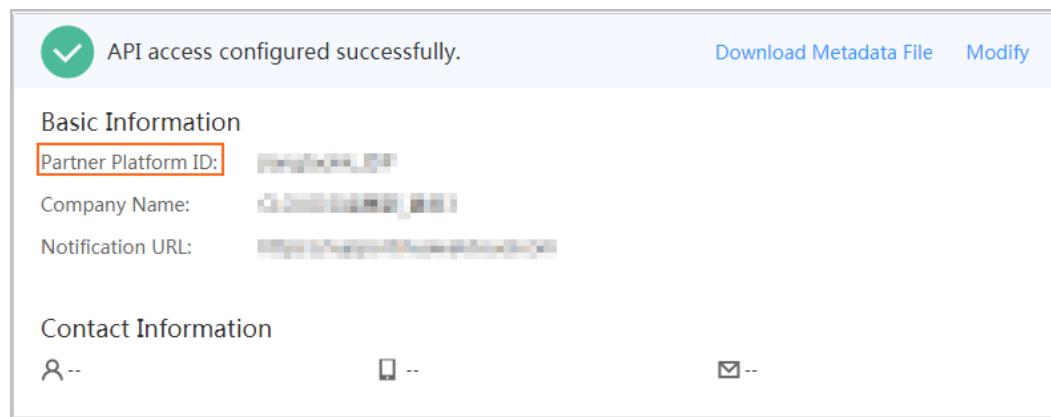

12.3 How Can I Replace a Partner Token with a Customer Token

Operations

1. Invoke the IAM API to obtain your Huawei Cloud account token. For details, see [Obtaining a User Token Through Password Authentication](#).

NOTE

For details about the IAM API endpoints, see [Regions and Endpoints](#). If the **scope** field in the request body is **domain**, use the endpoint with **Region** being **All**. If the **scope** field is set to **project**, you can use the endpoint with **Region** being **All**, or the endpoint of the region to which the project belongs.

In this step, no token needs to be transferred. You only need to add **Content-Type** to the header, and set its value to **application/json**. As shown in [Figure 12-4](#), the **x-subject-token** field in the red box on the **Headers** tab is your account token.

Example request

```
{  
    "auth": {
```

```
"identity": {
    "methods": [
        "password"
    ],
    "password": {
        "user": {
            "name": "Partner's Huawei Cloud account",
            "domain": {
                "name": "Partner's Huawei Cloud account",
                },
            "password": "XXXXXX"
        }
    }
},
"scope": {
    "domain": {
        "name": "Partner's Huawei Cloud account",
        }
    }
}
```

Figure 12-4 Obtaining partner's HUAWEI CLOUD account token

▶ GetBPToken

POST https://iam.myhuaweicloud.com/v3/auth/tokens

Authorization Headers (1) Body Pre-request Script Tests

form-data x-www-form-urlencoded raw binary JSON (application/json)

```
1 {  
2   "auth": {  
3     "identity": {  
4       "methods": ["password"],  
5       "password": {  
6         "user": {  
7           "name": "████████",  
8           "domain": {  
9             "name": "████████"  
10          },  
11          "password": "████████"  
12        }  
13      }  
14    },  
15    "scope": {  
16      "domain": {  
17        "name": "████████"  
18      }  
19    }  
20  }  
21 }
```

Body Cookies Headers (12) Test Results

Pretty Raw Preview JSON

```
22 }  
23   "roles": [  
24     {  
25       "name": "te_agency",  
26       "id": "6f0c8c16ec9e481ca83c8b90bf278187"  
27     },  
28   ]
```

2. Invoke the IAM API to obtain the customer account token. For details, see [Obtaining an Agency Token](#).

Add **Content-Type** and **X-Auth-Token** to the request header. Set **Content-Type** to `application/json` and **X-Auth-Token** to the BP token obtained in 1. As shown in Figure 12-5, the **x-subject-token** field in the red box on the **Headers** tab is the customer account token. A partner can use the customer's HUAWEI CLOUD account token to perform operations on resources in the customer's HUAWEI CLOUD account.

Example request:

```
{  
    "auth": {  
        "identity": {  
            "methods": [  
                "assume_role"  
            ],  
            "assume_role": {  
                "domain_name": "Customer's Huawei Cloud account",  
                "agency_name": "Agency name (xaccountType)"  
            }  
        },  
        "scope": {  
            "project": {  
                "name": "The name of the project to which the customer's resources belong"  
            }  
        }  
    }  
}
```

Figure 12-5 Obtaining customer's HUAWEI CLOUD account token

The screenshot shows a Postman request configuration for obtaining a token. The method is POST, and the URL is <https://iam.myhuaweicloud.com/v3/auth/tokens>. The Body tab is selected, showing a JSON payload with the example code from Figure 12-5. The Headers tab is also visible, with a red box highlighting it. The response body is shown below, containing a token object with an expiration date and assume_role method.

```
POST https://iam.myhuaweicloud.com/v3/auth/tokens  
Params Authorization Headers (12) Body Tests Settings  
none form-data x-www-form-urlencoded raw binary GraphQL JSON  
1 {  
2     "auth": {  
3         "identity": {  
4             "methods": [  
5                 "assume_role"  
6             ],  
7             "assume_role": {  
8                 "domain_name": "Customer's Huawei Cloud account",  
9                 "agency_name": "Agency name (xaccountType)"  
10            }  
11        },  
12        "scope": {  
13            "project": {  
14                "name": "The name of the project to which the customer's resources belong"  
15            }  
16        }  
17    }  
18 }
```

Body Cookies (2) Headers (16) Test Results (1/1)
Pretty Raw Preview Visualize JSON

```
1 {  
2     "token": {  
3         "expires_at": "2023-08-04T03:09:26.087000Z",  
4         "methods": [  
5             "assume_role"  
6         ]  
7     }  
8 }
```

Response body descriptions

- **readonly** indicates that the account has the Tenant Guest permissions.
te_admin indicates that the account has the Tenant Administrator permissions.

Figure 12-6 Permissions descriptions

The screenshot shows a JSON response with the following structure:

```
106 ],
107 "roles": [
108   {
109     "name": "readonly",
110     "id": "c40fc1b70fb14140a61ac60c7c292874"
111   },
112   {
113     "name": "te_admin",
114     "id": "e2d75429549044d2b313fbdd11520f7d"
115   },
116   {
117     "name": "op_gated_ecs_gpu_kvmm60",
118     "id": "0"
119   }
120 }
```

Annotations highlight specific fields:

- A red box surrounds the "name" and "id" fields of the first role object, labeled "Tenant Guest".
- A red box surrounds the "name" and "id" fields of the second role object, labeled "Tenant Administrator".

- Information marked in the red box in **Figure 12-7** is the project ID.

Figure 12-7 Project ID

The screenshot shows a JSON response with the following structure:

```
  },
  "project": {
    "domain": {
      "name": "████████",
      "id": "2aa29cbca17a4822abd096610e378ffa"
    },
    "name": "cn-north-1",
    "id": "74610f3a5ad941998e91f076297ecf27"
  },
  "issued_at": "2017-12-26T11:01:56.228000Z",
  "user": {
    "domain": {
      "name": "████████",
      "id": "2aa29cbca17a4822abd096610e378ffa"
    },
    "name": "████████",
    "id": "84e3bb19e6e7403ab96f837e9c9a9a33"
  },
  "assumed_by": {
    "user": {
      "domain": {
        "name": "████████",
        "id": "8c1d78bc75bf4154a4d0c73a28c3e0b5"
      },
      "name": "████████",
      "id": "e5b8b8758ce94763a6e2f93b3b3ffcba"
    }
  }
}
```

A red box surrounds the "id" field of the "project" object, which is "74610f3a5ad941998e91f076297ecf27".

12.4 File Subscription

Partners can subscribe to files in the Partner Center on HUAWEI CLOUD.

NOTE

- A reseller partner can subscribe to the files that contain customer resource usage details and the files that contain customer resource usage details and partner bill.
- Do not enable **Default Encryption** when other tenants have obtained the permission to access your OBS bucket.

Default Encryption

Enable


Procedure

Step 1 Use the partner account to log in to Partner Center. In the navigation pane on the left, choose Benefits and Support > API Management.


Step 2 Click **File Subscription**.

Step 3 If the partner has enabled real-name authentication, the bucket information is displayed on the **File Subscription** page.

Select the files to be subscribed to and click **Save**.

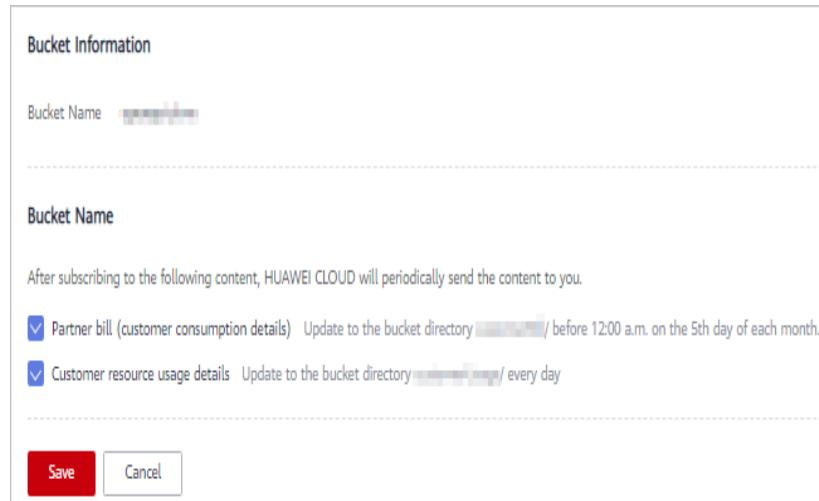


In the **Set Bucket Information** dialog box, enter the AK and SK of the OBS bucket and click **OK**.

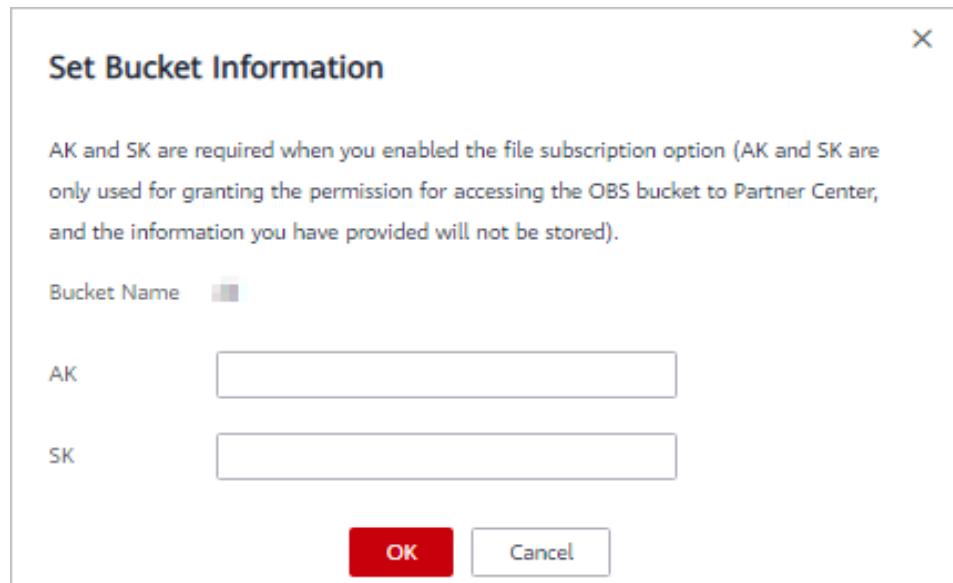


Step 4 If the partner has not enabled real-name authentication, the bucket information is not displayed on the **File Subscription** page.

Enter the OBS bucket name, select the files to be subscribed to, and click **Save**.

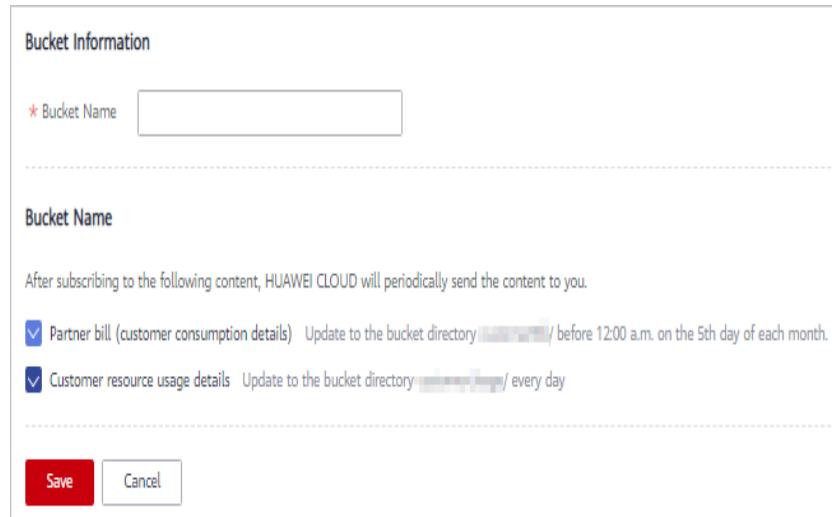

In the **Set Bucket Information** dialog box, enter the AK and SK of the OBS bucket and click **OK**.

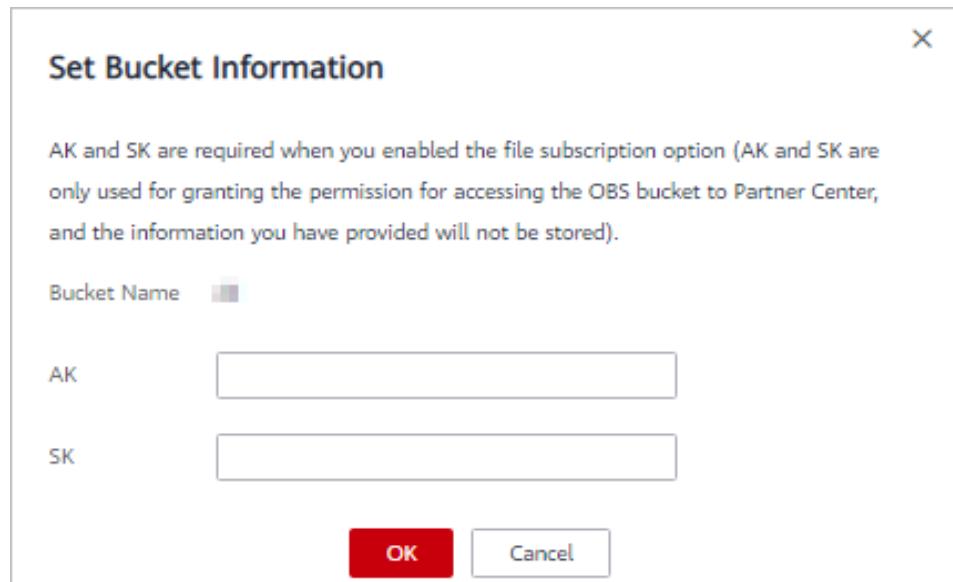

⚠ CAUTION

- AK and SK are mandatory.
- If your account is in arrears, pay off the outstanding fees in a timely manner. Otherwise, you cannot receive the subscription files. If you do not renew the subscription or pay off the outstanding fees after the retention period ends, the OBS bucket will be released, and the data stored in the bucket will be deleted. You are not allowed to subscribe files.


----End

12.5 How Do I Upload the Attachment for Real-Name Authentication?

If a partner's customers buy products from HUAWEI CLOUD Chinese mainland website and want to perform real-name authentication, customers need to upload pictures of the certificates for HUAWEI CLOUD to read to complete the real-name authentication.

Procedure

- Step 1** Log in to the HUAWEI CLOUD Partner Center using your partner account. In the navigation pane on the left, choose **Support Center > API Management**.
- Step 2** Click the **Configure** icon in the flowchart to switch to the **Configure** page. Enable **Upload Photos of Handheld ID Cards Required for Real-Name Authentication**.



NOTE

Skip this step if **Upload Photos of Handheld ID Cards Required for Real-Name Authentication** has been enabled when partners [configure the access parameters](#).

- Step 3** For details about how to create an OBS bucket, see [Creating a Bucket](#).

NOTE

- A partner account cannot be used to purchase resources. Therefore, partners need to use a common HUAWEI CLOUD account to log in to the system and create a bucket.
- To change a bucket, partners need to go to the configuration modification page, cancel subscription to all files, and disable attachment uploading for real-name authentication. Then, the partners can add a bucket on the configuration modification page.
- Different partners cannot share the same bucket.
- Only OBS buckets purchased on Huawei Cloud in the Hong Kong region can be used.

- Step 4** Upload the attachment for real-name authentication to the OBS bucket created by the partner. For details, see [Object Upload Overview](#).

----End

12.6 Support for Discounts or Coupons

When a partner invokes the interface described in [7.4.2 Renewing Subscription to Yearly/Monthly Resources](#) to renew the subscription, it can configure automatic payment.

- If the **isAutoPay** parameter is set to **1**, automatic payment is enabled. Discounts and coupons can be used in automatic payment.
For details about the payment rules, see **Rule Description** in [Auto-Renewal Rules](#).

12.7 Status Code

Table 12-2 lists the HTTP response status code.

Table 12-2 HTTP response status code

Status Code	Coding	Description
100	Continue	The client continues sending the request. This interim response is used to inform the client that the initial part of the request has been received and has not yet been rejected by the server.
101	Switching Protocols	Switching protocols. The target protocol must be more advanced than the source protocol. For example, the current HTTP protocol is switched to a later version.
201	Created	The request for creating a resource or task has been fulfilled.
202	Accepted	The request has been accepted, but the processing has not been completed.
203	Non-Authoritative Information	The server successfully processed the request, but is returning information that may be from another source.
204	NoContent	The server has successfully processed the request, but has not returned any content. The status code is returned in response to an HTTP OPTIONS request.
205	Reset Content	The server has fulfilled the request, but the requester is required to reset the content.
206	Partial Content	The server has processed certain GET requests.
300	Multiple Choices	There are multiple options for the location of the requested resource. The response contains a list of resource characteristics and addresses from which the customer or customer agent (such as a browser) can choose the most appropriate one.
301	Moved Permanently	The requested resource has been assigned a new permanent URI, and the new URI is contained in the response.
302	Found	The requested resource resides temporarily under a different URI.

Status Code	Coding	Description
303	See Other	Retrieve a location. The response to the request can be found under a different URI and should be retrieved using a GET or POST method.
304	Not Modified	The requested resource has not been modified. In such a case, there is no need to retransmit the resource since the client still has a previously-downloaded copy.
305	Use Proxy	The requested resource must be accessed through a proxy.
306	Unused	The HTTP status code is no longer used.
400	BadRequest	Invalid request. The client should not repeat the request without modifications.
401	Unauthorized	The status code is returned after the client provides the authentication information, indicating that the authentication information is incorrect or invalid.
402	Payment Required	This status code is reserved for future use.
403	Forbidden	The server understood the request, but is refusing to fulfill it. The client should not repeat the request without modifications.
404	NotFound	The requested resource cannot be found. The client should not repeat the request without modifications.
405	MethodNotAllowed	The method specified in the request is not supported for the requested resource. The client should not repeat the request without modifications.
406	Not Acceptable	The server cannot fulfill the request according to the content characteristics of the request.
407	Proxy Authentication Required	This status code is similar to 401, but indicates that the client must first authenticate itself with the proxy.
408	Request Time-out	The request timed out. The client may repeat the request without modifications at any later time.

Status Code	Coding	Description
409	Conflict	<p>The request could not be processed due to a conflict.</p> <p>This status code indicates that the resource that the client attempts to create already exists, or the request fails to be processed because of the update of the conflict request.</p>
410	Gone	<p>The requested resource is no longer available.</p> <p>The status code indicates that the requested resource has been deleted permanently.</p>
411	Length Required	<p>The server refuses to process the request without a defined Content-Length.</p>
412	Precondition Failed	<p>The server does not meet one of the preconditions that the requester puts on the request.</p>
413	Request Entity Too Large	<p>The request is larger than that a server is able to process. The server may close the connection to prevent the client from continuing the request. If the server cannot process the request temporarily, the response will contain a Retry-After header field.</p>
414	Request-URI Too Large	<p>The URI provided was too long for the server to process.</p>
415	Unsupported Media Type	<p>The server is unable to process the media format in the request.</p>
416	Requested range not satisfiable	<p>The requested range is invalid.</p>
417	Expectation Failed	<p>The server fails to meet the requirements of the Expect request-header field.</p>
422	UnprocessableEntity	<p>The request is well-formed but is unable to be processed due to semantic errors.</p>
429	TooManyRequests	<p>The client has sent more requests than its rate limit is allowed within a given amount of time, or the server has received more requests than it is able to process within a given amount of time. In this case, it is advisable for the client to re-initiate requests after the time specified in the Retry-After header of the response expires.</p>
500	InternalServerError	<p>The server is able to receive the request but it could not understand the request.</p>

Status Code	Coding	Description
501	Not Implemented	The server does not support the requested function.
502	Bad Gateway	The server is acting as a gateway or proxy and receives an invalid request from a remote server.
503	ServiceUnavailable	The requested service is invalid. The client should not repeat the request without modifications.
504	ServerTimeout	The request cannot be fulfilled within a given time. This status code is returned to the client only when the Timeout parameter is specified in the request.
505	HTTP Version not supported	The server does not support the HTTP protocol version used in the request.

12.8 Error Codes

Function description

When a partner invokes an operation API provided by HUAWEI CLOUD, the response body contains the error code and error code description.

NOTICE

- **4xx:** This class of HTTP status code is intended for situations in which the error seems to have been caused by the client, for example, the request contains bad syntax or incorrect parameters. You must ensure the request is correct.
- **5xx:** This class of HTTP status code is intended for cases in which the Huawei Cloud server is aware that it has encountered an error or is otherwise incapable of performing the request. In this case, contact Huawei Cloud customer service.

Error Code Structure Format

```
{  
    "error_code": "xxxx",  
    "error_msg": "xxxx"  
}
```

Error Codes

Table 12-3 Error codes

Status Code	Error Code	Error Message	Description
200	CBC.0000	Success.	Succeeded.
200	CBC.3002	The resource has been locked.	The resource has been locked.
200	CBC.3006	Unsupported cloud service type.	Unsupported cloud service type.
200	CBC.3016	Expired resources exist.	Expired resources exist.
200	CBC.300500 07	It is not a primary resource, and the renewal quotation is not allowed.	Renewal price inquiry is not available for non-primary resources.
200	CBC.300500 08	The period type or number of periods for the resource does not exist.	The resource don't have the period type or period.
200	CBC.300500 09	The resources do not exist or has been deleted due to expiration.	The resources have expired and been deleted or do not exist.
200	CBC.300500 10	This operation is not allowed because some resources are included in the unpaid orders.	Some resources are included in your orders to be paid. The operation is not supported.
200	CBC.300500 11	The resources are being unsubscribed from or changed.	Resources are being unsubscribed from or changed.
200	CBC.300500 13	The product cannot be renewed.	Renewal not supported.
200	CBC.3106	The order status has changed and no payment can be made.	The order status has changed and no payment can be made.

Status Code	Error Code	Error Message	Description
200	CBC.3112	The coupon or stored-value card has been used.	The coupon or stored-value card has been used.
200	CBC.3124	Resources have been unsubscribed from.	Resources have been unsubscribed from.
200	CBC.3144	Resources are being unsubscribed from or changed.	Resources are being unsubscribed from or changed.
200	CBC.3128	The resource does not have renewed periods or its renewed periods have taken effect, and the renewal periods cannot be unsubscribed from.	The resource does not have renewed periods or its renewed periods have taken effect, and the renewal periods cannot be unsubscribed from.
200	CBC.3141	Cloud service quota or capacity is insufficient, or the resource specifications have changed.	Cloud service quota or capacity is insufficient, or the resource specifications have changed.
200	CBC.3155	Insufficient enterprise project fund quota, or invalid project.	Insufficient enterprise project fund quota, or invalid project.
200	CBC.3162	The add-on package you purchased does not meet payment requirements.	The add-on package you purchased does not meet payment requirements.
200	CBC.3185	The cloud service can only be unsubscribed from as a whole.	The cloud service can only be unsubscribed from as a whole.
200	CBC.3638	Subscription to bandwidth add-on packages cannot be renewed.	Subscription to bandwidth add-on packages cannot be renewed.

Status Code	Error Code	Error Message	Description
200	CBC.3640	Bandwidth add-on packages cannot be unsubscribed from.	Bandwidth add-on packages cannot be unsubscribed from.
200	CBC.5005	The customer is being authenticated by HUAWEI CLOUD.	The customer is being authenticated by HUAWEI CLOUD.
200	CBC.5006	The customer type (individual/enterprise) is different from the customer type stored in HUAWEI CLOUD.	The customer type (individual/enterprise) is different from the customer type stored in HUAWEI CLOUD.
200	CBC.5007	The subscribed products must belong to the same region.	The subscribed products must belong to the same region.
200	CBC.5020	Partial failure.	Partial failure.
200	CBC.5023	The account type does not match the association type.	The account type does not match the association type.
200	CBC.5024	This API cannot be invoked because the association type of the customer is incorrect.	This API cannot be invoked because the association type of the customer is incorrect.
200	CBC.5041	Resources in this order have been unsubscribed.	Resources in this order have been unsubscribed.
200	CBC.5042	Resources cannot be found.	Resources cannot be found.
200	CBC.6001	Required param resource id or rInstanceId is null or empty.	The resource ID or reserved instance ID is empty.
200	CBC.6055	Calculate result exceeds max value.	The queried amount exceeds the upper limit.

Status Code	Error Code	Error Message	Description
200	CBC.6006	The required product cannot be found.	The required product cannot be found.
400	CBC.0100	parameter error.	Invalid parameter.
400	CBC.0101	Invalid parameter.	Invalid parameter.
400	CBC.180000 14	Inactive Cost Management.	Cost Center not enabled.
500	CBC.300000 10	Invalid order (maybe the order does not exist), unable to operate.	Operation not allowed because the order is invalid or does not exist.
400	CBC.300000 52	The resource or account has been already frozen.	Operation not allowed. Your account has been frozen.
400	CBC.300100 35	resource deleted.	Resource deleted.
400	CBC.300100 36	Renewal is only supported for primary resources.	Renewal is only supported for primary resources.
400	CBC.300500 06	Automatic order payment failed.	Automatic order payment failed.
400	CBC.300500 12	Duplicate resource ID.	There are duplicate resource IDs.
400	CBC.5001	You has not been a partner yet.	You are not a partner yet.
400	CBC.5002	The customer does not exist.	The customer does not exist.
400	CBC.5003	Insufficient balance.	Insufficient balance.
400	CBC.5004	You do not have the operation permission to the customer.	You do not have the operation permission to the customer.
400	CBC.500100 59	Customer association not allowed for Partner Service Provider.	Customer association not allowed for Partner Service Provider.

Status Code	Error Code	Error Message	Description
400	CBC.500100 85	Customer association not allowed. The account of this partner has been restricted.	Customer association not allowed. The account of this partner has been restricted.
400	CBC.500100 86	Customer association not allowed. This partner is a Huawei Cloud reseller, and the account of its associated distributor has been restricted.	Customer association not allowed. This partner is a Huawei Cloud reseller, and the account of its associated distributor has been restricted.
400	CBC.706000 26	Huawei Cloud cannot review the information you submitted for real-name authentication. Contact your account manager.	Sorry, Huawei Cloud cannot review your real-name authentication information. Please contact your account manager for assistance.
400	CBC.7151	Expired verification code.	Expired verification code.
400	CBC.7152	Incorrect verification code.	Incorrect verification code.
400	CBC.7188	The customer has passed real-name authentication or is being reviewed.	The customer has passed real-name authentication or is being reviewed.
400	CBC.7191	The number of real-name authentication times of the customer exceeds the upper limit.	The number of real-name authentication times of the customer exceeds the upper limit.
400	CBC.7202	Real-name authentication failed.	Real-name authentication failed.

Status Code	Error Code	Error Message	Description
400	CBC.7219	Real-name authentication information does not match the facial image.	Real-name authentication information does not match the facial image.
400	CBC.7253	The picture of the ID card is invalid or blurred.	The picture of the ID card is invalid or blurred.
400	CBC.7254	Currently, registration with HUAWEI CLOUD is not available to users in this country.	Currently, registration with HUAWEI CLOUD is not available to users in this country.
400	CBC.7255	The ID information or mobile number is incorrect.	The ID information or mobile number is incorrect.
400	CBC.7256	The legal entity information is incorrect.	The legal entity information is incorrect.
400	CBC.7257	The enterprise information is incorrect.	The enterprise information is incorrect.
400	CBC.7265	You are a partner and cannot be authenticated as an individual using your real name.	You are a partner and cannot be authenticated as an individual using your real name.
400	CBC.7267	The member account is being associated with a master account and cannot perform real-name authentication again.	The member account is being associated with a master account and cannot perform real-name authentication again.

Status Code	Error Code	Error Message	Description
400	CBC.7281	Your account has been frozen because your consumption has exceeded the budget set by your partner. Therefore, your resource subscription cannot be renewed.	Your account has been frozen because your consumption has exceeded the budget set by your partner. Therefore, your resource subscription cannot be renewed.
400	CBC.99000000	You do not have the operation permission to the customer.	You do not have the operation permission to the customer.
400	CBC.99000004	An exception occurred when the customer authorized rights to the partner.	An exception occurred when the customer authorized rights to the partner.
400	CBC.99000026	Incorrect verification code.	Incorrect verification code.
400	CBC.99000027	Expired verification code.	Expired verification code.
400	CBC.99000028	The email address already exists.	The email address already exists.
400	CBC.99000031	Invalid DomainName.	Invalid DomainName.
400	CBC.99000032	Invalid email address.	Invalid email address.
400	CBC.99000034	Currently, registration with HUAWEI CLOUD is not available to users in this country.	Currently, registration with HUAWEI CLOUD is not available to users in this country.
400	CBC.99000035	You are not a customer of a partner yet.	You are not a customer of a partner yet.
400	CBC.99000036	Invalid password.	Invalid password.

Status Code	Error Code	Error Message	Description
400	CBC.99000037	You do not have the permission to operate this Huawei Cloud reseller.	You do not have the permission to operate this Huawei Cloud reseller.
400	CBC.99000038	The account name already exists.	The account name already exists.
400	CBC.99000039	xAccountId exists.	Duplicate xAccountId.
400	CBC.99000046	Insufficient budget.	Insufficient budget.
400	CBC.99000049	BindType can not be resale.	The customer associated in Reseller model has no account balance.
400	CBC.99000051	Customer creation failed because this mobile number or email address has been preregistered by Huawei.	Customer creation failed because this mobile number or email address has been preregistered by Huawei.
400	CBC.99000055	Referral model not supported.	Referral model not supported.
400	CBC.99000082	You have exceeded the maximum verification code requests allowed.	Maximum verification code requests reached.
400	CBC.99000088	We have received your payment and it is currently being processed. Please do not attempt to make the payment again.	Your payment is being processed.
400	CBC.99003004	The resource has dependencies.	The resource has dependencies.
400	CBC.99003012	The resource ID does not exist.	The resource ID does not exist.

Status Code	Error Code	Error Message	Description
400	CBC.99003016	The resources have expired and been deleted or do not exist.	The resources have expired and been deleted or do not exist.
400	CBC.99003100	This operation is not allowed because some resources are included in your orders to be paid.	This operation is not allowed because some resources are included in your orders to be paid.
400	CBC.99003106	The order status has changed and no payment can be made.	The order status has changed and no payment can be made.
400	CBC.99003108	Unavailable discount.	Unavailable discount.
400	CBC.99003110	The order has not been paid before the expiration time. Please re-submit the order.	The order has not been paid before the expiration time. Please re-submit the order.
400	CBC.99003112	The coupon or stored-value card has been used.	The coupon or stored-value card has been used.
400	CBC.99003115	An error occurred. Try again later.	An error occurred. Try again later.
400	CBC.99003116	The restriction to selected coupon regulates that the coupon cannot be used with the discount at the same time.	The restriction to selected coupon regulates that the coupon cannot be used with the discount at the same time.

Status Code	Error Code	Error Message	Description
400	CBC.990031 17	The selected discount is less than the minimum discount rate configured for the selected coupon. Note: For example, if the minimum discount rate configured for a coupon is 90% and the selected discount is less than 90% in all order lines, the discount cannot be used.	The selected discount is less than the minimum discount rate configured for the selected coupon. Note: For example, if the minimum discount rate configured for a coupon is 90% and the selected discount is less than 90% in all order lines, the discount cannot be used.
400	CBC.990031 24	Resources have been unsubscribed from.	Resources have been unsubscribed from.
400	CBC.990031 28	The resource does not have renewed periods or its renewed periods have taken effect, and the renewal periods cannot be unsubscribed from.	The resource does not have renewed periods or its renewed periods have taken effect, and the renewal periods cannot be unsubscribed from.
400	CBC.990031 41	Cloud service quota or capacity is insufficient, or the resource specifications have changed.	Cloud service quota or capacity is insufficient, or the resource specifications have changed.
400	CBC.990031 44	Resources are being unsubscribed from or changed.	Resources are being unsubscribed from or changed.
400	CBC.990031 47	Discounts and cash coupons cannot be used together.	Discounts and cash coupons cannot be used together.

Status Code	Error Code	Error Message	Description
400	CBC.99003151	This discount cannot be used together with other discounts.	This discount cannot be used together with other discounts.
400	CBC.99003154	The sum of the existing and renewal durations has exceeded the maximum. Select another renewal duration.	The time that you have held the resource and that you need to extend for renewal has exceeded the upper limit. Modify the renewal time.
400	CBC.99003155	Insufficient enterprise project fund quota, or invalid project.	Insufficient enterprise project fund quota, or invalid project.
400	CBC.99003156	Coupons applicable to Marketplace products cannot be used together with dedicated coupons.	Coupons applicable to KooGallery products cannot be used together with dedicated coupons.
400	CBC.99003162	The payment time must be earlier than the specified effective time.	The payment time must be earlier than the specified effective time.
400	CBC.99003185	The cloud service can only be unsubscribed from as a whole.	The cloud service can only be unsubscribed from as a whole.
400	CBC.99003198	Insufficient organization budget.	Insufficient budget of the organization.
400	CBC.99003602	Automatic renewal is not supported for expired or frozen resources.	Automatic renewal is not supported for expired or frozen resources.
400	CBC.99003605	The automatic renewal has been canceled. The current operation cannot be performed.	Automatic renewal has been canceled and you cannot perform the current operation.

Status Code	Error Code	Error Message	Description
400	CBC.990036 09	The billing mode of this product type cannot be converted into pay-per-use.	The billing mode of this product type cannot be converted into pay-per-use.
400	CBC.990036 10	The billing mode of resources in the grace or retention period cannot be converted into pay-per-use.	The billing mode of resources in the grace or retention period cannot be converted into pay-per-use.
400	CBC.990036 11	The billing mode of pay-per-usage packages cannot be converted into pay-per-use.	The billing mode of pay-per-usage packages cannot be converted into pay-per-use.
400	CBC.990036 22	The billing mode of solutions cannot be converted into pay-per-use.	The billing mode of solutions cannot be converted into pay-per-use.
400	CBC.990036 23	Cannot be converted into the pay-per-use billing mode because there are transactions being processed.	Cannot be converted into the pay-per-use billing mode because there are transactions being processed.
400	CBC.990036 24	Cannot be converted into the pay-per-use billing mode because the resource has been frozen due to security reasons.	Cannot be converted into the pay-per-use billing mode because the resource has been frozen due to security reasons.
400	CBC.990036 26	Cannot be converted into the pay-per-use billing mode because this account has been frozen.	Cannot be converted into the pay-per-use billing mode because this account has been frozen.
400	CBC.990036 31	Unsubscribed, deleted, and released resources cannot be renewed.	The unsubscribed, deleted, or released resource cannot be renewed.

Status Code	Error Code	Error Message	Description
400	CBC.990036 34	Resources in discount packages must be renewed as a whole and cannot be renewed together with other resources.	Resources in discount packages must be renewed as a whole and cannot be renewed together with other resources.
400	CBC.990036 38	Subscription to bandwidth add-on packages cannot be renewed.	Subscription to bandwidth add-on packages cannot be renewed.
400	CBC.990036 43	Unsubscription is not allowed for cloud services that have been invoiced.	For cloud services for which invoices have been issued, unsubscription is not supported.
400	CBC.990036 45	Unsubscription not supported for the service type of the resource.	Unsubscription not supported for this cloud service type.
400	CBC.990036 49	Unsubscription not supported for cloud services in trial use.	Unsubscription not supported for cloud services in trial use.
400	CBC.990036 50	Unsubscription not supported for this cloud service from the KooGallery.	Unsubscription not supported for this cloud service from the KooGallery.
400	CBC.990036 51	Unsubscription not supported. An operation associated with this instance is in progress.	Unsubscription not supported. An operation associated with this instance is in progress.
400	CBC.990036 52	Unsubscription is not supported for DevCloud packages.	Unsubscription is not supported for DevCloud packages.

Status Code	Error Code	Error Message	Description
400	CBC.99003654	This renewal period cannot be canceled because it includes an add-on bandwidth package.	If there is a bandwidth add-on package, you cannot unsubscribe from the renewal period.
400	CBC.99003656	Unsubscription not supported for resources frozen due to security reasons.	Unsubscription not supported for resources frozen due to security reasons.
400	CBC.99004001	The template does not exist.	The template does not exist.
400	CBC.99004002	Failed to generate the verification code.	Failed to generate the verification code.
400	CBC.99004003	The verification code is successfully generated but fails to be sent.	The verification code is successfully generated but fails to be sent.
400	CBC.99004004	Empty email address./Invalid format.	Empty email address./Invalid format.
400	CBC.99004005	Empty mobile number./Invalid format.	Empty mobile number./Invalid format.
400	CBC.99004007	Failed to verify the email address.	Failed to verify the email address.
400	CBC.99004008	Invalid verification code.	Invalid verification code.
400	CBC.99004009	The verification code is available, but the number of verification failures is greater than 3.	The verification code is available, but the number of verification failures is greater than 3.
400	CBC.99004010	The verification code entered is incorrect.	The verification code entered is incorrect.

Status Code	Error Code	Error Message	Description
400	CBC.99004015	The number of verification code sending times has reached the upper limit (15 times per hour, 60 times per day).	The number of verification code sending times has reached the upper limit (15 times per hour, 60 times per day).
400	CBC.99005010	Orders in this state cannot be canceled.	Orders in this state cannot be canceled.
400	CBC.99005036	The customer does not support payment via interface.	The customer does not support payment via interface.
400	CBC.99005024	This API cannot be invoked because the association type of the customer is incorrect.	This API cannot be invoked because the association type of the customer is incorrect.
400	CBC.99005026	The order is not a degrade or unsubscription order.	The order is not a degrade or unsubscription order.
400	CBC.99005030	The partner did not complete real-name authentication or bucket authentication.	The partner did not complete real-name authentication or bucket authentication.
400	CBC.99005035	This API cannot be used by a sandbox account.	This API cannot be used by a sandbox account.
400	CBC.99005042	The resource cannot be found or unsubscribed from.	The resource cannot be found or unsubscribed from.
400	CBC.99006006	Product not found.	Product not found.
400	CBC.99006016	Failed to query coupon information.	Failed to query coupon information.

Status Code	Error Code	Error Message	Description
400	CBC.99006017	Failed to query customer details.	Failed to query customer information.
400	CBC.99006024	Failed to query product information.	Failed to query product information.
400	CBC.99006050	Incorrect usage measurement unit.	Incorrect usage unit
400	CBC.99006055	The queried amount exceeds the upper limit.	The queried amount exceeds the upper limit.
400	CBC.99006066	An error occurred during the query of the fee information.	An error occurred during the query of the fee information.
400	CBC.99006073	Project not found.	Project not found.
400	CBC.99006074	The billing item does not exist.	The billing item does not exist.
400	CBC.99006093	Failed to obtain tax rate information.	Failed to obtain the tax rate.
400	CBC.99007188	The customer has passed real-name authentication or is being reviewed.	This customer has completed real-name authentication or is currently being authenticated.
400	CBC.99007189	The number of users who used the certificate ID for real-name authentication has reached the maximum limit.	The number of users who used the certificate ID for real-name authentication has reached the maximum limit.
400	CBC.99007191	The number of real-name authentication times of the customer exceeds the upper limit.	The number of real-name authentication times of the customer exceeds the upper limit.

Status Code	Error Code	Error Message	Description
400	CBC.990071 93	The certificate ID is from an invalid certificate and cannot be used for real-name authentication.	The certificate ID is from an invalid certificate and cannot be used for real-name authentication.
400	CBC.990072 53	The picture of the ID card is invalid or blurred.	The picture of the ID card is invalid or blurred.
400	CBC.990072 56	The legal entity information is incorrect.	The legal entity information is incorrect.
400	CBC.990072 57	The enterprise information is incorrect.	The enterprise information is incorrect.
400	CBC.990072 61	Access denied.	Access denied.
400	CBC.990072 65	Other errors.	Other errors.
400	CBC.990072 67	The member account is being associated with a master account and cannot perform real-name authentication again.	The member account is being associated with a master account and cannot perform real-name authentication again.
400	CBC.990080 40	Too many attempts.	Too many attempts.
401	CBC.0154	Invalid or expired token.	Invalid or expired token.
403	CBC.0150	Invalid operation.	Invalid operation.
403	CBC.0151	Access denied.	Access denied.
403	CBC.0155	The request was a valid request, but the server is refusing to respond to it.	The request was a valid request, but the server is refusing to respond to it.

Status Code	Error Code	Error Message	Description
429	CBC.0250	Connection request control triggered.	Connection request control triggered.
500	CBC.0999	Other errors.	Other errors.
500	CBC.4001	The template does not exist.	The template does not exist.
500	CBC.4002	Failed to generate the verification code.	Failed to generate the verification code.
500	CBC.4003	The verification code is successfully generated but fails to be sent.	The verification code is successfully generated but fails to be sent.
500	CBC.4004	The email address is empty.	The email address is empty.
500	CBC.4005	Empty mobile number./Invalid format.	Empty mobile number/Invalid format.
500	CBC.4006	Failed to verify the mobile number.	Failed to verify the mobile number.
500	CBC.4007	Failed to verify the email address.	Failed to verify the email address.
500	CBC.4008	Invalid verification code.	Invalid verification code.
500	CBC.4009	The verification code is available, but the number of verification failures is greater than 3.	The verification code is available, but the number of verification failures is greater than 3.
500	CBC.4015	The number of verification code sending times has reached the upper limit.	The number of verification code sending times has reached the upper limit.

Status Code	Error Code	Error Message	Description
500	CBC.50000036	Credit limit adjustment for customers is not allowed because the partner is now in the credit control state.	Setting budgets for customers is not allowed because the partner is now in the credit control state.
500	CBC.5012	The account name already exists.	The account name already exists.
500	CBC.5013	The email address already exists.	The email address already exists.
500	CBC.5014	The mobile number already exists.	The mobile number already exists.
500	CBC.5015	Invalid account name.	Invalid account name.
500	CBC.5016	Invalid email address.	Invalid email address.
400	CBC.5017	Invalid mobile number.	Invalid mobile number.
500	CBC.5018	Duplicate xAccountId.	Duplicate xAccountId.
500	CBC.5019	The number of customers exceeds the license limit.	The number of customers exceeds the license limit.
500	CBC.5025	An exception occurred when the customer authorized rights to the partner.	An exception occurred when the customer authorized rights to the partner.
500	CBC.7001	Failed to allocate money to the member account because the primary account is not associated with the sub-account.	Failed to allocate money to the member account because the primary account is not associated with the sub-account.

Status Code	Error Code	Error Message	Description
500	CBC.7004	The initiated service operation does not meet the service check item requirement.	The initiated service operation does not meet the service check item requirement.
500	CBC.7181	the validity period of the credit line allocated or recovered has expired.	The credit limit allocated to or withdrawn from the customer account has expired.
500	CBC.7189	The number of users who used the certificate ID for real-name authentication has reached the maximum limit.	The number of users who used the certificate ID for real-name authentication has reached the maximum limit.
500	CBC.7193	The certificate ID is from an invalid certificate and cannot be used for real-name authentication.	The certificate ID is from an invalid certificate and cannot be used for real-name authentication.
500	CBC.7228	Invalid password.	Invalid password.
500	CBC.99000050	Query for the result of associating partner and its sub-customer timed out. Use the API for querying customers to check the association result.	Query for the result of associating partner and its sub-customer timed out. Use the API for querying customers to check the association result.

12.9 SDK Overview

This document provides the SDKs of different programming languages for partners and the addresses for obtaining the latest SDK versions.

Generating SDK Code Online

Use [API Explorer](#) to dynamically generate SDK code.

SDKs

Table 1 lists the SDK versions supported by partners. You can view SDK updates, obtain installation packages, and view user guides in GitHub.

Table 12-4 SDKs

Programming Languages	GitHub Address	Documentation
Java	huaweicloud-sdk-java-v3	Java SDK Usage Guide
Python	huaweicloud-sdk-python-v3	Python SDK Usage Guide
Go	huaweicloud-sdk-go-v3	Go SDK User Guide
NodeJs	huaweicloud-sdk-nodejs-v3	Node.js SDK User Guide
.NET	huaweicloud-sdk-net-v3	.Net SDK Usage Guide
PHP	huaweicloud-sdk-php-v3	PHP SDK User Guide
C++	huaweicloud-sdk-cpp-v3	C++ SDK User Guide