


Git Introduction assignment

Para empezar he creado un nuevo repositorio y he creado los primeros archivos de ejemplo indicados en las diapositivas. Posteriormente lo he configurado manualmente ya que copiando los comandos de la presentación me salta un error de sintaxis.

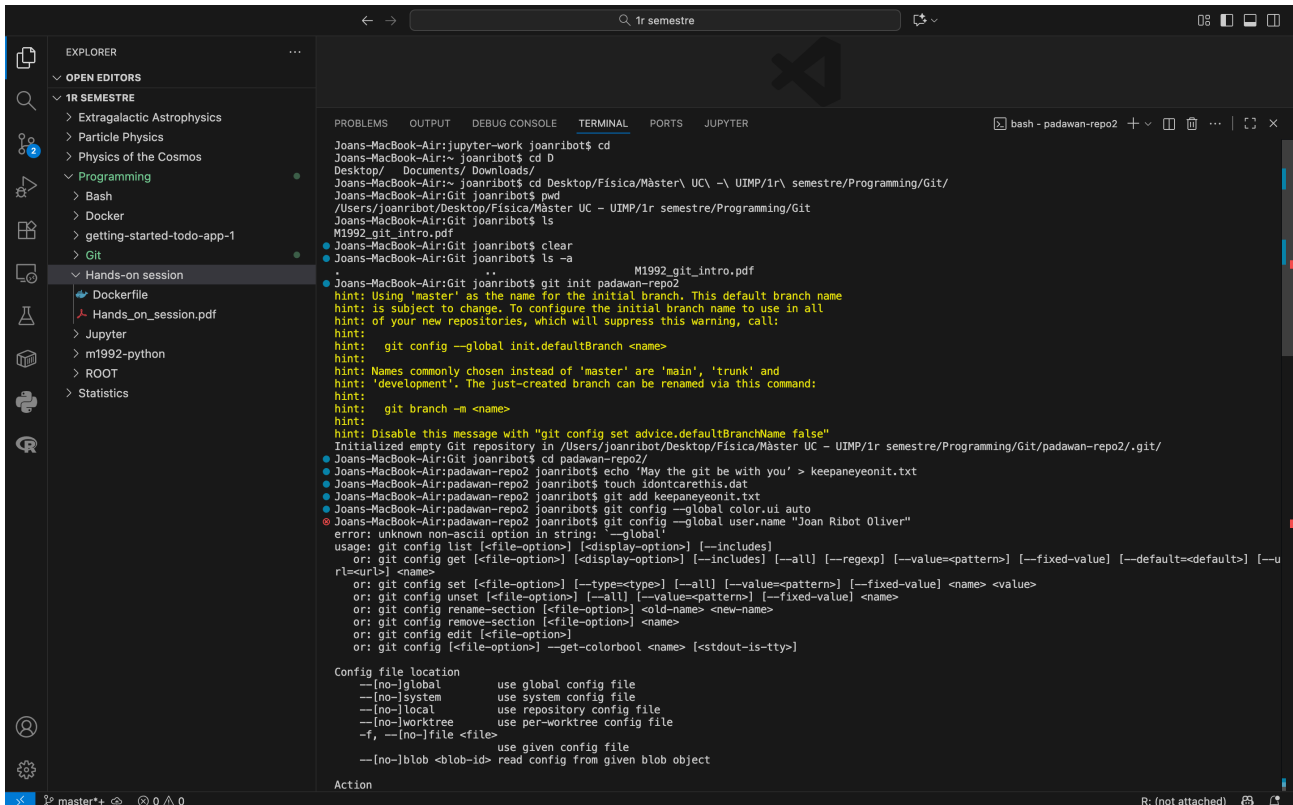


```
Joans-MacBook-Air:~ joanribot$ cd Desktop/
Joans-MacBook-Air:~ joanribot$ cd Desktop/Física\Máster UC - UIMP\1r semestre\Programming\Git\
Joans-MacBook-Air:Git joanribot$ pwd
/Users/joanribot/Desktop/Física\Máster UC - UIMP\1r semestre\Programming\Git
Joans-MacBook-Air:Git joanribot$ ls
M1992_git_intro.pdf
Joans-MacBook-Air:Git joanribot$ clear
Joans-MacBook-Air:Git joanribot$ ls -a
.
..
M1992_git_intro.pdf
Joans-MacBook-Air:Git joanribot$ git init padawan-repo2
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
hint:
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /Users/joanribot/Desktop/Física\Máster UC - UIMP\1r semestre\Programming\Git\padawan-repo2/.git/
Joans-MacBook-Air:Git joanribot$ cd padawan-repo2/
Joans-MacBook-Air:padawan-repo2 joanribot$ echo 'May the git be with you' > keepaneyeonit.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ touch idontcarethis.dat
Joans-MacBook-Air:padawan-repo2 joanribot$ git add keepaneyeonit.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git config --global color.ui auto
Joans-MacBook-Air:padawan-repo2 joanribot$ git config --global user.name "Joan Ribot Oliver"
error: unknown non-ascii option in string: --global
usage: git config list [<file-option>] [<display-option>] [--includes] [--all] [--regexp] [--value=<pattern>] [--fixed-value] [--default=<default>] [--u
rl=<url>] <name>
or: git config set [<file-option>] [--type=<type>] [--all] [--value=<pattern>] [--fixed-value] <name> <value>
or: git config unset [<file-option>] [--all] [--value=<pattern>] [--fixed-value] <name>
or: git config rename-section [<file-option>] <old-name> <new-name>
or: git config remove-section [<file-option>] <name>
or: git config edit [<file-option>]
or: git config [<file-option>] --get-colorbool <name> [<stdout-is-atty>]

Config file location
--[no-]global          use global config file
--[no-]system          use system config file
--[no-]local           use repository config file
--[no-]worktree        use per-worktree config file
-f, --[no-]file <file>
                        use given config file
--[no-]blob <blob-id>  read config from given blob object

Action
```

Hago el primer 'commit' y compruebo con 'git status' que hay un archivo que sigue en el working directory pero que no ha pasado por la 'staging area'.

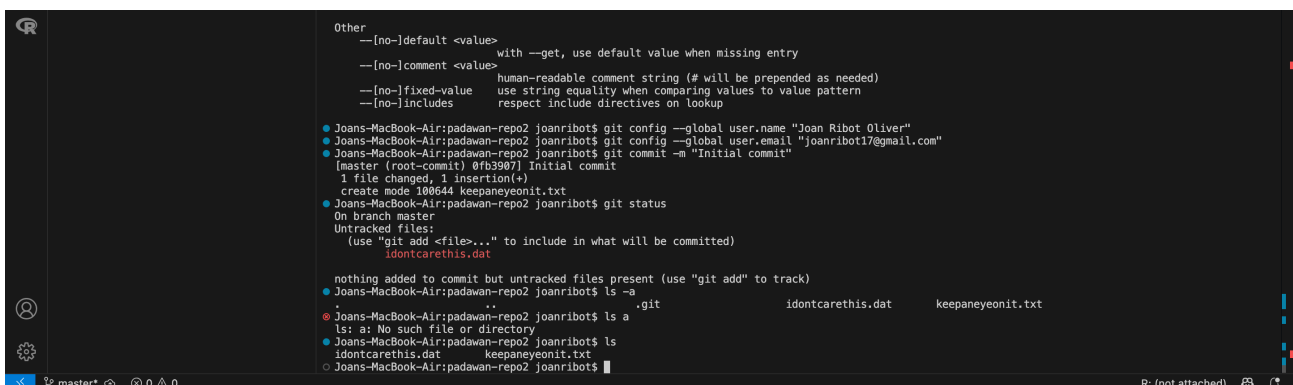

```
Joans-MacBook-Air:padawan-repo2 joanribot$ git config --global user.name "Joan Ribot Oliver"
Joans-MacBook-Air:padawan-repo2 joanribot$ git config --global user.email "joanribot17@gmail.com"
Joans-MacBook-Air:padawan-repo2 joanribot$ git commit -m "Initial commit"
[master (root-commit) 0fb3907] Initial commit
1 file changed, 1 insertion(+)
 create mode 100644 keepaneyeonit.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        idontcarethis.dat

nothing added to commit but untracked files present (use "git add" to track)
Joans-MacBook-Air:padawan-repo2 joanribot$ ls -a
.
..
idontcarethis.dat
keepaneyeonit.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ ls -a
ls: a: No such file or directory
Joans-MacBook-Air:padawan-repo2 joanribot$ ls
idontcarethis.dat  keepaneyeonit.txt
Joans-MacBook-Air:padawan-repo2 joanribot$
```

Compruebo de nuevo que copiando y pegando los comandos de las diapositivas no funciona bien y empiezo con el entrenamiento del jedi, empiezo a sentir la fuerza...

```
Joans-MacBook-Air:padawan-repo2 joanribot$ ls
dontcarethis.dat  keepaneyonit.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ echo 'Your google searches can deceive you. Don't trust them
Your google searches can deceive you. Don't trust them
Joans-MacBook-Air:padawan-repo2 joanribot$ echo 'Your google searches can deceive you. Don't trust them blindly' > training-01.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ touch training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git add training-01.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   training-01.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    dontcarethis.dat
    training-02.txt

Joans-MacBook-Air:padawan-repo2 joanribot$ git commit -m "Include lesson on keeping critical spirit"
[master 42166e9] Include lesson on keeping critical spirit
1 file changed, 1 insertion(+)
 create mode 100644 training-01.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git add training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$
```

Ahora me doy cuenta de que hay algo mal en el entrenamiento. Rectificar es de sabios, así que vamos a usar reset para corregir el training-02.txt. El training-01.txt ya está ‘commiteado’.

```
Joans-MacBook-Air:padawan-repo2 joanribot$ git add training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git reset training-01.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   training-02.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    dontcarethis.dat

Joans-MacBook-Air:padawan-repo2 joanribot$ git add training-01.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   training-02.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    dontcarethis.dat

Joans-MacBook-Air:padawan-repo2 joanribot$ git reset training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    dontcarethis.dat
    training-02.txt

nothing added to commit but untracked files present (use "git add" to track)
Joans-MacBook-Air:padawan-repo2 joanribot$ git add training-01.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    dontcarethis.dat
    training-02.txt

nothing added to commit but untracked files present (use "git add" to track)
Joans-MacBook-Air:padawan-repo2 joanribot$
```

Voy a crear el ‘.gitignore’ pero de nuevo vuelvo a comprobar que no debo copiar el texto de las diapositivas, esta vez ni siquiera de vista. Me busco la vida para ejecutar el comando de ‘cat’ correctamente y lo ejecuto

```

Joans-MacBook-Air:padawan-repo2 joanribot$ git status
(use "git add <file>..." to include in what will be committed)
  idontcarethis.dat
  training-02.txt

nothing added to commit but untracked files present (use "git add" to track)
Joans-MacBook-Air:padawan-repo2 joanribot$ cat '*.dat' > .gitignore
cat: *.dat: No such file or directory
Joans-MacBook-Air:padawan-repo2 joanribot$ cat '*.dat' > .gitignore
cat: *.dat: No such file or directory
Joans-MacBook-Air:padawan-repo2 joanribot$ cat '*.dat' >> .gitignore
cat: *.dat: No such file or directory
Joans-MacBook-Air:padawan-repo2 joanribot$ echo "*.dat" > .gitignore
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    .gitignore
    training-02.txt

nothing added to commit but untracked files present (use "git add" to track)
Joans-MacBook-Air:padawan-repo2 joanribot$ git add .gitignore
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   .gitignore

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    training-02.txt

Joans-MacBook-Air:padawan-repo2 joanribot$ git reset .gitignore
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    .gitignore
    training-02.txt

nothing added to commit but untracked files present (use "git add" to track)
Joans-MacBook-Air:padawan-repo2 joanribot$ cat *.dat > .gitignore
Joans-MacBook-Air:padawan-repo2 joanribot$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    .gitignore
    idontcarethis.dat
    training-02.txt

nothing added to commit but untracked files present (use "git add" to track)
Joans-MacBook-Air:padawan-repo2 joanribot$ git add .gitignore
Joans-MacBook-Air:padawan-repo2 joanribot$ git commit -m "Adding the .gitignore"
[master 4b8bd2c] Adding the .gitignore
1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 .gitignore
Joans-MacBook-Air:padawan-repo2 joanribot$ git add training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ echo "Git or Git not. There is no try" >> training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ echo -ne "\n+ Some useful subcommands:\n" >> training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git add -p training-02.txt
diff --git a/training-02.txt b/training-02.txt
index e69de29..32d6bac 100644
--- a/training-02.txt
+++ b/training-02.txt
@@ -0,0 +1,3 @@
+Git or Git not. There is no try
+
+Some useful subcommands:
+(1/1) Stage this hunk [y,n,q,a,d,e,p,?]? e
Joans-MacBook-Air:padawan-repo2 joanribot$

```

Al haber hecho eso he omitido la línea siguiente

```
git commit -m "Include lesson on keeping critical spirit"
```

No drama, sigo con las diapositivas. Más adelante esto se verá reflejado con el comando 'git log'. Modifico el 'training-02.txt' para mejorar mi entrenamiento y lo guardo con el 'flag' -p,

```

Joans-MacBook-Air:padawan-repo2 joanribot$ git add training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ echo "Git or Git not. There is no try" >> training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ echo -ne "\n+ Some useful subcommands:\n" >> training-02.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git add -p training-02.txt
diff --git a/training-02.txt b/training-02.txt
index e69de29..32d6bac 100644
--- a/training-02.txt
+++ b/training-02.txt
@@ -0,0 +1,3 @@
+Git or Git not. There is no try
+
+Some useful subcommands:
+(1/1) Stage this hunk [y,n,q,a,d,e,p,?]? e
Joans-MacBook-Air:padawan-repo2 joanribot$

```

que me permite interactuar interactivamente con el proceso de 'staging'. De este modo edito el entrenamiento de nuevo, con 'vi', y lo guardo con el comando ':wq'

```

# Manual hunk edit mode -- see bottom for a quick guide.
@@ -0,0 +1,3 @@
+Git or Git not. There is no try
#
# To remove '-' lines, make them ' ' lines (context).
# To remove '+' lines, delete them.
# Lines starting with # will be removed.
# If the patch applies cleanly, the edited hunk will immediately be marked for staging.
# If it does not apply cleanly, you will be given an opportunity to
# edit again. If all lines of the hunk are removed, then the edit is
# aborted and the hunk is left unchanged.
~
~
~
:wq
Joans-MacBook-Air:padawan-repo2 joanribot$

```

Después de modificar el entrenamiento de manera manual con el visor de 'vi' guardo los cambios y ejecuto el comando 'git log' para ver el registro o historial de guardados del repositorio. Se puede ver que me he salido del guión de las presentaciones en el 'commit' de 'Adding the

The screenshot shows a VS Code window with a terminal at the bottom. The terminal output displays the results of a series of git commands. It starts with 'git add -p training-02.txt', followed by 'git status' which shows changes to be committed. Then 'git commit -m "Force to take a side"' is executed, creating a new commit. The output shows the commit hash 'a18f477' and the message 'Force to take a side'. Subsequent commands show the addition of 'training-02.txt' and another commit '4bbbd2e' with the message 'Force to take a side'. The terminal also shows the addition of '.gitignore' and a final commit '0fb3907' with the message 'Initial commit'. The Explorer panel on the left shows the file structure of the 'padawan-repo2' directory, including '.gitignore', 'idontcarethis.dat', 'keepaneyonit.txt', 'training-01.txt', and 'training-02.txt'.

‘.gitignore’, todo lo demás es correcto. Cabe destacar que todo el rato estoy en la rama ‘master’, así como indica el punterp ‘HEAD’.

Voy a intentar hacer uso del comando ‘git diff’ que no llegamos a usar en clase. El primer intento me sale un poco rana

The screenshot shows a VS Code window with a terminal at the bottom. The terminal output displays the results of a series of git commands. It starts with 'git add -p training-02.txt', followed by 'git status' which shows changes to be committed. Then 'git commit -m "Include the need to take sides"' is executed, creating a new commit. The output shows the commit hash '0c7e28e' and the message 'Include the need to take sides'. Subsequent commands show the addition of 'training-02.txt' and another commit '4bbbd2e' with the message 'Force to take a side'. The terminal also shows the addition of '.gitignore' and a final commit '0fb3907' with the message 'Initial commit'. The Explorer panel on the left shows the file structure of the 'padawan-repo2' directory, including '.gitignore', 'idontcarethis.dat', 'keepaneyonit.txt', 'training-01.txt', and 'training-02.txt'.

Para seguir avanzando y más adelante volver a ‘git diff’, voy a usar ‘git checkout’

y hago un ‘commit’ para cerrar este apartado. Sigo con las diapositivas y vuelven a salir los registros (‘logs’), así que los pruebo y los hago más bonitos, o eso intento...

```

Joans-MacBook-Air:padawan-repo2 joanribot$ git log --graph --decorate --abbrev-commit --pretty=oneline
fatal: unrecognized argument: --decorate
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --graph --abbrev-commit --pretty=oneline
fatal: unrecognized argument: --abbrev-commit
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --pretty=oneline
7bfd20e18b76d4f57082132c753083145c494377 (HEAD -> master) Saving training-02.txt after a checkout
6c7c20e4c6e793c9228f4d6044b4a55652 Include the need to take sides
7bc3e93b6dbd6b44f4e8bee5664c4a82608400 Prepare placeholder for command reference
181f47aed84108fab9683f8d2e90afe19dd960 Force to take a side
4bbddc2e2726f874c4c8a37d4a90ff9f9e532f32 Adding the .gitignore
42166e9c5e9a1f127c374266c331747f95eecc5fa Include lesson on keeping critical spirit
01a30977372c4e70b64f445103891555d98d Initial commit
Joans-MacBook-Air:padawan-repo2 joanribot$

```

También está la opción de usar 'git log -patch' en la que te enseña los cambios explícitamente

```

1r semestre
bash - padawan-repo2
git log --patch
Date: Sat Oct 25 16:26:14 2025 +0200

Saving training-02.txt after a checkout

diff --git a/training-02.txt b/training-02.txt
index de845db..b01ee88 100644
--- a/training-02.txt
+++ b/training-02.txt
@@ -3,3 +3,4 @@
Git or Git not. There is no try
-> Some useful subcommands:
+
-> Some useful subcommands:
+> Some useful subcommands:

commit 0c7e28ec4e47d9c3cd9c220f84a084fbde51dde
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 16:18:14 2025 +0200

Include the need to take sides

diff --git a/training-02.txt b/training-02.txt
index 32d60ac..de845db 100644
--- a/training-02.txt
+++ b/training-02.txt
@@ -1,3 +1,3 @@
Git or Git not. There is no try
-> Some useful subcommands:
+
-> Some useful subcommands:
+> Some useful subcommands:

commit 7bc3e93b6bd0db6d4afe0bec566ae4a82600400
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 15:57:42 2025 +0200

Prepare placeholder for command reference

diff --git a/training-02.txt b/training-02.txt
index 8e85169..32d60ac 100644
--- a/training-02.txt
+++ b/training-02.txt
@@ -1 +1,3 @@
Git or Git not. There is no try
+
-> Some useful subcommands:
+> Some useful subcommands:


commit a18f477aed84188fab9683f8d2e90afe619dd960
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 15:57:17 2025 +0200

Force to take a side

diff --git a/training-02.txt b/training-02.txt
new file mode 100644
o Joans-MacBook-Air:padawan-repo2 joanribot$
o Joans-MacBook-Air:padawan-repo2 joanribot$


```

He probado el comando 'git commit --amend', que te permite modificar el último 'commit'

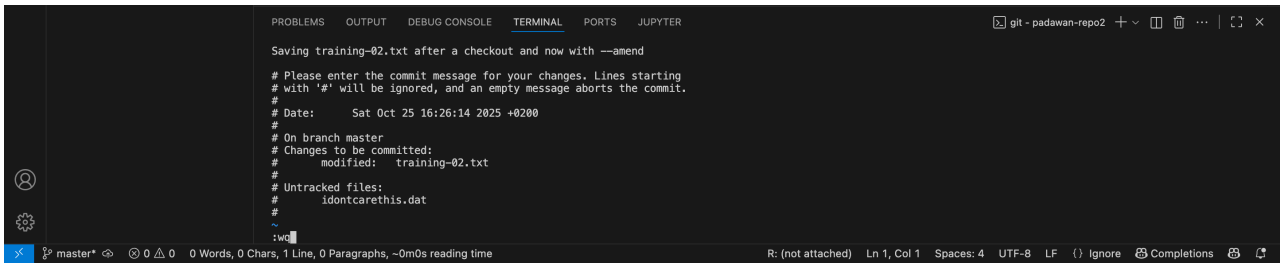

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS JUPYTER
Saving training-02.txt after a checkout and now with --amend
# Please enter the commit message for your changes. Lines starting
# with '#' will be ignored, and an empty message aborts the commit.
#
# Date: Sat Oct 25 16:26:14 2025 +0200
#
# On branch master
#
# Changes to be committed:
#   modified:   training-02.txt
#
# Untracked files:
#   idontcarethis.dat
#
~
master* 0 Words, 0 Chars, 1 Line, 0 Paragraphs, ~0m0s reading time R: (not attached) Ln 1, Col 1 Spaces: 4 UTF-8 LF {} Ignore Completions
```

El despertar de las ramas comienza. Sigo con las diapositivas, genero una rama nueva, modifico unos cuantos archivos y los voy 'commiteando'

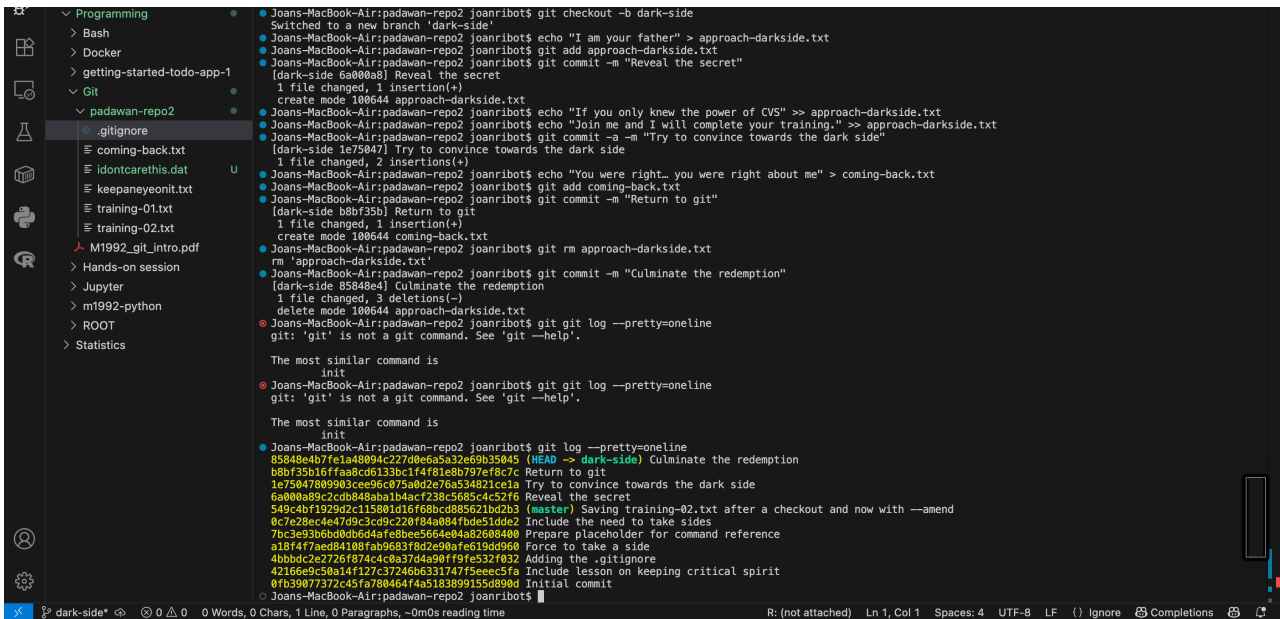


```
Joans-MacBook-Air:padawan-repo2 joanribot$ git checkout -b dark-side
Switched to a new branch 'dark-side'
Joans-MacBook-Air:padawan-repo2 joanribot$ echo "I am your father" > approach-darkside.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git add approach-darkside.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git commit -m "Reveal the secret"
[dark-side 6a000a8] Reveal the secret
1 file changed, 1 insertion(+)
create mode 100644 approach-darkside.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ echo "If you only knew the power of CVS" >> approach-darkside.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ echo "Join me and I will complete your training." >> approach-darkside.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git commit -m "Try to convince towards the dark side"
[dark-side 1e75047] Try to convince towards the dark side
1 file changed, 2 insertions(+)
Joans-MacBook-Air:padawan-repo2 joanribot$ echo "You were right... you were right about me" >> coming-back.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git add coming-back.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git commit -m "Return to git"
[dark-side b8bf35b] Return to git
1 file changed, 1 insertion(+)
create mode 100644 coming-back.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git rm approach-darkside.txt
rm 'approach-darkside.txt'
Joans-MacBook-Air:padawan-repo2 joanribot$ git commit -m "Culminate the redemption"
[dark-side 85848e4] Culminate the redemption
1 file changed, 3 deletions(-)
delete mode 100644 approach-darkside.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --pretty=oneline
git: 'git' is not a git command. See 'git --help'.

The most similar command is
  init
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --pretty=oneline
git: 'git' is not a git command. See 'git --help'.


The most similar command is
  init
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --pretty=oneline
85848e4b7f1ea48094c227d0e6a5a32e59b35045 (HEAD -> dark-side) Culminate the redemption
b8bf35b16f1fae8cd6133bc1f4f81e8b797ef8c7c Return to git
1e75047809903cee96c075a0d2e76a534821c1ea Try to convince towards the dark side
6a000a89c7cd848aba1b4ac7238c5685c4c52f6 Reveal the secret
549c4bf1929d2c115801d16f688bcd885621bd2b3 (master) Saving training-02.txt after a checkout and now with --amend
0c7e28ec4e47d9c3cd9c220f84a084fbde51dd2e Include the need to take sides
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --pretty=oneline
85848e4b7f1ea48094c227d0e6a5a32e59b35045 (HEAD -> dark-side) Culminate the redemption
b8bf35b16f1fae8cd6133bc1f4f81e8b797ef8c7c Return to git
1e75047809903cee96c075a0d2e76a534821c1ea Try to convince towards the dark side
6a000a89c7cd848aba1b4ac7238c5685c4c52f6 Reveal the secret
549c4bf1929d2c115801d16f688bcd885621bd2b3 Saving training-02.txt after a checkout and now with --amend
0c7e28ec4e47d9c3cd9c220f84a084fbde51dd2e Include the need to take sides
7bc3e93b6bd0db644fe8bee5664e84a2608400 Prepare placeholder for command reference
a18f477aed84108fab9683f8d2e90afe619dd960 Force to take a side
4bbdbdc2e2726f874c40a37d4a90ff9fe532f032 Adding the .gitignore
42166e9c50a14f127c37246b6331747f5eeec5fa Include lesson on keeping critical spirit
0fb39077372c45fa780464f4a5183899155d0890 Initial commit
Joans-MacBook-Air:padawan-repo2 joanribot$
```

Antes de culminar la redención hago visual el proceso con otro pretty log. Finalmente vuelvo a la rama del maestro y la fusiono con la del lado oscuro

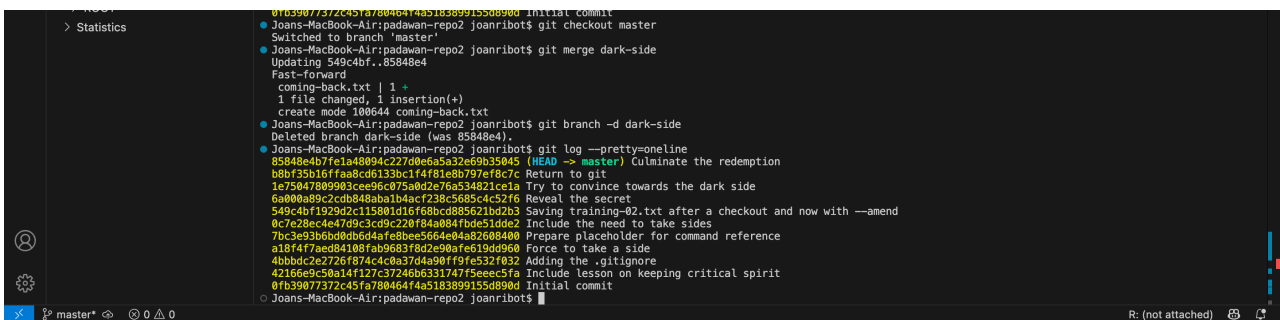


```
Joans-MacBook-Air:padawan-repo2 joanribot$ git merge dark-side
Updating 549c4bf..85848e4
Fast-forward
  coming-back.txt | 1 +
  1 file changed, 1 insertion(+)
  create mode 100644 coming-back.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git branch -d dark-side
Deleted branch dark-side (was 85848e4).
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --pretty=oneline
85848e4b7f1ea48094c227d0e6a5a32e59b35045 (HEAD -> master) Culminate the redemption
b8bf35b16f1fae8cd6133bc1f4f81e8b797ef8c7c Return to git
1e75047809903cee96c075a0d2e76a534821c1ea Try to convince towards the dark side
6a000a89c7cd848aba1b4ac7238c5685c4c52f6 Reveal the secret
549c4bf1929d2c115801d16f688bcd885621bd2b3 Saving training-02.txt after a checkout and now with --amend
0c7e28ec4e47d9c3cd9c220f84a084fbde51dd2e Include the need to take sides
7bc3e93b6bd0db644fe8bee5664e84a2608400 Prepare placeholder for command reference
a18f477aed84108fab9683f8d2e90afe619dd960 Force to take a side
4bbdbdc2e2726f874c40a37d4a90ff9fe532f032 Adding the .gitignore
42166e9c50a14f127c37246b6331747f5eeec5fa Include lesson on keeping critical spirit
0fb39077372c45fa780464f4a5183899155d0890 Initial commit
Joans-MacBook-Air:padawan-repo2 joanribot$
```

Sigo la presentación y compruebo que el lado oscuro ya no existe

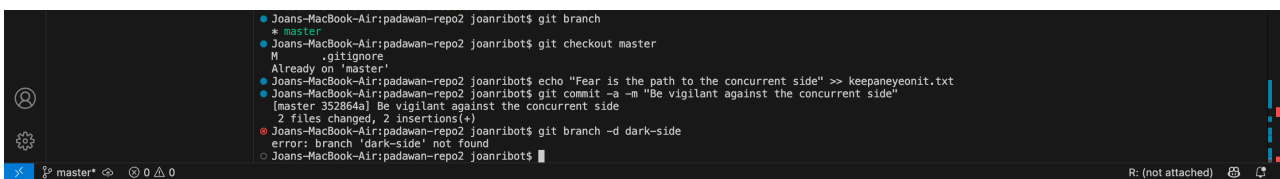

```
Joans-MacBook-Air:padawan-repo2 joanribot$ git branch
* master
Joans-MacBook-Air:padawan-repo2 joanribot$ git checkout master
M .gitignore
Already on 'master'
Joans-MacBook-Air:padawan-repo2 joanribot$ echo "Fear is the path to the concurrent side" >> keepaneyeonit.txt
Joans-MacBook-Air:padawan-repo2 joanribot$ git commit -a -m "Be vigilant against the concurrent side"
[master 352864a] Be vigilant against the concurrent side
2 files changed, 2 insertions(+)
Joans-MacBook-Air:padawan-repo2 joanribot$ git branch -d dark-side
error: branch 'dark-side' not found
Joans-MacBook-Air:padawan-repo2 joanribot$
```

Para seguir voy a comprobar el historial de incluyendo los archivos de cada ‘commit’ con ‘git commit –stat’

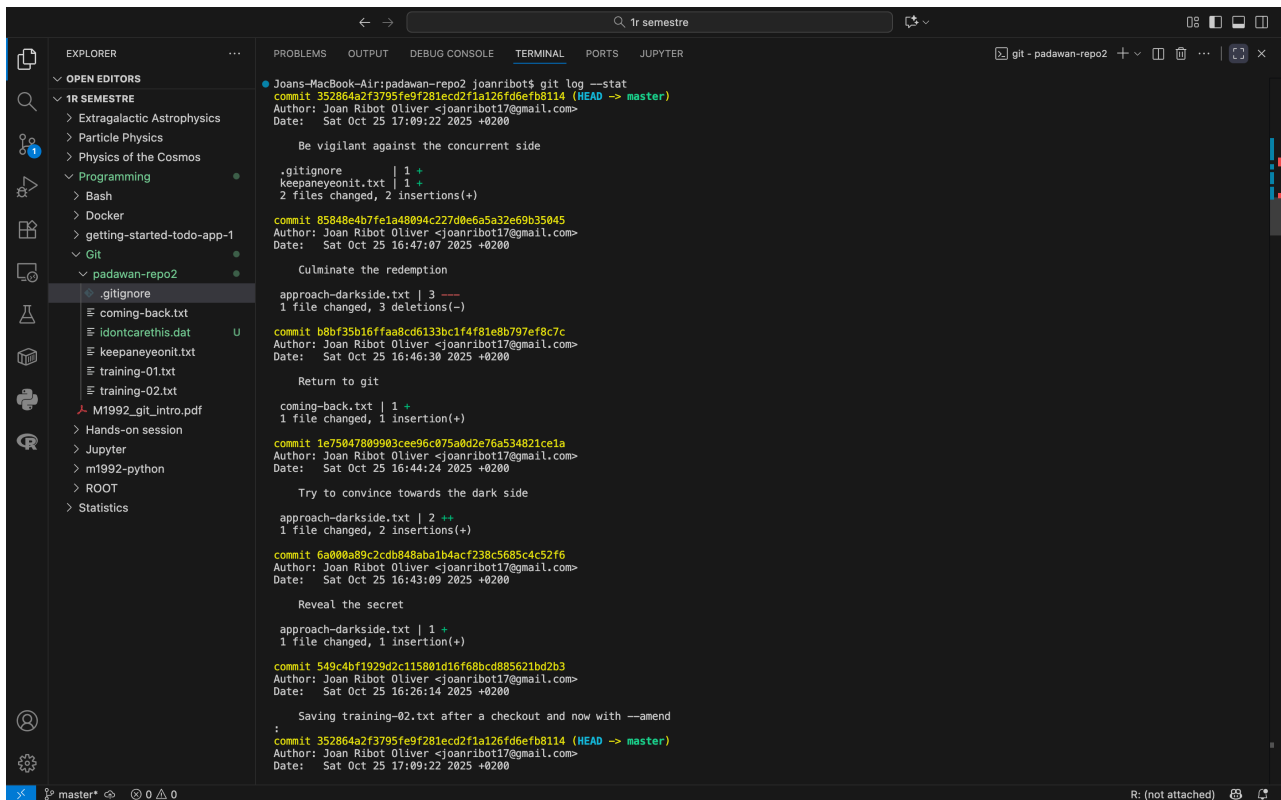

```
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --stat
commit 352864a2f3795fe9f281ecd2f1a126fd6efb8114 (HEAD -> master)
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 17:09:22 2025 +0200

    Be vigilant against the concurrent side

    .gitignore | 1 +
    keepaneyeonit.txt | 1 +
    2 files changed, 2 insertions(+)

commit 85848e4b7fe1a48094c227d0e6a5a32e69b35045
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 16:47:07 2025 +0200

    Culminate the redemption

    approach-darkside.txt | 3 ---
    1 file changed, 3 deletions(-)

commit b8bf35b16ffaa8cd6133bc1f4f81e8b797ef8c7c
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 16:46:30 2025 +0200

    Return to git

    coming-back.txt | 1 +
    1 file changed, 1 insertion(+)

commit 1e75847809903cee96c075a0d2e76a534821ce1a
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 16:44:24 2025 +0200

    Try to convince towards the dark side

    approach-darkside.txt | 2 ++
    1 file changed, 2 insertions(+)

commit 6a000a89c2c8b848aba1b4acf238c5685c4c52f6
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 16:43:09 2025 +0200

    Reveal the secret

    approach-darkside.txt | 1 +
    1 file changed, 1 insertion(+)


commit 549c4bf1929d2c115801d16f68bcd885621bd2b3
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 16:26:14 2025 +0200

    Saving training-02.txt after a checkout and now with --amend

commit 352864a2f3795fe9f281ecd2f1a126fd6efb8114 (HEAD -> master)
Author: Joan Ribot Oliver <joanribot17@gmail.com>
Date: Sat Oct 25 17:09:22 2025 +0200
```

hay muchísimos más commits que en esta imagen, hasta 800 líneas. Para no hacer más capturas y perder el tiempo, he copiado el output en un archivo .txt por si se desea comprobar las 800 líneas. Ver todos los logs disponibles.

Finalmente compruebo el historial incluyendo todas las ramas con ‘git log –oneline –graph –decorate –all –reflog’ ya que he fusinado las dos ramas

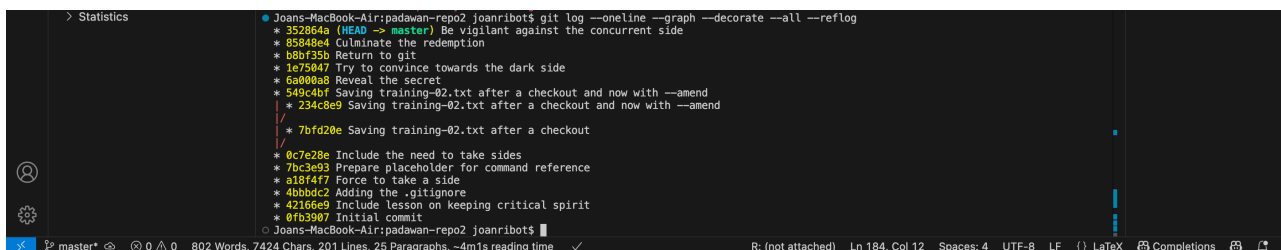

```
Joans-MacBook-Air:padawan-repo2 joanribot$ git log --oneline --graph --decorate --all --reflog
* 352864a (HEAD -> master) Be vigilant against the concurrent side
* 85848e4 Culminate the redemption
* b8bf35b Return to git
* 1e75847 Try to convince towards the dark side
* 6a000a0 Reveal the secret
* 549c4bf Saving training-02.txt after a checkout and now with --amend
* 234c8e9 Saving training-02.txt after a checkout and now with --amend
/
* 7bfd20e Saving training-02.txt after a checkout
* 0c7e28e Include the need to take sides
* 7bc3e93 Prepare placeholder for command reference
* a18f4f7 Force to take a side
* 4bb0b02 Adding the .gitignore
* 42166e9 Include lesson on keeping critical spirit
* 0fb3907 Initial commit
o Joans-MacBook-Air:padawan-repo2 joanribot$
```

Ahora respondo las preguntas planteadas en el enunciado del ejercicio.

Q1. Un repositorio remoto es un repositorio que se encuentra en un servidor remoto, mientras que un repositorio local se encuentra en el disco. El repositorio remoto tiene como mayor ventaja la posibilidad de colaborar con otros usuarios.

Q2. Los comandos ‘pull’ y ‘push’ sirven para descargar los contenidos del repositorio y actualizar los cambios realizados respectivamente.”

Q3. Un servidor GitLab es una plataforma que permite gestionar repositorios Git y tiene muchas funciones como CI/CD, seguimiento de problemas y revisión de código, entre otros.

Q4. CI/CD significa Integración Continua/Entrega Continua en inglés. Se trata de un sistema automático de revisión de código y software, de manera que cada vez que haya un push o un pull se realicen pruebas automáticas para verificar que el código funciona correctamente.

Q5. Un tag sirve como una referencia o marcador de un ‘commit’ pero no cambia el contenido del repositorio. Además, los tags deben ser ‘pusheados’ manualmente.