

# TST JUnit Testing

## Software Verification and Validation

### 2019–2020

João David  
49448

Ye Yang  
49521

09/05/2020

## 1 Instruction Coverage

### 1.1 size()

---

```
public int size() {  
    return n; //I1  
}
```

---

Test Case	Values	Expected / Actual	IC
sizeZeroTest	-	0	I1

### 1.2 contains(String key)

---

```
public boolean contains(String key) {  
    if (key == null) //I1  
        throw new IllegalArgumentException("argument to  
            contains() is null"); //I2  
    return get(key) != null; //I3  
}
```

---

Test Case	Values	Expected / Actual	IC
containsNullKey	null	IAE	I1, I2
containsNonNullKey	"someKey"	false	I1, I3

### 1.3 get(String key)

---

```

public T get(String key) {
    if (key == null) //I1
        throw new IllegalArgumentException("calls get() with
            null argument"); //I2
    if (key.length() == 0) //I3
        throw new IllegalArgumentException("key must have
            length >= 1"); //I4
    Node<T> x = get(root, key, 0); //I5
    if (x == null) //I6
        return null; //I7
    return x.val; //I8
}

```

---

Test Case	Values	Expected / Actual	IC
getNullKey	null	IAE	I1, I2
getEmptyStringKey	""	IAE	I1, I3, I4
getNonExistentKey	"someKey"	null	I1, I3, I5, I6, I7
getExistentKey	"key"	<value>	I1, I3, I5, I6, I8

### 1.4 put(String key, T val)

---

```

public void put(String key, T val) {
    if (key == null) //I1
        throw new IllegalArgumentException("calls put() with
            null key"); //I2
    if (!contains(key)) //I3
        n++; //I4
    root = put(root, key, val, 0); //I5
}

```

---

Test Case	Values	Expected / Actual	IC
putNullKey	null, 1	IAE	I1, I2
putValidNewKey	"someKey", 1	NoExep	I1, I3, I4, I5

## 1.5 longestPrefixOf(String query)

---

```

public String longestPrefixOf(String query) {
    if (query == null) //I1
        throw new IllegalArgumentException("calls
            longestPrefixOf() with null argument"); //I2
    if (query.length() == 0) //I3
        return null; //I4
    int length = 0; //I5
    Node<T> x = root; //I6
    int i = 0; //I7
    while (x != null /*I8*/ && i < query.length() /*I9*/) {
        char c = query.charAt(i); //I10
        if (c < x.c) /*I11*/ x = x.left; //I12
        else if (c > x.c) /*I13*/ x = x.right; //I14
        else {
            i++; //I15
            if (x.val != null) //I15
                length = i; //I17
            x = x.mid; //I18
        }
    }
    return query.substring(0, length); //I19
}

```

---

Test Case	Values	Expected / Actual	IC
longestPrefixOfNull	null	IAE	I1, I2
longestPrefixOf EmptyString	""	null	I1, I3, I4
longestPrefixOf AllInstructions	"c"	"c"	I1, I3, I5, I6, I7, I8, I9, I10, I11, I12, I13, I14, I15, I16, I17, I18, I19

## 1.6 keys()

---

```
public Iterable<String> keys() {
    Queue<String> queue = new LinkedList<>(); //I1
    collect(root, new StringBuilder(), queue); //I2
    return queue; //I3
}
```

---

Test Case	Values	Expected / Actual	IC
keysTest	-	Empty Iterator	I1, I2, I3

## 1.7 keysWithPrefix(String prefix)

---

```
public Iterable<String> keysWithPrefix(String prefix) {
    if (prefix == null) //I1
        throw new IllegalArgumentException("calls
            keysWithPrefix() with null argument"); //I2
    Queue<String> queue = new LinkedList<>(); //I3
    Node<T> x = get(root, prefix, 0); //I4
    if (x == null) //I5
        return queue; //I6
    if (x.val != null) //I7
        queue.add(prefix); //I8
        collect(x.mid, new StringBuilder(prefix), queue);
        //I9
    return queue; //I10
}
```

---

Test Case	Values	Expected / Actual	IC
keysWithPrefixNull	null	IAE	I1, I2
keysWithPrefix NonExistentPrefix	"prefix"	Iterator (size 0)	I1, I3, I4, I5, I6
keysWithPrefix ExistentPrefix	"c"	Iterator (size 1)	I1, I3, I4, I5, I6, I7, I8, I9, I10

## 1.8 keysThatMatch(String pattern)

---

```
public Iterable<String> keysThatMatch(String pattern) {
    Queue<String> queue = new LinkedList<>(); //I1
    collect(root, new StringBuilder(), 0, pattern, queue);
    //I2
    return queue; //I3
}
```

---

Test Case	Values	Expected / Actual	IC
keysThatMatchTest	"pattern"	Iterator (size 0)	I1, I2, I3

## 1.9 delete(String key)

---

```
public void delete(String key) {
    if (key == null) { //I1
        throw new IllegalArgumentException("calls put() with
            null key"); //I2
    }
    if (contains(key)) { //I3
        n--; //I4
        put(root, key, null, 0); //I5
    }
}
```

---

Test Case	Values	Expected / Actual	IC
deleteNull	null	IAE	I1, I2
deleteContains	"key"	Iterator (size 0)	I3, I4, I5

## 1.10 equals(Object obj)

---

```
public boolean equals(Object obj) {
    if (this == obj) //I1
        return true; //I2
    if (obj == null) //I3
        return false; //I4
}
```

```

    if (!(obj instanceof TST<?>)) //I5
        return false; //I6

    TST<T> other = (TST<T>) obj; //I7
    if (this.size() != other.size()) { //I8
        return false; //I9
    }

    Iterable<String> thisIterable = this.keys(); //I10
    for(String currKey : thisIterable){ //I11
        if(!this.get(currKey).equals(other.get(currKey))){
            //I12
            return false; //I13
        }
    }
    return true; //I14
}

```

---

Test Case	Values	Expected / Actual	IC
equalsSame	Same trie object	True	I1, I2
equalsNull	null	False	I1, I3, I4
equalsNotTrie	1	False	I1, I3, I5, I6
equalsDifSize	Trie with more keys	False	I1, I3, I5, I7, I8, I9
equalsDifContent	Trie with same keys	True	I1, I3, I5, I7, I8, I10, I11, I12, I14

## 2 Edge Coverage - EdgeCoverageTest.java

Graph Edges: [1,2], [1,3], [3,4], [3,5], [5,6], [6,7], [6,8], [8,9], [8,10], [10,6], [9,12], [9,11], [11,6], [12,13], [12,14], [13,14], [14,6]

### 2.1 Test cases

Test Case	Test Path	Edges Covered
edgeCoverage1	[1,2]	[1,2]
edgeCoverage2	[1,3,4]	[1,3], [3,4]
edgeCoverage3	[1,3,5,6,8,10,6,7]	[1,3], [3,5], [5,6], [6,8], [8,10], [10,6], [6,7]
edgeCoverage4	[1,3,5,6,8,9,11,6,7]	[1,3], [3,5], [5,6], [6,8], [8,9], [9,11], [11,6], [6,7]
edgeCoverage5	[1,3,5,6,8,9,12,14,6,7]	[1,3], [3,5], [5,6], [6,8], [8,9], [9,12], [12,14], [14,6], [6,7]
edgeCoverage6	[1,3,5,6,8,9,12,13,14,6,7]	[1,3], [3,5], [5,6], [6,8], [8,9], [9,12], [12,14], [14,6], [6,7]

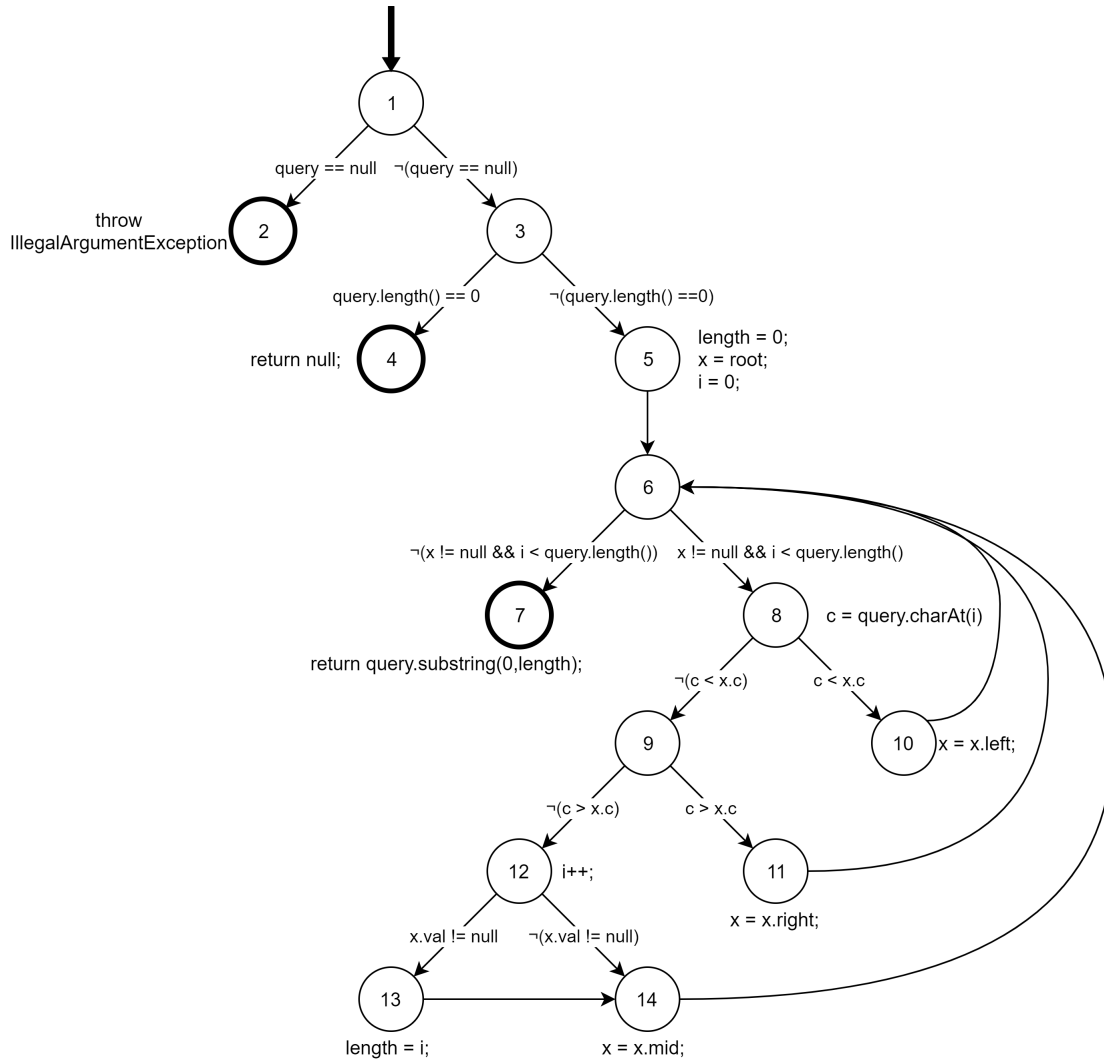


Figure 1: longestPrefixOf's Graph

### 3 Prime Path Coverage - PrimePathCoverageTest.java

For the Prime Path Coverage, we used the graph coverage tool made available to us through the course's moodle page. With this we extracted all the possible prime paths, and all that paths needed in order to cover them, totaling 19 test cases according to the graph previously shown. All the data regarding this test coverage is shown in comments in the above indicated Java class.

### 4 All-Uses Coverage

nodes & edges : I	def(I)	use(I)
1	{root, query}	{}
(1,2), (1,3)	{}	{query}
3	{}	{}
(3,4), (3,5)	{}	{query}
4	{}	{}
5	{length, x, i}	{root}
(5,6)	{}	{}
6	{}	{}
(6,7), (6,8)	{}	{x, i, query}
7	{}	{query, length}
8	{c}	{i}
(8,9), (8,10)	{}	{c, x}
9	{}	{}
10	{x}	{x}
(10,6), (11,6), (14,6)	{}	{}
(9,11), (9,12)	{}	{c, x}
12	{x}	{x}
12	{i}	{i}
(12,13), (12,14)	{}	{x}
13	{length}	{i}
14	{x}	{x}



var	node	du(node,var)
query	1	[1,2], [1,3], [1,3,4], [1,3,5], [1,3,5,6,7], [1,3,5,6,8]
root	1	[1,3,5]
length	5	[5,6,7]
	13	[13,14,6,7]
x	5	[5,6,7], [5,6,8], [5,6,8,10], [5,6,8,9], [5,6,8,9,11] [5,6,8,9,12], [5,6,8,9,12,13], [5,6,8,9,12,13,14], [5,6,8,9,12,14]
	10	[10,6,7], [10,6,8], [10,6,8,10], [10,6,8,9], [10,6,8,9,11], [10,6,8,9,12], [10,6,8,9,12,13] [10,6,8,9,12,13,14], [10,6,8,9,12,14]
	11	[11,6,7], [11,6,8], [11,6,8,10], [11,6,8,9], [11,6,8,9,11], [11,6,8,9,12], [11,6,8,9,12,13] [11,6,8,9,12,13,14], [11,6,8,9,12,14]
	14	[14,6,7], [14,6,8], [14,6,8,10], [14,6,8,9] [14,6,8,9,11], [14,6,8,9,12], [14,6,8,9,12,13] [14,6,8,9,12,13,14], [14,6,8,9,12,14]
i	5	[5,6,7], [5,6,8], [5,6,8,9,12], [5,6,8,9,12,13]
	12	[12,13], [12,13,14,6,7], [12,13,14,6,8] [12,13,14,6,8,9,12], [12,14,6,7], [12,14,6,8], [12,14,6,8,9,12]
c	8	[8,9], [8,10], [8,9,11], [8,9,12]

Test	put ops	Values	Expected	Test Path
1	{ }	null	IAE	[1,2]
2	{ }	""	null	[1,3,4]
3	{ }	"query"	""	[1,3,5,6,7]
4	{ sea }	"a"	""	[1,3,5,6,8,10,6,7]
5	{ sea }	"t"	""	[1,3,5,6,8,9,11,6,7]
6	{ sea, s, e, a }	"sea"	"sea"	[1,3,5,6,8,9,12,13,14,6,8,9,12,14,6,8,9,12,13,14,6,7]
7	{ sea, t, a }	"set"	""	[1,3,5,6,8,9,12,14,6,8,9,12,14,6,8,9,11,6,7]
8	{ sea, ball, c }	"c"	"c"	[1,3,5,6,8,10,6,8,9,11,6,8,9,12,13,14,6,7]
9	{ sea, cat, b }	"b"	"b"	[1,3,5,6,8,10,6,8,10,6,8,9,12,13,14,6,7]
10	{ sea, up, w }	"w"	"w"	[1,3,5,6,8,9,11,6,8,9,11,6,8,9,12,13,14,6,7]
11	{ sea }	"sd"	""	[1,3,5,6,8,9,12,14,6,8,10,6,7]
12	{ sea }	"su"	""	[1,3,5,6,8,9,12,14,6,8,9,11,6,7]
13	{ sea, w }	"t"	""	[1,3,5,6,8,9,11,6,8,10,6,7]

## 5 Logic-based Coverage - LogicBasedCoverage.java

For our Logic-based coverage we chose the Combinatorial Coverage (CoC) as it covers all the possible permutations of truth values of each clause. In order to guarantee that certain parts of the code is reached, and not only basing it off of truth values of clauses, we also added the reachability predicates from which we based our CoC off of. All the data regarding the analysis can be viewed in the Java class indicated above.

## 6 Base Choice Coverage - BaseChoiceCoverageTest.java

Given the 3 criteria, we separated them in simple blocks that would not overlap each other so as to not have any ambiguous requirements:

1. *Trie already includes the new key*
  - Blocks : [true, false]
2. *Trie already includes some new key prefix*
  - Blocks : [true, false]
3. *Trie is empty*
  - Blocks : [true, false]

The chosen base choice was: (**true, true, false**) and following are all the test requirements:

- (true, true, false)
- (false, true, false)
- (true, false, false)
- (true, true, true)

The last test requirement (**true, true, true**) is unfeasible due to the fact that a tree can not contain a key and at the same time be empty.

The tests used to cover the test requirements can be found in the above mentioned Java source file.

## **7 PIT Mutations**

## **8 JUnit QuickCheck**

## **References**

- [1] SiLK - CERT NetSA <https://tools.netsa.cert.org/silk/docs.html>
- [2] List of TCP and UDP port numbers [https://en.wikipedia.org/wiki/List\\_of\\_TCP\\_and\\_UDP\\_port\\_numbers](https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers)