REPORTE GLOBAL

_Revit_EXE_Geometrias

Análisis estático completo · 2026-07-28 19:26

78 Archivos	**14** Namespaces	**93** Clases	**2** Interfaces	**2** Enums
790 Métodos	**167** Propiedades	**537** Campos	**271** Relaciones	**28516** Líneas

Diagrama de Clases — Act_4.03_Geometrías

struct SimplificationOptions
Default : SimplificationOptions
+PreserveTopology : bool
+PreserveOrientation : bool
+PreserveSurfaceCurvature : bool
+MinimumFeatureSize : double
-StrictArithmetic : double
-MaximumError : double
-NumericTolerance : double
+GetEffectiveTolerance() : double
class SimplificationOptions
+ControlledSolve(Transform3 coolTransform, Mesh3d[] mesh2, double[] result, int iMax) : Mesh3d
+ControlledSolve(Transform3 coolTransform, Mesh3d[] mesh2, double[] result, int iMax, out Transform3 resultMatrix) : Mesh3d
+ControlledSolve(Mesh3d[] mesh1, Mesh3d[] mesh2, double[] result, Transform3 coolTransform, out Mesh3d resultMatrix, out Transform3 resultMatrix) : Mesh3d
+ControlledSolve(Mesh3d[] mesh1, Mesh3d[] mesh2, double[] result, int iMax, out Transform3 resultMatrix, out Transform3 resultMatrix) : Mesh3d
+RegularSolve(int[] ref, int[] ref) : Transform3
+RegularSolve(Mesh3d[] mesh1, Mesh3d[] mesh2, double[] result, int iMax, out Transform3 resultMatrix) : Mesh3d
-TransformVectorInches(Vector3 normal, ref Matrix4 transform) : void
-TransformVectorInches(Vector3 normal, out Matrix4 transform) : void
-RecalculateResultingArray(Transform3[] resultMatrix, int[] transform) : int
+ControlledSolve() : void
class MeshSolver
+ValidateSnapRadius(IsExternalException)
-propertyName : string
-actualValue : double
+Message : string
+ValidateSnapRadius(double actualValue, string propertyName, string message)
+ValidateSnapRadius(IsExternalException propertyName, string message, Exception innerException)
class ValidateSnapRadiusIsExternalException
+Name : string
+Age : int
+Email : string
+IsActive : bool
+CreatedAt : DateTime
+Person(string name, int age, string email)
+Person()
+ToString() : string
+Equals(object obj) : bool
+GetHashCode() : int
class Person

Diagrama de clases (Mermaid)

No disponible (classDiagram-mermaid.svg). Falta el renderer correspondiente (ver --check).

Mapa de dependencias entre clases

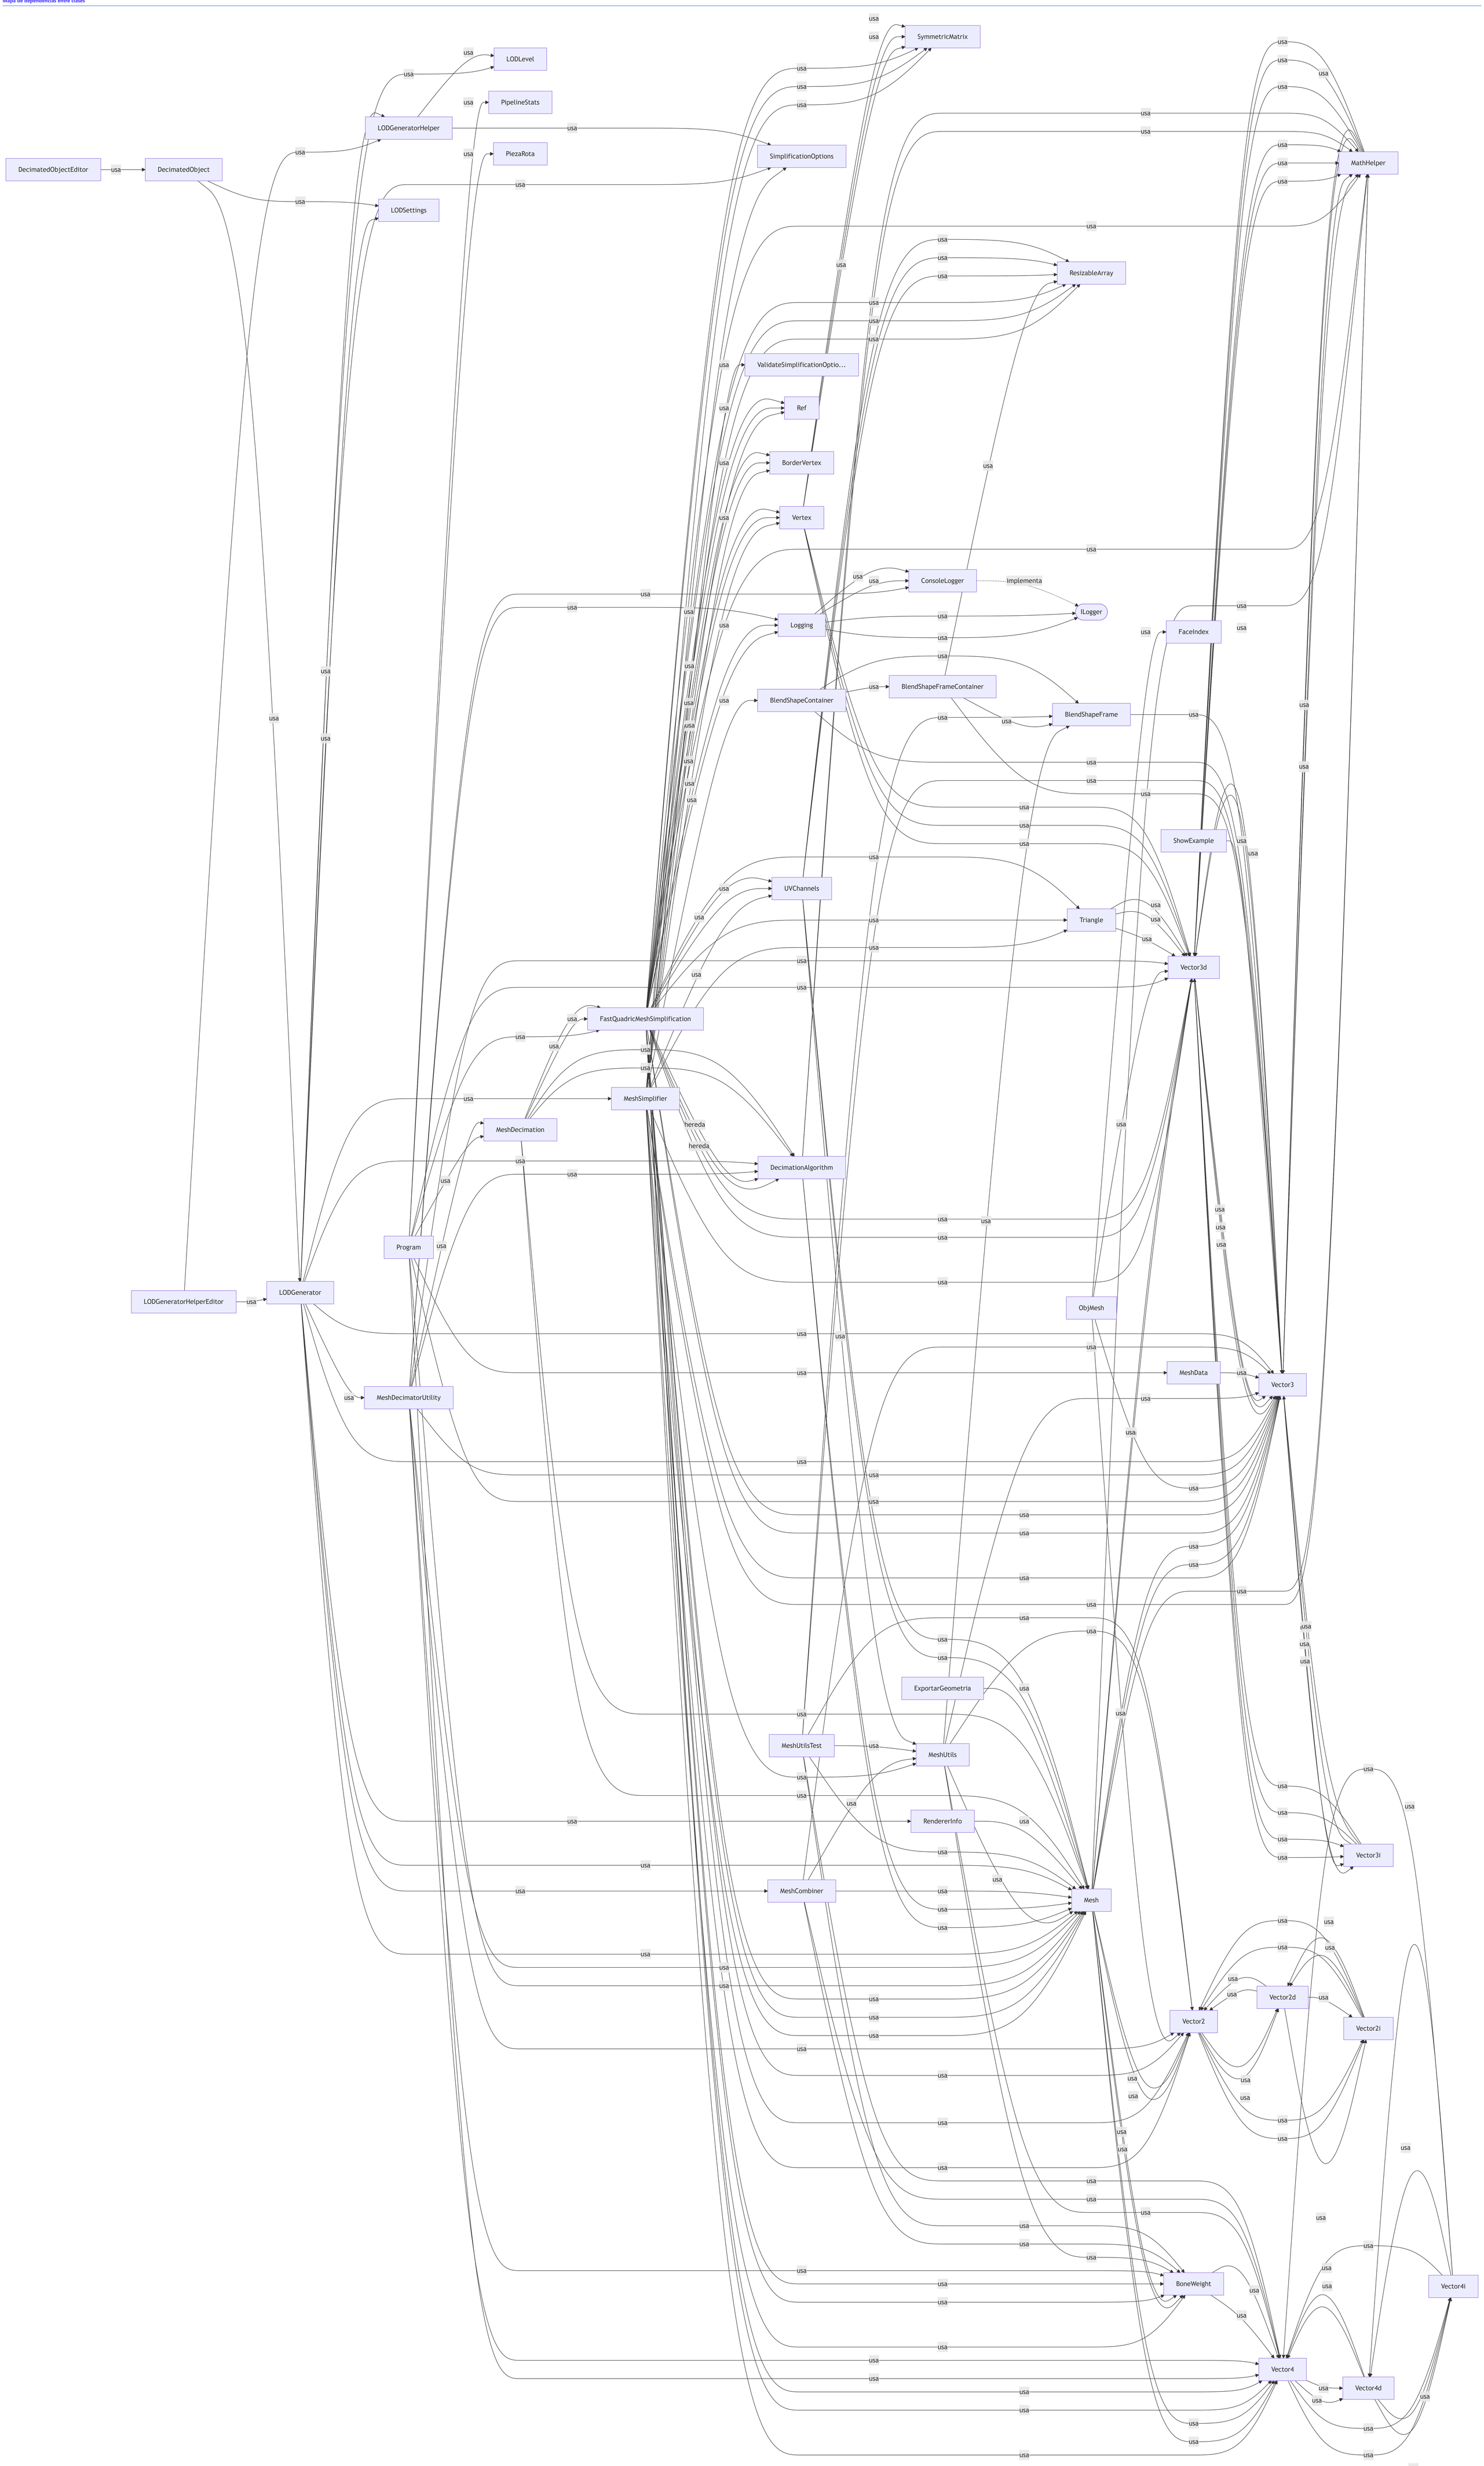

Diagrama de Namespaces - _Revit_EXE_Geometrias

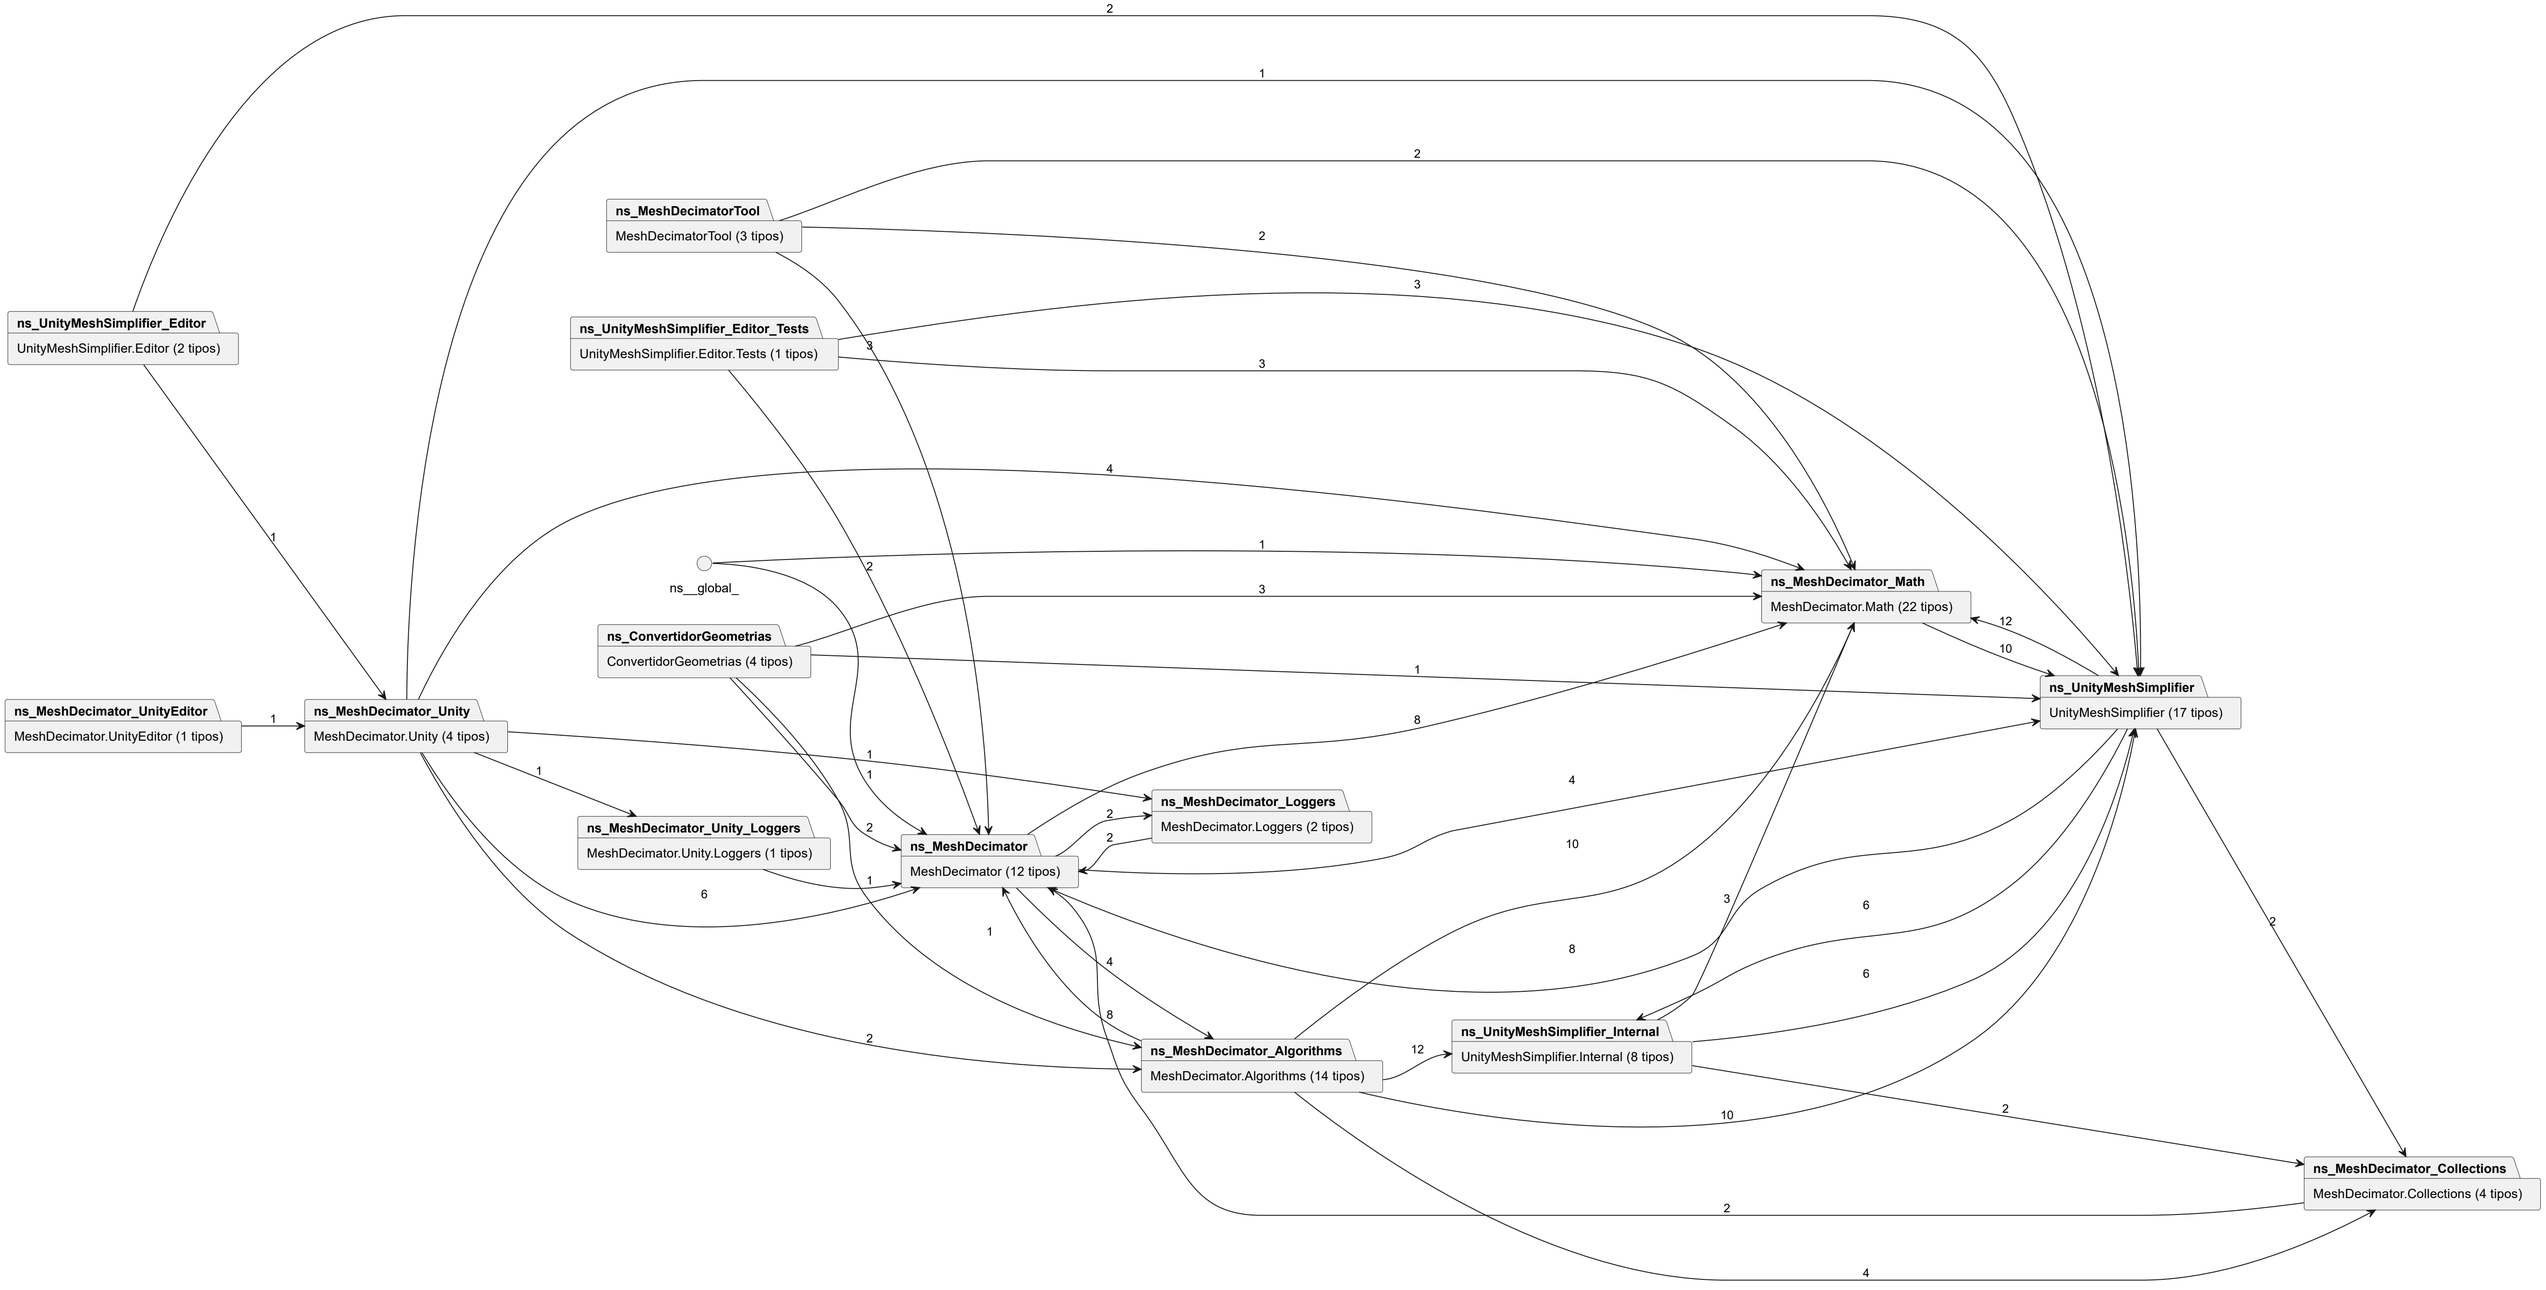

Diagrama de namespaces (Mermaid)

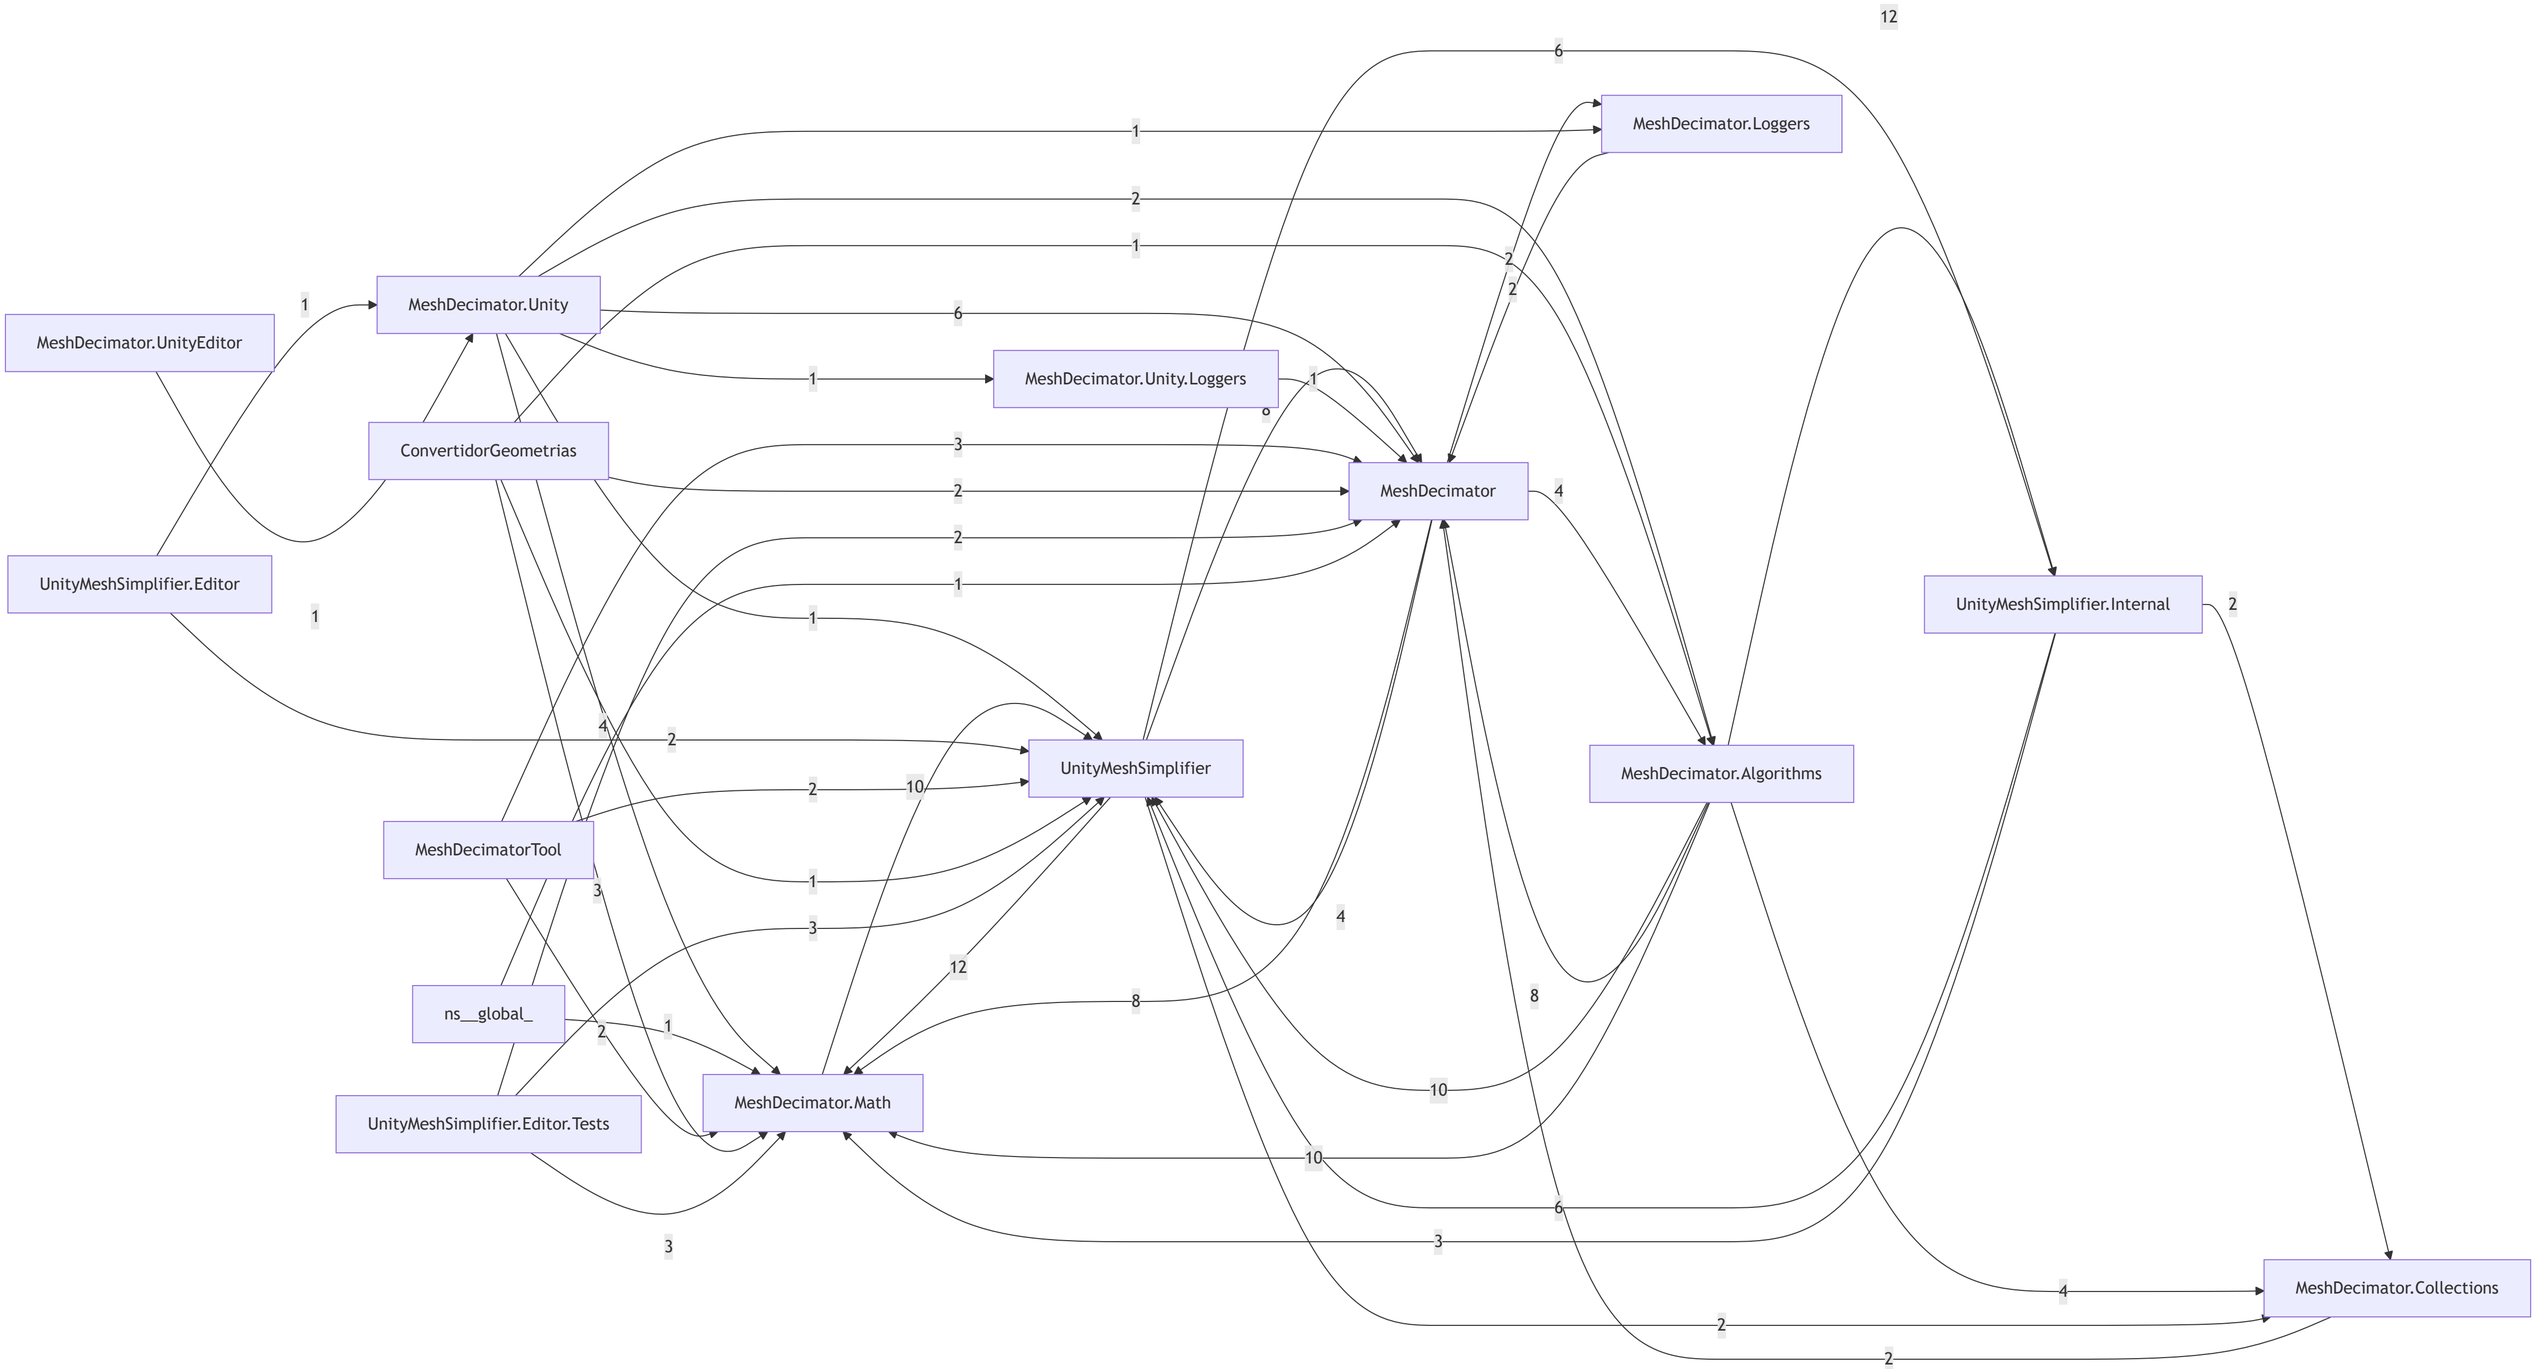

Documentación de _Revit_EXE_Geometrias

Generado: 2026-07-28 19:26:08

Resumen

- Archivos: 78
- Carpetas: 26
- Namespaces: 14
- Clases: 93
- Interfaces: 2
- Enums: 2
- Métodos: 790
- Propiedades: 167
- Campos: 537
- Líneas totales: 28516 (código 18367, comentarios 7497, blancos 2652)

Mapa de relaciones

- **Logging** usa **ILogger**
- **Logging** usa **ConsoleLogger**
- **DecimationAlgorithm** usa **MathHelper**
- **DecimationAlgorithm** usa **Mesh**
- **UVChannels** usa **Mesh**
- **UVChannels** usa **ResizableArray**
- **ConsoleLogger** implementa **ILogger**
- **LODBackupComponent** hereda de **MonoBehaviour**
- **MeshUtils** usa **Mesh**
- **MeshUtils** usa **Vector3**
- **MeshUtils** usa **Vector4**
- **MeshUtils** usa **BoneWeight**
- **MeshUtils** usa **Vector2**
- **MeshUtils** usa **BlendShape**
- **MeshUtils** usa **BlendShapeFrame**
- **MeshDecimatorUtility** usa **Logging**
- **MeshDecimatorUtility** usa **ConsoleLogger**
- **MeshDecimatorUtility** usa **UnityLogger**
- **MeshDecimatorUtility** usa **Vector3d**
- **MeshDecimatorUtility** usa **Vector2**
- **MeshDecimatorUtility** usa **Vector3**
- **MeshDecimatorUtility** usa **Vector4**
- **MeshDecimatorUtility** usa **BoneWeight**
- **MeshDecimatorUtility** usa **Mesh**
- **MeshDecimatorUtility** usa **DecimationAlgorithm**
- **MeshDecimatorUtility** usa **MeshDecimation**
- **MeshDecimatorUtility** usa **Algorithm**
- **LODGenerator** usa **Mesh**
- **LODGenerator** usa **DecimationAlgorithm**
- **LODGenerator** usa **MeshDecimatorUtility**
- **LODGenerator** usa **LODSettings**
- **LODGenerator** usa **Vector3**
- **DecimatedObject** hereda de **MonoBehaviour**
- **DecimatedObject** usa **LODSettings**
- **DecimatedObject** usa **LODGenerator**
- **Vector3** implementa **IEquatable**
- **Vector3** usa **Vector3d**
- **Vector3** usa **Vector3i**
- **Vector3** usa **MathHelper**
- **Vector2i** implementa **IEquatable**
- **Vector2i** usa **Vector2**
- **Vector2i** usa **Vector2d**
- **Vector2d** implementa **IEquatable**
- **Vector2d** usa **Vector2**
- **Vector2d** usa **Vector2i**
- **Vector2** implementa **IEquatable**
- **Vector2** usa **Vector2d**
- **Vector2** usa **Vector2i**
- **ShowExample** hereda de **MonoBehaviour**
- **ShowExample** usa **Vector3**
- **Triangle** implementa **IEquatable**
- **Triangle** usa **Vector3d**
- **BorderVertexComparer** implementa **IComparer**
- **BorderVertexComparer** usa **BorderVertex**
- **BlendShapeFrameContainer** usa **Vector3**
- **BlendShapeFrameContainer** usa **BlendShapeFrame**
- **BlendShapeFrameContainer** usa **ResizableArray**
- **UnityLogger** implementa **ILogger**
- **BlendShapeContainer** usa **BlendShapeFrameContainer**
- **BlendShapeContainer** usa **BlendShape**
- **BlendShapeContainer** usa **Vector3**
- **BlendShapeContainer** usa **BlendShapeFrame**
- **Vector3d** implementa **IEquatable**
- **Vector3d** usa **Vector3**
- **Vector3d** usa **MathHelper**
- **MathHelper** usa **Vector3d**
- **LODGeneratorHelperEditor** hereda de **Editor**
- **LODGeneratorHelperEditor** usa **LODGeneratorHelper**
- **LODGeneratorHelperEditor** usa **IOUtils**
- **LODGeneratorHelperEditor** usa **LODGenerator**

- **LODGeneratorHelper** hereda de **MonoBehaviour**
- **LODGeneratorHelper** usa **SimplificationOptions**
- **LODGeneratorHelper** usa **LODLevel**
- **UVChannels** usa **Mesh**
- **UVChannels** usa **ResizableArray**
- **ConsoleLogger** implementa **ILogger**
- **Vector4i** implementa **IEquatable**
- **Vector4i** usa **Vector4**
- **Vector4i** usa **Vector4d**
- **Vector3d** implementa **IEquatable**
- **Vector3d** usa **Vector3**
- **Vector3d** usa **Vector3i**
- **Vector3d** usa **MathHelper**
- **ValidateSimplificationOptionsException** hereda de **Exception**
- **Vertex** implementa **IEquatable**
- **Vertex** usa **Vector3d**
- **Vertex** usa **SymmetricMatrix**
- **UVChannels** usa **MeshUtils**
- **UVChannels** usa **ResizableArray**
- **Vector2** implementa **IEquatable**
- **Vector2** usa **Vector2d**
- **Vector2** usa **Vector2i**
- **MathHelper** usa **Vector3**
- **MathHelper** usa **Vector3d**
- **Program** usa **MathHelper**
- **Program** usa **ObjMesh**
- **Program** usa **Mesh**
- **Program** usa **MeshDecimation**
- **Program** usa **Algorithm**
- **ObjMesh** usa **FaceIndex**
- **ObjMesh** usa **Vector3d**
- **ObjMesh** usa **Vector3**
- **ObjMesh** usa **Vector2**
- **FaceIndex** implementa **IEquatable**
- **DecimatedObjectEditor** hereda de **Editor**
- **DecimatedObjectEditor** usa **DecimatedObject**
- **BoneWeight** implementa **IEquatable**
- **BoneWeight** usa **Vector4**
- **MeshData** usa **Vector3**
- **Program** usa **MeshData**
- **Program** usa **PipelineStats**
- **Program** usa **PiezaRota**
- **Program** usa **Vector3**
- **Program** usa **Vector3d**
- **Program** usa **Mesh**
- **Program** usa **FastQuadricMeshSimplification**
- **Program** usa **MeshDecimation**
- **Program** usa **Vector4**
- **FastQuadricMeshSimplification** hereda de **DecimationAlgorithm**
- **FastQuadricMeshSimplification** usa **Vector3d**
- **FastQuadricMeshSimplification** usa **SymmetricMatrix**
- **FastQuadricMeshSimplification** usa **BorderVertex**
- **FastQuadricMeshSimplification** usa **BorderVertexComparer**
- **FastQuadricMeshSimplification** usa **Triangle**
- **FastQuadricMeshSimplification** usa **Vertex**
- **FastQuadricMeshSimplification** usa **Ref**
- **FastQuadricMeshSimplification** usa **Vector3**
- **FastQuadricMeshSimplification** usa **Vector4**
- **FastQuadricMeshSimplification** usa **Vector2**
- **FastQuadricMeshSimplification** usa **BoneWeight**
- **FastQuadricMeshSimplification** usa **Logging**
- **FastQuadricMeshSimplification** usa **MathHelper**
- **FastQuadricMeshSimplification** usa **Mesh**
- **FastQuadricMeshSimplification** usa **ResizableArray**
- **FastQuadricMeshSimplification** usa **UVChannels**
- **Triangle** usa **Vector3d**
- **Vertex** usa **Vector3d**
- **Vertex** usa **SymmetricMatrix**
- **BorderVertexComparer** implementa **IComparer**
- **BorderVertexComparer** usa **BorderVertex**
- **Vector4d** implementa **IEquatable**
- **Vector4d** usa **Vector4**
- **Vector4d** usa **Vector4i**
- **Vector4** implementa **IEquatable**
- **Vector4** usa **Vector4d**
- **Vector4** usa **Vector4i**
- **Vector3i** implementa **IEquatable**
- **Vector3i** usa **Vector3**
- **Vector3i** usa **Vector3d**
- **Vector3d** implementa **IEquatable**
- **Vector3d** usa **Vector3**
- **Vector3d** usa **Vector3i**
- **Vector3d** usa **MathHelper**
- **Vector4i** implementa **IEquatable**
- **Vector4i** usa **Vector4**
- **Vector4i** usa **Vector4d**
- **MeshDecimation** usa **DecimationAlgorithm**
- **MeshDecimation** usa **Algorithm**
- **MeshDecimation** usa **FastQuadricMeshSimplification**
- **MeshDecimation** usa **Mesh**
- **Mesh** usa **Vector3d**
- **Mesh** usa **Vector3**
- **Mesh** usa **Vector4**
- **Mesh** usa **Vector2**
- **Mesh** usa **BoneWeight**

- **Mesh** usa **MathHelper**
- **Logging** usa **ILogger**
- **Logging** usa **ConsoleLogger**
- **BoneWeight** implementa **IEquatable**
- **BoneWeight** usa **Vector4**
- **MeshSimplifier** usa **MeshUtils**
- **MeshSimplifier** usa **SimplificationOptions**
- **MeshSimplifier** usa **Triangle**
- **MeshSimplifier** usa **Vertex**
- **MeshSimplifier** usa **Ref**
- **MeshSimplifier** usa **Vector3**
- **MeshSimplifier** usa **Vector4**
- **MeshSimplifier** usa **Vector2**
- **MeshSimplifier** usa **BoneWeight**
- **MeshSimplifier** usa **BlendShapeContainer**
- **MeshSimplifier** usa **Mesh**
- **MeshSimplifier** usa **SymmetricMatrix**
- **MeshSimplifier** usa **Vector3d**
- **MeshSimplifier** usa **MathHelper**
- **MeshSimplifier** usa **BorderVertex**
- **MeshSimplifier** usa **BorderVertexComparer**
- **MeshSimplifier** usa **BlendShape**
- **MeshSimplifier** usa **ValidateSimplificationOptionsException**
- **MeshSimplifier** usa **ResizableArray**
- **MeshSimplifier** usa **UVChannels**
- **BlendShape** usa **BlendShapeFrame**
- **BlendShapeFrame** usa **Vector3**
- **MeshUtilsTest** usa **Mesh**
- **MeshUtilsTest** usa **Vector3**
- **MeshUtilsTest** usa **BlendShape**
- **MeshUtilsTest** usa **BlendShapeFrame**
- **MeshUtilsTest** usa **MeshUtils**
- **MeshUtilsTest** usa **Vector4**
- **MeshUtilsTest** usa **Vector2**
- **MeshUtilsTest** usa **BoneWeight**
- **ExportarGeometria** usa **Mesh**
- **FastQuadricMeshSimplification** hereda de **DecimationAlgorithm**
- **FastQuadricMeshSimplification** usa **Vector3d**
- **FastQuadricMeshSimplification** usa **SymmetricMatrix**
- **FastQuadricMeshSimplification** usa **BorderVertex**
- **FastQuadricMeshSimplification** usa **BorderVertexComparer**
- **FastQuadricMeshSimplification** usa **Triangle**
- **FastQuadricMeshSimplification** usa **Vertex**
- **FastQuadricMeshSimplification** usa **Ref**
- **FastQuadricMeshSimplification** usa **Vector3**
- **FastQuadricMeshSimplification** usa **Vector4**
- **FastQuadricMeshSimplification** usa **Vector2**
- **FastQuadricMeshSimplification** usa **BoneWeight**
- **FastQuadricMeshSimplification** usa **Logging**
- **FastQuadricMeshSimplification** usa **MathHelper**
- **FastQuadricMeshSimplification** usa **Mesh**
- **FastQuadricMeshSimplification** usa **ResizableArray**
- **FastQuadricMeshSimplification** usa **UVChannels**
- **Triangle** usa **Vector3d**
- **Vertex** usa **Vector3d**
- **Vertex** usa **SymmetricMatrix**
- **BorderVertexComparer** implementa **IComparer**
- **BorderVertexComparer** usa **BorderVertex**
- **DecimationAlgorithm** usa **MathHelper**
- **DecimationAlgorithm** usa **Mesh**
- **Vector3** implementa **IEquatable**
- **Vector3** usa **Vector3d**
- **Vector3** usa **Vector3i**
- **Vector3** usa **MathHelper**
- **Vector2i** implementa **IEquatable**
- **Vector2i** usa **Vector2**
- **Vector2i** usa **Vector2d**
- **Vector2d** implementa **IEquatable**
- **Vector2d** usa **Vector2**
- **Vector2d** usa **Vector2i**
- **Vector4d** implementa **IEquatable**
- **Vector4d** usa **Vector4**
- **Vector4d** usa **Vector4i**
- **Vector4** implementa **IEquatable**
- **Vector4** usa **Vector4d**
- **Vector4** usa **Vector4i**
- **Vector3i** implementa **IEquatable**
- **Vector3i** usa **Vector3**
- **Vector3i** usa **Vector3d**
- **MathHelper** usa **Vector3**
- **MathHelper** usa **Vector3d**
- **MeshDecimation** usa **DecimationAlgorithm**
- **MeshDecimation** usa **Algorithm**
- **MeshDecimation** usa **FastQuadricMeshSimplification**
- **MeshDecimation** usa **Mesh**
- **Mesh** usa **Vector3d**
- **Mesh** usa **Vector3**
- **Mesh** usa **Vector4**
- **Mesh** usa **Vector2**
- **Mesh** usa **BoneWeight**
- **Mesh** usa **MathHelper**
- **MeshCombiner** usa **Mesh**
- **MeshCombiner** usa **Vector3**
- **MeshCombiner** usa **Vector4**
- **MeshCombiner** usa **BoneWeight**

- **MeshCombiner** usa **MeshUtils**
- **LODGenerator** usa **Mesh**
- **LODGenerator** usa **LODGeneratorHelper**
- **LODGenerator** usa **SimplificationOptions**
- **LODGenerator** usa **LODLevel**
- **LODGenerator** usa **MeshSimplifier**
- **LODGenerator** usa **RendererInfo**
- **LODGenerator** usa **MeshCombiner**
- **LODGenerator** usa **Vector3**
- **LODGenerator** usa **LODBackupComponent**
- **RendererInfo** usa **Mesh**

Tipos

Namespace `(sin namespace)`

static class ExportarGeometria

- Archivo: `ExportarGeometria.cs` (172 líneas)
- Usa: `Mesh`

Campos:

- FORMAT_MAGIC : int
- FORMAT_VERSION : int

Métodos:

- public static ExportRawDump(Document doc, string filePath = @"C:\.TBT\Proyectos_Revit_EXE_Geometrias\PostProcesadoEXE\IN\export2.bin") : void
- private static ExportarElemento(Document doc, Element elem, Options geomOptions, BinaryWriter writer, Dictionary<int, byte[]> colorCache) : void
- private static ObtenerColorMaterial(Document doc, Element elem, ElementId materialElementId, Dictionary<int, byte[]> cache) : byte[]
- private static ObtenerTodosLosSolidos(GeometryElement geomElem) : List<Solid>

class ShowExample

- Archivo: `ShowExample.cs` (35 líneas)
- Hereda de: `MonoBehaviour`
- Usa: `Vector3`

Campos:

- cameraTransform : Transform
- targetTransform : Transform
- cameraAngleTime : float
- cameraMinDistance : float
- cameraMaxDistance : float
- cameraDistanceTime : float
- cameraSwayHeight : float
- cameraSwayTime : float

Métodos:

- private Update() : void

Namespace `ConvertidorGeometrias`

class MeshData

- Archivo: `Program.cs` (14 líneas)
- Usa: `Vector3`

Campos:

- ElementId : int
- Guid : string
- MaterialId : int
- CategoryId : int
- ColR : byte
- ColG : byte
- ColB : byte
- ColA : byte
- HasColor : bool
- Vertices : List<Vector3>
- Normals : List<Vector3>
- Indices : List<int>

class PiezaRota

- Archivo: `Program.cs` (7 líneas)

Campos:

- Guid : string
- ElementId : int
- Problema : string
- Detalle : string

class PipelineStats

- Archivo: `Program.cs` (19 líneas)

Campos:

- FormatVersion : int
- InputMeshes : int
- OutputPieces : int
- VertsIn : long

- VertsWelded : long
- VertsOut : long
- TrisIn : long
- TrisOut : long
- DegenerateRemoved : long
- Fallbacks : int
- Retries : int
- Discarded : int
- NotDecimated : int
- ProtectedCat : int
- Transparent : int
- Instanced : int
- Repaired : int
- PoolMeshes : int
- TbvBytes : long

class Program

- Archivo: `Program.cs` (1206 líneas)
- Usa: `MeshData`, `PipelineStats`, `PiezaRota`, `Vector3`, `Vector3d`, `Mesh`, `FastQuadricMeshSimplification`, `MeshDecimation`, `Vector4`

Campos:

- FormatMagic : int
- WeldGrid : double
- SpikeTolerance : float
- MinVertsParaDecimar : int
- MinTrisParaDecimar : int
- CategoriasProtegidas : HashSet<int>
- APP_GUID : string
- CARPETA_TEMP : string
- RUTA_BASE_SALIDA : string
- RUTA_LOG : string

Métodos:

- private static EsVidrioProtegido(MeshData m) : bool
- private static Main(string[] args) : void
- private static EstaBloqueado(string path) : bool
- private static ProcesarArchivo(string filePath) : void
- private static Log(string msg) : void
- private static ConstruirReporte(PipelineStats s, List<PiezaRota> detectadas, List<PiezaRota> rotas, TimeSpan elapsed) : string
- private static Pct(long now, long before) : string
- private static ValidarPiezas(Dictionary<string, MeshData> originales, List<MeshData> finales) : List<PiezaRota>
- private static RepararPiezas(List<PiezaRota> rotas, Dictionary<string, MeshData> originales, List<MeshData> finales, PipelineStats stats) : void
- private static ClonarConNormales(MeshData src) : MeshData
- private static BBoxStr(List<Vector3> verts) : string
- private static OptimizeMeshes(List<MeshData> inputMeshes, PipelineStats stats, Dictionary<string, MeshData> weldedOriginals) : List<MeshData>
- private static ComputeTarget(int originalTriangles) : int
- private static TryDecimate(MeshData source, int targetTriangles, PipelineStats stats) : MeshData
- private static TotalArea(MeshData mesh) : double
- private static GetBounds(List<Vector3> verts, out Vector3 min, out Vector3 max) : void
- private static WeldVertices(MeshData mesh) : void
- private static RemoveDegenerateTriangles(MeshData mesh) : long
- private static CompactVertices(MeshData mesh) : void
- private static ComputeNormals(MeshData mesh) : void
- private static LeerBinario(string path, PipelineStats stats) : List<MeshData>
- private static ExportToObj(List<MeshData> meshes, string outputPath) : void
- private static ExportToGlb(List<MeshData> meshes, string outputPath, PipelineStats stats) : void
- private static GeometryHash(MeshData mesh) : long
- private static EsCopiaTrasladada(MeshData a, MeshData b, out Vector3 delta) : bool
- private static ExportToViewerBin(List<MeshData> meshes, string path, PipelineStats stats) : void
- private static Snorm(float f) : sbyte

Namespace `MeshDecimator`

enum Algorithm

- Archivo: `MeshDecimation.cs` (11 líneas)

Campos:

- Default : enum
- FastQuadricMesh : enum

enum Algorithm

- Archivo: `MeshDecimation.cs` (11 líneas)

Campos:

- Default : enum
- FastQuadricMesh : enum

struct BoneWeight

- Archivo: `BoneWeight.cs` (214 líneas)
- Implementa: `IEquatable`
- Usa: `Vector4`

Campos:

- boneIndex0 : int
- boneIndex1 : int
- boneIndex2 : int
- boneIndex3 : int
- boneWeight0 : float

- boneWeight1 : float
- boneWeight2 : float
- boneWeight3 : float

Métodos:

- public BoneWeight(int boneIndex0, int boneIndex1, int boneIndex2, int boneIndex3, float boneWeight0, float boneWeight1, float boneWeight2, float boneWeight3) : (constructor)
- private MergeBoneWeight(int boneIndex, float weight) : void
- private Normalize() : void
- public GetHashCode() : int
- public Equals(object obj) : bool
- public Equals(BoneWeight other) : bool
- public ToString() : string
- public static Merge(ref BoneWeight a, ref BoneWeight b) : void

struct BoneWeight

- Archivo: `BoneWeight.cs` (214 líneas)
- Implementa: `IEquatable`
- Usa: `Vector4`

Campos:

- boneIndex0 : int
- boneIndex1 : int
- boneIndex2 : int
- boneIndex3 : int
- boneWeight0 : float
- boneWeight1 : float
- boneWeight2 : float
- boneWeight3 : float

Métodos:

- public BoneWeight(int boneIndex0, int boneIndex1, int boneIndex2, int boneIndex3, float boneWeight0, float boneWeight1, float boneWeight2, float boneWeight3) : (constructor)
- private MergeBoneWeight(int boneIndex, float weight) : void
- private Normalize() : void
- public GetHashCode() : int
- public Equals(object obj) : bool
- public Equals(BoneWeight other) : bool
- public ToString() : string
- public static Merge(ref BoneWeight a, ref BoneWeight b) : void

interface ILogger

- Archivo: `Logging.cs` (20 líneas)

Métodos:

- public LogVerbose(string text) : void
- public LogWarning(string text) : void
- public LogError(string text) : void

interface ILogger

- Archivo: `Logging.cs` (20 líneas)

Métodos:

- public LogVerbose(string text) : void
- public LogWarning(string text) : void
- public LogError(string text) : void

static class Logging

- Archivo: `Logging.cs` (116 líneas)
- Usa: `ILogger`, `ConsoleLogger`

Propiedades:

- Logger : ILogger

Campos:

- logger : ILogger
- syncObj : object

Métodos:

- private static Logging() : (constructor)
- public static LogVerbose(string text) : void
- public static LogVerbose(string format, params object[] args) : void
- public static LogWarning(string text) : void
- public static LogWarning(string format, params object[] args) : void
- public static LogError(string text) : void
- public static LogError(string format, params object[] args) : void

static class Logging

- Archivo: `Logging.cs` (116 líneas)
- Usa: `ILogger`, `ConsoleLogger`

Propiedades:

- Logger : ILogger

Campos:

- logger : ILogger

- syncObj : object

Métodos:

- private static Logging() : (constructor)
- public static LogVerbose(string text) : void
- public static LogVerbose(string format, params object[] args) : void
- public static LogWarning(string text) : void
- public static LogWarning(string format, params object[] args) : void
- public static LogError(string text) : void
- public static LogError(string format, params object[] args) : void

class Mesh

- Archivo: `Mesh.cs` (919 líneas)
- Usa: `Vector3d`, `Vector3`, `Vector4`, `Vector2`, `BoneWeight`, `MathHelper`

Propiedades:

- VertexCount : int
- SubMeshCount : int
- TriangleCount : int
- Vertices : Vector3d[]
- Indices : int[]
- Normals : Vector3[]
- Tangents : Vector4[]
- UV1 : Vector2[]
- UV2 : Vector2[]
- UV3 : Vector2[]
- UV4 : Vector2[]
- Colors : Vector4[]
- BoneWeights : BoneWeight[]

Campos:

- UVChannelCount : int
- vertices : Vector3d[]
- indices : int[][]
- normals : Vector3[]
- tangents : Vector4[]
- uvs2D : Vector2[][]
- uvs3D : Vector3[][]
- uvs4D : Vector4[][]
- colors : Vector4[]
- boneWeights : BoneWeight[]
- emptyIndices : int[]

Métodos:

- public Mesh(Vector3d[] vertices, int[] indices) : (constructor)
- public Mesh(Vector3d[] vertices, int[][] indices) : (constructor)
- private ClearVertexAttributes() : void
- public RecalculateNormals() : void
- public RecalculateTangents() : void
- public GetTriangleCount(int subMeshIndex) : int
- public GetIndices(int subMeshIndex) : int[]
- public GetSubMeshIndices() : int[][]
- public SetIndices(int subMeshIndex, int[] indices) : void
- public GetUVDimension(int channel) : int
- public GetUVs2D(int channel) : Vector2[]
- public GetUVs3D(int channel) : Vector3[]
- public GetUVs4D(int channel) : Vector4[]
- public GetUVs(int channel, List<Vector2> uvs) : void
- public GetUVs(int channel, List<Vector3> uvs) : void
- public GetUVs(int channel, List<Vector4> uvs) : void
- public SetUVs(int channel, Vector2[] uvs) : void
- public SetUVs(int channel, Vector3[] uvs) : void
- public SetUVs(int channel, Vector4[] uvs) : void
- public SetUVs(int channel, List<Vector2> uvs) : void
- public SetUVs(int channel, List<Vector3> uvs) : void
- public SetUVs(int channel, List<Vector4> uvs) : void
- public ToString() : string

class Mesh

- Archivo: `Mesh.cs` (919 líneas)
- Usa: `Vector3d`, `Vector3`, `Vector4`, `Vector2`, `BoneWeight`, `MathHelper`

Propiedades:

- VertexCount : int
- SubMeshCount : int
- TriangleCount : int
- Vertices : Vector3d[]
- Indices : int[]
- Normals : Vector3[]
- Tangents : Vector4[]
- UV1 : Vector2[]
- UV2 : Vector2[]
- UV3 : Vector2[]
- UV4 : Vector2[]
- Colors : Vector4[]
- BoneWeights : BoneWeight[]

Campos:

- UVChannelCount : int
- vertices : Vector3d[]

- indices : int[][]
- normals : Vector3[]
- tangents : Vector4[]
- uvs2D : Vector2[][]
- uvs3D : Vector3[][]
- uvs4D : Vector4[][]
- colors : Vector4[]
- boneWeights : BoneWeight[]
- emptyIndices : int[]

Métodos:

- public Mesh(Vector3d[] vertices, int[] indices) : (constructor)
- public Mesh(Vector3d[] vertices, int[][] indices) : (constructor)
- private ClearVertexAttributes() : void
- public RecalculateNormals() : void
- public RecalculateTangents() : void
- public GetTriangleCount(int subMeshIndex) : int
- public GetIndices(int subMeshIndex) : int[]
- public GetSubMeshIndices() : int[][]
- public SetIndices(int subMeshIndex, int[] indices) : void
- public GetUVDimension(int channel) : int
- public GetUVs2D(int channel) : Vector2[]
- public GetUVs3D(int channel) : Vector3[]
- public GetUVs4D(int channel) : Vector4[]
- public GetUVs(int channel, List<Vector2> uvs) : void
- public GetUVs(int channel, List<Vector3> uvs) : void
- public GetUVs(int channel, List<Vector4> uvs) : void
- public SetUVs(int channel, Vector2[] uvs) : void
- public SetUVs(int channel, Vector3[] uvs) : void
- public SetUVs(int channel, Vector4[] uvs) : void
- public SetUVs(int channel, List<Vector2> uvs) : void
- public SetUVs(int channel, List<Vector3> uvs) : void
- public SetUVs(int channel, List<Vector4> uvs) : void
- public ToString() : string

static class MeshDecimation

- Archivo: `MeshDecimation.cs` (128 líneas)
- Usa: `DecimationAlgorithm`, `Algorithm`, `FastQuadricMeshSimplification`, `Mesh`

Métodos:

- public static CreateAlgorithm(Algorithm algorithm) : DecimationAlgorithm
- public static DecimateMesh(Mesh mesh, int targetTriangleCount) : Mesh
- public static DecimateMesh(Algorithm algorithm, Mesh mesh, int targetTriangleCount) : Mesh
- public static DecimateMesh(DecimationAlgorithm algorithm, Mesh mesh, int targetTriangleCount) : Mesh
- public static DecimateMeshLossless(Mesh mesh) : Mesh
- public static DecimateMeshLossless(Algorithm algorithm, Mesh mesh) : Mesh
- public static DecimateMeshLossless(DecimationAlgorithm algorithm, Mesh mesh) : Mesh

static class MeshDecimation

- Archivo: `MeshDecimation.cs` (128 líneas)
- Usa: `DecimationAlgorithm`, `Algorithm`, `FastQuadricMeshSimplification`, `Mesh`

Métodos:

- public static CreateAlgorithm(Algorithm algorithm) : DecimationAlgorithm
- public static DecimateMesh(Mesh mesh, int targetTriangleCount) : Mesh
- public static DecimateMesh(Algorithm algorithm, Mesh mesh, int targetTriangleCount) : Mesh
- public static DecimateMesh(DecimationAlgorithm algorithm, Mesh mesh, int targetTriangleCount) : Mesh
- public static DecimateMeshLossless(Mesh mesh) : Mesh
- public static DecimateMeshLossless(Algorithm algorithm, Mesh mesh) : Mesh
- public static DecimateMeshLossless(DecimationAlgorithm algorithm, Mesh mesh) : Mesh

Namespace `MeshDecimator.Algorithms`

struct BorderVertex

- Archivo: `FastQuadricMeshSimplification.cs` (11 líneas)

Campos:

- index : int
- hash : int

Métodos:

- public BorderVertex(int index, int hash) : (constructor)

struct BorderVertex

- Archivo: `FastQuadricMeshSimplification.cs` (11 líneas)

Campos:

- index : int
- hash : int

Métodos:

- public BorderVertex(int index, int hash) : (constructor)

class BorderVertexComparer

- Archivo: `FastQuadricMeshSimplification.cs` (9 líneas)
- Implementa: `IComparer`

- Usa: `BorderVertex`

Campos:

- instance : BorderVertexComparer

Métodos:

- public Compare(BorderVertex x, BorderVertex y) : int

class BorderVertexComparer

- Archivo: `FastQuadricMeshSimplification.cs` (9 líneas)
- Implementa: `IComparer`
- Usa: `BorderVertex`

Campos:

- instance : BorderVertexComparer

Métodos:

- public Compare(BorderVertex x, BorderVertex y) : int

abstract class DecimationAlgorithm

- Archivo: `DecimationAlgorithm.cs` (129 líneas)
- Usa: `MathHelper`, `Mesh`

Propiedades:

- KeepBorders : bool
- PreserveBorders : bool
- KeepLinkedVertices : bool
- MaxVertexCount : int
- Verbose : bool

Campos:

- preserveBorders : bool
- maxVertexCount : int
- verbose : bool
- statusReportInvoker : StatusReportCallback

Métodos:

- protected ReportStatus(int iteration, int originalTris, int currentTris, int targetTris) : void
- public Initialize(Mesh mesh) : void
- public DecimateMesh(int targetTrisCount) : void
- public DecimateMeshLossless() : void
- public ToMesh() : Mesh

abstract class DecimationAlgorithm

- Archivo: `DecimationAlgorithm.cs` (129 líneas)
- Usa: `MathHelper`, `Mesh`

Propiedades:

- KeepBorders : bool
- PreserveBorders : bool
- KeepLinkedVertices : bool
- MaxVertexCount : int
- Verbose : bool

Campos:

- preserveBorders : bool
- maxVertexCount : int
- verbose : bool
- statusReportInvoker : StatusReportCallback

Métodos:

- protected ReportStatus(int iteration, int originalTris, int currentTris, int targetTris) : void
- public Initialize(Mesh mesh) : void
- public DecimateMesh(int targetTrisCount) : void
- public DecimateMeshLossless() : void
- public ToMesh() : Mesh

class FastQuadricMeshSimplification

- Archivo: `FastQuadricMeshSimplification.cs` (1490 líneas)
- Hereda de: `DecimationAlgorithm`
- Usa: `Vector3d`, `SymmetricMatrix`, `BorderVertex`, `BorderVertexComparer`, `Triangle`, `Vertex`, `Ref`, `Vector3`, `Vector4`, `Vector2`, `BoneWeight`, `Logging`, `MathHelper`, `Mesh`, `ResizableArray`, `UVChannels`

Propiedades:

- PreserveSeams : bool
- PreserveFoldovers : bool
- EnableSmartLink : bool
- MaxIterationCount : int
- Agressiveness : double
- VertexLinkDistanceSqr : double

Campos:

- DoubleEpsilon : double
- preserveSeams : bool

- preserveFoldovers : bool
- enableSmartLink : bool
- maxIterationCount : int
- agressiveness : double
- vertexLinkDistanceSqr : double
- subMeshCount : int
- triangles : ResizableArray<Triangle>
- vertices : ResizableArray<Vertex>
- refs : ResizableArray<Ref>
- vertNormals : ResizableArray<Vector3>
- vertTangents : ResizableArray<Vector4>
- vertUV2D : UVChannels<Vector2>
- vertUV3D : UVChannels<Vector3>
- vertUV4D : UVChannels<Vector4>
- vertColors : ResizableArray<Vector4>
- vertBoneWeights : ResizableArray<BoneWeight>
- remainingVertices : int
- errArr : double[]
- attributeIndexArr : int[]

Métodos:

- public FastQuadricMeshSimplification() : (constructor)
- private InitializeVertexAttribute(T[] attributeValues, string attributeName) : ResizableArray<T>
- private VertexError(ref SymmetricMatrix q, double x, double y, double z) : double
- private CalculateError(ref Vertex vert0, ref Vertex vert1, out Vector3d result, out int resultIndex) : double
- private Flipped(ref Vector3d p, int i0, int i1, ref Vertex v0, bool[] deleted) : bool
- private UpdateTriangles(int i0, int ia0, ref Vertex v, ResizableArray<bool> deleted, ref int deletedTriangles) : void
- private MoveVertexAttributes(int i0, int i1) : void
- private MergeVertexAttributes(int i0, int i1) : void
- private AreUVsTheSame(int channel, int indexA, int indexB) : bool
- private RemoveVertexPass(int startTrisCount, int targetTrisCount, double threshold, ResizableArray<bool> deleted0, ResizableArray<bool> deleted1, ref int deletedTris) : void
- private UpdateMesh(int iteration) : void
- private UpdateReferences() : void
- private CompactMesh() : void
- public Initialize(Mesh mesh) : void
- public DecimateMesh(int targetTrisCount) : void
- public DecimateMeshLossless() : void
- public ToMesh() : Mesh

class FastQuadricMeshSimplification

- Archivo: `FastQuadricMeshSimplification.cs` (1490 líneas)
- Hereda de: `DecimationAlgorithm`
- Usa: `Vector3d`, `SymmetricMatrix`, `BorderVertex`, `BorderVertexComparer`, `Triangle`, `Vertex`, `Ref`, `Vector3`, `Vector4`, `Vector2`, `BoneWeight`, `Logging`, `MathHelper`, `Mesh`, `ResizableArray`, `UVChannels`

Propiedades:

- PreserveSeams : bool
- PreserveFoldovers : bool
- EnableSmartLink : bool
- MaxIterationCount : int
- Agressiveness : double
- VertexLinkDistanceSqr : double

Campos:

- DoubleEpsilon : double
- preserveSeams : bool
- preserveFoldovers : bool
- enableSmartLink : bool
- maxIterationCount : int
- agressiveness : double
- vertexLinkDistanceSqr : double
- subMeshCount : int
- triangles : ResizableArray<Triangle>
- vertices : ResizableArray<Vertex>
- refs : ResizableArray<Ref>
- vertNormals : ResizableArray<Vector3>
- vertTangents : ResizableArray<Vector4>
- vertUV2D : UVChannels<Vector2>
- vertUV3D : UVChannels<Vector3>
- vertUV4D : UVChannels<Vector4>
- vertColors : ResizableArray<Vector4>
- vertBoneWeights : ResizableArray<BoneWeight>
- remainingVertices : int
- errArr : double[]
- attributeIndexArr : int[]

Métodos:

- public FastQuadricMeshSimplification() : (constructor)
- private InitializeVertexAttribute(T[] attributeValues, string attributeName) : ResizableArray<T>
- private VertexError(ref SymmetricMatrix q, double x, double y, double z) : double
- private CalculateError(ref Vertex vert0, ref Vertex vert1, out Vector3d result, out int resultIndex) : double
- private Flipped(ref Vector3d p, int i0, int i1, ref Vertex v0, bool[] deleted) : bool
- private UpdateTriangles(int i0, int ia0, ref Vertex v, ResizableArray<bool> deleted, ref int deletedTriangles) : void
- private MoveVertexAttributes(int i0, int i1) : void
- private MergeVertexAttributes(int i0, int i1) : void
- private AreUVsTheSame(int channel, int indexA, int indexB) : bool
- private RemoveVertexPass(int startTrisCount, int targetTrisCount, double threshold, ResizableArray<bool> deleted0, ResizableArray<bool> deleted1, ref int deletedTris) : void
- private UpdateMesh(int iteration) : void
- private UpdateReferences() : void
- private CompactMesh() : void
- public Initialize(Mesh mesh) : void
- public DecimateMesh(int targetTrisCount) : void

- public DecimateMeshLossless() : void
- public ToMesh() : Mesh

struct Ref

- Archivo: `FastQuadricMeshSimplification.cs` (11 líneas)

Campos:

- tid : int
- tvertex : int

Métodos:

- public Set(int tid, int tvertex) : void

struct Ref

- Archivo: `FastQuadricMeshSimplification.cs` (11 líneas)

Campos:

- tid : int
- tvertex : int

Métodos:

- public Set(int tid, int tvertex) : void

struct Triangle

- Archivo: `FastQuadricMeshSimplification.cs` (101 líneas)
- Usa: `Vector3d`

Campos:

- v0 : int
- v1 : int
- v2 : int
- subMeshIndex : int
- va0 : int
- va1 : int
- va2 : int
- err0 : double
- err1 : double
- err2 : double
- err3 : double
- deleted : bool
- dirty : bool
- n : Vector3d

Métodos:

- public Triangle(int v0, int v1, int v2, int subMeshIndex) : (constructor)
- public GetAttributeIndices(int[] attributeIndices) : void
- public SetAttributeIndex(int index, int value) : void
- public GetErrors(double[] err) : void

struct Triangle

- Archivo: `FastQuadricMeshSimplification.cs` (101 líneas)
- Usa: `Vector3d`

Campos:

- v0 : int
- v1 : int
- v2 : int
- subMeshIndex : int
- va0 : int
- va1 : int
- va2 : int
- err0 : double
- err1 : double
- err2 : double
- err3 : double
- deleted : bool
- dirty : bool
- n : Vector3d

Métodos:

- public Triangle(int v0, int v1, int v2, int subMeshIndex) : (constructor)
- public GetAttributeIndices(int[] attributeIndices) : void
- public SetAttributeIndex(int index, int value) : void
- public GetErrors(double[] err) : void

struct Vertex

- Archivo: `FastQuadricMeshSimplification.cs` (21 líneas)
- Usa: `Vector3d`, `SymmetricMatrix`

Campos:

- p : Vector3d
- tstart : int
- tcount : int
- q : SymmetricMatrix
- border : bool

- seam : bool
- foldover : bool

Métodos:

- public Vertex(Vector3d p) : (constructor)

struct Vertex

- Archivo: `FastQuadricMeshSimplification.cs` (21 líneas)
- Usa: `Vector3d`, `SymmetricMatrix`

Campos:

- p : Vector3d
- tstart : int
- tcount : int
- q : SymmetricMatrix
- border : bool
- seam : bool
- foldover : bool

Métodos:

- public Vertex(Vector3d p) : (constructor)

Namespace `MeshDecimator.Collections`

class ResizableArray

- Archivo: `ResizableArray.cs` (144 líneas)

Propiedades:

- Length : int
- Data : T[]

Campos:

- items : T[]
- length : int
- emptyArr : T[]

Métodos:

- public ResizableArray(int capacity) : (constructor)
- public ResizableArray(int capacity, int length) : (constructor)
- private IncreaseCapacity(int capacity) : void
- public Clear() : void
- public Resize(int length, bool trimExess = false) : void
- public TrimExcess() : void
- public Add(T item) : void

class ResizableArray

- Archivo: `ResizableArray.cs` (144 líneas)

Propiedades:

- Length : int
- Data : T[]

Campos:

- items : T[]
- length : int
- emptyArr : T[]

Métodos:

- public ResizableArray(int capacity) : (constructor)
- public ResizableArray(int capacity, int length) : (constructor)
- private IncreaseCapacity(int capacity) : void
- public Clear() : void
- public Resize(int length, bool trimExess = false) : void
- public TrimExcess() : void
- public Add(T item) : void

class UVChannels

- Archivo: `UVChannels.cs` (70 líneas)
- Usa: `Mesh`, `ResizableArray`

Propiedades:

- Data : TVec[][]

Campos:

- channels : ResizableArray<TVec>[]
- channelsData : TVec[][]

Métodos:

- public UVChannels() : (constructor)
- public Resize(int capacity, bool trimExess = false) : void

class UVChannels

- Archivo: `UVChannels.cs` (70 líneas)

- Usa: `Mesh`, `ResizableArray`

Propiedades:

- Data : TVec[][]

Campos:

- channels : ResizableArray<TVec>[]
- channelsData : TVec[][]

Métodos:

- public UVChannels() : (constructor)
- public Resize(int capacity, bool trimExess = false) : void

Namespace `MeshDecimator.Loggers`

class ConsoleLogger

- Archivo: `ConsoleLogger.cs` (29 líneas)
- Implementa: `ILogger`

Métodos:

- public LogVerbose(string text) : void
- public LogWarning(string text) : void
- public LogError(string text) : void

class ConsoleLogger

- Archivo: `ConsoleLogger.cs` (29 líneas)
- Implementa: `ILogger`

Métodos:

- public LogVerbose(string text) : void
- public LogWarning(string text) : void
- public LogError(string text) : void

Namespace `MeshDecimator.Math`

static class MathHelper

- Archivo: `MathHelper.cs` (252 líneas)
- Usa: `Vector3`, `Vector3d`

Campos:

- PI : float
- PId : double
- Deg2Rad : float
- Deg2Radd : double
- Rad2Deg : float
- Rad2Degd : double

Métodos:

- public static Min(int val1, int val2) : int
- public static Min(int val1, int val2, int val3) : int
- public static Min(float val1, float val2) : float
- public static Min(float val1, float val2, float val3) : float
- public static Min(double val1, double val2) : double
- public static Min(double val1, double val2, double val3) : double
- public static Max(int val1, int val2) : int
- public static Max(int val1, int val2, int val3) : int
- public static Max(float val1, float val2) : float
- public static Max(float val1, float val2, float val3) : float
- public static Max(double val1, double val2) : double
- public static Max(double val1, double val2, double val3) : double
- public static Clamp(float value, float min, float max) : float
- public static Clamp(double value, double min, double max) : double
- public static Clamp01(float value) : float
- public static Clamp01(double value) : double
- public static TriangleArea(ref Vector3 p0, ref Vector3 p1, ref Vector3 p2) : float
- public static TriangleArea(ref Vector3d p0, ref Vector3d p1, ref Vector3d p2) : double

static class MathHelper

- Archivo: `MathHelper.cs` (252 líneas)
- Usa: `Vector3`, `Vector3d`

Campos:

- PI : float
- PId : double
- Deg2Rad : float
- Deg2Radd : double
- Rad2Deg : float
- Rad2Degd : double

Métodos:

- public static Min(int val1, int val2) : int
- public static Min(int val1, int val2, int val3) : int
- public static Min(float val1, float val2) : float
- public static Min(float val1, float val2, float val3) : float
- public static Min(double val1, double val2) : double
- public static Min(double val1, double val2, double val3) : double

- public static Max(int val1, int val2) : int
- public static Max(int val1, int val2, int val3) : int
- public static Max(float val1, float val2) : float
- public static Max(float val1, float val2, float val3) : float
- public static Max(double val1, double val2) : double
- public static Max(double val1, double val2, double val3) : double
- public static Clamp(float value, float min, float max) : float
- public static Clamp(double value, double min, double max) : double
- public static Clamp01(float value) : float
- public static Clamp01(double value) : double
- public static TriangleArea(ref Vector3 p0, ref Vector3 p1, ref Vector3 p2) : float
- public static TriangleArea(ref Vector3d p0, ref Vector3d p1, ref Vector3d p2) : double

struct SymmetricMatrix

- Archivo: `SymmetricMatrix.cs` (269 líneas)

Campos:

- m0 : double
- m1 : double
- m2 : double
- m3 : double
- m4 : double
- m5 : double
- m6 : double
- m7 : double
- m8 : double
- m9 : double

Métodos:

- public SymmetricMatrix(double c) : (constructor)
- public SymmetricMatrix(double m0, double m1, double m2, double m3, double m4, double m5, double m6, double m7, double m8, double m9) : (constructor)
- public SymmetricMatrix(double a, double b, double c, double d) : (constructor)
- internal Determinant1() : double
- internal Determinant2() : double
- internal Determinant3() : double
- internal Determinant4() : double
- public Determinant(int a11, int a12, int a13, int a21, int a22, int a23, int a31, int a32, int a33) : double

struct SymmetricMatrix

- Archivo: `SymmetricMatrix.cs` (269 líneas)

Campos:

- m0 : double
- m1 : double
- m2 : double
- m3 : double
- m4 : double
- m5 : double
- m6 : double
- m7 : double
- m8 : double
- m9 : double

Métodos:

- public SymmetricMatrix(double c) : (constructor)
- public SymmetricMatrix(double m0, double m1, double m2, double m3, double m4, double m5, double m6, double m7, double m8, double m9) : (constructor)
- public SymmetricMatrix(double a, double b, double c, double d) : (constructor)
- internal Determinant1() : double
- internal Determinant2() : double
- internal Determinant3() : double
- internal Determinant4() : double
- public Determinant(int a11, int a12, int a13, int a21, int a22, int a23, int a31, int a32, int a33) : double

struct Vector2

- Archivo: `Vector2.cs` (390 líneas)
- Implementa: `IEquatable`
- Usa: `Vector2d`, `Vector2i`

Propiedades:

- Magnitude : float
- MagnitudeSqr : float
- Normalized : Vector2

Campos:

- zero : Vector2
- Epsilon : float
- x : float
- y : float

Métodos:

- public Vector2(float value) : (constructor)
- public Vector2(float x, float y) : (constructor)
- public Set(float x, float y) : void
- public Scale(ref Vector2 scale) : void
- public Normalize() : void
- public Clamp(float min, float max) : void
- public GetHashCode() : int
- public Equals(object other) : bool

- public Equals(Vector2 other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector2 lhs, ref Vector2 rhs) : float
- public static Lerp(ref Vector2 a, ref Vector2 b, float t, out Vector2 result) : void
- public static Scale(ref Vector2 a, ref Vector2 b, out Vector2 result) : void
- public static Normalize(ref Vector2 value, out Vector2 result) : void

struct Vector2

- Archivo: `Vector2.cs` (390 líneas)
- Implementa: `IEquatable`
- Usa: `Vector2d`, `Vector2i`

Propiedades:

- Magnitude : float
- MagnitudeSqr : float
- Normalized : Vector2

Campos:

- zero : Vector2
- Epsilon : float
- x : float
- y : float

Métodos:

- public Vector2(float value) : (constructor)
- public Vector2(float x, float y) : (constructor)
- public Set(float x, float y) : void
- public Scale(ref Vector2 scale) : void
- public Normalize() : void
- public Clamp(float min, float max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector2 other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector2 lhs, ref Vector2 rhs) : float
- public static Lerp(ref Vector2 a, ref Vector2 b, float t, out Vector2 result) : void
- public static Scale(ref Vector2 a, ref Vector2 b, out Vector2 result) : void
- public static Normalize(ref Vector2 value, out Vector2 result) : void

struct Vector2d

- Archivo: `Vector2d.cs` (390 líneas)
- Implementa: `IEquatable`
- Usa: `Vector2`, `Vector2i`

Propiedades:

- Magnitude : double
- MagnitudeSqr : double
- Normalized : Vector2d

Campos:

- zero : Vector2d
- Epsilon : double
- x : double
- y : double

Métodos:

- public Vector2d(double value) : (constructor)
- public Vector2d(double x, double y) : (constructor)
- public Set(double x, double y) : void
- public Scale(ref Vector2d scale) : void
- public Normalize() : void
- public Clamp(double min, double max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector2d other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector2d lhs, ref Vector2d rhs) : double
- public static Lerp(ref Vector2d a, ref Vector2d b, double t, out Vector2d result) : void
- public static Scale(ref Vector2d a, ref Vector2d b, out Vector2d result) : void
- public static Normalize(ref Vector2d value, out Vector2d result) : void

struct Vector2d

- Archivo: `Vector2d.cs` (390 líneas)
- Implementa: `IEquatable`
- Usa: `Vector2`, `Vector2i`

Propiedades:

- Magnitude : double
- MagnitudeSqr : double
- Normalized : Vector2d

Campos:

- zero : Vector2d
- Epsilon : double

- x : double
- y : double

Métodos:

- public Vector2d(double value) : (constructor)
- public Vector2d(double x, double y) : (constructor)
- public Set(double x, double y) : void
- public Scale(ref Vector2d scale) : void
- public Normalize() : void
- public Clamp(double min, double max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector2d other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector2d lhs, ref Vector2d rhs) : double
- public static Lerp(ref Vector2d a, ref Vector2d b, double t, out Vector2d result) : void
- public static Scale(ref Vector2d a, ref Vector2d b, out Vector2d result) : void
- public static Normalize(ref Vector2d value, out Vector2d result) : void

struct Vector2i

- Archivo: `Vector2i.cs` (313 líneas)
- Implementa: `IEquatable`
- Usa: `Vector2`, `Vector2d`

Propiedades:

- Magnitude : int
- MagnitudeSqr : int

Campos:

- zero : Vector2i
- x : int
- y : int

Métodos:

- public Vector2i(int value) : (constructor)
- public Vector2i(int x, int y) : (constructor)
- public Set(int x, int y) : void
- public Scale(ref Vector2i scale) : void
- public Clamp(int min, int max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector2i other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Scale(ref Vector2i a, ref Vector2i b, out Vector2i result) : void

struct Vector2i

- Archivo: `Vector2i.cs` (313 líneas)
- Implementa: `IEquatable`
- Usa: `Vector2`, `Vector2d`

Propiedades:

- Magnitude : int
- MagnitudeSqr : int

Campos:

- zero : Vector2i
- x : int
- y : int

Métodos:

- public Vector2i(int value) : (constructor)
- public Vector2i(int x, int y) : (constructor)
- public Set(int x, int y) : void
- public Scale(ref Vector2i scale) : void
- public Clamp(int min, int max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector2i other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Scale(ref Vector2i a, ref Vector2i b, out Vector2i result) : void

struct Vector3

- Archivo: `Vector3.cs` (459 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3d`, `Vector3i`, `MathHelper`

Propiedades:

- Magnitude : float
- MagnitudeSqr : float
- Normalized : Vector3

Campos:

- zero : Vector3
- Epsilon : float

- x : float
- y : float
- z : float

Métodos:

- public Vector3(float value) : (constructor)
- public Vector3(float x, float y, float z) : (constructor)
- public Vector3(Vector3d vector) : (constructor)
- public Set(float x, float y, float z) : void
- public Scale(ref Vector3 scale) : void
- public Normalize() : void
- public Clamp(float min, float max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector3 other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector3 lhs, ref Vector3 rhs) : float
- public static Cross(ref Vector3 lhs, ref Vector3 rhs, out Vector3 result) : void
- public static Angle(ref Vector3 from, ref Vector3 to) : float
- public static Lerp(ref Vector3 a, ref Vector3 b, float t, out Vector3 result) : void
- public static Scale(ref Vector3 a, ref Vector3 b, out Vector3 result) : void
- public static Normalize(ref Vector3 value, out Vector3 result) : void
- public static OrthoNormalize(ref Vector3 normal, ref Vector3 tangent) : void

struct Vector3

- Archivo: `Vector3.cs` (459 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3d`, `Vector3i`, `MathHelper`

Propiedades:

- Magnitude : float
- MagnitudeSqr : float
- Normalized : Vector3

Campos:

- zero : Vector3
- Epsilon : float
- x : float
- y : float
- z : float

Métodos:

- public Vector3(float value) : (constructor)
- public Vector3(float x, float y, float z) : (constructor)
- public Vector3(Vector3d vector) : (constructor)
- public Set(float x, float y, float z) : void
- public Scale(ref Vector3 scale) : void
- public Normalize() : void
- public Clamp(float min, float max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector3 other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector3 lhs, ref Vector3 rhs) : float
- public static Cross(ref Vector3 lhs, ref Vector3 rhs, out Vector3 result) : void
- public static Angle(ref Vector3 from, ref Vector3 to) : float
- public static Lerp(ref Vector3 a, ref Vector3 b, float t, out Vector3 result) : void
- public static Scale(ref Vector3 a, ref Vector3 b, out Vector3 result) : void
- public static Normalize(ref Vector3 value, out Vector3 result) : void
- public static OrthoNormalize(ref Vector3 normal, ref Vector3 tangent) : void

struct Vector3d

- Archivo: `Vector3d.cs` (446 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3`, `Vector3i`, `MathHelper`

Propiedades:

- Magnitude : double
- MagnitudeSqr : double
- Normalized : Vector3d

Campos:

- zero : Vector3d
- Epsilon : double
- x : double
- y : double
- z : double

Métodos:

- public Vector3d(double value) : (constructor)
- public Vector3d(double x, double y, double z) : (constructor)
- public Vector3d(Vector3 vector) : (constructor)
- public Set(double x, double y, double z) : void
- public Scale(ref Vector3d scale) : void
- public Normalize() : void
- public Clamp(double min, double max) : void
- public GetHashCode() : int

- public Equals(object other) : bool
- public Equals(Vector3d other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector3d lhs, ref Vector3d rhs) : double
- public static Cross(ref Vector3d lhs, ref Vector3d rhs, out Vector3d result) : void
- public static Angle(ref Vector3d from, ref Vector3d to) : double
- public static Lerp(ref Vector3d a, ref Vector3d b, double t, out Vector3d result) : void
- public static Scale(ref Vector3d a, ref Vector3d b, out Vector3d result) : void
- public static Normalize(ref Vector3d value, out Vector3d result) : void

struct Vector3d

- Archivo: `Vector3d.cs` (446 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3`, `Vector3i`, `MathHelper`

Propiedades:

- Magnitude : double
- MagnitudeSqr : double
- Normalized : Vector3d

Campos:

- zero : Vector3d
- Epsilon : double
- x : double
- y : double
- z : double

Métodos:

- public Vector3d(double value) : (constructor)
- public Vector3d(double x, double y, double z) : (constructor)
- public Vector3d(Vector3 vector) : (constructor)
- public Set(double x, double y, double z) : void
- public Scale(ref Vector3d scale) : void
- public Normalize() : void
- public Clamp(double min, double max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector3d other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector3d lhs, ref Vector3d rhs) : double
- public static Cross(ref Vector3d lhs, ref Vector3d rhs, out Vector3d result) : void
- public static Angle(ref Vector3d from, ref Vector3d to) : double
- public static Lerp(ref Vector3d a, ref Vector3d b, double t, out Vector3d result) : void
- public static Scale(ref Vector3d a, ref Vector3d b, out Vector3d result) : void
- public static Normalize(ref Vector3d value, out Vector3d result) : void

struct Vector3i

- Archivo: `Vector3i.cs` (333 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3`, `Vector3d`

Propiedades:

- Magnitude : int
- MagnitudeSqr : int

Campos:

- zero : Vector3i
- x : int
- y : int
- z : int

Métodos:

- public Vector3i(int value) : (constructor)
- public Vector3i(int x, int y, int z) : (constructor)
- public Set(int x, int y, int z) : void
- public Scale(ref Vector3i scale) : void
- public Clamp(int min, int max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector3i other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Scale(ref Vector3i a, ref Vector3i b, out Vector3i result) : void

struct Vector3i

- Archivo: `Vector3i.cs` (333 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3`, `Vector3d`

Propiedades:

- Magnitude : int
- MagnitudeSqr : int

Campos:

- zero : Vector3i

- x : int
- y : int
- z : int

Métodos:

- public Vector3i(int value) : (constructor)
- public Vector3i(int x, int y, int z) : (constructor)
- public Set(int x, int y, int z) : void
- public Scale(ref Vector3i scale) : void
- public Clamp(int min, int max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector3i other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Scale(ref Vector3i a, ref Vector3i b, out Vector3i result) : void

struct Vector4

- Archivo: `Vector4.cs` (432 líneas)
- Implementa: `IEquatable`
- Usa: `Vector4d`, `Vector4i`

Propiedades:

- Magnitude : float
- MagnitudeSqr : float
- Normalized : Vector4

Campos:

- zero : Vector4
- Epsilon : float
- x : float
- y : float
- z : float
- w : float

Métodos:

- public Vector4(float value) : (constructor)
- public Vector4(float x, float y, float z, float w) : (constructor)
- public Set(float x, float y, float z, float w) : void
- public Scale(ref Vector4 scale) : void
- public Normalize() : void
- public Clamp(float min, float max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector4 other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector4 lhs, ref Vector4 rhs) : float
- public static Lerp(ref Vector4 a, ref Vector4 b, float t, out Vector4 result) : void
- public static Scale(ref Vector4 a, ref Vector4 b, out Vector4 result) : void
- public static Normalize(ref Vector4 value, out Vector4 result) : void

struct Vector4

- Archivo: `Vector4.cs` (432 líneas)
- Implementa: `IEquatable`
- Usa: `Vector4d`, `Vector4i`

Propiedades:

- Magnitude : float
- MagnitudeSqr : float
- Normalized : Vector4

Campos:

- zero : Vector4
- Epsilon : float
- x : float
- y : float
- z : float
- w : float

Métodos:

- public Vector4(float value) : (constructor)
- public Vector4(float x, float y, float z, float w) : (constructor)
- public Set(float x, float y, float z, float w) : void
- public Scale(ref Vector4 scale) : void
- public Normalize() : void
- public Clamp(float min, float max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector4 other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector4 lhs, ref Vector4 rhs) : float
- public static Lerp(ref Vector4 a, ref Vector4 b, float t, out Vector4 result) : void
- public static Scale(ref Vector4 a, ref Vector4 b, out Vector4 result) : void
- public static Normalize(ref Vector4 value, out Vector4 result) : void

struct Vector4d

- Archivo: `Vector4d.cs` (432 líneas)
- Implementa: `IEquatable`
- Usa: `Vector4`, `Vector4i`

Propiedades:

- Magnitude : double
- MagnitudeSqr : double
- Normalized : Vector4d

Campos:

- zero : Vector4d
- Epsilon : double
- x : double
- y : double
- z : double
- w : double

Métodos:

- public Vector4d(double value) : (constructor)
- public Vector4d(double x, double y, double z, double w) : (constructor)
- public Set(double x, double y, double z, double w) : void
- public Scale(ref Vector4d scale) : void
- public Normalize() : void
- public Clamp(double min, double max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector4d other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector4d lhs, ref Vector4d rhs) : double
- public static Lerp(ref Vector4d a, ref Vector4d b, double t, out Vector4d result) : void
- public static Scale(ref Vector4d a, ref Vector4d b, out Vector4d result) : void
- public static Normalize(ref Vector4d value, out Vector4d result) : void

struct Vector4d

- Archivo: `Vector4d.cs` (432 líneas)
- Implementa: `IEquatable`
- Usa: `Vector4`, `Vector4i`

Propiedades:

- Magnitude : double
- MagnitudeSqr : double
- Normalized : Vector4d

Campos:

- zero : Vector4d
- Epsilon : double
- x : double
- y : double
- z : double
- w : double

Métodos:

- public Vector4d(double value) : (constructor)
- public Vector4d(double x, double y, double z, double w) : (constructor)
- public Set(double x, double y, double z, double w) : void
- public Scale(ref Vector4d scale) : void
- public Normalize() : void
- public Clamp(double min, double max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector4d other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector4d lhs, ref Vector4d rhs) : double
- public static Lerp(ref Vector4d a, ref Vector4d b, double t, out Vector4d result) : void
- public static Scale(ref Vector4d a, ref Vector4d b, out Vector4d result) : void
- public static Normalize(ref Vector4d value, out Vector4d result) : void

struct Vector4i

- Archivo: `Vector4i.cs` (353 líneas)
- Implementa: `IEquatable`
- Usa: `Vector4`, `Vector4d`

Propiedades:

- Magnitude : int
- MagnitudeSqr : int

Campos:

- zero : Vector4i
- x : int
- y : int
- z : int
- w : int

Métodos:

- public Vector4i(int value) : (constructor)
- public Vector4i(int x, int y, int z, int w) : (constructor)

- public Set(int x, int y, int z, int w) : void
- public Scale(ref Vector4i scale) : void
- public Clamp(int min, int max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector4i other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Scale(ref Vector4i a, ref Vector4i b, out Vector4i result) : void

struct Vector4i

- Archivo: `Vector4i.cs` (353 líneas)
- Implementa: `IEquatable`
- Usa: `Vector4`, `Vector4d`

Propiedades:

- Magnitude : int
- MagnitudeSqr : int

Campos:

- zero : Vector4i
- x : int
- y : int
- z : int
- w : int

Métodos:

- public Vector4i(int value) : (constructor)
- public Vector4i(int x, int y, int z, int w) : (constructor)
- public Set(int x, int y, int z, int w) : void
- public Scale(ref Vector4i scale) : void
- public Clamp(int min, int max) : void
- public GetHashCode() : int
- public Equals(object other) : bool
- public Equals(Vector4i other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Scale(ref Vector4i a, ref Vector4i b, out Vector4i result) : void

Namespace `MeshDecimator.Unity`

class DecimatedObject

- Archivo: `DecimatedObject.cs` (67 líneas)
- Hereda de: `MonoBehaviour`
- Usa: `LODSettings`, `LODGenerator`

Propiedades:

- Levels : LODSettings[]
- IsGenerated : bool

Campos:

- levels : LODSettings[]
- generated : bool

Métodos:

- private Reset() : void
- public GenerateLODs(LODStatusReportCallback statusCallback = null) : void
- public ResetLODs() : void

static class LODGenerator

- Archivo: `LODGenerator.cs` (368 líneas)
- Usa: `Mesh`, `DecimationAlgorithm`, `MeshDecimatorUtility`, `LODSettings`, `Vector3`

Campos:

- ParentGameObjectName : string

Métodos:

- private static CombineRenderers(MeshRenderer[] meshRenderers, SkinnedMeshRenderer[] skinnedRenderers) : Renderer[]
- private static GenerateStaticLOD(Transform transform, MeshRenderer renderer, float quality, out Material[] materials, DecimationAlgorithm.StatusReportCallback statusCallback) : Mesh
- private static GenerateStaticLOD(Transform transform, MeshRenderer[] renderers, float quality, out Material[] materials, DecimationAlgorithm.StatusReportCallback statusCallback) : Mesh
- private static GenerateSkinnedLOD(Transform transform, SkinnedMeshRenderer renderer, float quality, out Material[] materials, out Transform[] mergedBones, DecimationAlgorithm.StatusReportCallback statusCallback) : Mesh
- private static GenerateSkinnedLOD(Transform transform, SkinnedMeshRenderer[] renderers, float quality, out Material[] materials, out Transform[] mergedBones, DecimationAlgorithm.StatusReportCallback statusCallback) : Mesh
- private static FindRootBone(Transform transform, Transform[] transforms) : Transform
- private static SetupLODRenderer(Renderer renderer, LODSettings settings) : void
- public static GenerateLODs(GameObject gameObj, LODSettings[] levels, LODStatusReportCallback statusCallback = null) : void
- public static DestroyLODs(GameObject gameObj) : void

struct LODSettings

- Archivo: `LODGenerator.cs` (127 líneas)

Campos:

- quality : float
- combineMeshes : bool
- skinQuality : SkinQuality

- receiveShadows : bool
- shadowCasting : ShadowCastingMode
- motionVectors : MotionVectorGenerationMode
- skinnedMotionVectors : bool
- lightProbeUsage : LightProbeUsage
- reflectionProbeUsage : ReflectionProbeUsage

Métodos:

- public LODSettings(float quality) : (constructor)
- public LODSettings(float quality, SkinQuality skinQuality) : (constructor)
- public LODSettings(float quality, SkinQuality skinQuality, bool receiveShadows, ShadowCastingMode shadowCasting) : (constructor)
- public LODSettings(float quality, SkinQuality skinQuality, bool receiveShadows, ShadowCastingMode shadowCasting, MotionVectorGenerationMode motionVectors, bool skinnedMotionVectors) : (constructor)

static class MeshDecimatorUtility

- Archivo: `MeshDecimatorUtility.cs` (876 líneas)
- Usa: `Logging`, `ConsoleLogger`, `UnityLogger`, `Vector3d`, `Vector2`, `Vector3`, `Vector4`, `BoneWeight`, `Mesh`, `DecimationAlgorithm`, `MeshDecimation`, `Algorithm`

Métodos:

- private static MeshDecimatorUtility() : (constructor)
- private static ToSimplifyVertices(UVector3[] vertices) : Vector3d[]
- private static ToSimplifyVec(UVector2[] vectors) : Vector2[]
- private static ToSimplifyVec(UVector3[] vectors) : Vector3[]
- private static ToSimplifyVec(UVector4[] vectors) : Vector4[]
- private static ToSimplifyVec(UColor[] colors) : Vector4[]
- private static ToSimplifyBoneWeights(UBoneWeight[] boneWeights) : BoneWeight[]
- private static FromSimplifyVertices(Vector3d[] vertices) : UVector3[]
- private static FromSimplifyVec(Vector2[] vectors) : UVector2[]
- private static FromSimplifyVec(Vector3[] vectors) : UVector3[]
- private static FromSimplifyVec(Vector4[] vectors) : UVector4[]
- private static FromSimplifyColor(Vector4[] vectors) : UColor[]
- private static FromSimplifyBoneWeights(BoneWeight[] boneWeights) : UBoneWeight[]
- private static AddToList(List<Vector3d> list, UVector3[] arr, int previousVertexCount, int totalVertexCount) : void
- private static AddToList(ref List<Vector2> list, UVector2[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount, Vector2 defaultValue) : void
- private static AddToList(ref List<Vector3> list, UVector3[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount, Vector3 defaultValue) : void
- private static AddToList(ref List<Vector4> list, UVector4[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount, Vector4 defaultValue) : void
- private static AddToList(ref List<Vector4> list, UColor[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount) : void
- private static AddToList(ref List<BoneWeight> list, UBoneWeight[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount) : void
- private static TransformVertices(UVector3[] vertices, ref UMatrix transform) : void
- private static TransformVertices(UVector3[] vertices, UBoneWeight[] boneWeights, UMatrix[] oldBindposes, UMatrix[] newBindposes) : void
- private static ScaleMatrix(ref UMatrix m, float scale) : UMatrix
- private static MergeArrays(T[] arr1, T[] arr2) : T[]
- private static RemapBones(UBoneWeight[] boneWeights, int[] boneIndices) : void
- private static CreateMesh(UMatrix[] bindposes, UVector3[] vertices, Mesh destMesh, bool recalculateNormals) : UMesh
- public static DecimateMesh(UMesh mesh, UMatrix transform, float quality, bool recalculateNormals, DecimationAlgorithm.StatusReportCallback statusCallback = null) : UMesh
- public static DecimateMeshes(UMesh[] meshes, UMatrix[] transforms, UMaterial[][] materials, float quality, bool recalculateNormals, out UMaterial[] resultMaterials, DecimationAlgorithm.StatusReportCallback statusCallback = null) : UMesh
- public static DecimateMeshes(UMesh[] meshes, UMatrix[] transforms, UMaterial[][] materials, UTransform[][] meshBones, float quality, bool recalculateNormals, out UMaterial[] resultMaterials, out UTransform[] mergedBones, DecimationAlgorithm.StatusReportCallback statusCallback = null) : UMesh

Namespace `MeshDecimator.Unity.Loggers`

class UnityLogger

- Archivo: `UnityLogger.cs` (29 líneas)
- Implementa: `ILogger`

Métodos:

- public LogVerbose(string text) : void
- public LogWarning(string text) : void
- public LogError(string text) : void

Namespace `MeshDecimator.UnityEditor`

class DecimatedObjectEditor

- Archivo: `DecimatedObjectEditor.cs` (174 líneas)
- Hereda de: `Editor`
- Usa: `DecimatedObject`

Propiedades:

- target : DecimatedObject

Campos:

- levelsProp : SerializedProperty
- generatedProp : SerializedProperty
- isGeneratingNew : bool
- settingsExpanded : bool[]
- settingsContent : GUIContent

Métodos:

- private OnEnable() : void
- private GenerateLODs() : void
- private ResetLODs() : void
- public OnInspectorGUI() : void

Namespace `MeshDecimatorTool`

struct FaceIndex

- Archivo: `ObjMesh.cs` (40 líneas)
- Implementa: `IEquatable`

Campos:

- vertexIndex : int
- texCoordIndex : int
- normalIndex : int
- hashCode : int

Métodos:

- public FaceIndex(int vertexIndex, int texCoordIndex, int normalIndex) : (constructor)
- public GetHashCode() : int
- public Equals(object obj) : bool
- public Equals(FaceIndex other) : bool
- public ToString() : string

class ObjMesh

- Archivo: `ObjMesh.cs` (853 líneas)
- Usa: `FaceIndex`, `Vector3d`, `Vector3`, `Vector2`

Propiedades:

- Vertices : Vector3d[]
- Normals : Vector3[]
- TexCoords2D : Vector2[]
- TexCoords3D : Vector3[]
- SubMeshCount : int
- Indices : int[]
- SubMeshIndices : int[][]
- SubMeshMaterials : string[]
- MaterialLibraries : string[]

Campos:

- VertexInitialCapacity : int
- IndexInitialCapacity : int
- vertices : Vector3d[]
- normals : Vector3[]
- texCoords2D : Vector2[]
- texCoords3D : Vector3[]
- subMeshIndices : int[][]
- subMeshMaterials : string[]
- materialLibraries : string[]

Métodos:

- public ObjMesh() : (constructor)
- public ObjMesh(Vector3d[] vertices, int[] indices) : (constructor)
- public ObjMesh(Vector3d[] vertices, int[][] indices) : (constructor)
- public ReadFile(string path) : void
- public WriteFile(string path) : void
- private static WriteVertices(TextWriter writer, Vector3d[] vertices) : void
- private static WriteNormals(TextWriter writer, Vector3[] normals) : void
- private static WriteTextureCoords(TextWriter writer, Vector2[] texCoords2D, Vector3[] texCoords3D) : void
- private static WriteSubMeshes(TextWriter writer, int[][] subMeshIndices, string[] subMeshMaterials, bool hasTexCoords, bool hasNormals) : void
- private static WriteFaces(TextWriter writer, int[] indices, bool hasTexCoords, bool hasNormals) : void
- private static ShiftIndex(int value, int count) : int
- private static CountOccurrences(string text, char character) : int

class Program

- Archivo: `Program.cs` (111 líneas)
- Usa: `MathHelper`, `ObjMesh`, `Mesh`, `MeshDecimation`, `Algorithm`

Métodos:

- private static Main(string[] args) : void
- private static PrintUsage() : void

Namespace `UnityMeshSimplifier`

struct BlendShape

- Archivo: `BlendShape.cs` (24 líneas)
- Usa: `BlendShapeFrame`

Campos:

- ShapeName : string
- Frames : BlendShapeFrame[]

Métodos:

- public BlendShape(string shapeName, BlendShapeFrame[] frames) : (constructor)

struct BlendShapeFrame

- Archivo: `BlendShape.cs` (36 líneas)
- Usa: `Vector3`

Campos:

- FrameWeight : float
- DeltaVertices : Vector3[]
- DeltaNormals : Vector3[]
- DeltaTangents : Vector3[]

Métodos:

- public BlendShapeFrame(float frameWeight, Vector3[] deltaVertices, Vector3[] deltaNormals, Vector3[] deltaTangents) : (constructor)

static class IOUtils

- Archivo: `IOUtils.cs` (93 líneas)

Métodos:

- internal static MakeSafeRelativePath(string path) : string
- internal static MakeSafeFileName(string name) : string

class LODBackupComponent

- Archivo: `LODBackupComponent.cs` (12 líneas)
- Hereda de: `MonoBehaviour`

Propiedades:

- OriginalRenderers : Renderer[]

Campos:

- originalRenderers : Renderer[]

static class LODGenerator

- Archivo: `LODGenerator.cs` (787 líneas)
- Usa: `Mesh`, `LODGeneratorHelper`, `SimplificationOptions`, `LODLevel`, `MeshSimplifier`, `RendererInfo`, `MeshCombiner`, `Vector3`, `LODBackupComponent`

Campos:

- LODParentGameObjectName : string
- LODAssetDefaultParentPath : string
- AssetsRootPath : string
- LODAssetUserData : string

Métodos:

- public static GenerateLODs(LODGeneratorHelper generatorHelper) : LODGroup
- public static GenerateLODs(GameObject gameObject, LODLevel[] levels, bool autoCollectRenderers, SimplificationOptions simplificationOptions) : LODGroup
- public static GenerateLODs(GameObject gameObject, LODLevel[] levels, bool autoCollectRenderers, SimplificationOptions simplificationOptions, string saveAssetsPath) : LODGroup
- public static DestroyLODs(LODGeneratorHelper generatorHelper) : bool
- public static DestroyLODs(GameObject gameObject) : bool
- private static GetStaticRenderers(MeshRenderer[] renderers) : RendererInfo[]
- private static GetSkinnedRenderers(SkinnedMeshRenderer[] renderers) : RendererInfo[]
- private static CombineStaticMeshes(Transform transform, int levelIndex, MeshRenderer[] renderers) : RendererInfo[]
- private static CombineSkinnedMeshes(Transform transform, int levelIndex, SkinnedMeshRenderer[] renderers) : RendererInfo[]
- private static ParentAndResetTransform(Transform transform, Transform parentTransform) : void
- private static ParentAndOffsetTransform(Transform transform, Transform parentTransform, Transform originalTransform) : void
- private static CreateLevelRenderer(GameObject gameObject, int levelIndex, in LODLevel level, Transform levelTransform, int rendererIndex, in RendererInfo renderer, in SimplificationOptions simplificationOptions, string saveAssetsPath) : Renderer
- private static CreateStaticLevelRenderer(string name, Transform parentTransform, Transform originalTransform, Mesh mesh, Material[] materials, in LODLevel level) : MeshRenderer
- private static CreateSkinnedLevelRenderer(string name, Transform parentTransform, Transform originalTransform, Mesh mesh, Material[] materials, Transform rootBone, Transform[] bones, in LODLevel level) : SkinnedMeshRenderer
- private static FindBestRootBone(Transform transform, SkinnedMeshRenderer[] skinnedMeshRenderers) : Transform
- private static SetupLevelRenderer(Renderer renderer, in LODLevel level) : void
- private static GetChildRenderersForLOD(GameObject gameObject) : Renderer[]
- private static CollectChildRenderersForLOD(Transform transform, List<Renderer> resultRenderers) : void
- private static SimplifyMesh(Mesh mesh, float quality, in SimplificationOptions options) : Mesh
- private static DestroyObject(Object obj) : void
- private static CreateBackup(GameObject gameObject, Renderer[] originalRenderers) : void
- private static RestoreBackup(GameObject gameObject) : void
- private static ValidateSaveAssetsPath(string saveAssetsPath) : string

class LODGeneratorHelper

- Archivo: `LODGeneratorHelper.cs` (138 líneas)
- Hereda de: `MonoBehaviour`
- Usa: `SimplificationOptions`, `LODLevel`

Propiedades:

- FadeMode : LODFadeMode
- AnimateCrossFading : bool
- AutoCollectRenderers : bool
- SimplificationOptions : SimplificationOptions
- SaveAssetsPath : string
- Levels : LODLevel[]
- IsGenerated : bool

Campos:

- fadeMode : LODFadeMode
- animateCrossFading : bool
- autoCollectRenderers : bool
- simplificationOptions : SimplificationOptions
- saveAssetsPath : string
- levels : LODLevel[]
- isGenerated : bool

Métodos:

- private Reset() : void

struct LODLevel

- Archivo: `LODLevel.cs` (210 líneas)

Propiedades:

- ScreenRelativeTransitionHeight : float
- FadeTransitionWidth : float
- Quality : float
- CombineMeshes : bool
- CombineSubMeshes : bool
- Renderers : Renderer[]
- SkinQuality : SkinQuality
- ShadowCastingMode : ShadowCastingMode
- ReceiveShadows : bool
- MotionVectorGenerationMode : MotionVectorGenerationMode
- SkinnedMotionVectors : bool
- LightProbeUsage : LightProbeUsage
- ReflectionProbeUsage : ReflectionProbeUsage

Campos:

- screenRelativeTransitionHeight : float
- fadeTransitionWidth : float
- quality : float
- combineMeshes : bool
- combineSubMeshes : bool
- renderers : Renderer[]
- skinQuality : SkinQuality
- shadowCastingMode : ShadowCastingMode
- receiveShadows : bool
- motionVectorGenerationMode : MotionVectorGenerationMode
- skinnedMotionVectors : bool
- lightProbeUsage : LightProbeUsage
- reflectionProbeUsage : ReflectionProbeUsage

Métodos:

- public LODLevel(float screenRelativeTransitionHeight, float quality) : (constructor)
- public LODLevel(float screenRelativeTransitionHeight, float fadeTransitionWidth, float quality, bool combineMeshes, bool combineSubMeshes) : (constructor)
- public LODLevel(float screenRelativeTransitionHeight, float fadeTransitionWidth, float quality, bool combineMeshes, bool combineSubMeshes, Renderer[] renderers) : (constructor)

static class MathHelper

- Archivo: `MathHelper.cs` (81 líneas)
- Usa: `Vector3d`

Campos:

- PI : float
- PId : double
- Deg2Rad : float
- Deg2Radd : double
- Rad2Deg : float
- Rad2Degd : double

Métodos:

- public static Min(double val1, double val2, double val3) : double
- public static Clamp(double value, double min, double max) : double
- public static TriangleArea(ref Vector3d p0, ref Vector3d p1, ref Vector3d p2) : double

static class MeshCombiner

- Archivo: `MeshCombiner.cs` (444 líneas)
- Usa: `Mesh`, `Vector3`, `Vector4`, `BoneWeight`, `MeshUtils`

Métodos:

- public static CombineMeshes(Transform rootTransform, MeshRenderer[] renderers, out Material[] resultMaterials) : Mesh
- public static CombineMeshes(Transform rootTransform, SkinnedMeshRenderer[] renderers, out Material[] resultMaterials, out Transform[] resultBones) : Mesh
- public static CombineMeshes(Mesh[] meshes, Matrix4x4[] transforms, Material[][] materials, out Material[] resultMaterials) : Mesh
- public static CombineMeshes(Mesh[] meshes, Matrix4x4[] transforms, Material[][] materials, Transform[][] bones, out Material[] resultMaterials, out Transform[] resultBones) : Mesh
- private static CopyVertexPositions(ICollection<Vector3> list, Vector3[] arr) : void
- private static CopyVertexAttributes(ref List<T> dest, IEnumerable<T> src, int previousVertexCount, int meshVertexCount, int totalVertexCount, T defaultValue) : void
- private static MergeArrays(T[] arr1, T[] arr2) : T[]
- private static TransformVertices(Vector3[] vertices, ref Matrix4x4 transform) : void
- private static TransformNormals(Vector3[] normals, ref Matrix4x4 transform) : void
- private static TransformTangents(Vector4[] tangents, ref Matrix4x4 transform) : void
- private static RemapBones(BoneWeight[] boneWeights, int[] boneIndices) : void
- private static CanReadMesh(Mesh mesh) : bool

class MeshSimplifier

- Archivo: `MeshSimplifier.cs` (2265 líneas)
- Usa: `MeshUtils`, `SimplificationOptions`, `Triangle`, `Vertex`, `Ref`, `Vector3`, `Vector4`, `Vector2`, `BoneWeight`, `BlendShapeContainer`, `Mesh`, `SymmetricMatrix`, `Vector3d`, `MathHelper`, `BorderVertex`, `BorderVertexComparer`, `BlendShape`, `ValidateSimplificationOptionsException`, `ResizableArray`, `UVChannels`

Propiedades:

- SimplificationOptions : SimplificationOptions
- PreserveBorderEdges : bool
- PreserveUVSeamEdges : bool
- PreserveUVFoldoverEdges : bool
- PreserveSurfaceCurvature : bool
- EnableSmartLink : bool
- MaxIterationCount : int
- Agressiveness : double
- Verbose : bool
- VertexLinkDistance : double
- VertexLinkDistanceSqr : double

- Vertices : Vector3[]
- SubMeshCount : int
- BlendShapeCount : int
- Normals : Vector3[]
- Tangents : Vector4[]
- UV1 : Vector2[]
- UV2 : Vector2[]
- UV3 : Vector2[]
- UV4 : Vector2[]
- Colors : Color[]
- BoneWeights : BoneWeight[]

Campos:

- TriangleEdgeCount : int
- TriangleVertexCount : int
- DoubleEpsilon : double
- DenomEpilson : double
- UVChannelCount : int
- simplificationOptions : SimplificationOptions
- verbose : bool
- subMeshCount : int
- subMeshOffsets : int[]
- triangles : ResizableArray<Triangle>
- vertices : ResizableArray<Vertex>
- refs : ResizableArray<Ref>
- vertNormals : ResizableArray<Vector3>
- vertTangents : ResizableArray<Vector4>
- vertUV2D : UVChannels<Vector2>
- vertUV3D : UVChannels<Vector3>
- vertUV4D : UVChannels<Vector4>
- vertColors : ResizableArray<Color>
- vertBoneWeights : ResizableArray<BoneWeight>
- blendShapes : ResizableArray<BlendShapeContainer>
- bindposes : Matrix4x4[]
- errArr : double[]
- attributeIndexArr : int[]
- triangleHashSet1 : HashSet<Triangle>
- triangleHashSet2 : HashSet<Triangle>

Métodos:

- public MeshSimplifier() : (constructor)
- public MeshSimplifier(Mesh mesh) : (constructor)
- private InitializeVertexAttribute(T[] attributeValues, ref ResizableArray<T> attributeArray, string attributeName) : void
- private static VertexError(ref SymmetricMatrix q, double x, double y, double z) : double
- private CurvatureError(ref Vertex vert0, ref Vertex vert1) : double
- private CalculateError(ref Vertex vert0, ref Vertex vert1, out Vector3d result) : double
- private static CalculateBarycentricCoords(ref Vector3d point, ref Vector3d a, ref Vector3d b, ref Vector3d c, out Vector3 result) : void
- private static NormalizeTangent(Vector4 tangent) : Vector4
- private Flipped(ref Vector3d p, int i0, int i1, ref Vertex v0, bool[] deleted) : bool
- private UpdateTriangles(int i0, int ia0, ref Vertex v, ResizableArray<bool> deleted, ref int deletedTriangles) : void
- private InterpolateVertexAttributes(int dst, int i0, int i1, int i2, ref Vector3 barycentricCoord) : void
- private AreUVsTheSame(int channel, int indexA, int indexB) : bool
- private RemoveVertexPass(int startTrisCount, int targetTrisCount, double threshold, ResizableArray<bool> deleted0, ResizableArray<bool> deleted1, ref int deletedTris) : void
- private UpdateMesh(int iteration) : void
- private UpdateReferences() : void
- private CompactMesh() : void
- private CalculateSubMeshOffsets() : void
- private GetTrianglesContainingVertex(ref Vertex vert, HashSet<Triangle> tris) : void
- private GetTrianglesContainingBothVertices(ref Vertex vert0, ref Vertex vert1, HashSet<Triangle> tris) : void
- public GetAllSubMeshTriangles() : int[][]
- public GetSubMeshTriangles(int subMeshIndex) : int[]
- public ClearSubMeshes() : void
- public AddSubMeshTriangles(int[] triangles) : void
- public AddSubMeshTriangles(int[][] triangles) : void
- public GetUVs2D(int channel) : Vector2[]
- public GetUVs3D(int channel) : Vector3[]
- public GetUVs4D(int channel) : Vector4[]
- public GetUVs(int channel, List<Vector2> uvs) : void
- public GetUVs(int channel, List<Vector3> uvs) : void
- public GetUVs(int channel, List<Vector4> uvs) : void
- public SetUVs(int channel, IList<Vector2> uvs) : void
- public SetUVs(int channel, IList<Vector3> uvs) : void
- public SetUVs(int channel, IList<Vector4> uvs) : void
- public SetUVs(int channel, IList<Vector4> uvs, int uvComponentCount) : void
- public SetUVsAuto(int channel, IList<Vector4> uvs) : void
- public GetAllBlendShapes() : BlendShape[]
- public GetBlendShape(int blendShapeIndex) : BlendShape
- public ClearBlendShapes() : void
- public AddBlendShape(BlendShape blendShape) : void
- public AddBlendShapes(BlendShape[] blendShapes) : void
- public Initialize(Mesh mesh) : void
- public SimplifyMesh(float quality) : void
- public SimplifyMeshLossless() : void
- public ToMesh() : Mesh
- public static ValidateOptions(SimplificationOptions options) : void

static class MeshUtils

- Archivo: `MeshUtils.cs` (431 líneas)
- Usa: `Mesh`, `Vector3`, `Vector4`, `BoneWeight`, `Vector2`, `BlendShape`, `BlendShapeFrame`

Campos:

- UVChannelCount : int

Métodos:

- public static CreateMesh(Vector3[] vertices, int[][] indices, Vector3[] normals, Vector4[] tangents, Color[] colors, BoneWeight[] boneWeights, List<Vector2>[] uvs, Matrix4x4[] bindposes, BlendShape[] blendShapes) : Mesh
- public static CreateMesh(Vector3[] vertices, int[][] indices, Vector3[] normals, Vector4[] tangents, Color[] colors, BoneWeight[] boneWeights, List<Vector4>[] uvs, Matrix4x4[] bindposes, BlendShape[] blendShapes) : Mesh
- public static CreateMesh(Vector3[] vertices, int[][] indices, Vector3[] normals, Vector4[] tangents, Color[] colors, BoneWeight[] boneWeights, List<Vector2>[] uvs2D, List<Vector3>[] uvs3D, List<Vector4>[] uvs4D, Matrix4x4[] bindposes, BlendShape[] blendShapes) : Mesh
- public static GetMeshBlendShapes(Mesh mesh) : BlendShape[]
- public static ApplyMeshBlendShapes(Mesh mesh, BlendShape[] blendShapes) : void
- public static GetMeshUVs(Mesh mesh) : IList<Vector4>[]
- public static GetMeshUVs2D(Mesh mesh, int channel) : IList<Vector2>
- public static GetMeshUVs3D(Mesh mesh, int channel) : IList<Vector3>
- public static GetMeshUVs(Mesh mesh, int channel) : IList<Vector4>
- public static GetUsedUVComponents(IList<Vector4> uvs) : int
- public static ConvertUVsTo2D(IList<Vector4> uvs) : Vector2[]
- public static ConvertUVsTo3D(IList<Vector4> uvs) : Vector3[]
- public static GetSubMeshIndexMinMax(int[][] indices, out IndexFormat indexFormat) : Vector2Int[]
- private static GetIndexMinMax(int[] indices, out int minIndex, out int maxIndex) : void

struct RendererInfo

- Archivo: `LODGenerator.cs` (11 líneas)
- Usa: `Mesh`

Campos:

- name : string
- isStatic : bool
- isNewMesh : bool
- transform : Transform
- mesh : Mesh
- materials : Material[]
- rootBone : Transform
- bones : Transform[]

class ResizableArray

- Archivo: `ResizableArray.cs` (182 líneas)

Propiedades:

- Length : int
- Data : T[]

Campos:

- items : T[]
- length : int
- emptyArr : T[]

Métodos:

- public ResizableArray(int capacity) : (constructor)
- public ResizableArray(int capacity, int length) : (constructor)
- public ResizableArray(T[] initialArray) : (constructor)
- private IncreaseCapacity(int capacity) : void
- public Clear() : void
- public Resize(int length, bool trimExess = false, bool clearMemory = false) : void
- public TrimExcess() : void
- public Add(T item) : void
- public ToArray() : T[]

struct SimplificationOptions

- Archivo: `SimplificationOptions.cs` (86 líneas)

Campos:

- Default : SimplificationOptions
- PreserveBorderEdges : bool
- PreserveUVSeamEdges : bool
- PreserveUVFoldoverEdges : bool
- PreserveSurfaceCurvature : bool
- EnableSmartLink : bool
- VertexLinkDistance : double
- MaxIterationCount : int
- Agressiveness : double
- ManualUVComponentCount : bool
- UVComponentCount : int

struct SymmetricMatrix

- Archivo: `SymmetricMatrix.cs` (280 líneas)

Campos:

- m0 : double
- m1 : double
- m2 : double
- m3 : double
- m4 : double
- m5 : double
- m6 : double
- m7 : double
- m8 : double
- m9 : double

Métodos:

- public SymmetricMatrix(double c) : (constructor)
- public SymmetricMatrix(double m0, double m1, double m2, double m3, double m4, double m5, double m6, double m7, double m8, double m9) : (constructor)
- public SymmetricMatrix(double a, double b, double c, double d) : (constructor)
- internal Determinant1() : double
- internal Determinant2() : double
- internal Determinant3() : double
- internal Determinant4() : double
- public Determinant(int a11, int a12, int a13, int a21, int a22, int a23, int a31, int a32, int a33) : double

class ValidateSimplificationOptionsException

- Archivo: `ValidateSimplificationOptionsException.cs` (43 líneas)
- Hereda de: `Exception`

Propiedades:

- PropertyName : string
- Message : string

Campos:

- propertyName : string

Métodos:

- public ValidateSimplificationOptionsException(string propertyName, string message) : (constructor)
- public ValidateSimplificationOptionsException(string propertyName, string message, Exception innerException) : (constructor)

struct Vector3d

- Archivo: `Vector3d.cs` (469 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3`, `MathHelper`

Propiedades:

- Magnitude : double
- MagnitudeSqr : double
- Normalized : Vector3d

Campos:

- zero : Vector3d
- Epsilon : double
- x : double
- y : double
- z : double

Métodos:

- public Vector3d(double value) : (constructor)
- public Vector3d(double x, double y, double z) : (constructor)
- public Vector3d(Vector3 vector) : (constructor)
- public Set(double x, double y, double z) : void
- public Scale(ref Vector3d scale) : void
- public Normalize() : void
- public Clamp(double min, double max) : void
- public GetHashCode() : int
- public Equals(object obj) : bool
- public Equals(Vector3d other) : bool
- public ToString() : string
- public ToString(string format) : string
- public static Dot(ref Vector3d lhs, ref Vector3d rhs) : double
- public static Cross(ref Vector3d lhs, ref Vector3d rhs, out Vector3d result) : void
- public static Angle(ref Vector3d from, ref Vector3d to) : double
- public static Lerp(ref Vector3d a, ref Vector3d b, double t, out Vector3d result) : void
- public static Scale(ref Vector3d a, ref Vector3d b, out Vector3d result) : void
- public static Normalize(ref Vector3d value, out Vector3d result) : void

Namespace `UnityMeshSimplifier.Editor`

class LODGeneratorHelperEditor

- Archivo: `LODGeneratorHelperEditor.cs` (657 líneas)
- Hereda de: `Editor`
- Usa: `LODGeneratorHelper`, `IOUtils`, `LODGenerator`

Campos:

- FadeModeFieldName : string
- AnimateCrossFadingFieldName : string
- AutoCollectRenderersFieldName : string
- SimplificationOptionsFieldName : string
- SaveAssetsPathFieldName : string
- LevelsFieldName : string
- IsGeneratedFieldName : string
- LevelScreenRelativeHeightFieldName : string
- LevelFadeTransitionWidthFieldName : string
- LevelQualityFieldName : string
- LevelCombineMeshesFieldName : string
- LevelCombineSubMeshesFieldName : string
- LevelRenderersFieldName : string
- SimplificationOptionsEnableSmartLinkFieldName : string
- SimplificationOptionsVertexLinkDistanceFieldName : string
- RemoveLevelButtonSize : float
- RendererButtonWidth : float

- RemoveRendererButtonSize : float
- fadeModeProperty : SerializedProperty
- animateCrossFadingProperty : SerializedProperty
- autoCollectRenderersProperty : SerializedProperty
- simplificationOptionsProperty : SerializedProperty
- saveAssetsPathProperty : SerializedProperty
- levelsProperty : SerializedProperty
- isGeneratedProperty : SerializedProperty
- overrideSaveAssetsPath : bool
- settingsExpanded : bool[]
- lodGeneratorHelper : LODGeneratorHelper
- createLevelButtonContent : GUIContent
- deleteLevelButtonContent : GUIContent
- generateLODButtonContent : GUIContent
- destroyLODButtonContent : GUIContent
- copyVisibilityChangesContent : GUIContent
- settingsContent : GUIContent
- renderersHeaderContent : GUIContent
- removeRendererButtonContent : GUIContent
- addRendererButtonContent : GUIContent
- overrideSaveAssetsPathContent : GUIContent
- removeColor : Color
- ObjectPickerControlID : int

Métodos:

- private OnEnable() : void
- public OnInspectorGUI() : void
- private DrawGeneratedView() : void
- private DrawNotGeneratedView() : void
- private DrawSimplificationOptions() : void
- private DrawLevel(int index, SerializedProperty levelProperty, bool hasCrossFade) : void
- private DrawRendererList(SerializedProperty renderersProperty, float availableWidth) : void
- private DrawRendererButton(Rect position, SerializedProperty renderersProperty, int rendererIndex, Renderer renderer) : void
- private HandleAddRenderer(Rect position, Rect listArea, SerializedProperty renderersProperty) : void
- private AddRenderers(SerializedProperty renderersProperty, IEnumerable<Renderer> renderers, bool append) : void
- private CreateLevel() : void
- private DeleteLevel(int index) : void
- private GenerateLODs() : void
- private DestroyLODs() : void
- private VisibilitySettingsHaveChanged() : bool
- private CopyVisibilityChanges() : void
- private GetRenderers(IEnumerable<GameObject> gameObjects, bool searchChildren) : Renderer[]
- private MarkSceneAsDirty() : void
- private static DisplayError(string title, string message, string ok, Object context) : void

static class SerializedPropertyExtensions

- Archivo: `SerializedPropertyExtensions.cs` (18 líneas)

Métodos:

- public static GetChildProperties(this SerializedProperty property) : IEnumerable<SerializedProperty>

Namespace `UnityMeshSimplifier.Editor.Tests`

class MeshUtilsTest

- Archivo: `MeshUtilsTest.cs` (507 líneas)
- Usa: `Mesh`, `Vector3`, `BlendShape`, `BlendShapeFrame`, `MeshUtils`, `Vector4`, `Vector2`, `BoneWeight`

Métodos:

- public ShouldApplyBlendShapes() : void
- public ShouldConvertUVsTo2D() : void
- public ShouldConvertUVsTo3D() : void
- public ShouldCreateMesh() : void
- public ShouldGetMeshBlendShapes() : void
- public ShouldGetMeshUVs() : void
- public ShouldGetSubMeshIndexMinMax() : void
- public ShouldGetUsedUVComponents() : void

Namespace `UnityMeshSimplifier.Internal`

class BlendShapeContainer

- Archivo: `BlendShapeContainer.cs` (51 líneas)
- Usa: `BlendShapeFrameContainer`, `BlendShape`, `Vector3`, `BlendShapeFrame`

Campos:

- shapeName : string
- frames : BlendShapeFrameContainer[]

Métodos:

- public BlendShapeContainer(BlendShape blendShape) : (constructor)
- public MoveVertexElement(int dst, int src) : void
- public InterpolateVertexAttributes(int dst, int i0, int i1, int i2, ref Vector3 barycentricCoord) : void
- public Resize(int length, bool trimExess = false) : void
- public ToBlendShape() : BlendShape

class BlendShapeFrameContainer

- Archivo: `BlendShapeFrameContainer.cs` (46 líneas)
- Usa: `Vector3`, `BlendShapeFrame`, `ResizableArray`

Campos:

- frameWeight : float
- deltaVertices : ResizableArray<Vector3>
- deltaNormals : ResizableArray<Vector3>
- deltaTangents : ResizableArray<Vector3>

Métodos:

- public BlendShapeFrameContainer(BlendShapeFrame frame) : (constructor)
- public MoveVertexElement(int dst, int src) : void
- public InterpolateVertexAttributes(int dst, int i0, int i1, int i2, ref Vector3 barycentricCoord) : void
- public Resize(int length, bool trimExess = false) : void
- public ToBlendShapeFrame() : BlendShapeFrame

struct BorderVertex

- Archivo: `BorderVertex.cs` (12 líneas)

Campos:

- index : int
- hash : int

Métodos:

- public BorderVertex(int index, int hash) : (constructor)

class BorderVertexComparer

- Archivo: `BorderVertex.cs` (10 líneas)
- Implementa: `IComparer`
- Usa: `BorderVertex`

Campos:

- instance : BorderVertexComparer

Métodos:

- public Compare(BorderVertex x, BorderVertex y) : int

struct Ref

- Archivo: `Ref.cs` (12 líneas)

Campos:

- tid : int
- tvertex : int

Métodos:

- public Set(int tid, int tvertex) : void

struct Triangle

- Archivo: `Triangle.cs` (132 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3d`

Campos:

- index : int
- v0 : int
- v1 : int
- v2 : int
- subMeshIndex : int
- va0 : int
- va1 : int
- va2 : int
- err0 : double
- err1 : double
- err2 : double
- err3 : double
- deleted : bool
- dirty : bool
- n : Vector3d

Métodos:

- public Triangle(int index, int v0, int v1, int v2, int subMeshIndex) : (constructor)
- public GetAttributeIndices(int[] attributeIndices) : void
- public SetAttributeIndex(int index, int value) : void
- public GetErrors(double[] err) : void
- public GetHashCode() : int
- public Equals(object obj) : bool
- public Equals(Triangle other) : bool

class UVChannels

- Archivo: `UVChannels.cs` (61 líneas)
- Usa: `MeshUtils`, `ResizableArray`

Propiedades:

- Data : TVec[][]

Campos:

- UVChannelCount : int
- channels : ResizableArray<TVec>[]
- channelsData : TVec[][]

Métodos:

- public UVChannels() : (constructor)
- public Resize(int capacity, bool trimExess = false) : void

struct Vertex

- Archivo: `Vertex.cs` (45 líneas)
- Implementa: `IEquatable`
- Usa: `Vector3d`, `SymmetricMatrix`

Campos:

- index : int
- p : Vector3d
- tstart : int
- tcount : int
- q : SymmetricMatrix
- borderEdge : bool
- uvSeamEdge : bool
- uvFoldoverEdge : bool

Métodos:

- public Vertex(int index, Vector3d p) : (constructor)
- public GetHashCode() : int
- public Equals(object obj) : bool
- public Equals(Vertex other) : bool

🧠 Volcado completo de Roslyn

Volcado completo de Roslyn — _Revit_EXE_Geometrias

Generado: 2026-07-28 19:26:18

Tipos: 97 · Métodos: 790 · Propiedades: 167 · Campos: 537 · Eventos: 2

Directivas using por archivo

- **Logging.cs**: `System`
- **DecimationAlgorithm.cs**: `System`
- **UVChannels.cs**: `System`
- **ResizableArray.cs**: `System`
- **ConsoleLogger.cs**: `System`
- **SymmetricMatrix.cs**: `System`
- **LODBackupComponent.cs**: `UnityEngine`
- **ResizableArray.cs**: `System`, `System.Runtime.CompilerServices`
- **MeshUtils.cs**: `System`, `System.Collections.Generic`, `UnityEngine`, `UnityEngine.Rendering`
- **IOUtils.cs**: `System`, `System.IO`, `System.Linq`, `System.Text`
- **SimplificationOptions.cs**: `System`, `System.Runtime.InteropServices`, `UnityEngine`
- **MeshDecimatorUtility.cs**: `System`, `System.Collections.Generic`, `MeshDecimator.Algorithms`, `MeshDecimator.Math`, `UnityEngine.Mesh`, `UnityEngine.BoneWeight`, `UnityEngine.Vector2`, `UnityEngine.Vector3`, `UnityEngine.Vector4`, `UnityEngine.Color`, `UnityEngine.Matrix4x4`, `UnityEngine.Mathf`, `UnityEngine.Transform`, `UnityEngine.Material`
- **LODGenerator.cs**: `UnityEngine`, `UnityEngine.Rendering`, `System.Linq`, `MeshDecimator.Algorithms`, `UnityEngine.Mesh`
- **DecimatedObject.cs**: `UnityEngine`, `UnityEngine.Rendering`
- **Vector3.cs**: `System`, `System.Globalization`
- **Vector2i.cs**: `System`, `System.Globalization`
- **Vector2d.cs**: `System`, `System.Globalization`
- **Vector2.cs**: `System`, `System.Globalization`
- **AssemblyInfo.cs**: `System.Reflection`, `System.Runtime.CompilerServices`, `System.Runtime.InteropServices`
- **ShowExample.cs**: `UnityEngine`
- **Triangle.cs**: `System`, `System.Runtime.CompilerServices`
- **Ref.cs**: `System.Runtime.CompilerServices`
- **BorderVertex.cs**: `System.Collections.Generic`, `System.Runtime.CompilerServices`
- **BlendShapeFrameContainer.cs**: `System.Runtime.CompilerServices`, `UnityEngine`
- **UnityLogger.cs**: `UnityEngine`
- **BlendShapeContainer.cs**: `System.Runtime.CompilerServices`, `UnityEngine`
- **Vector3d.cs**: `System`, `System.Runtime.CompilerServices`, `System.Runtime.InteropServices`, `UnityEngine`
- **SymmetricMatrix.cs**: `System`, `System.Runtime.CompilerServices`, `System.Runtime.InteropServices`
- **MathHelper.cs**: `System`, `System.Runtime.CompilerServices`
- **SerializedPropertyExtensions.cs**: `System.Collections.Generic`, `UnityEditor`
- **LODGeneratorHelperEditor.cs**: `System.Collections.Generic`, `System.Linq`, `UnityEngine`, `UnityEditor`, `UnityEditor.SceneManagement`
- **LODGeneratorHelper.cs**: `UnityEngine`
- **UVChannels.cs**: `System`
- **ResizableArray.cs**: `System`
- **ConsoleLogger.cs**: `System`
- **Vector4i.cs**: `System`, `System.Globalization`
- **Vector3d.cs**: `System`, `System.Globalization`
- **ValidateSimplificationOptionsException.cs**: `System`
- **Vertex.cs**: `System`, `System.Runtime.CompilerServices`
- **UVChannels.cs**: `System.Runtime.CompilerServices`
- **Vector2.cs**: `System`, `System.Globalization`
- **SymmetricMatrix.cs**: `System`
- **MathHelper.cs**: `System`
- **AssemblyInfo.cs**: `System.Reflection`, `System.Runtime.CompilerServices`, `System.Runtime.InteropServices`
- **Program.cs**: `System`, `System.IO`, `System.Globalization`, `MeshDecimator`, `MeshDecimator.Math`
- **ObjMesh.cs**: `System`, `System.Collections.Generic`, `System.IO`, `System.Globalization`, `MeshDecimator.Math`
- **DecimatedObjectEditor.cs**: `UnityEngine`, `UnityEditor`, `UnityEditor.SceneManagement`, `MeshDecimator.Unity`
- **BoneWeight.cs**: `System`, `MeshDecimator.Math`
- **Program.cs**: `System`, `System.Collections.Generic`, `System.Diagnostics`, `System.IO`, `System.Linq`, `System.Numerics`, `System.Text`, `System.Threading`, `SharpGLTF.Geometry`, `SharpGLTF.Geometry.VertexTypes`, `SharpGLTF.Materials`, `SharpGLTF.Scenes`
- **FastQuadricMeshSimplification.cs**: `System`, `System.Collections.Generic`, `MeshDecimator.Collections`, `MeshDecimator.Math`
- **Vector4d.cs**: `System`, `System.Globalization`
- **Vector4.cs**: `System`, `System.Globalization`
- **Vector3i.cs**: `System`, `System.Globalization`
- **Vector3d.cs**: `System`, `System.Globalization`
- **Vector4i.cs**: `System`, `System.Globalization`
- **MeshDecimation.cs**: `System`, `MeshDecimator.Algorithms`
- **Mesh.cs**: `System`, `System.Collections.Generic`, `MeshDecimator.Math`
- **Logging.cs**: `System`
- **BoneWeight.cs**: `System`, `MeshDecimator.Math`
- **MeshSimplifier.cs**: `System`, `System.Collections.Generic`, `System.Runtime.CompilerServices`, `UnityEngine`, `UnityMeshSimplifier.Internal`
- **BlendShape.cs**: `System`, `System.Runtime.InteropServices`, `UnityEngine`
- **AssemblyAttributes.cs**: `System.Runtime.CompilerServices`
- **MeshUtilsTest.cs**: `System.Collections.Generic`, `System.Linq`, `UnityEngine`, `UnityEngine.Rendering`, `NUnit.Framework`
- **ExportarGeometria.cs**: `System`, `System.Collections.Generic`, `System.IO`, `Autodesk.Revit.DB`
- **FastQuadricMeshSimplification.cs**: `System`, `System.Collections.Generic`, `MeshDecimator.Collections`, `MeshDecimator.Math`
- **DecimationAlgorithm.cs**: `System`
- **Vector3.cs**: `System`, `System.Globalization`
- **Vector2i.cs**: `System`, `System.Globalization`
- **Vector2d.cs**: `System`, `System.Globalization`
- **Vector4d.cs**: `System`, `System.Globalization`
- **Vector4.cs**: `System`, `System.Globalization`
- **Vector3i.cs**: `System`, `System.Globalization`
- **MathHelper.cs**: `System`
- **MeshDecimation.cs**: `System`, `MeshDecimator.Algorithms`

- **Mesh.cs**: `System`, `System.Collections.Generic`, `MeshDecimator.Math`
- **MeshCombiner.cs**: `System.Collections.Generic`, `System.Linq`, `UnityEngine`
- **LODLevel.cs**: `System`, `UnityEngine`, `UnityEngine.Rendering`
- **LODGenerator.cs**: `System.Collections.Generic`, `System.Linq`, `UnityEngine`

Namespace `(global)`

static class ExportarGeometria

- Accesibilidad: `public`
- Modificadores: `public`, `static`
- Archivo: `ExportarGeometria.cs` · líneas 6-177 (172)
- Usa: `Mesh`

Campos:

- private const int **FORMAT_MAGIC** (inicializado)
- private const int **FORMAT_VERSION** (inicializado)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static void ExportRawDump(Document doc, string filePath = @"C:\.TBT\Proyectos_Revit_EXE_Geometrias\PostProcesadoEXE\IN\export2.bin")	5	20	48	WhereElementIsNotElementType, WherePasses, GetDirectoryName, IsNullOrEmpty, Exists, CreateDirectory, Write, ExportarElemento
private static void ExportarElemento(Document doc, Element elem, Options geomOptions, BinaryWriter writer, Dictionary<int, byte[]> colorCache)	11	39	53	get_Geometry, ObtenerTodosLosSolidos, Triangulate, ObtenerColorMaterial, Write, get_Triangle, get_Index
private static byte[] ObtenerColorMaterial(Document doc, Element elem, ElementId materialElementId, Dictionary<int, byte[]> cache)	15	32	38	TryGetValue, GetElement, Round
private static List<Solid> ObtenerTodosLosSolidos(GeometryElement geomElem)	8	17	24	Add, GetInstanceGeometry, AddRange, ObtenerTodosLosSolidos

class ShowExample

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `ShowExample.cs` · líneas 29-63 (35)
- Hereda de: `MonoBehaviour` (profundidad 0)
- Usa: `Vector3`

Campos:

- private Transform **cameraTransform** (inicializado) `[SerializeField]`
- private Transform **targetTransform** (inicializado) `[SerializeField]`
- private float **cameraAngleTime** (inicializado) `[SerializeField]`
- private float **cameraMinDistance** (inicializado) `[SerializeField]`
- private float **cameraMaxDistance** (inicializado) `[SerializeField]`
- private float **cameraDistanceTime** (inicializado) `[SerializeField]`
- private float **cameraSwayHeight** (inicializado) `[SerializeField]`
- private float **cameraSwayTime** (inicializado) `[SerializeField]`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private void Update()	1	6	14	Repeat, Max, Sin, Lerp, Cos, LookRotation

Namespace `ConvertidorGeometrias`

class MeshData

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Program.cs` · líneas 16-29 (14)
- Usa: `Vector3`

Campos:

- public int **ElementId**
- public string **Guid**
- public int **MaterialId**
- public int **CategoryId**
- public byte **ColR** (inicializado)
- public byte **ColG** (inicializado)
- public byte **ColB** (inicializado)
- public byte **ColA** (inicializado)
- public bool **HasColor**
- public List<Vector3> **Vertices** (inicializado)
- public List<Vector3> **Normals** (inicializado)
- public List<int> **Indices** (inicializado)

class PiezaRota

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Program.cs` · líneas 51-57 (7)

Campos:

- public string **Guid**
- public int **ElementId**
- public string **Problema**
- public string **Detalle**

class PipelineStats

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Program.cs` · líneas 31-49 (19)

Campos:

- public int **FormatVersion** (inicializado)
- public int **InputMeshes**
- public int **OutputPieces**
- public long **VertsIn**
- public long **VertsWelded**
- public long **VertsOut**
- public long **TrisIn**
- public long **TrisOut**
- public long **DegenerateRemoved**
- public int **Fallbacks**
- public int **Retries**
- public int **Discarded**
- public int **NotDecimated**
- public int **ProtectedCat**
- public int **Transparent**
- public int **Instanced**
- public int **Repaired**
- public int **PoolMeshes**
- public long **TbvBytes**

class Program

- Accesibilidad: `private`
- Archivo: `Program.cs` · líneas 59-1264 (1206)
- Usa: `MeshData`, `PipelineStats`, `PiezaRota`, `Vector3`, `Vector3d`, `Mesh`, `FastQuadricMeshSimplification`, `MeshDecimation`, `Vector4`

Campos:

- private const int **FormatMagic** (inicializado)
- private const double **WeldGrid** (inicializado)
- private const float **SpikeTolerance** (inicializado)
- private const int **MinVertsParaDecimar** (inicializado)
- private const int **MinTrisParaDecimar** (inicializado)
- private static readonly HashSet<int> **CategoriasProtegidas** (inicializado)
- private const string **APP_GUID** (inicializado)
- private static readonly string **CARPETA_TEMP** (inicializado)
- private static string **RUTA_BASE_SALIDA** (inicializado)
- private static string **RUTA_LOG** (inicializado)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private static bool EsVidrioProtegido(MeshData m)	9	4	6	
private static void Main(string[] args)	10	35	50	IsNullOrWhiteSpace, Combine, Log, Exists, CreateDirectory, GetFiles, EstaBloqueado, ProcesarArchivo…
private static bool EstaBloqueado(string path)	2	6	8	Open
private static void ProcesarArchivo(string filePath)	7	40	60	Log, GetFileName, StartNew, LeerBinario, WriteLine, OptimizeMeshes, ValidarPiezas, RepararPiezas…
private static void Log(string msg)	3	8	13	WriteLine, IsNullOrEmpty, ToString, AppendAllText
private static string ConstruirReporte(PipelineStats s, List<PiezaRota> detectadas, List<PiezaRota> rotas, TimeSpan elapsed)	6	40	52	AppendLine, Pct, ToString
private static string Pct(long now, long before)	2	1	2	
private static List<PiezaRota> ValidarPiezas(Dictionary<string, MeshData> originales, List<MeshData> finales)	27	48	104	ToDictionary, TryGetValue, Add, BBoxStr, IsNaN, IsInfinity, Join, GetBounds…
private static void RepararPiezas(List<PiezaRota> rotas, Dictionary<string, MeshData> originales, List<MeshData> finales, PipelineStats stats)	5	11	17	TryGetValue, ClonarConNormales, FindIndex, Add, WriteLine
private static MeshData ClonarConNormales(MeshData src)	1	3	16	ComputeNormals
private static string BBoxStr(List<Vector3> verts)	1	2	5	GetBounds
private static List<MeshData> OptimizeMeshes(List<MeshData> inputMeshes, PipelineStats stats, Dictionary<string, MeshData> weldedOriginals)	17	64	119	GroupBy, First, AddRange, Add, WeldVertices, RemoveDegenerateTriangles, CompactVertices, Contains…
private static int ComputeTarget(int originalTriangles)	5	9	8	Max
private static MeshData TryDecimate(MeshData source, int targetTriangles, PipelineStats stats)	20	40	76	ToArray, DecimateMesh, IsNaN, IsInfinity, Add, AddRange, RemoveDegenerateTriangles, CompactVertices…
private static double TotalArea(MeshData mesh)	2	8	12	Length, Cross
private static void GetBounds(List<Vector3> verts, out Vector3 min, out Vector3 max)	2	6	10	Min, Max
private static void WeldVertices(MeshData mesh)	6	20	31	Round, TryGetValue, Add, RemoveRange
private static long RemoveDegenerateTriangles(MeshData mesh)	6	19	22	Cross, LengthSquared, Add
private static void CompactVertices(MeshData mesh)	4	13	19	Add
private static void ComputeNormals(MeshData mesh)	4	14	23	Cross, Length
private static List<MeshData> LeerBinario(string path, PipelineStats stats)	8	49	72	OpenRead, ReadInt32, ReadString, ReadByte, ReadSingle, Add, ReadUInt32
private static void ExportToObj(List<MeshData> meshes, string outputPath)	9	40	58	WriteLine, ToString
private static void ExportToGlb(List<MeshData> meshes, string outputPath, PipelineStats stats)	14	65	118	TryGetValue, NextDouble, WithChannelParam, WithMetallicRoughnessShader, WithDoubleSide, WithAlpha, GeometryHash, EsCopiaTrasladada…
private static long GeometryHash(MeshData mesh)	3	14	20	Round
private static bool EsCopiaTrasladada(MeshData a, MeshData b, out Vector3 delta)	9	15	19	Abs
private static void ExportToViewerBin(List<MeshData> meshes, string path, PipelineStats stats)	20	129	147	ContainsKey, Add, GeometryHash, TryGetValue, EsCopiaTrasladada, GetBounds, Min, Max…
private static sbyte Snorm(float f)	1	2	5	Max, Min, Round

Namespace `MeshDecimator`

enum Algorithm

> The decimation algorithms.

- Accesibilidad: `public`
- Archivo: `MeshDecimation.cs` · líneas 36-46 (11)

Valores del enum:

- `Default`
- `FastQuadricMesh`

enum Algorithm

> The decimation algorithms.

- Accesibilidad: `public`
- Archivo: `MeshDecimation.cs` · líneas 36-46 (11)

Valores del enum:

- `Default`
- `FastQuadricMesh`

struct BoneWeight

> A bone weight.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `BoneWeight.cs` · líneas 35-248 (214)
- Implementa: `IEquatable`
- Usa: `Vector4`

Campos:

- public int **boneIndex0** — The first bone index.
- public int **boneIndex1** — The second bone index.
- public int **boneIndex2** — The third bone index.
- public int **boneIndex3** — The fourth bone index.
- public float **boneWeight0** — The first bone weight.
- public float **boneWeight1** — The second bone weight.
- public float **boneWeight2** — The third bone weight.
- public float **boneWeight3** — The fourth bone weight.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BoneWeight(int boneIndex0, int boneIndex1, int boneIndex2, int boneIndex3, float boneWeight0, float boneWeight1, float boneWeight2, float boneWeight3)	1	8	12	
private void MergeBoneWeight(int boneIndex, float weight)	9	29	40	Normalize
private void Normalize()	2	9	15	Sqrt
public override int GetHashCode()	1	1	5	GetHashCode
public override bool Equals(object obj)	9	5	10	
public bool Equals(BoneWeight other)	8	1	5	
public override string ToString()	1	1	5	Format
public static void Merge(ref BoneWeight a, ref BoneWeight b)	5	8	7	MergeBoneWeight

- `BoneWeight` : Creates a new bone weight.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this bone weight is equal to another object.
- `Equals` : Returns if this bone weight is equal to another one.
- `ToString` : Returns a nicely formatted string for this bone weight.
- `Merge` : Merges two bone weights and stores the merged result in the first parameter.

struct BoneWeight

> A bone weight.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `BoneWeight.cs` · líneas 35-248 (214)
- Implementa: `IEquatable`
- Usa: `Vector4`

Campos:

- public int **boneIndex0** — The first bone index.
- public int **boneIndex1** — The second bone index.
- public int **boneIndex2** — The third bone index.
- public int **boneIndex3** — The fourth bone index.
- public float **boneWeight0** — The first bone weight.
- public float **boneWeight1** — The second bone weight.
- public float **boneWeight2** — The third bone weight.
- public float **boneWeight3** — The fourth bone weight.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BoneWeight(int boneIndex0, int boneIndex1, int boneIndex2, int boneIndex3, float boneWeight0, float boneWeight1, float boneWeight2, float boneWeight3)	1	8	12	
private void MergeBoneWeight(int boneIndex, float weight)	9	29	40	Normalize

private void Normalize()	2	9	15	Sqrt
public override int GetHashCode()	1	1	5	GetHashCode
public override bool Equals(object obj)	9	5	10	
public bool Equals(BoneWeight other)	8	1	5	
public override string ToString()	1	1	5	Format
public static void Merge(ref BoneWeight a, ref BoneWeight b)	5	8	7	MergeBoneWeight

- `BoneWeight` : Creates a new bone weight.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this bone weight is equal to another object.
- `Equals` : Returns if this bone weight is equal to another one.
- `ToString` : Returns a nicely formatted string for this bone weight.
- `Merge` : Merges two bone weights and stores the merged result in the first parameter.

interface ILogger

> A logger.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Logging.cs` · líneas 35-54 (20)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void LogVerbose(string text)	1	0	1	
public void LogWarning(string text)	1	0	1	
public void LogError(string text)	1	0	1	

- `LogVerbose` : Logs a line of verbose text.
- `LogWarning` : Logs a line of warning text.
- `LogError` : Logs a line of error text.

interface ILogger

> A logger.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Logging.cs` · líneas 35-54 (20)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void LogVerbose(string text)	1	0	1	
public void LogWarning(string text)	1	0	1	
public void LogError(string text)	1	0	1	

- `LogVerbose` : Logs a line of verbose text.
- `LogWarning` : Logs a line of warning text.
- `LogError` : Logs a line of error text.

static class Logging

> The logging API.

- Accesibilidad: `public`
- Modificadores: `public`, `static`
- Archivo: `Logging.cs` · líneas 60-175 (116)
- Usa: `ILogger`, `ConsoleLogger`

Campos:

- private static ILogger **logger** (inicializado)
- private static object **syncObj** (inicializado)

Propiedades:

- public static ILogger **Logger** `{ get; set; }` — Gets or sets the active logger.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private static (ctor) Logging()	1	1	4	
public static void LogVerbose(string text)	2	5	10	LogVerbose
public static void LogVerbose(string format, params object[] args)	1	1	4	LogVerbose, Format
public static void LogWarning(string text)	2	5	10	LogWarning
public static void LogWarning(string format, params object[] args)	1	1	4	LogWarning, Format
public static void LogError(string text)	2	5	10	LogError
public static void LogError(string format, params object[] args)	1	1	4	LogError, Format

- `Logging` : The static initializer.
- `LogVerbose` : Logs a line of verbose text.
- `LogVerbose` : Logs a line of formatted verbose text.
- `LogWarning` : Logs a line of warning text.
- `LogWarning` : Logs a line of formatted warning text.
- `LogError` : Logs a line of error text.
- `LogError` : Logs a line of formatted error text.

static class Logging

> The logging API.

- Accesibilidad: `public`
- Modificadores: `public`, `static`
- Archivo: `Logging.cs` · líneas 60-175 (116)
- Usa: `ILogger`, `ConsoleLogger`

Campos:

- private static ILogger **logger** (inicializado)
- private static object **syncObj** (inicializado)

Propiedades:

- public static ILogger **Logger** `{ get; set; }` — Gets or sets the active logger.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private static (ctor) Logging()	1	1	4	
public static void LogVerbose(string text)	2	5	10	LogVerbose
public static void LogVerbose(string format, params object[] args)	1	1	4	LogVerbose, Format
public static void LogWarning(string text)	2	5	10	LogWarning
public static void LogWarning(string format, params object[] args)	1	1	4	LogWarning, Format
public static void LogError(string text)	2	5	10	LogError
public static void LogError(string format, params object[] args)	1	1	4	LogError, Format

- `Logging` : The static initializer.
- `LogVerbose` : Logs a line of verbose text.
- `LogVerbose` : Logs a line of formatted verbose text.
- `LogWarning` : Logs a line of warning text.
- `LogWarning` : Logs a line of formatted warning text.
- `LogError` : Logs a line of error text.
- `LogError` : Logs a line of formatted error text.

class Mesh

> A mesh.

- Accesibilidad: `public`
- Modificadores: `public`, `sealed`
- Archivo: `Mesh.cs` · líneas 36-954 (919)
- Usa: `Vector3d`, `Vector3`, `Vector4`, `Vector2`, `BoneWeight`, `MathHelper`

Campos:

- public const int **UVChannelCount** (inicializado) — The count of supported UV channels.
- private Vector3d[] **vertices** (inicializado)
- private int[][] **indices** (inicializado)
- private Vector3[] **normals** (inicializado)
- private Vector4[] **tangents** (inicializado)
- private Vector2[][] **uvs2D** (inicializado)
- private Vector3[][] **uvs3D** (inicializado)
- private Vector4[][] **uvs4D** (inicializado)
- private Vector4[] **colors** (inicializado)
- private BoneWeight[] **boneWeights** (inicializado)
- private static readonly int[] **emptyIndices** (inicializado)

Propiedades:

- public int **VertexCount** `{ get; }` — Gets the count of vertices of this mesh.
- public int **SubMeshCount** `{ get; set; }` — Gets or sets the count of submeshes in this mesh.
- public int **TriangleCount** `{ get; }` — Gets the total count of triangles in this mesh.
- public Vector3d[] **Vertices** `{ get; set; }` — Gets or sets the vertices for this mesh. Note that this resets all other vertex attributes.
- public int[] **Indices** `{ get; set; }` — Gets or sets the combined indices for this mesh. Once set, the sub-mesh count gets set to 1.
- public Vector3[] **Normals** `{ get; set; }` — Gets or sets the normals for this mesh.
- public Vector4[] **Tangents** `{ get; set; }` — Gets or sets the tangents for this mesh.
- public Vector2[] **UV1** `{ get; set; }` — Gets or sets the first UV set for this mesh.
- public Vector2[] **UV2** `{ get; set; }` — Gets or sets the second UV set for this mesh.
- public Vector2[] **UV3** `{ get; set; }` — Gets or sets the third UV set for this mesh.
- public Vector2[] **UV4** `{ get; set; }` — Gets or sets the fourth UV set for this mesh.
- public Vector4[] **Colors** `{ get; set; }` — Gets or sets the vertex colors for this mesh.
- public BoneWeight[] **BoneWeights** `{ get; set; }` — Gets or sets the vertex bone weights for this mesh.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Mesh(Vector3d[] vertices, int[] indices)	4	9	13	
public (ctor) Mesh(Vector3d[] vertices, int[][] indices)	6	10	16	Format
private void ClearVertexAttributes()	1	7	10	
public void RecalculateNormals()	5	29	42	Cross, Normalize
public void RecalculateTangents()	18	83	111	Dot, Normalize, Cross
public int GetTriangleCount(int subMeshIndex)	3	3	7	
public int[] GetIndices(int subMeshIndex)	3	3	7	
public int[][] GetSubMeshIndices()	2	5	9	
public void SetIndices(int subMeshIndex, int[] indices)	5	7	11	

public int GetUVDimension(int channel)	9	13	22	
public Vector2[] GetUVs2D(int channel)	5	7	14	
public Vector3[] GetUVs3D(int channel)	5	7	14	
public Vector4[] GetUVs4D(int channel)	5	7	14	
public void GetUVs(int channel, List<Vector2> uvs)	7	11	17	Clear, AddRange
public void GetUVs(int channel, List<Vector3> uvs)	7	11	17	Clear, AddRange
public void GetUVs(int channel, List<Vector4> uvs)	7	11	17	Clear, AddRange
public void SetUVs(int channel, Vector2[] uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, Vector3[] uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, Vector4[] uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, List<Vector2> uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, List<Vector3> uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, List<Vector4> uvs)	10	22	35	Format, CopyTo
public override string ToString()	1	1	4	Format

- `Mesh` : Creates a new mesh.
- `Mesh` : Creates a new mesh.
- `RecalculateNormals` : Recalculates the normals for this mesh smoothly.
- `RecalculateTangents` : Recalculates the tangents for this mesh.
- `GetTriangleCount` : Returns the count of triangles for a specific sub-mesh in this mesh.
- `GetIndices` : Returns the triangle indices of a specific sub-mesh in this mesh.
- `GetSubMeshIndices` : Returns the triangle indices for all sub-meshes in this mesh.
- `SetIndices` : Sets the triangle indices of a specific sub-mesh in this mesh.
- `GetUVDimension` : Returns the UV dimension for a specific channel.
- `GetUVs2D` : Returns the UVs (2D) from a specific channel.
- `GetUVs3D` : Returns the UVs (3D) from a specific channel.
- `GetUVs4D` : Returns the UVs (4D) from a specific channel.
- `GetUVs` : Returns the UVs (2D) from a specific channel.
- `GetUVs` : Returns the UVs (3D) from a specific channel.
- `GetUVs` : Returns the UVs (4D) from a specific channel.
- `SetUVs` : Sets the UVs (2D) for a specific channel.
- `SetUVs` : Sets the UVs (3D) for a specific channel.
- `SetUVs` : Sets the UVs (4D) for a specific channel.
- `SetUVs` : Sets the UVs (2D) for a specific channel.
- `SetUVs` : Sets the UVs (3D) for a specific channel.
- `SetUVs` : Sets the UVs (4D) for a specific channel.
- `ToString` : Returns the text-representation of this mesh.

class Mesh

> A mesh.

- Accesibilidad: `public`
- Modificadores: `public`, `sealed`
- Archivo: `Mesh.cs` · líneas 36-954 (919)
- Usa: `Vector3d`, `Vector3`, `Vector4`, `Vector2`, `BoneWeight`, `MathHelper`

Campos:

- public const int **UVChannelCount** (inicializado) — The count of supported UV channels.
- private Vector3d[] **vertices** (inicializado)
- private int[][] **indices** (inicializado)
- private Vector3[] **normals** (inicializado)
- private Vector4[] **tangents** (inicializado)
- private Vector2[][] **uvs2D** (inicializado)
- private Vector3[][] **uvs3D** (inicializado)
- private Vector4[][] **uvs4D** (inicializado)
- private Vector4[] **colors** (inicializado)
- private BoneWeight[] **boneWeights** (inicializado)
- private static readonly int[] **emptyIndices** (inicializado)

Propiedades:

- public int **VertexCount** `{ get; }` — Gets the count of vertices of this mesh.
- public int **SubMeshCount** `{ get; set; }` — Gets or sets the count of submeshes in this mesh.
- public int **TriangleCount** `{ get; }` — Gets the total count of triangles in this mesh.
- public Vector3d[] **Vertices** `{ get; set; }` — Gets or sets the vertices for this mesh. Note that this resets all other vertex attributes.
- public int[] **Indices** `{ get; set; }` — Gets or sets the combined indices for this mesh. Once set, the sub-mesh count gets set to 1.
- public Vector3[] **Normals** `{ get; set; }` — Gets or sets the normals for this mesh.
- public Vector4[] **Tangents** `{ get; set; }` — Gets or sets the tangents for this mesh.
- public Vector2[] **UV1** `{ get; set; }` — Gets or sets the first UV set for this mesh.
- public Vector2[] **UV2** `{ get; set; }` — Gets or sets the second UV set for this mesh.
- public Vector2[] **UV3** `{ get; set; }` — Gets or sets the third UV set for this mesh.
- public Vector2[] **UV4** `{ get; set; }` — Gets or sets the fourth UV set for this mesh.
- public Vector4[] **Colors** `{ get; set; }` — Gets or sets the vertex colors for this mesh.
- public BoneWeight[] **BoneWeights** `{ get; set; }` — Gets or sets the vertex bone weights for this mesh.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Mesh(Vector3d[] vertices, int[] indices)	4	9	13	
public (ctor) Mesh(Vector3d[] vertices, int[][] indices)	6	10	16	Format
private void ClearVertexAttributes()	1	7	10	
public void RecalculateNormals()	5	29	42	Cross, Normalize
public void RecalculateTangents()	18	83	111	Dot, Normalize, Cross

public int GetTriangleCount(int subMeshIndex)	3	3	7	
public int[] GetIndices(int subMeshIndex)	3	3	7	
public int[][] GetSubMeshIndices()	2	5	9	
public void SetIndices(int subMeshIndex, int[] indices)	5	7	11	
public int GetUVDimension(int channel)	9	13	22	
public Vector2[] GetUVs2D(int channel)	5	7	14	
public Vector3[] GetUVs3D(int channel)	5	7	14	
public Vector4[] GetUVs4D(int channel)	5	7	14	
public void GetUVs(int channel, List<Vector2> uvs)	7	11	17	Clear, AddRange
public void GetUVs(int channel, List<Vector3> uvs)	7	11	17	Clear, AddRange
public void GetUVs(int channel, List<Vector4> uvs)	7	11	17	Clear, AddRange
public void SetUVs(int channel, Vector2[] uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, Vector3[] uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, Vector4[] uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, List<Vector2> uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, List<Vector3> uvs)	10	22	35	Format, CopyTo
public void SetUVs(int channel, List<Vector4> uvs)	10	22	35	Format, CopyTo
public override string ToString()	1	1	4	Format

- `Mesh` : Creates a new mesh.
- `Mesh` : Creates a new mesh.
- `RecalculateNormals` : Recalculates the normals for this mesh smoothly.
- `RecalculateTangents` : Recalculates the tangents for this mesh.
- `GetTriangleCount` : Returns the count of triangles for a specific sub-mesh in this mesh.
- `GetIndices` : Returns the triangle indices of a specific sub-mesh in this mesh.
- `GetSubMeshIndices` : Returns the triangle indices for all sub-meshes in this mesh.
- `SetIndices` : Sets the triangle indices of a specific sub-mesh in this mesh.
- `GetUVDimension` : Returns the UV dimension for a specific channel.
- `GetUVs2D` : Returns the UVs (2D) from a specific channel.
- `GetUVs3D` : Returns the UVs (3D) from a specific channel.
- `GetUVs4D` : Returns the UVs (4D) from a specific channel.
- `GetUVs` : Returns the UVs (2D) from a specific channel.
- `GetUVs` : Returns the UVs (3D) from a specific channel.
- `GetUVs` : Returns the UVs (4D) from a specific channel.
- `SetUVs` : Sets the UVs (2D) for a specific channel.
- `SetUVs` : Sets the UVs (3D) for a specific channel.
- `SetUVs` : Sets the UVs (4D) for a specific channel.
- `SetUVs` : Sets the UVs (2D) for a specific channel.
- `SetUVs` : Sets the UVs (3D) for a specific channel.
- `SetUVs` : Sets the UVs (4D) for a specific channel.
- `ToString` : Returns the text-representation of this mesh.

static class MeshDecimation

> The mesh decimation API.

- Accesibilidad: `public`
- Modificadores: `public` , `static`
- Archivo: `MeshDecimation.cs` · líneas 52-179 (128)
- Usa: `DecimationAlgorithm` , `Algorithm` , `FastQuadricMeshSimplification` , `Mesh`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static DecimationAlgorithm CreateAlgorithm(Algorithm algorithm)	3	6	16	
public static Mesh DecimateMesh(Mesh mesh, int targetTriangleCount)	1	1	4	DecimateMesh
public static Mesh DecimateMesh(Algorithm algorithm, Mesh mesh, int targetTriangleCount)	2	4	8	CreateAlgorithm, DecimateMesh
public static Mesh DecimateMesh(DecimationAlgorithm algorithm, Mesh mesh, int targetTriangleCount)	5	12	17	Initialize, DecimateMesh, ToMesh
public static Mesh DecimateMeshLossless(Mesh mesh)	1	1	4	DecimateMeshLossless
public static Mesh DecimateMeshLossless(Algorithm algorithm, Mesh mesh)	2	4	8	CreateAlgorithm, DecimateMeshLossless
public static Mesh DecimateMeshLossless(DecimationAlgorithm algorithm, Mesh mesh)	3	8	12	Initialize, DecimateMeshLossless, ToMesh

- `CreateAlgorithm` : Creates a specific decimation algorithm.
- `DecimateMesh` : Decimates a mesh.
- `DecimateMesh` : Decimates a mesh.
- `DecimateMesh` : Decimates a mesh.
- `DecimateMeshLossless` : Decimates a mesh without losing any quality.
- `DecimateMeshLossless` : Decimates a mesh without losing any quality.
- `DecimateMeshLossless` : Decimates a mesh without losing any quality.

static class MeshDecimation

> The mesh decimation API.

- Accesibilidad: `public`
- Modificadores: `public` , `static`
- Archivo: `MeshDecimation.cs` · líneas 52-179 (128)
- Usa: `DecimationAlgorithm` , `Algorithm` , `FastQuadricMeshSimplification` , `Mesh`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas

public static DecimationAlgorithm CreateAlgorithm(Algorithm algorithm)	3	6	16	
public static Mesh DecimateMesh(Mesh mesh, int targetTriangleCount)	1	1	4	DecimateMesh
public static Mesh DecimateMesh(Algorithm algorithm, Mesh mesh, int targetTriangleCount)	2	4	8	CreateAlgorithm, DecimateMesh
public static Mesh DecimateMesh(DecimationAlgorithm algorithm, Mesh mesh, int targetTriangleCount)	5	12	17	Initialize, DecimateMesh, ToMesh
public static Mesh DecimateMeshLossless(Mesh mesh)	1	1	4	DecimateMeshLossless
public static Mesh DecimateMeshLossless(Algorithm algorithm, Mesh mesh)	2	4	8	CreateAlgorithm, DecimateMeshLossless
public static Mesh DecimateMeshLossless(DecimationAlgorithm algorithm, Mesh mesh)	3	8	12	Initialize, DecimateMeshLossless, ToMesh

- `CreateAlgorithm` : Creates a specific decimation algorithm.
- `DecimateMesh` : Decimates a mesh.
- `DecimateMesh` : Decimates a mesh.
- `DecimateMesh` : Decimates a mesh.
- `DecimateMeshLossless` : Decimates a mesh without losing any quality.
- `DecimateMeshLossless` : Decimates a mesh without losing any quality.
- `DecimateMeshLossless` : Decimates a mesh without losing any quality.

Namespace `MeshDecimator.Algorithms`

struct BorderVertex

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 200-210 (11)

Campos:

- public int **index**
- public int **hash**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BorderVertex(int index, int hash)	1	2	5	

struct BorderVertex

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 200-210 (11)

Campos:

- public int **index**
- public int **hash**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BorderVertex(int index, int hash)	1	2	5	

class BorderVertexComparer

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 214-222 (9)
- Implementa: `IComparer`
- Usa: `BorderVertex`

Campos:

- public static readonly BorderVertexComparer **instance** (inicializado)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public int Compare(BorderVertex x, BorderVertex y)	1	1	4	CompareTo

class BorderVertexComparer

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 214-222 (9)
- Implementa: `IComparer`
- Usa: `BorderVertex`

Campos:

- public static readonly BorderVertexComparer **instance** (inicializado)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public int Compare(BorderVertex x, BorderVertex y)	1	1	4	CompareTo

abstract class DecimationAlgorithm

> A decimation algorithm.

- Accesibilidad: `public`
- Modificadores: `public` , `abstract`
- Archivo: `DecimationAlgorithm.cs` · líneas 34-162 (129)

- Usa: `MathHelper`, `Mesh`

Eventos:

- public event StatusReportCallback **StatusReport**

Campos:

- private bool **preserveBorders** (inicializado)
- private int **maxVertexCount** (inicializado)
- private bool **verbose** (inicializado)
- private StatusReportCallback **statusReportInvoker** (inicializado)

Propiedades:

- public bool **KeepBorders** `{ get; set; }` — Gets or sets if borders should be kept. Default value: false
- public bool **PreserveBorders** `{ get; set; }` — Gets or sets if borders should be preserved. Default value: false
- public bool **KeepLinkedVertices** `{ get; set; }` — Gets or sets if linked vertices should be kept. Default value: false
- public int **MaxVertexCount** `{ get; set; }` — Gets or sets the maximum vertex count. Set to zero for no limitation. Default value: 0 (no limitation)
- public bool **Verbose** `{ get; set; }` — Gets or sets if verbose information should be printed in the console. Default value: false

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
protected void ReportStatus(int iteration, int originalTris, int currentTris, int targetTris)	2	4	8	Invoke
public abstract void Initialize(Mesh mesh)	1	0	1	
public abstract void DecimateMesh(int targetTrisCount)	1	0	1	
public abstract void DecimateMeshLossless()	1	0	1	
public abstract Mesh ToMesh()	1	0	1	

- `ReportStatus` : Reports the current status of the decimation.
- `Initialize` : Initializes the algorithm with the original mesh.
- `DecimateMesh` : Decimates the mesh.
- `DecimateMeshLossless` : Decimates the mesh without losing any quality.
- `ToMesh` : Returns the resulting mesh.

abstract class DecimationAlgorithm

> A decimation algorithm.

- Accesibilidad: `public`
- Modificadores: `public`, `abstract`
- Archivo: `DecimationAlgorithm.cs` · líneas 34-162 (129)
- Usa: `MathHelper`, `Mesh`

Eventos:

- public event StatusReportCallback **StatusReport**

Campos:

- private bool **preserveBorders** (inicializado)
- private int **maxVertexCount** (inicializado)
- private bool **verbose** (inicializado)
- private StatusReportCallback **statusReportInvoker** (inicializado)

Propiedades:

- public bool **KeepBorders** `{ get; set; }` — Gets or sets if borders should be kept. Default value: false
- public bool **PreserveBorders** `{ get; set; }` — Gets or sets if borders should be preserved. Default value: false
- public bool **KeepLinkedVertices** `{ get; set; }` — Gets or sets if linked vertices should be kept. Default value: false
- public int **MaxVertexCount** `{ get; set; }` — Gets or sets the maximum vertex count. Set to zero for no limitation. Default value: 0 (no limitation)
- public bool **Verbose** `{ get; set; }` — Gets or sets if verbose information should be printed in the console. Default value: false

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
protected void ReportStatus(int iteration, int originalTris, int currentTris, int targetTris)	2	4	8	Invoke
public abstract void Initialize(Mesh mesh)	1	0	1	
public abstract void DecimateMesh(int targetTrisCount)	1	0	1	
public abstract void DecimateMeshLossless()	1	0	1	
public abstract Mesh ToMesh()	1	0	1	

- `ReportStatus` : Reports the current status of the decimation.
- `Initialize` : Initializes the algorithm with the original mesh.
- `DecimateMesh` : Decimates the mesh.
- `DecimateMeshLossless` : Decimates the mesh without losing any quality.
- `ToMesh` : Returns the resulting mesh.

class FastQuadricMeshSimplification

> The fast quadric mesh simplification algorithm.

- Accesibilidad: `public`
- Modificadores: `public`, `sealed`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 50-1539 (1490)
- Hereda de: `DecimationAlgorithm` (profundidad 1)
- Tipos anidados: `Triangle`, `Vertex`, `Ref`, `BorderVertex`, `BorderVertexComparer`
- Usa: `Vector3d`, `SymmetricMatrix`, `BorderVertex`, `BorderVertexComparer`, `Triangle`, `Vertex`, `Ref`, `Vector3`, `Vector4`, `Vector2`, `BoneWeight`, `Logging`, `MathHelper`, `Mesh`, `ResizableArray`, `UVChannels`

Campos:

- private const double **DoubleEpsilon** (inicializado)
- private bool **preserveSeams** (inicializado)
- private bool **preserveFoldovers** (inicializado)
- private bool **enableSmartLink** (inicializado)
- private int **maxIterationCount** (inicializado)
- private double **agressiveness** (inicializado)
- private double **vertexLinkDistanceSqr** (inicializado)
- private int **subMeshCount** (inicializado)
- private ResizableArray<Triangle> **triangles** (inicializado)
- private ResizableArray<Vertex> **vertices** (inicializado)
- private ResizableArray<Ref> **refs** (inicializado)
- private ResizableArray<Vector3> **vertNormals** (inicializado)
- private ResizableArray<Vector4> **vertTangents** (inicializado)
- private UVChannels<Vector2> **vertUV2D** (inicializado)
- private UVChannels<Vector3> **vertUV3D** (inicializado)
- private UVChannels<Vector4> **vertUV4D** (inicializado)
- private ResizableArray<Vector4> **vertColors** (inicializado)
- private ResizableArray<BoneWeight> **vertBoneWeights** (inicializado)
- private int **remainingVertices** (inicializado)
- private double[] **errArr** (inicializado)
- private int[] **attributeIndexArr** (inicializado)

Propiedades:

- public bool **PreserveSeams** `{ get; set; }` — Gets or sets if seams should be preserved. Default value: false
- public bool **PreserveFoldovers** `{ get; set; }` — Gets or sets if foldovers should be preserved. Default value: false
- public bool **EnableSmartLink** `{ get; set; }` — Gets or sets if a feature for smarter vertex linking should be enabled, reducing artifacts in the decimated result at the cost of a slightly more expensive initialization by treating vertices at the same position as the same vertex while separating the attributes. Default value: true
- public int **MaxIterationCount** `{ get; set; }` — Gets or sets the maximum iteration count. Higher number is more expensive but can bring you closer to your target quality. Sometimes a lower maximum count might be desired in order to lower the performance cost. Default value: 100
- public double **Agressiveness** `{ get; set; }` — Gets or sets the agressiveness of this algorithm. Higher number equals higher quality, but more expensive to run. Default value: 7.0
- public double **VertexLinkDistanceSqr** `{ get; set; }` — Gets or sets the maximum squared distance between two vertices in order to link them. Note that this value is only used if EnableSmartLink is true. Default value: double.Epsilon

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) FastQuadricMeshSimplification()	1	3	6	
private ResizableArray<T> InitializeVertexAttribute<T>(T[] attributeValues, string attributeName)	5	10	15	Copy, LogError
private double VertexError(ref SymmetricMatrix q, double x, double y, double z)	1	1	5	
private double CalculateError(ref Vertex vert0, ref Vertex vert1, out Vector3d result, out int resultIndex)	6	33	50	Determinant1, Determinant2, Determinant3, Determinant4, VertexError, Min
private bool Flipped(ref Vector3d p, int i0, int i1, ref Vertex v0, bool[] deleted)	7	31	40	Normalize, Dot, Abs, Cross
private void UpdateTriangles(int i0, int ia0, ref Vertex v, ResizableArray<bool> deleted, ref int deletedTriangles)	5	28	37	SetAttributeIndex, CalculateError, Min, Add
private void MoveVertexAttributes(int i0, int i1)	14	36	52	
private void MergeVertexAttributes(int i0, int i1)	13	33	50	
private bool AreUVsTheSame(int channel, int indexA, int indexB)	7	25	37	
private void RemoveVertexPass(int startTrisCount, int targetTrisCount, double threshold, ResizableArray<bool> deleted0, ResizableArray<bool> deleted1, ref int deletedTris)	26	72	113	GetErrors, GetAttributeIndices, CalculateError, Resize, Flipped, MoveVertexAttributes, MergeVertexAttributes, UpdateTriangles…
private void UpdateMesh(int iteration)	32	159	230	Resize, UpdateReferences, Clear, Add, Sort, Sqrt, Max, AreUVsTheSame…
private void UpdateReferences()	6	42	58	Resize, Set
private void CompactMesh()	41	121	144	Resize
public override void Initialize(Mesh mesh)	12	55	73	Resize, GetIndices, InitializeVertexAttribute, GetUVDimension, Format, GetUVs2D, GetUVs3D, GetUVs4D
public override void DecimateMesh(int targetTrisCount)	10	32	55	ReportStatus, UpdateMesh, Pow, LogVerbose, RemoveVertexPass, CompactMesh
public override void DecimateMeshLossless()	5	27	49	ReportStatus, UpdateMesh, LogVerbose, RemoveVertexPass, CompactMesh
public override Mesh ToMesh()	24	82	121	SetUVs

- `FastQuadricMeshSimplification` : Creates a new fast quadric mesh simplification algorithm.
- `Flipped` : Check if a triangle flips when this edge is removed
- `UpdateTriangles` : Update triangle connections and edge error after a edge is collapsed.
- `RemoveVertexPass` : Remove vertices and mark deleted triangles
- `UpdateMesh` : Compact triangles, compute edge error and build reference list.
- `CompactMesh` : Finally compact mesh before exiting.
- `Initialize` : Initializes the algorithm with the original mesh.
- `DecimateMesh` : Decimates the mesh.
- `DecimateMeshLossless` : Decimates the mesh without losing any quality.
- `ToMesh` : Returns the resulting mesh.

class FastQuadricMeshSimplification

> The fast quadric mesh simplification algorithm.

- Accesibilidad: `public`
- Modificadores: `public` , `sealed`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 50-1539 (1490)
- Hereda de: `DecimationAlgorithm` (profundidad 1)
- Tipos anidados: `Triangle` , `Vertex` , `Ref` , `BorderVertex` , `BorderVertexComparer`
- Usa: `Vector3d` , `SymmetricMatrix` , `BorderVertex` , `BorderVertexComparer` , `Triangle` , `Vertex` , `Ref` , `Vector3` , `Vector4` , `Vector2` , `BoneWeight` , `Logging` , `MathHelper` , `Mesh` , `ResizableArray` , `UVChannels`

Campos:

- private const double **DoubleEpsilon** (inicializado)
- private bool **preserveSeams** (inicializado)
- private bool **preserveFoldovers** (inicializado)
- private bool **enableSmartLink** (inicializado)
- private int **maxIterationCount** (inicializado)
- private double **agressiveness** (inicializado)

- private double **vertexLinkDistanceSqr** (inicializado)
- private int **subMeshCount** (inicializado)
- private ResizableArray<Triangle> **triangles** (inicializado)
- private ResizableArray<Vertex> **vertices** (inicializado)
- private ResizableArray<Ref> **refs** (inicializado)
- private ResizableArray<Vector3> **vertNormals** (inicializado)
- private ResizableArray<Vector4> **vertTangents** (inicializado)
- private UVChannels<Vector2> **vertUV2D** (inicializado)
- private UVChannels<Vector3> **vertUV3D** (inicializado)
- private UVChannels<Vector4> **vertUV4D** (inicializado)
- private ResizableArray<Vector4> **vertColors** (inicializado)
- private ResizableArray<BoneWeight> **vertBoneWeights** (inicializado)
- private int **remainingVertices** (inicializado)
- private double[] **errArr** (inicializado)
- private int[] **attributeIndexArr** (inicializado)

Propiedades:

- public bool **PreserveSeams** `{ get; set; }` — Gets or sets if seams should be preserved. Default value: false
- public bool **PreserveFoldovers** `{ get; set; }` — Gets or sets if foldovers should be preserved. Default value: false
- public bool **EnableSmartLink** `{ get; set; }` — Gets or sets if a feature for smarter vertex linking should be enabled, reducing artifacts in the decimated result at the cost of a slightly more expensive initialization by treating vertices at the same position as the same vertex while separating the attributes. Default value: true
- public int **MaxIterationCount** `{ get; set; }` — Gets or sets the maximum iteration count. Higher number is more expensive but can bring you closer to your target quality. Sometimes a lower maximum count might be desired in order to lower the performance cost. Default value: 100
- public double **Agressiveness** `{ get; set; }` — Gets or sets the agressiveness of this algorithm. Higher number equals higher quality, but more expensive to run. Default value: 7.0
- public double **VertexLinkDistanceSqr** `{ get; set; }` — Gets or sets the maximum squared distance between two vertices in order to link them. Note that this value is only used if EnableSmartLink is true. Default value: double.Epsilon

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) FastQuadricMeshSimplification()	1	3	6	
private ResizableArray<T> InitializeVertexAttribute<T>(T[] attributeValues, string attributeName)	5	10	15	Copy, LogError
private double VertexError(ref SymmetricMatrix q, double x, double y, double z)	1	1	5	
private double CalculateError(ref Vertex vert0, ref Vertex vert1, out Vector3d result, out int resultIndex)	6	33	50	Determinant1, Determinant2, Determinant3, Determinant4, VertexError, Min
private bool Flipped(ref Vector3d p, int i0, int i1, ref Vertex v0, bool[] deleted)	7	31	40	Normalize, Dot, Abs, Cross
private void UpdateTriangles(int i0, int ia0, ref Vertex v, ResizableArray<bool> deleted, ref int deletedTriangles)	5	28	37	SetAttributeIndex, CalculateError, Min, Add
private void MoveVertexAttributes(int i0, int i1)	14	36	52	
private void MergeVertexAttributes(int i0, int i1)	13	33	50	
private bool AreUVsTheSame(int channel, int indexA, int indexB)	7	25	37	
private void RemoveVertexPass(int startTrisCount, int targetTrisCount, double threshold, ResizableArray<bool> deleted0, ResizableArray<bool> deleted1, ref int deletedTris)	26	72	113	GetErrors, GetAttributeIndices, CalculateError, Resize, Flipped, MoveVertexAttributes, MergeVertexAttributes, UpdateTriangles…
private void UpdateMesh(int iteration)	32	159	230	Resize, UpdateReferences, Clear, Add, Sort, Sqrt, Max, AreUVsTheSame…
private void UpdateReferences()	6	42	58	Resize, Set
private void CompactMesh()	41	121	144	Resize
public override void Initialize(Mesh mesh)	12	55	73	Resize, GetIndices, InitializeVertexAttribute, GetUVDimension, Format, GetUVs2D, GetUVs3D, GetUVs4D
public override void DecimateMesh(int targetTrisCount)	10	32	55	ReportStatus, UpdateMesh, Pow, LogVerbose, RemoveVertexPass, CompactMesh
public override void DecimateMeshLossless()	5	27	49	ReportStatus, UpdateMesh, LogVerbose, RemoveVertexPass, CompactMesh
public override Mesh ToMesh()	24	82	121	SetUVs

- `FastQuadricMeshSimplification` : Creates a new fast quadric mesh simplification algorithm.
- `Flipped` : Check if a triangle flips when this edge is removed
- `UpdateTriangles` : Update triangle connections and edge error after a edge is collapsed.
- `RemoveVertexPass` : Remove vertices and mark deleted triangles
- `UpdateMesh` : Compact triangles, compute edge error and build reference list.
- `CompactMesh` : Finally compact mesh before exiting.
- `Initialize` : Initializes the algorithm with the original mesh.
- `DecimateMesh` : Decimates the mesh.
- `DecimateMeshLossless` : Decimates the mesh without losing any quality.
- `ToMesh` : Returns the resulting mesh.

struct Ref

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 186-196 (11)

Campos:

- public int **tid**
- public int **tvertex**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void Set(int tid, int tvertex)	1	2	5	

struct Ref

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 186-196 (11)

Campos:

- public int **tid**
- public int **tvertex**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void Set(int tid, int tvertex)	1	2	5	

struct Triangle

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 58-158 (101)
- Usa: `Vector3d`

Campos:

- public int **v0**
- public int **v1**
- public int **v2**
- public int **subMeshIndex**
- public int **va0**
- public int **va1**
- public int **va2**
- public double **err0**
- public double **err1**
- public double **err2**
- public double **err3**
- public bool **deleted**
- public bool **dirty**
- public Vector3d **n**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Triangle(int v0, int v1, int v2, int subMeshIndex)	1	10	15	
public void GetAttributeIndices(int[] attributeIndices)	1	3	6	
public void SetAttributeIndex(int index, int value)	4	8	17	
public void GetErrors(double[] err)	1	3	6	

struct Triangle

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 58-158 (101)
- Usa: `Vector3d`

Campos:

- public int **v0**
- public int **v1**
- public int **v2**
- public int **subMeshIndex**
- public int **va0**
- public int **va1**
- public int **va2**
- public double **err0**
- public double **err1**
- public double **err2**
- public double **err3**
- public bool **deleted**
- public bool **dirty**
- public Vector3d **n**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Triangle(int v0, int v1, int v2, int subMeshIndex)	1	10	15	
public void GetAttributeIndices(int[] attributeIndices)	1	3	6	
public void SetAttributeIndex(int index, int value)	4	8	17	
public void GetErrors(double[] err)	1	3	6	

struct Vertex

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 162-182 (21)
- Usa: `Vector3d`, `SymmetricMatrix`

Campos:

- public Vector3d **p**
- public int **tstart**
- public int **tcount**
- public SymmetricMatrix **q**
- public bool **border**
- public bool **seam**
- public bool **foldover**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vertex(Vector3d p)	1	7	10	

struct Vertex

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `FastQuadricMeshSimplification.cs` · líneas 162-182 (21)
- Usa: `Vector3d`, `SymmetricMatrix`

Campos:

- public Vector3d **p**
- public int **tstart**
- public int **tcount**
- public SymmetricMatrix **q**
- public bool **border**
- public bool **seam**
- public bool **foldover**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vertex(Vector3d p)	1	7	10	

Namespace `MeshDecimator.Collections`

class ResizableArray<T>

> A resizable array.

- Accesibilidad: `internal`
- Modificadores: `internal`, `sealed`
- Archivo: `ResizableArray.cs` · líneas 35-178 (144)

Campos:

- private T[] **items** (inicializado)
- private int **length** (inicializado)
- private static T[] **emptyArr** (inicializado)

Propiedades:

- public int **Length** `{ get; }` — Gets the length of this array.
- public T[] **Data** `{ get; }` — Gets the internal data buffer for this array.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) ResizableArray(int capacity)	1	0	5	
public (ctor) ResizableArray(int capacity, int length)	5	8	14	
private void IncreaseCapacity(int capacity)	1	3	6	Copy, Min
public void Clear()	1	2	5	Clear
public void Resize(int length, bool trimExess = false)	5	11	21	IncreaseCapacity, TrimExcess
public void TrimExcess()	2	5	9	Copy
public void Add(T item)	2	4	9	IncreaseCapacity

- `ResizableArray` : Creates a new resizable array.
- `ResizableArray` : Creates a new resizable array.
- `Clear` : Clears this array.
- `Resize` : Resizes this array.
- `TrimExcess` : Trims any excess memory for this array.
- `Add` : Adds a new item to the end of this array.

class ResizableArray<T>

> A resizable array.

- Accesibilidad: `internal`
- Modificadores: `internal`, `sealed`
- Archivo: `ResizableArray.cs` · líneas 35-178 (144)

Campos:

- private T[] **items** (inicializado)
- private int **length** (inicializado)
- private static T[] **emptyArr** (inicializado)

Propiedades:

- public int **Length** `{ get; }` — Gets the length of this array.
- public T[] **Data** `{ get; }` — Gets the internal data buffer for this array.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) ResizableArray(int capacity)	1	0	5	
public (ctor) ResizableArray(int capacity, int length)	5	8	14	
private void IncreaseCapacity(int capacity)	1	3	6	Copy, Min
public void Clear()	1	2	5	Clear
public void Resize(int length, bool trimExess = false)	5	11	21	IncreaseCapacity, TrimExcess
public void TrimExcess()	2	5	9	Copy
public void Add(T item)	2	4	9	IncreaseCapacity

- `ResizableArray` : Creates a new resizable array.
- `ResizableArray` : Creates a new resizable array.
- `Clear` : Clears this array.
- `Resize` : Resizes this array.
- `TrimExcess` : Trims any excess memory for this array.
- `Add` : Adds a new item to the end of this array.

class UVChannels<TVec>

> A collection of UV channels.

- Accesibilidad: `internal`
- Modificadores: `internal`, `sealed`
- Archivo: `UVChannels.cs` · líneas 9-78 (70)
- Usa: `Mesh`, `ResizableArray`

Campos:

- private ResizableArray<TVec>[] **channels** (inicializado)
- private TVec[][] **channelsData** (inicializado)

Propiedades:

- public TVec[][] **Data** `{ get; }` — Gets the channel collection data.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) UVChannels()	1	2	5	
public void Resize(int capacity, bool trimExess = false)	3	5	10	Resize

- `UVChannels` : Creates a new collection of UV channels.
- `Resize` : Resizes all channels at once.

class UVChannels<TVec>

> A collection of UV channels.

- Accesibilidad: `internal`
- Modificadores: `internal`, `sealed`
- Archivo: `UVChannels.cs` · líneas 9-78 (70)
- Usa: `Mesh`, `ResizableArray`

Campos:

- private ResizableArray<TVec>[] **channels** (inicializado)
- private TVec[][] **channelsData** (inicializado)

Propiedades:

- public TVec[][] **Data** `{ get; }` — Gets the channel collection data.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) UVChannels()	1	2	5	
public void Resize(int capacity, bool trimExess = false)	3	5	10	Resize

- `UVChannels` : Creates a new collection of UV channels.
- `Resize` : Resizes all channels at once.

Namespace `MeshDecimator.Loggers`

class ConsoleLogger

> The default console logger.

- Accesibilidad: `public`
- Modificadores: `public`, `sealed`
- Archivo: `ConsoleLogger.cs` · líneas 34-62 (29)
- Implementa: `ILogger`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void LogVerbose(string text)	1	1	4	WriteLine
public void LogWarning(string text)	1	1	4	WriteLine
public void LogError(string text)	1	1	4	WriteLine

- `LogVerbose` : Logs a line of verbose text.
- `LogWarning` : Logs a line of warning text.
- `LogError` : Logs a line of error text.

class ConsoleLogger

> The default console logger.

- Accesibilidad: `public`
- Modificadores: `public`, `sealed`
- Archivo: `ConsoleLogger.cs` · líneas 34-62 (29)
- Implementa: `ILogger`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void LogVerbose(string text)	1	1	4	WriteLine
public void LogWarning(string text)	1	1	4	WriteLine
public void LogError(string text)	1	1	4	WriteLine

- `LogVerbose` : Logs a line of verbose text.
- `LogWarning` : Logs a line of warning text.
- `LogError` : Logs a line of error text.

Namespace `MeshDecimator.Math`

static class MathHelper

> Math helpers.

- Accesibilidad: `public`
- Modificadores: `public` , `static`
- Archivo: `MathHelper.cs` · líneas 34-285 (252)
- Usa: `Vector3` , `Vector3d`

Campos:

- public const float **PI** (inicializado) — The Pi constant.
- public const double **PId** (inicializado) — The Pi constant.
- public const float **Deg2Rad** (inicializado) — Degrees to radian constant.
- public const double **Deg2Radd** (inicializado) — Degrees to radian constant.
- public const float **Rad2Deg** (inicializado) — Radians to degrees constant.
- public const double **Rad2Degd** (inicializado) — Radians to degrees constant.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static int Min(int val1, int val2)	2	1	4	
public static int Min(int val1, int val2, int val3)	4	1	4	
public static float Min(float val1, float val2)	2	1	4	
public static float Min(float val1, float val2, float val3)	4	1	4	
public static double Min(double val1, double val2)	2	1	4	
public static double Min(double val1, double val2, double val3)	4	1	4	
public static int Max(int val1, int val2)	2	1	4	
public static int Max(int val1, int val2, int val3)	4	1	4	
public static float Max(float val1, float val2)	2	1	4	
public static float Max(float val1, float val2, float val3)	4	1	4	
public static double Max(double val1, double val2)	2	1	4	
public static double Max(double val1, double val2, double val3)	4	1	4	
public static float Clamp(float value, float min, float max)	3	1	4	
public static double Clamp(double value, double min, double max)	3	1	4	
public static float Clamp01(float value)	3	1	4	
public static double Clamp01(double value)	3	1	4	
public static float TriangleArea(ref Vector3 p0, ref Vector3 p1, ref Vector3 p2)	1	3	6	Sin, Angle
public static double TriangleArea(ref Vector3d p0, ref Vector3d p1, ref Vector3d p2)	1	3	6	Sin, Angle

- `Min` : Returns the minimum of two values.
- `Min` : Returns the minimum of three values.
- `Min` : Returns the minimum of two values.
- `Min` : Returns the minimum of three values.
- `Min` : Returns the minimum of two values.
- `Min` : Returns the minimum of three values.
- `Max` : Returns the maximum of two values.
- `Max` : Returns the maximum of three values.
- `Max` : Returns the maximum of two values.
- `Max` : Returns the maximum of three values.
- `Max` : Returns the maximum of two values.
- `Max` : Returns the maximum of three values.
- `Clamp` : Clamps a value between a minimum and a maximum value.
- `Clamp` : Clamps a value between a minimum and a maximum value.
- `Clamp01` : Clamps the value between 0 and 1.
- `Clamp01` : Clamps the value between 0 and 1.
- `TriangleArea` : Calculates the area of a triangle.
- `TriangleArea` : Calculates the area of a triangle.

static class MathHelper

> Math helpers.

- Accesibilidad: `public`
- Modificadores: `public` , `static`
- Archivo: `MathHelper.cs` · líneas 34-285 (252)
- Usa: `Vector3` , `Vector3d`

Campos:

- public const float **PI** (inicializado) — The Pi constant.
- public const double **PId** (inicializado) — The Pi constant.
- public const float **Deg2Rad** (inicializado) — Degrees to radian constant.
- public const double **Deg2Radd** (inicializado) — Degrees to radian constant.

- public const float **Rad2Deg** (inicializado) — Radians to degrees constant.
- public const double **Rad2Degd** (inicializado) — Radians to degrees constant.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static int Min(int val1, int val2)	2	1	4	
public static int Min(int val1, int val2, int val3)	4	1	4	
public static float Min(float val1, float val2)	2	1	4	
public static float Min(float val1, float val2, float val3)	4	1	4	
public static double Min(double val1, double val2)	2	1	4	
public static double Min(double val1, double val2, double val3)	4	1	4	
public static int Max(int val1, int val2)	2	1	4	
public static int Max(int val1, int val2, int val3)	4	1	4	
public static float Max(float val1, float val2)	2	1	4	
public static float Max(float val1, float val2, float val3)	4	1	4	
public static double Max(double val1, double val2)	2	1	4	
public static double Max(double val1, double val2, double val3)	4	1	4	
public static float Clamp(float value, float min, float max)	3	1	4	
public static double Clamp(double value, double min, double max)	3	1	4	
public static float Clamp01(float value)	3	1	4	
public static double Clamp01(double value)	3	1	4	
public static float TriangleArea(ref Vector3 p0, ref Vector3 p1, ref Vector3 p2)	1	3	6	Sin, Angle
public static double TriangleArea(ref Vector3d p0, ref Vector3d p1, ref Vector3d p2)	1	3	6	Sin, Angle

- `Min` : Returns the minimum of two values.
- `Min` : Returns the minimum of three values.
- `Min` : Returns the minimum of two values.
- `Min` : Returns the minimum of three values.
- `Min` : Returns the minimum of two values.
- `Min` : Returns the minimum of three values.
- `Max` : Returns the maximum of two values.
- `Max` : Returns the maximum of three values.
- `Max` : Returns the maximum of two values.
- `Max` : Returns the maximum of three values.
- `Max` : Returns the maximum of two values.
- `Max` : Returns the maximum of three values.
- `Clamp` : Clamps a value between a minimum and a maximum value.
- `Clamp` : Clamps a value between a minimum and a maximum value.
- `Clamp01` : Clamps the value between 0 and 1.
- `Clamp01` : Clamps the value between 0 and 1.
- `TriangleArea` : Calculates the area of a triangle.
- `TriangleArea` : Calculates the area of a triangle.

struct SymmetricMatrix

> A symmetric matrix.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `SymmetricMatrix.cs` · líneas 34-302 (269)

Campos:

- public double **m0** — The m11 component.
- public double **m1** — The m12 component.
- public double **m2** — The m13 component.
- public double **m3** — The m14 component.
- public double **m4** — The m22 component.
- public double **m5** — The m23 component.
- public double **m6** — The m24 component.
- public double **m7** — The m33 component.
- public double **m8** — The m34 component.
- public double **m9** — The m44 component.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) SymmetricMatrix(double c)	1	10	13	
public (ctor) SymmetricMatrix(double m0, double m1, double m2, double m3, double m4, double m5, double m6, double m7, double m8, double m9)	1	10	14	
public (ctor) SymmetricMatrix(double a, double b, double c, double d)	1	10	16	
internal double Determinant1()	1	2	11	
internal double Determinant2()	1	2	11	
internal double Determinant3()	1	2	11	
internal double Determinant4()	1	2	11	
public double Determinant(int a11, int a12, int a13, int a21, int a22, int a23, int a31, int a32, int a33)	1	2	13	

- `SymmetricMatrix` : Creates a symmetric matrix with a value in each component.
- `SymmetricMatrix` : Creates a symmetric matrix.
- `SymmetricMatrix` : Creates a symmetric matrix from a plane.
- `Determinant1` : Determinant(0, 1, 2, 1, 4, 5, 2, 5, 7)
- `Determinant2` : Determinant(1, 2, 3, 4, 5, 6, 5, 7, 8)
- `Determinant3` : Determinant(0, 2, 3, 1, 5, 6, 2, 7, 8)

- `Determinant4` : Determinant(0, 1, 3, 1, 4, 6, 2, 5, 8)
- `Determinant` : Computes the determinant of this matrix.

struct SymmetricMatrix

> A symmetric matrix.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `SymmetricMatrix.cs` · líneas 34-302 (269)

Campos:

- public double **m0** — The m11 component.
- public double **m1** — The m12 component.
- public double **m2** — The m13 component.
- public double **m3** — The m14 component.
- public double **m4** — The m22 component.
- public double **m5** — The m23 component.
- public double **m6** — The m24 component.
- public double **m7** — The m33 component.
- public double **m8** — The m34 component.
- public double **m9** — The m44 component.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) SymmetricMatrix(double c)	1	10	13	
public (ctor) SymmetricMatrix(double m0, double m1, double m2, double m3, double m4, double m5, double m6, double m7, double m8, double m9)	1	10	14	
public (ctor) SymmetricMatrix(double a, double b, double c, double d)	1	10	16	
internal double Determinant1()	1	2	11	
internal double Determinant2()	1	2	11	
internal double Determinant3()	1	2	11	
internal double Determinant4()	1	2	11	
public double Determinant(int a11, int a12, int a13, int a21, int a22, int a23, int a31, int a32, int a33)	1	2	13	

- `SymmetricMatrix` : Creates a symmetric matrix with a value in each component.
- `SymmetricMatrix` : Creates a symmetric matrix.
- `SymmetricMatrix` : Creates a symmetric matrix from a plane.
- `Determinant1` : Determinant(0, 1, 2, 1, 4, 5, 2, 5, 7)
- `Determinant2` : Determinant(1, 2, 3, 4, 5, 6, 5, 7, 8)
- `Determinant3` : Determinant(0, 2, 3, 1, 5, 6, 2, 7, 8)
- `Determinant4` : Determinant(0, 1, 3, 1, 4, 6, 2, 5, 8)
- `Determinant` : Computes the determinant of this matrix.

struct Vector2

> A single precision 2D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector2.cs` · líneas 35-424 (390)
- Implementa: `IEquatable`
- Usa: `Vector2d` , `Vector2i`

Campos:

- public static readonly Vector2 **zero** (inicializado) — The zero vector.
- public const float **Epsilon** (inicializado) — The vector epsilon.
- public float **x** — The x component.
- public float **y** — The y component.

Propiedades:

- public float **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public float **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector2 **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector2(float value)	1	2	5	
public (ctor) Vector2(float x, float y)	1	2	5	
public void Set(float x, float y)	1	2	5	
public void Scale(ref Vector2 scale)	1	2	5	
public void Normalize()	2	7	13	
public void Clamp(float min, float max)	5	8	8	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	3	5	9	
public bool Equals(Vector2 other)	2	1	4	
public override string ToString()	1	1	6	Format, ToString
public string ToString(string format)	1	1	6	Format, ToString
public static float Dot(ref Vector2 lhs, ref Vector2 rhs)	1	1	4	
public static void Lerp(ref Vector2 a, ref Vector2 b, float t, out Vector2 result)	1	1	4	
public static void Scale(ref Vector2 a, ref Vector2 b, out Vector2 result)	1	1	4	
public static void Normalize(ref Vector2 value, out Vector2 result)	2	6	12	

- `Vector2` : Creates a new vector with one value for all components.
- `Vector2` : Creates a new vector.
- `Set` : Set x and y components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector2

> A single precision 2D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector2.cs` · líneas 35-424 (390)
- Implementa: `IEquatable`
- Usa: `Vector2d`, `Vector2i`

Campos:

- public static readonly Vector2 **zero** (inicializado) — The zero vector.
- public const float **Epsilon** (inicializado) — The vector epsilon.
- public float **x** — The x component.
- public float **y** — The y component.

Propiedades:

- public float **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public float **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector2 **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector2(float value)	1	2	5	
public (ctor) Vector2(float x, float y)	1	2	5	
public void Set(float x, float y)	1	2	5	
public void Scale(ref Vector2 scale)	1	2	5	
public void Normalize()	2	7	13	
public void Clamp(float min, float max)	5	8	8	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	3	5	9	
public bool Equals(Vector2 other)	2	1	4	
public override string ToString()	1	1	6	Format, ToString
public string ToString(string format)	1	1	6	Format, ToString
public static float Dot(ref Vector2 lhs, ref Vector2 rhs)	1	1	4	
public static void Lerp(ref Vector2 a, ref Vector2 b, float t, out Vector2 result)	1	1	4	
public static void Scale(ref Vector2 a, ref Vector2 b, out Vector2 result)	1	1	4	
public static void Normalize(ref Vector2 value, out Vector2 result)	2	6	12	

- `Vector2` : Creates a new vector with one value for all components.
- `Vector2` : Creates a new vector.
- `Set` : Set x and y components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector2d

> A double precision 2D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector2d.cs` · líneas 35-424 (390)
- Implementa: `IEquatable`
- Usa: `Vector2`, `Vector2i`

Campos:

- public static readonly Vector2d **zero** (inicializado) — The zero vector.
- public const double **Epsilon** (inicializado) — The vector epsilon.

- public double **x** — The x component.
- public double **y** — The y component.

Propiedades:

- public double **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public double **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector2d **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector2d(double value)	1	2	5	
public (ctor) Vector2d(double x, double y)	1	2	5	
public void Set(double x, double y)	1	2	5	
public void Scale(ref Vector2d scale)	1	2	5	
public void Normalize()	2	7	13	
public void Clamp(double min, double max)	5	8	8	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	3	5	9	
public bool Equals(Vector2d other)	2	1	4	
public override string ToString()	1	1	6	Format, ToString
public string ToString(string format)	1	1	6	Format, ToString
public static double Dot(ref Vector2d lhs, ref Vector2d rhs)	1	1	4	
public static void Lerp(ref Vector2d a, ref Vector2d b, double t, out Vector2d result)	1	1	4	
public static void Scale(ref Vector2d a, ref Vector2d b, out Vector2d result)	1	1	4	
public static void Normalize(ref Vector2d value, out Vector2d result)	2	6	12	

- `Vector2d` : Creates a new vector with one value for all components.
- `Vector2d` : Creates a new vector.
- `Set` : Set x and y components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector2d

> A double precision 2D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector2d.cs` · líneas 35-424 (390)
- Implementa: `IEquatable`
- Usa: `Vector2` , `Vector2i`

Campos:

- public static readonly Vector2d **zero** (inicializado) — The zero vector.
- public const double **Epsilon** (inicializado) — The vector epsilon.
- public double **x** — The x component.
- public double **y** — The y component.

Propiedades:

- public double **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public double **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector2d **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector2d(double value)	1	2	5	
public (ctor) Vector2d(double x, double y)	1	2	5	
public void Set(double x, double y)	1	2	5	
public void Scale(ref Vector2d scale)	1	2	5	
public void Normalize()	2	7	13	
public void Clamp(double min, double max)	5	8	8	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	3	5	9	
public bool Equals(Vector2d other)	2	1	4	
public override string ToString()	1	1	6	Format, ToString
public string ToString(string format)	1	1	6	Format, ToString
public static double Dot(ref Vector2d lhs, ref Vector2d rhs)	1	1	4	
public static void Lerp(ref Vector2d a, ref Vector2d b, double t, out Vector2d result)	1	1	4	

public static void Scale(ref Vector2d a, ref Vector2d b, out Vector2d result)	1	1	4	
public static void Normalize(ref Vector2d value, out Vector2d result)	2	6	12	

- `Vector2d` : Creates a new vector with one value for all components.
- `Vector2d` : Creates a new vector.
- `Set` : Set x and y components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector2i

> A 2D integer vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector2i.cs` · líneas 35-347 (313)
- Implementa: `IEquatable`
- Usa: `Vector2` , `Vector2d`

Campos:

- public static readonly Vector2i **zero** (inicializado) — The zero vector.
- public int **x** — The x component.
- public int **y** — The y component.

Propiedades:

- public int **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public int **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector2i(int value)	1	2	5	
public (ctor) Vector2i(int x, int y)	1	2	5	
public void Set(int x, int y)	1	2	5	
public void Scale(ref Vector2i scale)	1	2	5	
public void Clamp(int min, int max)	5	8	8	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	3	5	9	
public bool Equals(Vector2i other)	2	1	4	
public override string ToString()	1	1	6	Format, ToString
public string ToString(string format)	1	1	6	Format, ToString
public static void Scale(ref Vector2i a, ref Vector2i b, out Vector2i result)	1	1	4	

- `Vector2i` : Creates a new vector with one value for all components.
- `Vector2i` : Creates a new vector.
- `Set` : Set x and y components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Scale` : Multiplies two vectors component-wise.

struct Vector2i

> A 2D integer vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector2i.cs` · líneas 35-347 (313)
- Implementa: `IEquatable`
- Usa: `Vector2` , `Vector2d`

Campos:

- public static readonly Vector2i **zero** (inicializado) — The zero vector.
- public int **x** — The x component.
- public int **y** — The y component.

Propiedades:

- public int **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public int **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector2i(int value)	1	2	5	
public (ctor) Vector2i(int x, int y)	1	2	5	
public void Set(int x, int y)	1	2	5	
public void Scale(ref Vector2i scale)	1	2	5	
public void Clamp(int min, int max)	5	8	8	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	3	5	9	
public bool Equals(Vector2i other)	2	1	4	
public override string ToString()	1	1	6	Format, ToString
public string ToString(string format)	1	1	6	Format, ToString
public static void Scale(ref Vector2i a, ref Vector2i b, out Vector2i result)	1	1	4	

- `Vector2i` : Creates a new vector with one value for all components.
- `Vector2i` : Creates a new vector.
- `Set` : Set x and y components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Scale` : Multiplies two vectors component-wise.

struct Vector3

> A single precision 3D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector3.cs` · líneas 35-493 (459)
- Implementa: `IEquatable`
- Usa: `Vector3d`, `Vector3i`, `MathHelper`

Campos:

- public static readonly Vector3 **zero** (inicializado) — The zero vector.
- public const float **Epsilon** (inicializado) — The vector epsilon.
- public float **x** — The x component.
- public float **y** — The y component.
- public float **z** — The z component.

Propiedades:

- public float **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public float **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector3 **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector3(float value)	1	3	6	
public (ctor) Vector3(float x, float y, float z)	1	3	6	
public (ctor) Vector3(Vector3d vector)	1	3	6	
public void Set(float x, float y, float z)	1	3	6	
public void Scale(ref Vector3 scale)	1	3	6	
public void Normalize()	2	8	14	
public void Clamp(float min, float max)	7	12	11	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	4	5	9	
public bool Equals(Vector3 other)	3	1	4	
public override string ToString()	1	1	7	Format, ToString
public string ToString(string format)	1	1	7	Format, ToString
public static float Dot(ref Vector3 lhs, ref Vector3 rhs)	1	1	4	
public static void Cross(ref Vector3 lhs, ref Vector3 rhs, out Vector3 result)	1	1	4	
public static float Angle(ref Vector3 from, ref Vector3 to)	1	3	6	Acos, Clamp, Dot
public static void Lerp(ref Vector3 a, ref Vector3 b, float t, out Vector3 result)	1	1	4	
public static void Scale(ref Vector3 a, ref Vector3 b, out Vector3 result)	1	1	4	
public static void Normalize(ref Vector3 value, out Vector3 result)	2	6	12	
public static void OrthoNormalize(ref Vector3 normal, ref Vector3 tangent)	1	4	7	Normalize, Dot

- `Vector3` : Creates a new vector with one value for all components.
- `Vector3` : Creates a new vector.
- `Vector3` : Creates a new vector from a double precision vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.

- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Cross` : Cross Product of two vectors.
- `Angle` : Calculates the angle between two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.
- `OrthoNormalize` : Normalizes both vectors and makes them orthogonal to each other.

struct Vector3

> A single precision 3D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector3.cs` · líneas 35-493 (459)
- Implementa: `IEquatable`
- Usa: `Vector3d`, `Vector3i`, `MathHelper`

Campos:

- public static readonly Vector3 **zero** (inicializado) — The zero vector.
- public const float **Epsilon** (inicializado) — The vector epsilon.
- public float **x** — The x component.
- public float **y** — The y component.
- public float **z** — The z component.

Propiedades:

- public float **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public float **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector3 **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector3(float value)	1	3	6	
public (ctor) Vector3(float x, float y, float z)	1	3	6	
public (ctor) Vector3(Vector3d vector)	1	3	6	
public void Set(float x, float y, float z)	1	3	6	
public void Scale(ref Vector3 scale)	1	3	6	
public void Normalize()	2	8	14	
public void Clamp(float min, float max)	7	12	11	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	4	5	9	
public bool Equals(Vector3 other)	3	1	4	
public override string ToString()	1	1	7	Format, ToString
public string ToString(string format)	1	1	7	Format, ToString
public static float Dot(ref Vector3 lhs, ref Vector3 rhs)	1	1	4	
public static void Cross(ref Vector3 lhs, ref Vector3 rhs, out Vector3 result)	1	1	4	
public static float Angle(ref Vector3 from, ref Vector3 to)	1	3	6	Acos, Clamp, Dot
public static void Lerp(ref Vector3 a, ref Vector3 b, float t, out Vector3 result)	1	1	4	
public static void Scale(ref Vector3 a, ref Vector3 b, out Vector3 result)	1	1	4	
public static void Normalize(ref Vector3 value, out Vector3 result)	2	6	12	
public static void OrthoNormalize(ref Vector3 normal, ref Vector3 tangent)	1	4	7	Normalize, Dot

- `Vector3` : Creates a new vector with one value for all components.
- `Vector3` : Creates a new vector.
- `Vector3` : Creates a new vector from a double precision vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Cross` : Cross Product of two vectors.
- `Angle` : Calculates the angle between two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.
- `OrthoNormalize` : Normalizes both vectors and makes them orthogonal to each other.

struct Vector3d

> A double precision 3D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector3d.cs` · líneas 35-480 (446)
- Implementa: `IEquatable`

- Usa: `Vector3`, `Vector3i`, `MathHelper`

Campos:

- public static readonly Vector3d **zero** (inicializado) — The zero vector.
- public const double **Epsilon** (inicializado) — The vector epsilon.
- public double **x** — The x component.
- public double **y** — The y component.
- public double **z** — The z component.

Propiedades:

- public double **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public double **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector3d **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector3d(double value)	1	3	6	
public (ctor) Vector3d(double x, double y, double z)	1	3	6	
public (ctor) Vector3d(Vector3 vector)	1	3	6	
public void Set(double x, double y, double z)	1	3	6	
public void Scale(ref Vector3d scale)	1	3	6	
public void Normalize()	2	8	14	
public void Clamp(double min, double max)	7	12	11	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	4	5	9	
public bool Equals(Vector3d other)	3	1	4	
public override string ToString()	1	1	7	Format, ToString
public string ToString(string format)	1	1	7	Format, ToString
public static double Dot(ref Vector3d lhs, ref Vector3d rhs)	1	1	4	
public static void Cross(ref Vector3d lhs, ref Vector3d rhs, out Vector3d result)	1	1	4	
public static double Angle(ref Vector3d from, ref Vector3d to)	1	3	6	Acos, Clamp, Dot
public static void Lerp(ref Vector3d a, ref Vector3d b, double t, out Vector3d result)	1	1	4	
public static void Scale(ref Vector3d a, ref Vector3d b, out Vector3d result)	1	1	4	
public static void Normalize(ref Vector3d value, out Vector3d result)	2	6	12	

- `Vector3d` : Creates a new vector with one value for all components.
- `Vector3d` : Creates a new vector.
- `Vector3d` : Creates a new vector from a single precision vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Cross` : Cross Product of two vectors.
- `Angle` : Calculates the angle between two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector3d

> A double precision 3D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector3d.cs` · líneas 35-480 (446)
- Implementa: `IEquatable`
- Usa: `Vector3`, `Vector3i`, `MathHelper`

Campos:

- public static readonly Vector3d **zero** (inicializado) — The zero vector.
- public const double **Epsilon** (inicializado) — The vector epsilon.
- public double **x** — The x component.
- public double **y** — The y component.
- public double **z** — The z component.

Propiedades:

- public double **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public double **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector3d **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector3d(double value)	1	3	6	
public (ctor) Vector3d(double x, double y, double z)	1	3	6	

public (ctor) Vector3d(Vector3 vector)	1	3	6	
public void Set(double x, double y, double z)	1	3	6	
public void Scale(ref Vector3d scale)	1	3	6	
public void Normalize()	2	8	14	
public void Clamp(double min, double max)	7	12	11	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	4	5	9	
public bool Equals(Vector3d other)	3	1	4	
public override string ToString()	1	1	7	Format, ToString
public string ToString(string format)	1	1	7	Format, ToString
public static double Dot(ref Vector3d lhs, ref Vector3d rhs)	1	1	4	
public static void Cross(ref Vector3d lhs, ref Vector3d rhs, out Vector3d result)	1	1	4	
public static double Angle(ref Vector3d from, ref Vector3d to)	1	3	6	Acos, Clamp, Dot
public static void Lerp(ref Vector3d a, ref Vector3d b, double t, out Vector3d result)	1	1	4	
public static void Scale(ref Vector3d a, ref Vector3d b, out Vector3d result)	1	1	4	
public static void Normalize(ref Vector3d value, out Vector3d result)	2	6	12	

- `Vector3d` : Creates a new vector with one value for all components.
- `Vector3d` : Creates a new vector.
- `Vector3d` : Creates a new vector from a single precision vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Cross` : Cross Product of two vectors.
- `Angle` : Calculates the angle between two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector3i

> A 3D integer vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector3i.cs` · líneas 35-367 (333)
- Implementa: `IEquatable`
- Usa: `Vector3`, `Vector3d`

Campos:

- public static readonly Vector3i **zero** (inicializado) — The zero vector.
- public int **x** — The x component.
- public int **y** — The y component.
- public int **z** — The z component.

Propiedades:

- public int **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public int **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector3i(int value)	1	3	6	
public (ctor) Vector3i(int x, int y, int z)	1	3	6	
public void Set(int x, int y, int z)	1	3	6	
public void Scale(ref Vector3i scale)	1	3	6	
public void Clamp(int min, int max)	7	12	11	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	4	5	9	
public bool Equals(Vector3i other)	3	1	4	
public override string ToString()	1	1	7	Format, ToString
public string ToString(string format)	1	1	7	Format, ToString
public static void Scale(ref Vector3i a, ref Vector3i b, out Vector3i result)	1	1	4	

- `Vector3i` : Creates a new vector with one value for all components.
- `Vector3i` : Creates a new vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.

- `Scale` : Multiplies two vectors component-wise.

struct Vector3i

> A 3D integer vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector3i.cs` · líneas 35-367 (333)
- Implementa: `IEquatable`
- Usa: `Vector3` , `Vector3d`

Campos:

- public static readonly Vector3i **zero** (inicializado) — The zero vector.
- public int **x** — The x component.
- public int **y** — The y component.
- public int **z** — The z component.

Propiedades:

- public int **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public int **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector3i(int value)	1	3	6	
public (ctor) Vector3i(int x, int y, int z)	1	3	6	
public void Set(int x, int y, int z)	1	3	6	
public void Scale(ref Vector3i scale)	1	3	6	
public void Clamp(int min, int max)	7	12	11	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	4	5	9	
public bool Equals(Vector3i other)	3	1	4	
public override string ToString()	1	1	7	Format, ToString
public string ToString(string format)	1	1	7	Format, ToString
public static void Scale(ref Vector3i a, ref Vector3i b, out Vector3i result)	1	1	4	

- `Vector3i` : Creates a new vector with one value for all components.
- `Vector3i` : Creates a new vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Scale` : Multiplies two vectors component-wise.

struct Vector4

> A single precision 4D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector4.cs` · líneas 35-466 (432)
- Implementa: `IEquatable`
- Usa: `Vector4d` , `Vector4i`

Campos:

- public static readonly Vector4 **zero** (inicializado) — The zero vector.
- public const float **Epsilon** (inicializado) — The vector epsilon.
- public float **x** — The x component.
- public float **y** — The y component.
- public float **z** — The z component.
- public float **w** — The w component.

Propiedades:

- public float **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public float **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector4 **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector4(float value)	1	4	7	
public (ctor) Vector4(float x, float y, float z, float w)	1	4	7	
public void Set(float x, float y, float z, float w)	1	4	7	
public void Scale(ref Vector4 scale)	1	4	7	
public void Normalize()	2	9	15	
public void Clamp(float min, float max)	9	16	14	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	5	5	9	

public bool Equals(Vector4 other)	4	1	4	
public override string ToString()	1	1	8	Format, ToString
public string ToString(string format)	1	1	8	Format, ToString
public static float Dot(ref Vector4 lhs, ref Vector4 rhs)	1	1	4	
public static void Lerp(ref Vector4 a, ref Vector4 b, float t, out Vector4 result)	1	1	4	
public static void Scale(ref Vector4 a, ref Vector4 b, out Vector4 result)	1	1	4	
public static void Normalize(ref Vector4 value, out Vector4 result)	2	6	12	

- `Vector4` : Creates a new vector with one value for all components.
- `Vector4` : Creates a new vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector4

> A single precision 4D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector4.cs` · líneas 35-466 (432)
- Implementa: `IEquatable`
- Usa: `Vector4d`, `Vector4i`

Campos:

- public static readonly Vector4 **zero** (inicializado) — The zero vector.
- public const float **Epsilon** (inicializado) — The vector epsilon.
- public float **x** — The x component.
- public float **y** — The y component.
- public float **z** — The z component.
- public float **w** — The w component.

Propiedades:

- public float **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public float **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector4 **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector4(float value)	1	4	7	
public (ctor) Vector4(float x, float y, float z, float w)	1	4	7	
public void Set(float x, float y, float z, float w)	1	4	7	
public void Scale(ref Vector4 scale)	1	4	7	
public void Normalize()	2	9	15	
public void Clamp(float min, float max)	9	16	14	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	5	5	9	
public bool Equals(Vector4 other)	4	1	4	
public override string ToString()	1	1	8	Format, ToString
public string ToString(string format)	1	1	8	Format, ToString
public static float Dot(ref Vector4 lhs, ref Vector4 rhs)	1	1	4	
public static void Lerp(ref Vector4 a, ref Vector4 b, float t, out Vector4 result)	1	1	4	
public static void Scale(ref Vector4 a, ref Vector4 b, out Vector4 result)	1	1	4	
public static void Normalize(ref Vector4 value, out Vector4 result)	2	6	12	

- `Vector4` : Creates a new vector with one value for all components.
- `Vector4` : Creates a new vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector4d

> A double precision 4D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector4d.cs` · líneas 35-466 (432)
- Implementa: `IEquatable`
- Usa: `Vector4`, `Vector4i`

Campos:

- public static readonly Vector4d **zero** (inicializado) — The zero vector.
- public const double **Epsilon** (inicializado) — The vector epsilon.
- public double **x** — The x component.
- public double **y** — The y component.
- public double **z** — The z component.
- public double **w** — The w component.

Propiedades:

- public double **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public double **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector4d **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector4d(double value)	1	4	7	
public (ctor) Vector4d(double x, double y, double z, double w)	1	4	7	
public void Set(double x, double y, double z, double w)	1	4	7	
public void Scale(ref Vector4d scale)	1	4	7	
public void Normalize()	2	9	15	
public void Clamp(double min, double max)	9	16	14	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	5	5	9	
public bool Equals(Vector4d other)	4	1	4	
public override string ToString()	1	1	8	Format, ToString
public string ToString(string format)	1	1	8	Format, ToString
public static double Dot(ref Vector4d lhs, ref Vector4d rhs)	1	1	4	
public static void Lerp(ref Vector4d a, ref Vector4d b, double t, out Vector4d result)	1	1	4	
public static void Scale(ref Vector4d a, ref Vector4d b, out Vector4d result)	1	1	4	
public static void Normalize(ref Vector4d value, out Vector4d result)	2	6	12	

- `Vector4d` : Creates a new vector with one value for all components.
- `Vector4d` : Creates a new vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector4d

> A double precision 4D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector4d.cs` · líneas 35-466 (432)
- Implementa: `IEquatable`
- Usa: `Vector4`, `Vector4i`

Campos:

- public static readonly Vector4d **zero** (inicializado) — The zero vector.
- public const double **Epsilon** (inicializado) — The vector epsilon.
- public double **x** — The x component.
- public double **y** — The y component.
- public double **z** — The z component.
- public double **w** — The w component.

Propiedades:

- public double **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public double **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector4d **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector4d(double value)	1	4	7	
public (ctor) Vector4d(double x, double y, double z, double w)	1	4	7	

public void Set(double x, double y, double z, double w)	1	4	7	
public void Scale(ref Vector4d scale)	1	4	7	
public void Normalize()	2	9	15	
public void Clamp(double min, double max)	9	16	14	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	5	5	9	
public bool Equals(Vector4d other)	4	1	4	
public override string ToString()	1	1	8	Format, ToString
public string ToString(string format)	1	1	8	Format, ToString
public static double Dot(ref Vector4d lhs, ref Vector4d rhs)	1	1	4	
public static void Lerp(ref Vector4d a, ref Vector4d b, double t, out Vector4d result)	1	1	4	
public static void Scale(ref Vector4d a, ref Vector4d b, out Vector4d result)	1	1	4	
public static void Normalize(ref Vector4d value, out Vector4d result)	2	6	12	

- `Vector4d` : Creates a new vector with one value for all components.
- `Vector4d` : Creates a new vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

struct Vector4i

> A 4D integer vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector4i.cs` · líneas 35-387 (353)
- Implementa: `IEquatable`
- Usa: `Vector4`, `Vector4d`

Campos:

- public static readonly Vector4i **zero** (inicializado) — The zero vector.
- public int **x** — The x component.
- public int **y** — The y component.
- public int **z** — The z component.
- public int **w** — The w component.

Propiedades:

- public int **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public int **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector4i(int value)	1	4	7	
public (ctor) Vector4i(int x, int y, int z, int w)	1	4	7	
public void Set(int x, int y, int z, int w)	1	4	7	
public void Scale(ref Vector4i scale)	1	4	7	
public void Clamp(int min, int max)	9	16	14	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	5	5	9	
public bool Equals(Vector4i other)	4	1	4	
public override string ToString()	1	1	8	Format, ToString
public string ToString(string format)	1	1	8	Format, ToString
public static void Scale(ref Vector4i a, ref Vector4i b, out Vector4i result)	1	1	4	

- `Vector4i` : Creates a new vector with one value for all components.
- `Vector4i` : Creates a new vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Scale` : Multiplies two vectors component-wise.

struct Vector4i

> A 4D integer vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector4i.cs` · líneas 35-387 (353)
- Implementa: `IEquatable`
- Usa: `Vector4`, `Vector4d`

Campos:

- public static readonly Vector4i **zero** (inicializado) — The zero vector.
- public int **x** — The x component.
- public int **y** — The y component.
- public int **z** — The z component.
- public int **w** — The w component.

Propiedades:

- public int **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public int **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector4i(int value)	1	4	7	
public (ctor) Vector4i(int x, int y, int z, int w)	1	4	7	
public void Set(int x, int y, int z, int w)	1	4	7	
public void Scale(ref Vector4i scale)	1	4	7	
public void Clamp(int min, int max)	9	16	14	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object other)	5	5	9	
public bool Equals(Vector4i other)	4	1	4	
public override string ToString()	1	1	8	Format, ToString
public string ToString(string format)	1	1	8	Format, ToString
public static void Scale(ref Vector4i a, ref Vector4i b, out Vector4i result)	1	1	4	

- `Vector4i` : Creates a new vector with one value for all components.
- `Vector4i` : Creates a new vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Scale` : Multiplies two vectors component-wise.

Namespace `MeshDecimator.Unity`

class DecimatedObject

> An object to be decimated.

- Accesibilidad: `public`
- Modificadores: `public`, `sealed`
- Archivo: `DecimatedObject.cs` · líneas 35-101 (67)
- Hereda de: `MonoBehaviour` (profundidad 0)
- Atributos: `[AddComponentMenu]`
- Usa: `LODSettings`, `LODGenerator`

Campos:

- private LODSettings[] **levels** (inicializado) `[SerializeField]`
- private bool **generated** (inicializado) `[SerializeField]`

Propiedades:

- public LODSettings[] **Levels** `{ get; set; }` — Gets or sets the LOD levels of this object.
- public bool **IsGenerated** `{ get; }` — Gets if this decimated object has been generated.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private void Reset()	1	2	10	ResetLODs
public void GenerateLODs(LODStatusReportCallback statusCallback = null)	2	4	8	GenerateLODs
public void ResetLODs()	1	2	5	DestroyLODs

- `GenerateLODs` : Generates the LODs for this object.
- `ResetLODs` : Resets the LODs for this object.

static class LODGenerator

> A LOD generator API.

- Accesibilidad: `public`
- Modificadores: `public`, `static`
- Archivo: `LODGenerator.cs` · líneas 184-551 (368)
- Usa: `Mesh`, `DecimationAlgorithm`, `MeshDecimatorUtility`, `LODSettings`, `Vector3`

Campos:

- private const string **ParentGameObjectName** (inicializado)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private static Renderer[] CombineRenderers(MeshRenderer[] meshRenderers, SkinnedMeshRenderer[] skinnedRenderers)	1	5	8	Copy
private static Mesh GenerateStaticLOD(Transform transform, MeshRenderer renderer, float quality, out Material[] materials, DecimationAlgorithm.StatusReportCallback statusCallback)	1	6	9	GetComponent, DecimateMesh
private static Mesh GenerateStaticLOD(Transform transform, MeshRenderer[] renderers, float quality, out Material[] materials, DecimationAlgorithm.StatusReportCallback statusCallback)	3	16	23	GenerateStaticLOD, GetComponent, DecimateMeshes
private static Mesh GenerateSkinnedLOD(Transform transform, SkinnedMeshRenderer renderer, float quality, out Material[] materials, out Transform[] mergedBones, DecimationAlgorithm.StatusReportCallback statusCallback)	1	6	9	DecimateMesh
private static Mesh GenerateSkinnedLOD(Transform transform, SkinnedMeshRenderer[] renderers, float quality, out Material[] materials, out Transform[] mergedBones, DecimationAlgorithm.StatusReportCallback statusCallback)	3	17	24	GenerateSkinnedLOD, DecimateMeshes
private static Transform FindRootBone(Transform transform, Transform[] transforms)	4	9	16	
private static void SetupLODRenderer(Renderer renderer, LODSettings settings)	2	10	16	
public static void GenerateLODs(GameObject gameObj, LODSettings[] levels, LODStatusReportCallback statusCallback = null)	18	144	187	DestroyLODs, GetComponentsInChildren, GetComponent, AddComponent, CombineRenderers, Clamp, Format, Invoke…
public static void DestroyLODs(GameObject gameObj)	6	19	33	Find, Destroy, DestroyImmediate, GetComponent

- `GenerateLODs` : Generates the LODs and sets up a LOD Group for the specified game object.
- `DestroyLODs` : Destroys the generated LODs for the specified game object.

struct LODSettings

> LOD Level Settings.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `LODGenerator.cs` · líneas 52-178 (127)
- Atributos: `[System.Serializable]`

Campos:

- public float **quality** `[Range]` — The LOD level quality between 0 and 1.
- public bool **combineMeshes** — If the meshes should be combined into one.
- public SkinQuality **skinQuality** — The LOD level skin quality.
- public bool **receiveShadows** — If the LOD level receives shadows.
- public ShadowCastingMode **shadowCasting** — The LOD level shadow casting mode.
- public MotionVectorGenerationMode **motionVectors** — The LOD level motion vectors generation mode.
- public bool **skinnedMotionVectors** — If the LOD level uses skinned motion vectors.
- public LightProbeUsage **lightProbeUsage** — The LOD level light probe usage.
- public ReflectionProbeUsage **reflectionProbeUsage** — The LOD level reflection probe usage.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) LODSettings(float quality)	1	9	13	
public (ctor) LODSettings(float quality, SkinQuality skinQuality)	1	9	13	
public (ctor) LODSettings(float quality, SkinQuality skinQuality, bool receiveShadows, ShadowCastingMode shadowCasting)	1	9	13	
public (ctor) LODSettings(float quality, SkinQuality skinQuality, bool receiveShadows, ShadowCastingMode shadowCasting, MotionVectorGenerationMode motionVectors, bool skinnedMotionVectors)	1	9	13	

- `LODSettings` : Creates new LOD Level Settings.
- `LODSettings` : Creates new LOD Level Settings.
- `LODSettings` : Creates new LOD Level Settings.
- `LODSettings` : Creates new LOD Level Settings.

static class MeshDecimatorUtility

> A mesh decimation utility.

- Accesibilidad: `public`
- Modificadores: `public` , `static`
- Archivo: `MeshDecimatorUtility.cs` · líneas 48-923 (876)
- Usa: `Logging` , `ConsoleLogger` , `UnityLogger` , `Vector3d` , `Vector2` , `Vector3` , `Vector4` , `BoneWeight` , `Mesh` , `DecimationAlgorithm` , `MeshDecimation` , `Algorithm`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private static (ctor) MeshDecimatorUtility()	3	3	9	
private static Vector3d[] ToSimplifyVertices(UVector3[] vertices)	2	6	10	
private static Vector2[] ToSimplifyVec(UVector2[] vectors)	3	8	11	
private static Vector3[] ToSimplifyVec(UVector3[] vectors)	3	8	11	
private static Vector4[] ToSimplifyVec(UVector4[] vectors)	3	8	11	
private static Vector4[] ToSimplifyVec(UColor[] colors)	3	8	11	
private static BoneWeight[] ToSimplifyBoneWeights(UBoneWeight[] boneWeights)	3	8	13	
private static UVector3[] FromSimplifyVertices(Vector3d[] vertices)	2	6	10	
private static UVector2[] FromSimplifyVec(Vector2[] vectors)	3	8	11	
private static UVector3[] FromSimplifyVec(Vector3[] vectors)	3	8	11	
private static UVector4[] FromSimplifyVec(Vector4[] vectors)	3	8	11	
private static UColor[] FromSimplifyColor(Vector4[] vectors)	3	8	11	
private static UBoneWeight[] FromSimplifyBoneWeights(BoneWeight[] boneWeights)	3	8	21	

private static void AddToList(List<Vector3d> list, UVector3[] arr, int previousVertexCount, int totalVertexCount)	4	6	11	Add
private static void AddToList(ref List<Vector2> list, UVector2[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount, Vector2 defaultValue)	8	18	29	Add
private static void AddToList(ref List<Vector3> list, UVector3[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount, Vector3 defaultValue)	8	18	29	Add
private static void AddToList(ref List<Vector4> list, UVector4[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount, Vector4 defaultValue)	8	18	29	Add
private static void AddToList(ref List<Vector4> list, UColor[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount)	8	18	29	Add
private static void AddToList(ref List<BoneWeight> list, UBoneWeight[] arr, int previousVertexCount, int currentVertexCount, int totalVertexCount)	8	18	31	Add
private static void TransformVertices(UVector3[] vertices, ref UMatrix transform)	2	3	7	MultiplyPoint3x4
private static void TransformVertices(UVector3[] vertices, UBoneWeight[] boneWeights, UMatrix[] oldBindposes, UMatrix[] newBindposes)	7	28	42	ScaleMatrix
private static UMatrix ScaleMatrix(ref UMatrix m, float scale)	1	1	25	
private static T[] MergeArrays<T>(T[] arr1, T[] arr2)	1	4	7	Copy
private static void RemapBones(UBoneWeight[] boneWeights, int[] boneIndices)	6	16	24	
private static UMesh CreateMesh(UMatrix[] bindposes, UVector3[] vertices, Mesh destMesh, bool recalculateNormals)	16	50	57	RecalculateNormals, RecalculateTangents, FromSimplifyVec, FromSimplifyColor, FromSimplifyBoneWeights, GetIndices, SetTriangles, RecalculateBounds
public static UMesh DecimateMesh(UMesh mesh, UMatrix transform, float quality, bool recalculateNormals, DecimationAlgorithm.StatusReportCallback statusCallback = null)	21	59	84	GetTriangles, TransformVertices, ToSimplifyVertices, Clamp01, CeilToInt, ToSimplifyVec, ToSimplifyBoneWeights, CreateAlgorithm…
public static UMesh DecimateMeshes(UMesh[] meshes, UMatrix[] transforms, UMaterial[][] materials, float quality, bool recalculateNormals, out UMaterial[] resultMaterials, DecimationAlgorithm.StatusReportCallback statusCallback = null)	1	2	5	DecimateMeshes
public static UMesh DecimateMeshes(UMesh[] meshes, UMatrix[] transforms, UMaterial[][] materials, UTransform[][] meshBones, float quality, bool recalculateNormals, out UMaterial[] resultMaterials, out UTransform[] mergedBones, DecimationAlgorithm.StatusReportCallback statusCallback = null)	44	167	225	Format, IndexOf, Add, TransformVertices, RemapBones, AddToList, GetTriangles, TryGetValue…

- `DecimateMesh` : Decimates a mesh.
- `DecimateMeshes` : Decimates an array of meshes, and combines them into one mesh.
- `DecimateMeshes` : Decimates an array of meshes, and combines them into one mesh.

Namespace `MeshDecimator.Unity.Loggers`

class UnityLogger

> A unity logger.

- Accesibilidad: `public`
- Modificadores: `public` , `sealed`
- Archivo: `UnityLogger.cs` · líneas 34-62 (29)
- Implementa: `ILogger`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void LogVerbose(string text)	1	1	4	Log
public void LogWarning(string text)	1	1	4	LogWarning
public void LogError(string text)	1	1	4	LogError

- `LogVerbose` : Logs a line of verbose text.
- `LogWarning` : Logs a line of warning text.
- `LogError` : Logs a line of error text.

Namespace `MeshDecimator.UnityEditor`

class DecimatedObjectEditor

> An decimated object editor.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `DecimatedObjectEditor.cs` · líneas 37-210 (174)
- Hereda de: `Editor` (profundidad 0)
- Atributos: `[CustomEditor]`
- Usa: `DecimatedObject`

Campos:

- private SerializedProperty **levelsProp** (inicializado)
- private SerializedProperty **generatedProp** (inicializado)
- private bool **isGeneratingNew** (inicializado)
- private bool[] **settingsExpanded** (inicializado)
- private static readonly GUIContent **settingsContent** (inicializado)

Propiedades:

- private new DecimatedObject **target** `{ get; }`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private void OnEnable()	1	3	7	FindProperty
private void GenerateLODs()	2	21	32	DisplayProgressBar, GenerateLODs, Format, ClearProgressBar, FindProperty, MarkSceneDirty
private void ResetLODs()	1	4	8	ResetLODs, MarkSceneDirty
public override void OnInspectorGUI()	18	70	94	Update, Copy, Min, Width, GetArrayElementAtIndex, FindPropertyRelative, Label, Format…

- `OnInspectorGUI` : Renders the editor inspector GUI.

Namespace `MeshDecimatorTool`

struct FaceIndex

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `ObjMesh.cs` · líneas 46-85 (40)
- Implementa: `IEquatable`

Campos:

- public readonly int **vertexIndex**
- public readonly int **texCoordIndex**
- public readonly int **normalIndex**
- private readonly int **hashCode**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) FaceIndex(int vertexIndex, int texCoordIndex, int normalIndex)	1	4	7	
public override int GetHashCode()	1	1	4	
public override bool Equals(object obj)	4	5	9	
public bool Equals(FaceIndex other)	3	1	4	
public override string ToString()	1	1	4	Format

class ObjMesh

> A very simple OBJ mesh.

- Accesibilidad: `public`
- Modificadores: `public` , `sealed`
- Archivo: `ObjMesh.cs` · líneas 38-890 (853)
- Tipos anidados: `FaceIndex`
- Usa: `FaceIndex` , `Vector3d` , `Vector3` , `Vector2`

Campos:

- private const int **VertexInitialCapacity** (inicializado)
- private const int **IndexInitialCapacity** (inicializado)
- private Vector3d[] **vertices** (inicializado)
- private Vector3[] **normals** (inicializado)
- private Vector2[] **texCoords2D** (inicializado)
- private Vector3[] **texCoords3D** (inicializado)
- private int[][] **subMeshIndices** (inicializado)
- private string[] **subMeshMaterials** (inicializado)
- private string[] **materialLibraries** (inicializado)

Propiedades:

- public Vector3d[] **Vertices** `{ get; set; }` — Gets or sets the vertices for this mesh.
- public Vector3[] **Normals** `{ get; set; }` — Gets or sets the normals for this mesh.
- public Vector2[] **TexCoords2D** `{ get; set; }` — Gets or sets the 2D texture coordinates for this mesh.
- public Vector3[] **TexCoords3D** `{ get; set; }` — Gets or sets the 3D texture coordinates for this mesh.
- public int **SubMeshCount** `{ get; }` — Gets the count of sub-meshes in this mesh.
- public int[] **Indices** `{ get; set; }` — Gets or sets the combined triangle indices for this mesh. Note that setting this will remove any existing sub-meshes and turn it into just one sub-mesh.
- public int[][] **SubMeshIndices** `{ get; set; }` — Gets or sets the indices divided by sub-meshes.
- public string[] **SubMeshMaterials** `{ get; set; }` — Gets or sets the names of each sub-mesh material.
- public string[] **MaterialLibraries** `{ get; set; }` — Gets or sets the paths to material libraries used by this mesh.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) ObjMesh()	1	0	4	
public (ctor) ObjMesh(Vector3d[] vertices, int[] indices)	2	2	5	
public (ctor) ObjMesh(Vector3d[] vertices, int[][] indices)	1	2	5	
public void ReadFile(string path)	53	230	379	OpenText, ReadLine, Split, Equals, TryParse, Add, Clear, CountOccurrences…
public void WriteFile(string path)	9	22	34	CreateText, Write, WriteLine, WriteVertices, WriteNormals, WriteTextureCoords, WriteSubMeshes
private static void WriteVertices(TextWriter writer, Vector3d[] vertices)	2	10	14	Write, ToString, WriteLine
private static void WriteNormals(TextWriter writer, Vector3[] normals)	3	12	17	Write, ToString, WriteLine
private static void WriteTextureCoords(TextWriter writer, Vector2[] texCoords2D, Vector3[] texCoords3D)	5	22	29	Write, ToString, WriteLine
private static void WriteSubMeshes(TextWriter writer, int[][] subMeshIndices, string[] subMeshMaterials, bool hasTexCoords, bool hasNormals)	3	11	19	WriteLine, Write, WriteFaces
private static void WriteFaces(TextWriter writer, int[] indices, bool hasTexCoords, bool hasNormals)	6	61	73	Write, WriteLine
private static int ShiftIndex(int value, int count)	2	5	11	
private static int CountOccurrences(string text, char character)	3	7	12	

- `ObjMesh` : Creates a new OBJ mesh.
- `ObjMesh` : Creates a new OBJ mesh.
- `ObjMesh` : Creates a new OBJ mesh.
- `ReadFile` : Reads an OBJ mesh from a file. Please note that this method only supports extremely simple OBJ meshes.
- `WriteFile` : Writes this OBJ mesh to a file.

class Program

- Accesibilidad: `private`
- Archivo: `Program.cs` · líneas 35-145 (111)
- Usa: `MathHelper`, `ObjMesh`, `Mesh`, `MeshDecimation`, `Algorithm`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private static void Main(string[] args)	11	69	101	PrintUsage, GetFullPath, TryParse, WriteLine, Clamp01, ReadFile, SetUVs, Ceiling…
private static void PrintUsage()	1	3	6	GetCurrentProcess, WriteLine

Namespace `UnityMeshSimplifier`

struct BlendShape

> A blend shape.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `BlendShape.cs` · líneas 36-59 (24)
- Atributos: `[Serializable]`, `[StructLayout]`
- Usa: `BlendShapeFrame`

Campos:

- public string **ShapeName** — The name of the blend shape.
- public BlendShapeFrame[] **Frames** — The blend shape frames.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BlendShape(string shapeName, BlendShapeFrame[] frames)	1	2	5	

- `BlendShape`: Creates a new blend shape.

struct BlendShapeFrame

> A blend shape frame.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `BlendShape.cs` · líneas 64-99 (36)
- Atributos: `[Serializable]`, `[StructLayout]`
- Usa: `Vector3`

Campos:

- public float **FrameWeight** — The weight of the blend shape frame.
- public Vector3[] **DeltaVertices** — The delta vertices of the blend shape frame.
- public Vector3[] **DeltaNormals** — The delta normals of the blend shape frame.
- public Vector3[] **DeltaTangents** — The delta tangents of the blend shape frame.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BlendShapeFrame(float frameWeight, Vector3[] deltaVertices, Vector3[] deltaNormals, Vector3[] deltaTangents)	1	4	7	

- `BlendShapeFrame`: Creates a new blend shape frame.

static class IOUtils

- Accesibilidad: `internal`
- Modificadores: `internal`, `static`
- Archivo: `IOUtils.cs` · líneas 8-100 (93)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
internal static string MakeSafeRelativePath(string path)	4	10	18	IsNullOrEmpty, Trim, Replace, IsPathRooted, Split, MakeSafeFileName, Join
internal static string MakeSafeFileName(string name)	4	14	21	GetInvalidFileNameChars, Contains, Append, ToString

class LODBackupComponent

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `LODBackupComponent.cs` · líneas 31-42 (12)
- Hereda de: `MonoBehaviour` (profundidad 0)
- Atributos: `[AddComponentMenu]`

Campos:

- private Renderer[] **originalRenderers** (inicializado) `[SerializeField]`

Propiedades:

- public Renderer[] **OriginalRenderers** `{ get; set; }`

static class LODGenerator

> Contains methods for generating LODs (level of details) for game objects.

- Accesibilidad: `public`
- Modificadores: `public`, `static`
- Archivo: `LODGenerator.cs` · líneas 36-822 (787)

- Tipos anidados: `RendererInfo`
- Usa: `Mesh`, `LODGeneratorHelper`, `SimplificationOptions`, `LODLevel`, `MeshSimplifier`, `RendererInfo`, `MeshCombiner`, `Vector3`, `LODBackupComponent`

Campos:

- public static readonly string **LODParentGameObjectName** (inicializado) — The name of the game object where generated LODs are parented under.
- public static readonly string **LODAssetDefaultParentPath** (inicializado) — The default parent path for generated LOD assets.
- public static readonly string **AssetsRootPath** (inicializado) — The root assets path.
- public static readonly string **LODAssetUserData** (inicializado) — The user data applied to created LOD assets.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static LODGroup GenerateLODs(LODGeneratorHelper generatorHelper)	3	13	19	nameof, GenerateLODs
public static LODGroup GenerateLODs(GameObject gameObject, LODLevel[] levels, bool autoCollectRenderers, SimplificationOptions simplificationOptions)	1	1	4	GenerateLODs
public static LODGroup GenerateLODs(GameObject gameObject, LODLevel[] levels, bool autoCollectRenderers, SimplificationOptions simplificationOptions, string saveAssetsPath)	24	71	113	nameof, Find, GetComponent, ValidateOptions, ValidateSaveAssetsPath, ParentAndResetTransform, AddComponent, GetChildRenderersForLOD...
public static bool DestroyLODs(LODGeneratorHelper generatorHelper)	2	3	7	nameof, DestroyLODs
public static bool DestroyLODs(GameObject gameObject)	4	13	29	nameof, RestoreBackup, Find, DestroyObject, GetComponent
private static RendererInfo[] GetStaticRenderers(MeshRenderer[] renderers)	4	16	32	GetComponent, LogWarning, Add, ToArray
private static RendererInfo[] GetSkinnedRenderers(SkinnedMeshRenderer[] renderers)	3	11	28	LogWarning, Add, ToArray
private static RendererInfo[] CombineStaticMeshes(Transform transform, int levelIndex, MeshRenderer[] renderers)	2	9	27	CombineMeshes, Format, Add, ToArray
private static RendererInfo[] CombineSkinnedMeshes(Transform transform, int levelIndex, SkinnedMeshRenderer[] renderers)	7	22	64	ToArray, LogWarning, Add, CombineMeshes, Format, FindBestRootBone
private static void ParentAndResetTransform(Transform transform, Transform parentTransform)	1	4	7	SetParent
private static void ParentAndOffsetTransform(Transform transform, Transform parentTransform, Transform originalTransform)	1	4	7	SetParent
private static Renderer CreateLevelRenderer(GameObject gameObject, int levelIndex, in LODLevel level, Transform levelTransform, int rendererIndex, in RendererInfo renderer, in SimplificationOptions simplificationOptions, string saveAssetsPath)	4	14	30	SimplifyMesh, DestroyObject, Format, CreateStaticLevelRenderer, CreateSkinnedLevelRenderer
private static MeshRenderer CreateStaticLevelRenderer(string name, Transform parentTransform, Transform originalTransform, Mesh mesh, Material[] materials, in LODLevel level)	2	13	21	ParentAndOffsetTransform, ParentAndResetTransform, GetComponent, SetupLevelRenderer
private static SkinnedMeshRenderer CreateSkinnedLevelRenderer(string name, Transform parentTransform, Transform originalTransform, Mesh mesh, Material[] materials, Transform rootBone, Transform[] bones, in LODLevel level)	2	14	21	ParentAndOffsetTransform, ParentAndResetTransform, GetComponent, SetupLevelRenderer
private static Transform FindBestRootBone(Transform transform, SkinnedMeshRenderer[] skinnedMeshRenderers)	7	15	23	
private static void SetupLevelRenderer(Renderer renderer, in LODLevel level)	2	10	15	
private static Renderer[] GetChildRenderersForLOD(GameObject gameObject)	1	3	6	CollectChildRenderersForLOD, ToArray
private static void CollectChildRenderersForLOD(Transform transform, List<Renderer> resultRenderers)	6	15	28	GetComponents, AddRange, GetChild, Equals, GetComponent, CollectChildRenderersForLOD
private static Mesh SimplifyMesh(Mesh mesh, float quality, in SimplificationOptions options)	1	7	11	Initialize, SimplifyMesh, ToMesh
private static void DestroyObject(Object obj)	2	3	18	nameof, Destroy
private static void CreateBackup(GameObject gameObject, Renderer[] originalRenderers)	1	3	6	AddComponent
private static void RestoreBackup(GameObject gameObject)	5	12	19	GetComponents, DestroyObject
private static string ValidateSaveAssetsPath(string saveAssetsPath)	2	4	12	IsNullOrEmpty, LogWarning

- `GenerateLODs` : Generates the LODs and sets up a LOD Group for the LOD generator helper component.
- `GenerateLODs` : Generates the LODs and sets up a LOD Group for the specified game object.
- `GenerateLODs` : Generates the LODs and sets up a LOD Group for the specified game object.
- `DestroyLODs` : Destroys the generated LODs and LOD Group for the LOD generator helper component.
- `DestroyLODs` : Destroys the generated LODs and LOD Group for the specified game object.

class LODGeneratorHelper

> A LOD (level of detail) generator helper.

- Accesibilidad: `public`
- Modificadores: `public`, `sealed`
- Archivo: `LODGeneratorHelper.cs` · líneas 34-171 (138)
- Hereda de: `MonoBehaviour` (profundidad 0)
- Atributos: `[AddComponentMenu]`
- Usa: `SimplificationOptions`, `LODLevel`

Campos:

- private LODFadeMode **fadeMode** (inicializado) `[SerializeField][Tooltip]`
- private bool **animateCrossFading** (inicializado) `[SerializeField][Tooltip]`
- private bool **autoCollectRenderers** (inicializado) `[SerializeField][Tooltip]`
- private SimplificationOptions **simplificationOptions** (inicializado) `[SerializeField][Tooltip]`
- private string **saveAssetsPath** (inicializado) `[SerializeField][Tooltip]`
- private LODLevel[] **levels** (inicializado) `[SerializeField][Tooltip]`
- private bool **isGenerated** (inicializado) `[SerializeField]`

Propiedades:

- public LODFadeMode **FadeMode** `{ get; set; }` — Gets or sets the fade mode used by the created LOD group.
- public bool **AnimateCrossFading** `{ get; set; }` — Gets or sets if the cross-fading should be animated by time. The animation duration is specified globally as crossFadeAnimationDuration.
- public bool **AutoCollectRenderers** `{ get; set; }` — Gets or sets if the renderers under this game object and any children should be automatically collected.
- public SimplificationOptions **SimplificationOptions** `{ get; set; }` — Gets or sets the simplification options.
- public string **SaveAssetsPath** `{ get; set; }` — Gets or sets the path within the project to save the generated assets. Leave this empty to use the default path.
- public LODLevel[] **Levels** `{ get; set; }` — Gets or sets the LOD levels for this generator.
- public bool **IsGenerated** `{ get; }` — Gets if the LODs have been generated.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private void Reset()	1	5	44	

struct LODLevel

> A LOD (level of detail) level.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `LODLevel.cs` · líneas 36-245 (210)
- Atributos: `[Serializable]`

Campos:

- private float **screenRelativeTransitionHeight** `[SerializeField][Range][Tooltip]`
- private float **fadeTransitionWidth** `[SerializeField][Range][Tooltip]`
- private float **quality** `[SerializeField][Range][Tooltip]`
- private bool **combineMeshes** `[SerializeField][Tooltip]`
- private bool **combineSubMeshes** `[SerializeField][Tooltip]`
- private Renderer[] **renderers** `[SerializeField][Tooltip]`
- private SkinQuality **skinQuality** `[SerializeField][Tooltip]`
- private ShadowCastingMode **shadowCastingMode** `[SerializeField][Tooltip]`
- private bool **receiveShadows** `[SerializeField][Tooltip]`
- private MotionVectorGenerationMode **motionVectorGenerationMode** `[SerializeField][Tooltip]`
- private bool **skinnedMotionVectors** `[SerializeField][Tooltip]`
- private LightProbeUsage **lightProbeUsage** `[SerializeField][Tooltip]`
- private ReflectionProbeUsage **reflectionProbeUsage** `[SerializeField][Tooltip]`

Propiedades:

- public float **ScreenRelativeTransitionHeight** `{ get; set; }` — Gets or sets the screen relative height to use for the transition [0-1].
- public float **FadeTransitionWidth** `{ get; set; }` — Gets or sets the width of the cross-fade transition zone (proportion to the current LOD's whole length) [0-1]. Only used if it's not animated.
- public float **Quality** `{ get; set; }` — Gets or sets the quality of this level [0-1].
- public bool **CombineMeshes** `{ get; set; }` — Gets or sets if all renderers and meshes under this level should be combined into one, where possible.
- public bool **CombineSubMeshes** `{ get; set; }` — Gets or sets if all sub-meshes should be combined into one, where possible. NOTE: This is only used if is true.
- public Renderer[] **Renderers** `{ get; set; }` — Gets or sets the renderers used in this level. These will have no purpose if automatic collection is used for the LOD generator.
- public SkinQuality **SkinQuality** `{ get; set; }` — Gets or sets the skin quality to use for renderers on this level.
- public ShadowCastingMode **ShadowCastingMode** `{ get; set; }` — Gets or sets the shadow casting mode for renderers on this level.
- public bool **ReceiveShadows** `{ get; set; }` — Gets or sets if renderers on this level should receive shadows.
- public MotionVectorGenerationMode **MotionVectorGenerationMode** `{ get; set; }` — Gets or sets the motion vector generation mode for renderers on this level.
- public bool **SkinnedMotionVectors** `{ get; set; }` — Gets or sets if renderers on this level should use skinned motion vectors.
- public LightProbeUsage **LightProbeUsage** `{ get; set; }` — Gets or sets the light probe usage for renderers on this level.
- public ReflectionProbeUsage **ReflectionProbeUsage** `{ get; set; }` — Gets or sets the reflection probe usage for renderers on this level.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) LODLevel(float screenRelativeTransitionHeight, float quality)	1	0	5	
public (ctor) LODLevel(float screenRelativeTransitionHeight, float fadeTransitionWidth, float quality, bool combineMeshes, bool combineSubMeshes)	1	0	5	
public (ctor) LODLevel(float screenRelativeTransitionHeight, float fadeTransitionWidth, float quality, bool combineMeshes, bool combineSubMeshes, Renderer[] renderers)	1	13	18	Clamp01

- `LODLevel` : Creates a new LOD level.
- `LODLevel` : Creates a new LOD level.
- `LODLevel` : Creates a new LOD level.

static class MathHelper

> Math helpers.

- Accesibilidad: `public`
- Modificadores: `public` , `static`
- Archivo: `MathHelper.cs` · líneas 35-115 (81)
- Usa: `Vector3d`

Campos:

- public const float **PI** (inicializado) — The Pi constant.
- public const double **PId** (inicializado) — The Pi constant.
- public const float **Deg2Rad** (inicializado) — Degrees to radian constant.
- public const double **Deg2Radd** (inicializado) — Degrees to radian constant.
- public const float **Rad2Deg** (inicializado) — Radians to degrees constant.
- public const double **Rad2Degd** (inicializado) — Radians to degrees constant.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static double Min(double val1, double val2, double val3)	4	1	5	
public static double Clamp(double value, double min, double max)	3	1	5	
public static double TriangleArea(ref Vector3d p0, ref Vector3d p1, ref Vector3d p2)	1	3	7	Sin, Angle

- `Min` : Returns the minimum of three values.
- `Clamp` : Clamps a value between a minimum and a maximum value.
- `TriangleArea` : Calculates the area of a triangle.

static class MeshCombiner

> Contains methods for combining meshes.

- Accesibilidad: `public`
- Modificadores: `public` , `static`
- Archivo: `MeshCombiner.cs` · líneas 36-479 (444)
- Usa: `Mesh` , `Vector3` , `Vector4` , `BoneWeight` , `MeshUtils`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static Mesh CombineMeshes(Transform rootTransform, MeshRenderer[] renderers, out Material[] resultMaterials)	8	24	33	nameof, Format, GetComponent, CanReadMesh, CombineMeshes
public static Mesh CombineMeshes(Transform rootTransform, SkinnedMeshRenderer[] renderers, out Material[] resultMaterials, out Transform[] resultBones)	7	23	31	nameof, Format, CanReadMesh, CombineMeshes
public static Mesh CombineMeshes(Mesh[] meshes, Matrix4x4[] transforms, Material[][] materials, out Material[] resultMaterials)	4	8	12	nameof, CombineMeshes
public static Mesh CombineMeshes(Mesh[] meshes, Matrix4x4[] transforms, Material[][] materials, Transform[][] bones, out Material[] resultMaterials, out Transform[] resultBones)	42	126	174	nameof, Format, CanReadMesh, GetMeshUVs, IndexOf, Add, RemapBones, TransformVertices…
private static void CopyVertexPositions(ICollection<Vector3> list, Vector3[] arr)	4	5	10	Add
private static void CopyVertexAttributes<T>(ref List<T> dest, IEnumerable<T> src, int previousVertexCount, int meshVertexCount, int totalVertexCount, T defaultValue)	7	15	25	Count, Add, AddRange
private static T[] MergeArrays<T>(T[] arr1, T[] arr2)	1	4	7	Copy
private static void TransformVertices(Vector3[] vertices, ref Matrix4x4 transform)	2	3	7	MultiplyPoint3x4
private static void TransformNormals(Vector3[] normals, ref Matrix4x4 transform)	3	5	10	MultiplyVector
private static void TransformTangents(Vector4[] tangents, ref Matrix4x4 transform)	3	7	12	MultiplyVector
private static void RemapBones(BoneWeight[] boneWeights, int[] boneIndices)	6	14	22	
private static bool CanReadMesh(Mesh mesh)	1	1	8	

- `CombineMeshes` : Combines an array of mesh renderers into one single mesh.
- `CombineMeshes` : Combines an array of skinned mesh renderers into one single skinned mesh.
- `CombineMeshes` : Combines an array of meshes into a single mesh.
- `CombineMeshes` : Combines an array of meshes into a single mesh.

class MeshSimplifier

> The mesh simplifier. Deeply based on https://github.com/sp4cerat/Fast-Quadric-Mesh-Simplification but rewritten completely in C#.

- Accesibilidad: `public`
- Modificadores: `public` , `sealed`
- Archivo: `MeshSimplifier.cs` · líneas 56-2320 (2265)
- Usa: `MeshUtils` , `SimplificationOptions` , `Triangle` , `Vertex` , `Ref` , `Vector3` , `Vector4` , `Vector2` , `BoneWeight` , `BlendShapeContainer` , `Mesh` , `SymmetricMatrix` , `Vector3d` , `MathHelper` , `BorderVertex` , `BorderVertexComparer` , `BlendShape` , `ValidateSimplificationOptionsException` , `ResizableArray` , `UVChannels`

Campos:

- private const int **TriangleEdgeCount** (inicializado)
- private const int **TriangleVertexCount** (inicializado)
- private const double **DoubleEpsilon** (inicializado)
- private const double **DenomEpilson** (inicializado)
- private static readonly int **UVChannelCount** (inicializado)
- private SimplificationOptions **simplificationOptions** (inicializado)
- private bool **verbose** (inicializado)
- private int **subMeshCount** (inicializado)
- private int[] **subMeshOffsets** (inicializado)
- private ResizableArray<Triangle> **triangles** (inicializado)
- private ResizableArray<Vertex> **vertices** (inicializado)
- private ResizableArray<Ref> **refs** (inicializado)
- private ResizableArray<Vector3> **vertNormals** (inicializado)
- private ResizableArray<Vector4> **vertTangents** (inicializado)
- private UVChannels<Vector2> **vertUV2D** (inicializado)
- private UVChannels<Vector3> **vertUV3D** (inicializado)
- private UVChannels<Vector4> **vertUV4D** (inicializado)
- private ResizableArray<Color> **vertColors** (inicializado)
- private ResizableArray<BoneWeight> **vertBoneWeights** (inicializado)
- private ResizableArray<BlendShapeContainer> **blendShapes** (inicializado)
- private Matrix4x4[] **bindposes** (inicializado)
- private readonly double[] **errArr** (inicializado)
- private readonly int[] **attributeIndexArr** (inicializado)
- private readonly HashSet<Triangle> **triangleHashSet1** (inicializado)
- private readonly HashSet<Triangle> **triangleHashSet2** (inicializado)

Propiedades:

- public SimplificationOptions **SimplificationOptions** `{ get; set; }` — Gets or sets all of the simplification options as a single block. Default value: SimplificationOptions.Default
- public bool **PreserveBorderEdges** `{ get; set; }` — Gets or sets if the border edges should be preserved. Default value: false
- public bool **PreserveUVSeamEdges** `{ get; set; }` — Gets or sets if the UV seam edges should be preserved. Default value: false
- public bool **PreserveUVFoldoverEdges** `{ get; set; }` — Gets or sets if the UV foldover edges should be preserved. Default value: false
- public bool **PreserveSurfaceCurvature** `{ get; set; }` — Gets or sets if the discrete curvature of the mesh surface be taken into account during simplification. Default value: false
- public bool **EnableSmartLink** `{ get; set; }` — Gets or sets if a feature for smarter vertex linking should be enabled, reducing artifacts in the decimated result at the cost of a slightly more expensive initialization by treating vertices at the same position as the same vertex while separating the attributes. Default value: true
- public int **MaxIterationCount** `{ get; set; }` — Gets or sets the maximum iteration count. Higher number is more expensive but can bring you closer to your target quality. Sometimes a lower maximum count might be desired in order to lower the performance cost. Default value: 100
- public double **Agressiveness** `{ get; set; }` — Gets or sets the agressiveness of the mesh simplification. Higher number equals higher quality, but more expensive to run. Default value: 7.0
- public bool **Verbose** `{ get; set; }` — Gets or sets if verbose information should be printed to the console. Default value: false
- public double **VertexLinkDistance** `{ get; set; }` — Gets or sets the maximum distance between two vertices in order to link them. Note that this value is only used if EnableSmartLink is true.
- public double **VertexLinkDistanceSqr** `{ get; set; }` — Gets or sets the maximum squared distance between two vertices in order to link them. Note that this value is only used if EnableSmartLink is true. Default value: double.Epsilon
- public Vector3[] **Vertices** `{ get; set; }` — Gets or sets the vertex positions.
- public int **SubMeshCount** `{ get; }` — Gets the count of sub-meshes.
- public int **BlendShapeCount** `{ get; }` — Gets the count of blend shapes.
- public Vector3[] **Normals** `{ get; set; }` — Gets or sets the vertex normals.
- public Vector4[] **Tangents** `{ get; set; }` — Gets or sets the vertex tangents.
- public Vector2[] **UV1** `{ get; set; }` — Gets or sets the vertex 2D UV set 1.
- public Vector2[] **UV2** `{ get; set; }` — Gets or sets the vertex 2D UV set 2.
- public Vector2[] **UV3** `{ get; set; }` — Gets or sets the vertex 2D UV set 3.
- public Vector2[] **UV4** `{ get; set; }` — Gets or sets the vertex 2D UV set 4.
- public Color[] **Colors** `{ get; set; }` — Gets or sets the vertex colors.

- public BoneWeight[] **BoneWeights** `{ get; set; }` — Gets or sets the vertex bone weights.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) MeshSimplifier()	1	3	6	
public (ctor) MeshSimplifier(Mesh mesh)	2	3	8	Initialize
private void InitializeVertexAttribute<T>(T[] attributeValues, ref ResizableArray<T> attributeArray, string attributeName)	6	14	25	Resize, Copy, LogErrorFormat
private static double VertexError(ref SymmetricMatrix q, double x, double y, double z)	1	1	6	
private double CurvatureError(ref Vertex vert0, ref Vertex vert1)	5	22	35	Clear, GetTrianglesContainingVertex, GetTrianglesContainingBothVertices, Dot
private double CalculateError(ref Vertex vert0, ref Vertex vert1, out Vector3d result)	8	36	59	Determinant1, Determinant2, Determinant3, Determinant4, CurvatureError, VertexError
private static void CalculateBarycentricCoords(ref Vector3d point, ref Vector3d a, ref Vector3d b, ref Vector3d c, out Vector3 result)	2	14	21	Dot, Abs
private static Vector4 NormalizeTangent(Vector4 tangent)	1	3	7	Normalize
private bool Flipped(ref Vector3d p, int i0, int i1, ref Vertex v0, bool[] deleted)	7	31	40	Normalize, Dot, Abs, Cross
private void UpdateTriangles(int i0, int ia0, ref Vertex v, ResizableArray<bool> deleted, ref int deletedTriangles)	5	27	36	SetAttributeIndex, CalculateError, Min, Add
private void InterpolateVertexAttributes(int dst, int i0, int i1, int i2, ref Vector3 barycentricCoord)	15	38	57	Normalize, NormalizeTangent, InterpolateVertexAttributes
private bool AreUVsTheSame(int channel, int indexA, int indexB)	7	25	37	
private void RemoveVertexPass(int startTrisCount, int targetTrisCount, double threshold, ResizableArray<bool> deleted0, ResizableArray<bool> deleted1, ref int deletedTris)	22	65	103	GetErrors, GetAttributeIndices, CalculateError, Resize, Flipped, CalculateBarycentricCoords, InterpolateVertexAttributes, UpdateTriangles…
private void UpdateMesh(int iteration)	32	160	231	Resize, UpdateReferences, Clear, Add, Sort, Sqrt, Max, AreUVsTheSame…
private void UpdateReferences()	5	35	49	Resize, Set
private void CompactMesh()	49	146	180	Resize, MoveVertexElement
private void CalculateSubMeshOffsets()	5	17	26	
private void GetTrianglesContainingVertex(ref Vertex vert, HashSet<Triangle> tris)	2	5	11	Add
private void GetTrianglesContainingBothVertices(ref Vertex vert0, ref Vertex vert1, HashSet<Triangle> tris)	5	9	19	Add
public int[][] GetAllSubMeshTriangles()	2	5	9	GetSubMeshTriangles
public int[] GetSubMeshTriangles(int subMeshIndex)	9	31	44	nameof, CalculateSubMeshOffsets, AssertFormat
public void ClearSubMeshes()	1	3	6	Resize
public void AddSubMeshTriangles(int[] triangles)	4	17	22	nameof, Resize
public void AddSubMeshTriangles(int[][] triangles)	7	27	38	nameof, Format, Resize
public Vector2[] GetUVs2D(int channel)	5	7	14	nameof
public Vector3[] GetUVs3D(int channel)	5	7	14	nameof
public Vector4[] GetUVs4D(int channel)	5	7	14	nameof
public void GetUVs(int channel, List<Vector2> uvs)	7	11	17	nameof, Clear, AddRange
public void GetUVs(int channel, List<Vector3> uvs)	7	11	17	nameof, Clear, AddRange
public void GetUVs(int channel, List<Vector4> uvs)	7	11	17	nameof, Clear, AddRange
public void SetUVs(int channel, IList<Vector2> uvs)	10	26	42	nameof, Resize, CopyTo
public void SetUVs(int channel, IList<Vector3> uvs)	10	26	42	nameof, Resize, CopyTo
public void SetUVs(int channel, IList<Vector4> uvs)	10	26	42	nameof, Resize, CopyTo
public void SetUVs(int channel, IList<Vector4> uvs, int uvComponentCount)	13	26	40	nameof, ConvertUVsTo2D, SetUVs, ConvertUVsTo3D
public void SetUVsAuto(int channel, IList<Vector4> uvs)	3	4	8	nameof, GetUsedUVComponents, SetUVs
public BlendShape[] GetAllBlendShapes()	3	7	12	ToBlendShape
public BlendShape GetBlendShape(int blendShapeIndex)	4	3	7	nameof, ToBlendShape
public void ClearBlendShapes()	2	4	8	Clear
public void AddBlendShape(BlendShape blendShape)	4	8	14	nameof, Add
public void AddBlendShapes(BlendShape[] blendShapes)	6	12	20	nameof, Max, Format, Add
public void Initialize(Mesh mesh)	11	39	63	nameof, GetMeshUVs2D, SetUVs, GetMeshUVs3D, GetMeshUVs, SetUVsAuto, GetMeshBlendShapes, AddBlendShapes…
public void SimplifyMesh(float quality)	7	31	55	Clamp01, RoundToInt, UpdateMesh, Pow, LogFormat, RemoveVertexPass, CompactMesh
public void SimplifyMeshLossless()	6	28	51	UpdateMesh, LogFormat, RemoveVertexPass, CompactMesh
public Mesh ToMesh()	10	41	58	GetAllSubMeshTriangles, GetAllBlendShapes, GetUVs, CreateMesh
public static void ValidateOptions(SimplificationOptions options)	8	10	17	nameof

- `MeshSimplifier` : Creates a new mesh simplifier.
- `MeshSimplifier` : Creates a new mesh simplifier.
- `Flipped` : Check if a triangle flips when this edge is removed
- `UpdateTriangles` : Update triangle connections and edge error after a edge is collapsed.
- `RemoveVertexPass` : Remove vertices and mark deleted triangles
- `UpdateMesh` : Compact triangles, compute edge error and build reference list.
- `CompactMesh` : Finally compact mesh before exiting.
- `GetAllSubMeshTriangles` : Returns the triangle indices for all sub-meshes.
- `GetSubMeshTriangles` : Returns the triangle indices for a specific sub-mesh.
- `ClearSubMeshes` : Clears out all sub-meshes.
- `AddSubMeshTriangles` : Adds a sub-mesh triangle indices for a specific sub-mesh.
- `AddSubMeshTriangles` : Adds several sub-meshes at once with their triangle indices for each sub-mesh.
- `GetUVs2D` : Returns the UVs (2D) from a specific channel.
- `GetUVs3D` : Returns the UVs (3D) from a specific channel.
- `GetUVs4D` : Returns the UVs (4D) from a specific channel.
- `GetUVs` : Returns the UVs (2D) from a specific channel.
- `GetUVs` : Returns the UVs (3D) from a specific channel.
- `GetUVs` : Returns the UVs (4D) from a specific channel.
- `SetUVs` : Sets the UVs (2D) for a specific channel.
- `SetUVs` : Sets the UVs (3D) for a specific channel.

- `SetUVs` : Sets the UVs (4D) for a specific channel.
- `SetUVs` : Sets the UVs for a specific channel with a specific count of UV components.
- `SetUVsAuto` : Sets the UVs for a specific channel and automatically detects the used components.
- `GetAllBlendShapes` : Returns all blend shapes.
- `GetBlendShape` : Returns a specific blend shape.
- `ClearBlendShapes` : Clears all blend shapes.
- `AddBlendShape` : Adds a blend shape.
- `AddBlendShapes` : Adds several blend shapes.
- `Initialize` : Initializes the algorithm with the original mesh.
- `SimplifyMesh` : Simplifies the mesh to a desired quality.
- `SimplifyMeshLossless` : Simplifies the mesh without losing too much quality.
- `ToMesh` : Returns the resulting mesh.
- `ValidateOptions` : Validates simplification options. Will throw an exception if the options are invalid.

static class MeshUtils

> Contains utility methods for meshes.

- Accesibilidad: `public`
- Modificadores: `public` , `static`
- Archivo: `MeshUtils.cs` · líneas 41-471 (431)
- Usa: `Mesh` , `Vector3` , `Vector4` , `BoneWeight` , `Vector2` , `BlendShape` , `BlendShapeFrame`

Campos:

- public static readonly int **UVChannelCount** (inicializado) — The count of supported UV channels.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static Mesh CreateMesh(Vector3[] vertices, int[][] indices, Vector3[] normals, Vector4[] tangents, Color[] colors, BoneWeight[] boneWeights, List<Vector2>[] uvs, Matrix4x4[] bindposes, BlendShape[] blendShapes)	1	1	4	CreateMesh
public static Mesh CreateMesh(Vector3[] vertices, int[][] indices, Vector3[] normals, Vector4[] tangents, Color[] colors, BoneWeight[] boneWeights, List<Vector4>[] uvs, Matrix4x4[] bindposes, BlendShape[] blendShapes)	1	1	4	CreateMesh
public static Mesh CreateMesh(Vector3[] vertices, int[][] indices, Vector3[] normals, Vector4[] tangents, Color[] colors, BoneWeight[] boneWeights, List<Vector2>[] uvs2D, List<Vector3>[] uvs3D, List<Vector4>[] uvs4D, Matrix4x4[] bindposes, BlendShape[] blendShapes)	30	65	98	nameof, GetSubMeshIndexMinMax, SetUVs, ApplyMeshBlendShapes, SetTriangles, RecalculateBounds
public static BlendShape[] GetMeshBlendShapes(Mesh mesh)	5	22	35	nameof, GetBlendShapeName, GetBlendShapeFrameCount, GetBlendShapeFrameWeight, GetBlendShapeFrameVertices
public static void ApplyMeshBlendShapes(Mesh mesh, BlendShape[] blendShapes)	7	14	23	nameof, ClearBlendShapes, AddBlendShapeFrame
public static IList<Vector4>[] GetMeshUVs(Mesh mesh)	3	7	12	nameof, GetMeshUVs
public static IList<Vector2> GetMeshUVs2D(Mesh mesh, int channel)	4	7	11	nameof, GetUVs
public static IList<Vector3> GetMeshUVs3D(Mesh mesh, int channel)	4	7	11	nameof, GetUVs
public static IList<Vector4> GetMeshUVs(Mesh mesh, int channel)	4	7	11	nameof, GetUVs
public static int GetUsedUVComponents(IList<Vector4> uvs)	12	19	29	
public static Vector2[] ConvertUVsTo2D(IList<Vector4> uvs)	3	8	13	
public static Vector3[] ConvertUVsTo3D(IList<Vector4> uvs)	3	8	13	
public static Vector2Int[] GetSubMeshIndexMinMax(int[][] indices, out IndexFormat indexFormat)	4	14	21	nameof, GetIndexMinMax
private static void GetIndexMinMax(int[] indices, out int minIndex, out int maxIndex)	6	14	23	

- `CreateMesh` : Creates a new mesh.
- `CreateMesh` : Creates a new mesh.
- `CreateMesh` : Creates a new mesh.
- `GetMeshBlendShapes` : Returns the blend shapes of a mesh.
- `ApplyMeshBlendShapes` : Applies and overrides the specified blend shapes on the specified mesh.
- `GetMeshUVs` : Returns the UV sets for a specific mesh.
- `GetMeshUVs2D` : Returns the 2D UV list for a specific mesh and UV channel.
- `GetMeshUVs3D` : Returns the 3D UV list for a specific mesh and UV channel.
- `GetMeshUVs` : Returns the 4D UV list for a specific mesh and UV channel.
- `GetUsedUVComponents` : Returns the number of used UV components in a UV set.
- `ConvertUVsTo2D` : Converts a list of 4D UVs into 2D.
- `ConvertUVsTo3D` : Converts a list of 4D UVs into 3D.
- `GetSubMeshIndexMinMax` : Returns the minimum and maximum indices for each submesh along with the needed index format.

struct RendererInfo

- Accesibilidad: `private`
- Modificadores: `private`
- Archivo: `LODGenerator.cs` · líneas 61-71 (11)
- Usa: `Mesh`

Campos:

- public string **name**
- public bool **isStatic**
- public bool **isNewMesh**
- public Transform **transform**
- public Mesh **mesh**
- public Material[] **materials**
- public Transform **rootBone**
- public Transform[] **bones**

class ResizableArray<T>

> A resizable array with the goal of being quicker than List .

- Accesibilidad: `internal`
- Modificadores: `internal` , `sealed`
- Archivo: `ResizableArray.cs` · líneas 36-217 (182)

Campos:

- private T[] **items** (inicializado)
- private int **length** (inicializado)
- private static T[] **emptyArr** (inicializado)

Propiedades:

- public int **Length** `{ get; }` — Gets the length of this array.
- public T[] **Data** `{ get; }` — Gets the internal data buffer for this array.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) ResizableArray(int capacity)	1	0	5	
public (ctor) ResizableArray(int capacity, int length)	5	8	14	nameof
public (ctor) ResizableArray(T[] initialArray)	3	10	17	nameof, Copy
private void IncreaseCapacity(int capacity)	1	3	6	Copy, Min
public void Clear()	1	2	5	Clear
public void Resize(int length, bool trimExess = false, bool clearMemory = false)	6	12	21	nameof, IncreaseCapacity, Clear, TrimExcess
public void TrimExcess()	2	5	9	Copy
public void Add(T item)	2	4	9	IncreaseCapacity
public T[] ToArray()	1	3	6	Copy

- `ResizableArray` : Creates a new resizable array.
- `ResizableArray` : Creates a new resizable array.
- `ResizableArray` : Creates a new resizable array.
- `Clear` : Clears this array.
- `Resize` : Resizes this array.
- `TrimExcess` : Trims any excess memory for this array.
- `Add` : Adds a new item to the end of this array.
- `ToArray` : Returns a copy of the resizable array as an actually array.

struct SimplificationOptions

> Options for mesh simplification.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `SimplificationOptions.cs` · líneas 36-121 (86)
- Atributos: `[Serializable]` , `[StructLayout]`

Campos:

- public static readonly SimplificationOptions **Default** (inicializado) — The default simplification options.
- public bool **PreserveBorderEdges** `[Tooltip]` — If the border edges should be preserved. Default value: false
- public bool **PreserveUVSeamEdges** `[Tooltip]` — If the UV seam edges should be preserved. Default value: false
- public bool **PreserveUVFoldoverEdges** `[Tooltip]` — If the UV foldover edges should be preserved. Default value: false
- public bool **PreserveSurfaceCurvature** `[Tooltip]` — If the discrete curvature of the mesh surface be taken into account during simplification. Taking surface curvature into account can result in good quality mesh simplification, but it can slow the simplification process significantly. Default value: false
- public bool **EnableSmartLink** `[Tooltip]` — If a feature for smarter vertex linking should be enabled, reducing artifacts in the decimated result at the cost of a slightly more expensive initialization by treating vertices at the same position as the same vertex while separating the attributes. Default value: true
- public double **VertexLinkDistance** `[Tooltip]` — The maximum distance between two vertices in order to link them. Note that this value is only used if EnableSmartLink is true. Default value: double.Epsilon
- public int **MaxIterationCount** `[Tooltip]` — The maximum iteration count. Higher number is more expensive but can bring you closer to your target quality. Sometimes a lower maximum count might be desired in order to lower the performance cost. Default value: 100
- public double **Agressiveness** `[Tooltip]` — The agressiveness of the mesh simplification. Higher number equals higher quality, but more expensive to run. Default value: 7.0
- public bool **ManualUVComponentCount** `[Tooltip]` — If a manual UV component count should be used (set by UVComponentCount), instead of the automatic detection. Default value: false
- public int **UVComponentCount** `[Range][Tooltip]` — The UV component count. The same UV component count will be used on all UV channels. Default value: 2

struct SymmetricMatrix

> A symmetric matrix.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `SymmetricMatrix.cs` · líneas 36-315 (280)
- Atributos: `[StructLayout]`

Campos:

- public double **m0** — The m11 component.
- public double **m1** — The m12 component.
- public double **m2** — The m13 component.
- public double **m3** — The m14 component.
- public double **m4** — The m22 component.
- public double **m5** — The m23 component.
- public double **m6** — The m24 component.
- public double **m7** — The m33 component.
- public double **m8** — The m34 component.
- public double **m9** — The m44 component.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) SymmetricMatrix(double c)	1	10	14	
public (ctor) SymmetricMatrix(double m0, double m1, double m2, double m3, double m4, double m5, double m6, double m7, double m8, double m9)	1	10	15	
public (ctor) SymmetricMatrix(double a, double b, double c, double d)	1	10	17	
internal double Determinant1()	1	2	12	

internal double Determinant2()	1	2	12	
internal double Determinant3()	1	2	12	
internal double Determinant4()	1	2	12	
public double Determinant(int a11, int a12, int a13, int a21, int a22, int a23, int a31, int a32, int a33)	1	2	14	

- `SymmetricMatrix` : Creates a symmetric matrix with a value in each component.
- `SymmetricMatrix` : Creates a symmetric matrix.
- `SymmetricMatrix` : Creates a symmetric matrix from a plane.
- `Determinant1` : Determinant(0, 1, 2, 1, 4, 5, 2, 5, 7)
- `Determinant2` : Determinant(1, 2, 3, 4, 5, 6, 5, 7, 8)
- `Determinant3` : Determinant(0, 2, 3, 1, 5, 6, 2, 7, 8)
- `Determinant4` : Determinant(0, 1, 3, 1, 4, 6, 2, 5, 8)
- `Determinant` : Computes the determinant of this matrix.

class ValidateSimplificationOptionsException

> An exception thrown when validating simplification options.

- Accesibilidad: `public`
- Modificadores: `public` , `sealed`
- Archivo: `ValidateSimplificationOptionsException.cs` · líneas 8-50 (43)
- Hereda de: `Exception` (profundidad 0)

Campos:

- private readonly string **propertyName**

Propiedades:

- public string **PropertyName** `{ get; }` — Gets the property name that caused the validation error.
- public override string **Message** `{ get; }` — Gets the message of the exception.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) ValidateSimplificationOptionsException(string propertyName, string message)	1	1	5	
public (ctor) ValidateSimplificationOptionsException(string propertyName, string message, Exception innerException)	1	1	5	

- `ValidateSimplificationOptionsException` : Creates a new simplification options validation exception.
- `ValidateSimplificationOptionsException` : Creates a new simplification options validation exception.

struct Vector3d

> A double precision 3D vector.

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `Vector3d.cs` · líneas 37-505 (469)
- Implementa: `IEquatable`
- Atributos: `[StructLayout]`
- Usa: `Vector3` , `MathHelper`

Campos:

- public static readonly Vector3d **zero** (inicializado) — The zero vector.
- public const double **Epsilon** (inicializado) — The vector epsilon.
- public double **x** — The x component.
- public double **y** — The y component.
- public double **z** — The z component.

Propiedades:

- public double **Magnitude** `{ get; }` — Gets the magnitude of this vector.
- public double **MagnitudeSqr** `{ get; }` — Gets the squared magnitude of this vector.
- public Vector3d **Normalized** `{ get; }` — Gets a normalized vector from this vector.

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vector3d(double value)	1	3	7	
public (ctor) Vector3d(double x, double y, double z)	1	3	7	
public (ctor) Vector3d(Vector3 vector)	1	3	7	
public void Set(double x, double y, double z)	1	3	7	
public void Scale(ref Vector3d scale)	1	3	7	
public void Normalize()	2	8	15	
public void Clamp(double min, double max)	7	12	12	
public override int GetHashCode()	1	1	4	GetHashCode
public override bool Equals(object obj)	4	5	9	
public bool Equals(Vector3d other)	3	1	4	
public override string ToString()	1	1	4	Format
public string ToString(string format)	1	1	4	Format, ToString
public static double Dot(ref Vector3d lhs, ref Vector3d rhs)	1	1	5	
public static void Cross(ref Vector3d lhs, ref Vector3d rhs, out Vector3d result)	1	1	5	
public static double Angle(ref Vector3d from, ref Vector3d to)	1	3	7	Acos, Clamp, Dot
public static void Lerp(ref Vector3d a, ref Vector3d b, double t, out Vector3d result)	1	1	5	
public static void Scale(ref Vector3d a, ref Vector3d b, out Vector3d result)	1	1	5	

public static void Normalize(ref Vector3d value, out Vector3d result)	2	6	13	

- `Vector3d` : Creates a new vector with one value for all components.
- `Vector3d` : Creates a new vector.
- `Vector3d` : Creates a new vector from a single precision vector.
- `Set` : Set x, y and z components of an existing vector.
- `Scale` : Multiplies with another vector component-wise.
- `Normalize` : Normalizes this vector.
- `Clamp` : Clamps this vector between a specific range.
- `GetHashCode` : Returns a hash code for this vector.
- `Equals` : Returns if this vector is equal to another one.
- `Equals` : Returns if this vector is equal to another one.
- `ToString` : Returns a nicely formatted string for this vector.
- `ToString` : Returns a nicely formatted string for this vector.
- `Dot` : Dot Product of two vectors.
- `Cross` : Cross Product of two vectors.
- `Angle` : Calculates the angle between two vectors.
- `Lerp` : Performs a linear interpolation between two vectors.
- `Scale` : Multiplies two vectors component-wise.
- `Normalize` : Normalizes a vector.

Namespace `UnityMeshSimplifier.Editor`

class LODGeneratorHelperEditor

- Accesibilidad: `internal`
- Modificadores: `internal`, `sealed`
- Archivo: `LODGeneratorHelperEditor.cs` · líneas 35-691 (657)
- Hereda de: `Editor` (profundidad 0)
- Atributos: `[CustomEditor]`
- Usa: `LODGeneratorHelper`, `IOUtils`, `LODGenerator`

Campos:

- private const string **FadeModeFieldName** (inicializado)
- private const string **AnimateCrossFadingFieldName** (inicializado)
- private const string **AutoCollectRenderersFieldName** (inicializado)
- private const string **SimplificationOptionsFieldName** (inicializado)
- private const string **SaveAssetsPathFieldName** (inicializado)
- private const string **LevelsFieldName** (inicializado)
- private const string **IsGeneratedFieldName** (inicializado)
- private const string **LevelScreenRelativeHeightFieldName** (inicializado)
- private const string **LevelFadeTransitionWidthFieldName** (inicializado)
- private const string **LevelQualityFieldName** (inicializado)
- private const string **LevelCombineMeshesFieldName** (inicializado)
- private const string **LevelCombineSubMeshesFieldName** (inicializado)
- private const string **LevelRenderersFieldName** (inicializado)
- private const string **SimplificationOptionsEnableSmartLinkFieldName** (inicializado)
- private const string **SimplificationOptionsVertexLinkDistanceFieldName** (inicializado)
- private const float **RemoveLevelButtonSize** (inicializado)
- private const float **RendererButtonWidth** (inicializado)
- private const float **RemoveRendererButtonSize** (inicializado)
- private SerializedProperty **fadeModeProperty** (inicializado)
- private SerializedProperty **animateCrossFadingProperty** (inicializado)
- private SerializedProperty **autoCollectRenderersProperty** (inicializado)
- private SerializedProperty **simplificationOptionsProperty** (inicializado)
- private SerializedProperty **saveAssetsPathProperty** (inicializado)
- private SerializedProperty **levelsProperty** (inicializado)
- private SerializedProperty **isGeneratedProperty** (inicializado)
- private bool **overrideSaveAssetsPath** (inicializado)
- private bool[] **settingsExpanded** (inicializado)
- private LODGeneratorHelper **lodGeneratorHelper** (inicializado)
- private static readonly GUIContent **createLevelButtonContent** (inicializado)
- private static readonly GUIContent **deleteLevelButtonContent** (inicializado)
- private static readonly GUIContent **generateLODButtonContent** (inicializado)
- private static readonly GUIContent **destroyLODButtonContent** (inicializado)
- private static readonly GUIContent **copyVisibilityChangesContent** (inicializado)
- private static readonly GUIContent **settingsContent** (inicializado)
- private static readonly GUIContent **renderersHeaderContent** (inicializado)
- private static readonly GUIContent **removeRendererButtonContent** (inicializado)
- private static readonly GUIContent **addRendererButtonContent** (inicializado)
- private static readonly GUIContent **overrideSaveAssetsPathContent** (inicializado)
- private static readonly Color **removeColor** (inicializado)
- private static readonly int **ObjectPickerControlID** (inicializado)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
private void OnEnable()	1	9	13	FindProperty
public override void OnInspectorGUI()	2	8	16	UpdateIfRequiredOrScript, DrawGeneratedView, DrawNotGeneratedView, ApplyModifiedProperties
private void DrawGeneratedView()	3	8	14	Button, DestroyLODs, BeginDisabledGroup, VisibilitySettingsHaveChanged, CopyVisibilityChanges, EndDisabledGroup
private void DrawNotGeneratedView()	12	39	59	PropertyField, DrawSimplificationOptions, Toggle, ApplyModifiedProperties, ExitGUI, BeginChangeCheck, EndChangeCheck, MakeSafeRelativePath…
private void DrawSimplificationOptions()	5	11	20	PropertyField, FindPropertyRelative, GetChildProperties, Equals
private void DrawLevel(int index, SerializedProperty levelProperty, bool hasCrossFade)	17	51	79	BeginVertical, BeginHorizontal, Label, Format, Button, Width, DeleteLevel, EndHorizontal…
private void DrawRendererList(SerializedProperty renderersProperty, float availableWidth)	2	20	31	Label, Max, FloorToInt, CeilToInt, GetRect, ExpandWidth, Box, GetArrayElementAtIndex…
private void DrawRendererButton(Rect position, SerializedProperty renderersProperty, int rendererIndex, Renderer renderer)	10	45	66	Contains, DeleteArrayElementAtIndex, Use, ApplyModifiedProperties, ExitGUI, Log, PingObject, GetAssetPreview…

private void HandleAddRenderer(Rect position, Rect listArea, SerializedProperty renderersProperty)	12	35	52	Button, ShowObjectPicker, ExitGUI, Contains, GetRenderers, AddRenderers, AcceptDrag, Use…
private void AddRenderers(SerializedProperty renderersProperty, IEnumerable<Renderer> renderers, bool append)	6	20	31	ClearArray, GetArrayElementAtIndex, Add, Contains, ApplyModifiedProperties
private void CreateLevel()	3	17	25	InsertArrayElementAtIndex, GetArrayElementAtIndex, FindPropertyRelative, ApplyModifiedProperties, ExitGUI
private void DeleteLevel(int index)	1	3	6	DeleteArrayElementAtIndex, ApplyModifiedProperties, ExitGUI
private void GenerateLODs()	3	18	28	DisplayProgressBar, GenerateLODs, FindProperty, UpdateIfRequiredOrScript, ApplyModifiedPropertiesWithoutUndo, LogException, DisplayError, MarkSceneAsDirty…
private void DestroyLODs()	2	16	26	DisplayProgressBar, DestroyLODs, FindProperty, UpdateIfRequiredOrScript, ApplyModifiedPropertiesWithoutUndo, LogException, DisplayError, MarkSceneAsDirty…
private bool VisibilitySettingsHaveChanged()	5	16	24	GetComponent, GetLODs, Approximately
private void CopyVisibilityChanges()	4	15	22	GetComponent, LogError, GetLODs
private Renderer[] GetRenderers(IEnumerable<GameObject> gameObjects, bool searchChildren)	9	30	70	IsChildOf, Any, DisplayDialog, SetParent, Add, Union, GetComponentsInChildren, Contains…
private void MarkSceneAsDirty()	1	1	4	MarkSceneDirty
private static void DisplayError(string title, string message, string ok, Object context)	1	1	4	DisplayDialog

static class SerializedPropertyExtensions

- Accesibilidad: `internal`
- Modificadores: `internal`, `static`
- Archivo: `SerializedPropertyExtensions.cs` · líneas 32-49 (18)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public static IEnumerable<SerializedProperty> GetChildProperties(this SerializedProperty property)	4	9	15	Copy, NextVisible

Namespace `UnityMeshSimplifier.Editor.Tests`

class MeshUtilsTest

- Accesibilidad: `public`
- Modificadores: `public`
- Archivo: `MeshUtilsTest.cs` · líneas 35-541 (507)
- Usa: `Mesh`, `Vector3`, `BlendShape`, `BlendShapeFrame`, `MeshUtils`, `Vector4`, `Vector2`, `BoneWeight`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void ShouldApplyBlendShapes()	2	23	84	Cross, ApplyMeshBlendShapes, AreEqual, GetBlendShapeName, GetBlendShapeFrameCount, GetBlendShapeFrameWeight, GetBlendShapeFrameVertices
public void ShouldConvertUVsTo2D()	1	4	20	ConvertUVsTo2D, AreEqual
public void ShouldConvertUVsTo3D()	1	4	20	ConvertUVsTo3D, AreEqual
public void ShouldCreateMesh()	2	34	145	Cross, Rotate, Euler, CreateMesh, IsNotNull, AreEqual, GetIndices, GetUVs…
public void ShouldGetMeshBlendShapes()	2	24	73	Cross, AddBlendShapeFrame, GetMeshBlendShapes, IsNotNull, AreEqual
public void ShouldGetMeshUVs()	3	12	41	SetUVs, ToList, GetMeshUVs, AreEqual, ToArray, Select, Take
public void ShouldGetSubMeshIndexMinMax()	1	11	61	GetSubMeshIndexMinMax, AreEqual
public void ShouldGetUsedUVComponents()	1	15	53	GetUsedUVComponents, AreEqual

Namespace `UnityMeshSimplifier.Internal`

class BlendShapeContainer

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `BlendShapeContainer.cs` · líneas 32-82 (51)
- Usa: `BlendShapeFrameContainer`, `BlendShape`, `Vector3`, `BlendShapeFrame`

Campos:

- private readonly string **shapeName**
- private readonly BlendShapeFrameContainer[] **frames**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BlendShapeContainer(BlendShape blendShape)	2	5	9	
public void MoveVertexElement(int dst, int src)	2	3	8	MoveVertexElement
public void InterpolateVertexAttributes(int dst, int i0, int i1, int i2, ref Vector3 barycentricCoord)	2	3	8	InterpolateVertexAttributes
public void Resize(int length, bool trimExess = false)	2	3	7	Resize
public BlendShape ToBlendShape()	2	5	9	ToBlendShapeFrame

class BlendShapeFrameContainer

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `BlendShapeFrameContainer.cs` · líneas 32-77 (46)
- Usa: `Vector3`, `BlendShapeFrame`, `ResizableArray`

Campos:

- private readonly float **frameWeight**
- private readonly ResizableArray<Vector3> **deltaVertices**
- private readonly ResizableArray<Vector3> **deltaNormals**

- private readonly ResizableArray<Vector3> **deltaTangents**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BlendShapeFrameContainer(BlendShapeFrame frame)	1	4	7	
public void MoveVertexElement(int dst, int src)	1	3	7	
public void InterpolateVertexAttributes(int dst, int i0, int i1, int i2, ref Vector3 barycentricCoord)	1	3	7	Normalize
public void Resize(int length, bool trimExess = false)	1	3	6	Resize
public BlendShapeFrame ToBlendShapeFrame()	1	4	7	ToArray

struct BorderVertex

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `BorderVertex.cs` · líneas 32-43 (12)

Campos:

- public int **index**
- public int **hash**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) BorderVertex(int index, int hash)	1	2	6	

class BorderVertexComparer

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `BorderVertex.cs` · líneas 45-54 (10)
- Implementa: `IComparer`
- Usa: `BorderVertex`

Campos:

- public static readonly BorderVertexComparer **instance** (inicializado)

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public int Compare(BorderVertex x, BorderVertex y)	1	1	5	CompareTo

struct Ref

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `Ref.cs` · líneas 31-42 (12)

Campos:

- public int **tid**
- public int **tvertex**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public void Set(int tid, int tvertex)	1	2	6	

struct Triangle

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `Triangle.cs` · líneas 32-163 (132)
- Implementa: `IEquatable`
- Usa: `Vector3d`

Campos:

- public int **index**
- public int **v0**
- public int **v1**
- public int **v2**
- public int **subMeshIndex**
- public int **va0**
- public int **va1**
- public int **va2**
- public double **err0**
- public double **err1**
- public double **err2**
- public double **err3**
- public bool **deleted**
- public bool **dirty**
- public Vector3d **n**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Triangle(int index, int v0, int v1, int v2, int subMeshIndex)	1	11	18	
public void GetAttributeIndices(int[] attributeIndices)	1	3	7	

public void SetAttributeIndex(int index, int value)	4	8	18	nameof
public void GetErrors(double[] err)	1	3	7	
public override int GetHashCode()	1	1	4	
public override bool Equals(object obj)	2	5	10	
public bool Equals(Triangle other)	1	1	4	

class UVChannels<TVec>

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `UVChannels.cs` · líneas 31-91 (61)
- Usa: `MeshUtils`, `ResizableArray`

Campos:

- private static readonly int **UVChannelCount** (inicializado)
- private ResizableArray<TVec>[] **channels** (inicializado)
- private TVec[][] **channelsData** (inicializado)

Propiedades:

- public TVec[][] **Data** `{ get; }`

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) UVChannels()	1	2	5	
public void Resize(int capacity, bool trimExess = false)	3	5	10	Resize

- `Resize` : Resizes all channels at once.

struct Vertex

- Accesibilidad: `internal`
- Modificadores: `internal`
- Archivo: `Vertex.cs` · líneas 32-76 (45)
- Implementa: `IEquatable`
- Usa: `Vector3d`, `SymmetricMatrix`

Campos:

- public int **index**
- public Vector3d **p**
- public int **tstart**
- public int **tcount**
- public SymmetricMatrix **q**
- public bool **borderEdge**
- public bool **uvSeamEdge**
- public bool **uvFoldoverEdge**

Métodos:

Firma	Compl.	Sent.	Líneas	Llamadas
public (ctor) Vertex(int index, Vector3d p)	1	8	12	
public override int GetHashCode()	1	1	4	
public override bool Equals(object obj)	2	5	10	
public bool Equals(Vertex other)	1	1	4	

📝 Resumen

Análisis del Proyecto

Proyecto: _Revit_EXE_Geometrias

Fecha: 2026-07-28 19:26:08

Estadísticas

Métrica	Valor
Archivos	78
Carpetas	26
Namespaces	14
Clases	93
Interfaces	2
Enums	2
Métodos	790
Propiedades	167
Campos	537
Líneas totales	28516
Código	18367
Comentarios	7497
Blancos	2652

Archivos

- **Logging.cs** (176 líneas)
- **DecimationAlgorithm.cs** (163 líneas)
- **UVChannels.cs** (80 líneas)
- **ResizableArray.cs** (179 líneas)
- **ConsoleLogger.cs** (63 líneas)
- **SymmetricMatrix.cs** (303 líneas)
- **LODBackupComponent.cs** (44 líneas)
- **ResizableArray.cs** (219 líneas)
- **MeshUtils.cs** (473 líneas)
- **IOUtils.cs** (102 líneas)
- **SimplificationOptions.cs** (123 líneas)
- **MeshDecimatorUtility.cs** (924 líneas)
- **LODGenerator.cs** (552 líneas)
- **DecimatedObject.cs** (102 líneas)
- **Vector3.cs** (494 líneas)
- **Vector2i.cs** (348 líneas)
- **Vector2d.cs** (425 líneas)
- **Vector2.cs** (425 líneas)
- **AssemblyInfo.cs** (27 líneas)
- **ShowExample.cs** (64 líneas)
- **Triangle.cs** (165 líneas)
- **Ref.cs** (44 líneas)
- **BorderVertex.cs** (56 líneas)
- **BlendShapeFrameContainer.cs** (79 líneas)
- **UnityLogger.cs** (63 líneas)
- **BlendShapeContainer.cs** (84 líneas)
- **Vector3d.cs** (507 líneas)
- **SymmetricMatrix.cs** (317 líneas)
- **MathHelper.cs** (117 líneas)
- **SerializedPropertyExtensions.cs** (51 líneas)
- **LODGeneratorHelperEditor.cs** (693 líneas)
- **LODGeneratorHelper.cs** (173 líneas)
- **UVChannels.cs** (80 líneas)
- **ResizableArray.cs** (179 líneas)
- **ConsoleLogger.cs** (63 líneas)
- **Vector4i.cs** (388 líneas)
- **Vector3d.cs** (481 líneas)
- **ValidateSimplificationOptionsException.cs** (52 líneas)
- **Vertex.cs** (78 líneas)
- **UVChannels.cs** (93 líneas)
- **Vector2.cs** (425 líneas)
- **SymmetricMatrix.cs** (303 líneas)
- **MathHelper.cs** (286 líneas)
- **AssemblyInfo.cs** (27 líneas)
- **Program.cs** (146 líneas)
- **ObjMesh.cs** (891 líneas)
- **DecimatedObjectEditor.cs** (211 líneas)
- **BoneWeight.cs** (249 líneas)
- **Program.cs** (1266 líneas)
- **FastQuadricMeshSimplification.cs** (1540 líneas)
- **Vector4d.cs** (467 líneas)
- **Vector4.cs** (467 líneas)
- **Vector3i.cs** (368 líneas)
- **Vector3d.cs** (481 líneas)
- **Vector4i.cs** (388 líneas)
- **MeshDecimation.cs** (180 líneas)
- **Mesh.cs** (955 líneas)
- **Logging.cs** (176 líneas)

- **BoneWeight.cs** (249 líneas)
- **MeshSimplifier.cs** (2322 líneas)
- **BlendShape.cs** (101 líneas)
- **AssemblyAttributes.cs** (4 líneas)
- **MeshUtilsTest.cs** (543 líneas)
- **ExportarGeometria.cs** (177 líneas)
- **FastQuadricMeshSimplification.cs** (1540 líneas)
- **DecimationAlgorithm.cs** (163 líneas)
- **Vector3.cs** (494 líneas)
- **Vector2i.cs** (348 líneas)
- **Vector2d.cs** (425 líneas)
- **Vector4d.cs** (467 líneas)
- **Vector4.cs** (467 líneas)
- **Vector3i.cs** (368 líneas)
- **MathHelper.cs** (286 líneas)
- **MeshDecimation.cs** (180 líneas)
- **Mesh.cs** (955 líneas)
- **MeshCombiner.cs** (481 líneas)
- **LODLevel.cs** (247 líneas)
- **LODGenerator.cs** (824 líneas)

Clases (classes.csv)

ClassName	Namespace	Kind	File	Lines	Methods	Fields	Properties	BaseClass	Interfaces	Uses
ILogger	MeshDecimator	interface	Logging.cs	20	3	0	0			
Logging	MeshDecimator	static class	Logging.cs	116	7	2	1			ILogger; ConsoleL
DecimationAlgorithm	MeshDecimator.Algorithms	abstract class	DecimationAlgorithm.cs	129	5	4	5			MathHelper; Mesh
UVChannels	MeshDecimator.Collections	class	UVChannels.cs	70	2	2	1			Mesh; ResizableAr
ResizableArray	MeshDecimator.Collections	class	ResizableArray.cs	144	7	3	2			
ConsoleLogger	MeshDecimator.Loggers	class	ConsoleLogger.cs	29	3	0	0		ILogger	
SymmetricMatrix	MeshDecimator.Math	struct	SymmetricMatrix.cs	269	8	10	0			
LODBackupComponent	UnityMeshSimplifier	class	LODBackupComponent.cs	12	0	1	1	MonoBehaviour		
ResizableArray	UnityMeshSimplifier	class	ResizableArray.cs	182	9	3	2			
MeshUtils	UnityMeshSimplifier	static class	MeshUtils.cs	431	14	1	0			Mesh; Vector3; Ve Vector2; BlendSha BlendShapeFrame
IOUtils	UnityMeshSimplifier	static class	IOUtils.cs	93	2	0	0			
SimplificationOptions	UnityMeshSimplifier	struct	SimplificationOptions.cs	86	0	11	0			
MeshDecimatorUtility	MeshDecimator.Unity	static class	MeshDecimatorUtility.cs	876	28	0	0			Logging; ConsoleL Vector3d; Vector2; BoneWeight; Mesh DecimationAlgorit MeshDecimation;
LODSettings	MeshDecimator.Unity	struct	LODGenerator.cs	127	4	9	0			
LODGenerator	MeshDecimator.Unity	static class	LODGenerator.cs	368	9	1	0			Mesh; Decimation MeshDecimatorUt Vector3
DecimatedObject	MeshDecimator.Unity	class	DecimatedObject.cs	67	3	2	2	MonoBehaviour		LODSettings; LOD
Vector3	MeshDecimator.Math	struct	Vector3.cs	459	19	5	3		IEquatable	Vector3d; Vector3
Vector2i	MeshDecimator.Math	struct	Vector2i.cs	313	11	3	2		IEquatable	Vector2; Vector2d
Vector2d	MeshDecimator.Math	struct	Vector2d.cs	390	15	4	3		IEquatable	Vector2; Vector2i
Vector2	MeshDecimator.Math	struct	Vector2.cs	390	15	4	3		IEquatable	Vector2d; Vector2
ShowExample		class	ShowExample.cs	35	1	8	0	MonoBehaviour		Vector3
Triangle	UnityMeshSimplifier.Internal	struct	Triangle.cs	132	7	15	0		IEquatable	Vector3d
Ref	UnityMeshSimplifier.Internal	struct	Ref.cs	12	1	2	0			
BorderVertex	UnityMeshSimplifier.Internal	struct	BorderVertex.cs	12	1	2	0			
BorderVertexComparer	UnityMeshSimplifier.Internal	class	BorderVertex.cs	10	1	1	0		IComparer	BorderVertex
BlendShapeFrameContainer	UnityMeshSimplifier.Internal	class	BlendShapeFrameContainer.cs	46	5	4	0			Vector3; BlendSha ResizableArray
UnityLogger	MeshDecimator.Unity.Loggers	class	UnityLogger.cs	29	3	0	0		ILogger	
BlendShapeContainer	UnityMeshSimplifier.Internal	class	BlendShapeContainer.cs	51	5	2	0			BlendShapeFrame BlendShape; Vect BlendShapeFrame
Vector3d	UnityMeshSimplifier	struct	Vector3d.cs	469	18	5	3		IEquatable	Vector3; MathHelp
SymmetricMatrix	UnityMeshSimplifier	struct	SymmetricMatrix.cs	280	8	10	0			
MathHelper	UnityMeshSimplifier	static class	MathHelper.cs	81	3	6	0			Vector3d
SerializedPropertyExtensions	UnityMeshSimplifier.Editor	static class	SerializedPropertyExtensions.cs	18	1	0	0			
LODGeneratorHelperEditor	UnityMeshSimplifier.Editor	class	LODGeneratorHelperEditor.cs	657	19	40	0	Editor		LODGeneratorHel LODGenerator
LODGeneratorHelper	UnityMeshSimplifier	class	LODGeneratorHelper.cs	138	1	7	7	MonoBehaviour		SimplificationOpti
UVChannels	MeshDecimator.Collections	class	UVChannels.cs	70	2	2	1			Mesh; ResizableAr
ResizableArray	MeshDecimator.Collections	class	ResizableArray.cs	144	7	3	2			
ConsoleLogger	MeshDecimator.Loggers	class	ConsoleLogger.cs	29	3	0	0		ILogger	
Vector4i	MeshDecimator.Math	struct	Vector4i.cs	353	11	5	2		IEquatable	Vector4; Vector4d
Vector3d	MeshDecimator.Math	struct	Vector3d.cs	446	18	5	3		IEquatable	Vector3; Vector3i;
ValidateSimplificationOptionsException	UnityMeshSimplifier	class	ValidateSimplificationOptionsException.cs	43	2	1	2	Exception		
Vertex	UnityMeshSimplifier.Internal	struct	Vertex.cs	45	4	8	0		IEquatable	Vector3d; Symmet
UVChannels	UnityMeshSimplifier.Internal	class	UVChannels.cs	61	2	3	1			MeshUtils; Resizab
Vector2	MeshDecimator.Math	struct	Vector2.cs	390	15	4	3		IEquatable	Vector2d; Vector2
SymmetricMatrix	MeshDecimator.Math	struct	SymmetricMatrix.cs	269	8	10	0			
MathHelper	MeshDecimator.Math	static class	MathHelper.cs	252	18	6	0			Vector3; Vector3d
Program	MeshDecimatorTool	class	Program.cs	111	2	0	0			MathHelper; ObjM MeshDecimation;
ObjMesh	MeshDecimatorTool	class	ObjMesh.cs	853	12	9	9			FaceIndex; Vector3
FaceIndex	MeshDecimatorTool	struct	ObjMesh.cs	40	5	4	0		IEquatable	
DecimatedObjectEditor	MeshDecimator.UnityEditor	class	DecimatedObjectEditor.cs	174	4	5	1	Editor		DecimatedObject
BoneWeight	MeshDecimator	struct	BoneWeight.cs	214	8	8	0		IEquatable	Vector4

ClassName	Namespace	Kind	File	Lines	Methods	Fields	Properties	BaseClass	Interfaces	Uses
MeshData	ConvertidorGeometrias	class	Program.cs	14	0	12	0			Vector3
PipelineStats	ConvertidorGeometrias	class	Program.cs	19	0	19	0			
PiezaRota	ConvertidorGeometrias	class	Program.cs	7	0	4	0			
Program	ConvertidorGeometrias	class	Program.cs	1206	27	10	0			MeshData; Pipelin Vector3; Vector3d; FastQuadricMeshS MeshDecimation;
FastQuadricMeshSimplification	MeshDecimator.Algorithms	class	FastQuadricMeshSimplification.cs	1490	17	21	6	DecimationAlgorithm		Vector3d; Symmet BorderVertex; Bor Triangle; Vertex; R Vector2; BoneWei MathHelper; Mesh UVChannels
Triangle	MeshDecimator.Algorithms	struct	FastQuadricMeshSimplification.cs	101	4	14	0			Vector3d
Vertex	MeshDecimator.Algorithms	struct	FastQuadricMeshSimplification.cs	21	1	7	0			Vector3d; Symmet
Ref	MeshDecimator.Algorithms	struct	FastQuadricMeshSimplification.cs	11	1	2	0			
BorderVertex	MeshDecimator.Algorithms	struct	FastQuadricMeshSimplification.cs	11	1	2	0			
BorderVertexComparer	MeshDecimator.Algorithms	class	FastQuadricMeshSimplification.cs	9	1	1	0		IComparer	BorderVertex
Vector4d	MeshDecimator.Math	struct	Vector4d.cs	432	15	6	3		IEquatable	Vector4; Vector4i
Vector4	MeshDecimator.Math	struct	Vector4.cs	432	15	6	3		IEquatable	Vector4d; Vector4
Vector3i	MeshDecimator.Math	struct	Vector3i.cs	333	11	4	2		IEquatable	Vector3; Vector3d
Vector3d	MeshDecimator.Math	struct	Vector3d.cs	446	18	5	3		IEquatable	Vector3; Vector3i;
Vector4i	MeshDecimator.Math	struct	Vector4i.cs	353	11	5	2		IEquatable	Vector4; Vector4d
Algorithm	MeshDecimator	enum	MeshDecimation.cs	11	0	2	0			
MeshDecimation	MeshDecimator	static class	MeshDecimation.cs	128	7	0	0			DecimationAlgorit FastQuadricMeshS
Mesh	MeshDecimator	class	Mesh.cs	919	23	11	13			Vector3d; Vector3; BoneWeight; Mat
ILogger	MeshDecimator	interface	Logging.cs	20	3	0	0			
Logging	MeshDecimator	static class	Logging.cs	116	7	2	1			ILogger; ConsoleL
BoneWeight	MeshDecimator	struct	BoneWeight.cs	214	8	8	0		IEquatable	Vector4
MeshSimplifier	UnityMeshSimplifier	class	MeshSimplifier.cs	2265	45	25	22			MeshUtils; Simplif Triangle; Vertex; R Vector2; BoneWei BlendShapeConta SymmetricMatrix; MathHelper; Bord BorderVertexCom ValidateSimplificat ResizableArray; UV
BlendShape	UnityMeshSimplifier	struct	BlendShape.cs	24	1	2	0			BlendShapeFrame
BlendShapeFrame	UnityMeshSimplifier	struct	BlendShape.cs	36	1	4	0			Vector3
MeshUtilsTest	UnityMeshSimplifier.Editor.Tests	class	MeshUtilsTest.cs	507	8	0	0			Mesh; Vector3; Ble BlendShapeFrame Vector2; BoneWei
ExportarGeometria		static class	ExportarGeometria.cs	172	4	2	0			Mesh
FastQuadricMeshSimplification	MeshDecimator.Algorithms	class	FastQuadricMeshSimplification.cs	1490	17	21	6	DecimationAlgorithm		Vector3d; Symmet BorderVertex; Bor Triangle; Vertex; R Vector2; BoneWei MathHelper; Mesh UVChannels
Triangle	MeshDecimator.Algorithms	struct	FastQuadricMeshSimplification.cs	101	4	14	0			Vector3d
Vertex	MeshDecimator.Algorithms	struct	FastQuadricMeshSimplification.cs	21	1	7	0			Vector3d; Symmet
Ref	MeshDecimator.Algorithms	struct	FastQuadricMeshSimplification.cs	11	1	2	0			
BorderVertex	MeshDecimator.Algorithms	struct	FastQuadricMeshSimplification.cs	11	1	2	0			
BorderVertexComparer	MeshDecimator.Algorithms	class	FastQuadricMeshSimplification.cs	9	1	1	0		IComparer	BorderVertex
DecimationAlgorithm	MeshDecimator.Algorithms	abstract class	DecimationAlgorithm.cs	129	5	4	5			MathHelper; Mesh
Vector3	MeshDecimator.Math	struct	Vector3.cs	459	19	5	3		IEquatable	Vector3d; Vector3
Vector2i	MeshDecimator.Math	struct	Vector2i.cs	313	11	3	2		IEquatable	Vector2; Vector2d
Vector2d	MeshDecimator.Math	struct	Vector2d.cs	390	15	4	3		IEquatable	Vector2; Vector2i
Vector4d	MeshDecimator.Math	struct	Vector4d.cs	432	15	6	3		IEquatable	Vector4; Vector4i
Vector4	MeshDecimator.Math	struct	Vector4.cs	432	15	6	3		IEquatable	Vector4d; Vector4
Vector3i	MeshDecimator.Math	struct	Vector3i.cs	333	11	4	2		IEquatable	Vector3; Vector3d
MathHelper	MeshDecimator.Math	static class	MathHelper.cs	252	18	6	0			Vector3; Vector3d
Algorithm	MeshDecimator	enum	MeshDecimation.cs	11	0	2	0			
MeshDecimation	MeshDecimator	static class	MeshDecimation.cs	128	7	0	0			DecimationAlgorit FastQuadricMeshS
Mesh	MeshDecimator	class	Mesh.cs	919	23	11	13			Vector3d; Vector3; BoneWeight; Mat
MeshCombiner	UnityMeshSimplifier	static class	MeshCombiner.cs	444	12	0	0			Mesh; Vector3; Ve MeshUtils
LODLevel	UnityMeshSimplifier	struct	LODLevel.cs	210	3	13	13			

ClassName	Namespace	Kind	File	Lines	Methods	Fields	Properties	BaseClass	Interfaces	Uses
LODGenerator	UnityMeshSimplifier	static class	LODGenerator.cs	787	23	4	0			Mesh; LODGenera SimplificationOpti MeshSimplifier; Re MeshCombiner; V LODBackupComp
RendererInfo	UnityMeshSimplifier	struct	LODGenerator.cs	11	0	8	0			Mesh

Relaciones (relations.csv)

From	RelationType	To
Logging	usa	ILogger
Logging	usa	ConsoleLogger
DecimationAlgorithm	usa	MathHelper
DecimationAlgorithm	usa	Mesh
UVChannels	usa	Mesh
UVChannels	usa	ResizableArray
ConsoleLogger	implementa	ILogger
LODBackupComponent	hereda	MonoBehaviour
MeshUtils	usa	Mesh
MeshUtils	usa	Vector3
MeshUtils	usa	Vector4
MeshUtils	usa	BoneWeight
MeshUtils	usa	Vector2
MeshUtils	usa	BlendShape
MeshUtils	usa	BlendShapeFrame
MeshDecimatorUtility	usa	Logging
MeshDecimatorUtility	usa	ConsoleLogger
MeshDecimatorUtility	usa	UnityLogger
MeshDecimatorUtility	usa	Vector3d
MeshDecimatorUtility	usa	Vector2
MeshDecimatorUtility	usa	Vector3
MeshDecimatorUtility	usa	Vector4
MeshDecimatorUtility	usa	BoneWeight
MeshDecimatorUtility	usa	Mesh
MeshDecimatorUtility	usa	DecimationAlgorithm
MeshDecimatorUtility	usa	MeshDecimation
MeshDecimatorUtility	usa	Algorithm
LODGenerator	usa	Mesh
LODGenerator	usa	DecimationAlgorithm
LODGenerator	usa	MeshDecimatorUtility
LODGenerator	usa	LODSettings
LODGenerator	usa	Vector3
DecimatedObject	hereda	MonoBehaviour
DecimatedObject	usa	LODSettings
DecimatedObject	usa	LODGenerator
Vector3	implementa	IEquatable
Vector3	usa	Vector3d
Vector3	usa	Vector3i
Vector3	usa	MathHelper
Vector2i	implementa	IEquatable
Vector2i	usa	Vector2
Vector2i	usa	Vector2d
Vector2d	implementa	IEquatable
Vector2d	usa	Vector2
Vector2d	usa	Vector2i
Vector2	implementa	IEquatable
Vector2	usa	Vector2d
Vector2	usa	Vector2i
ShowExample	hereda	MonoBehaviour
ShowExample	usa	Vector3
Triangle	implementa	IEquatable
Triangle	usa	Vector3d
BorderVertexComparer	implementa	IComparer
BorderVertexComparer	usa	BorderVertex
BlendShapeFrameContainer	usa	Vector3
BlendShapeFrameContainer	usa	BlendShapeFrame
BlendShapeFrameContainer	usa	ResizableArray

From	RelationType	To
UnityLogger	implementa	ILogger
BlendShapeContainer	usa	BlendShapeFrameContainer
BlendShapeContainer	usa	BlendShape
BlendShapeContainer	usa	Vector3
BlendShapeContainer	usa	BlendShapeFrame
Vector3d	implementa	IEquatable
Vector3d	usa	Vector3
Vector3d	usa	MathHelper
MathHelper	usa	Vector3d
LODGeneratorHelperEditor	hereda	Editor
LODGeneratorHelperEditor	usa	LODGeneratorHelper
LODGeneratorHelperEditor	usa	IOUtils
LODGeneratorHelperEditor	usa	LODGenerator
LODGeneratorHelper	hereda	MonoBehaviour
LODGeneratorHelper	usa	SimplificationOptions
LODGeneratorHelper	usa	LODLevel
UVChannels	usa	Mesh
UVChannels	usa	ResizableArray
ConsoleLogger	implementa	ILogger
Vector4i	implementa	IEquatable
Vector4i	usa	Vector4
Vector4i	usa	Vector4d
Vector3d	implementa	IEquatable
Vector3d	usa	Vector3
Vector3d	usa	Vector3i
Vector3d	usa	MathHelper
ValidateSimplificationOptionsException	hereda	Exception
Vertex	implementa	IEquatable
Vertex	usa	Vector3d
Vertex	usa	SymmetricMatrix
UVChannels	usa	MeshUtils
UVChannels	usa	ResizableArray
Vector2	implementa	IEquatable
Vector2	usa	Vector2d
Vector2	usa	Vector2i
MathHelper	usa	Vector3
MathHelper	usa	Vector3d
Program	usa	MathHelper
Program	usa	ObjMesh
Program	usa	Mesh
Program	usa	MeshDecimation
Program	usa	Algorithm
ObjMesh	usa	FaceIndex
ObjMesh	usa	Vector3d
ObjMesh	usa	Vector3
ObjMesh	usa	Vector2
FaceIndex	implementa	IEquatable
DecimatedObjectEditor	hereda	Editor
DecimatedObjectEditor	usa	DecimatedObject
BoneWeight	implementa	IEquatable
BoneWeight	usa	Vector4
MeshData	usa	Vector3
Program	usa	MeshData
Program	usa	PipelineStats
Program	usa	PiezaRota
Program	usa	Vector3
Program	usa	Vector3d
Program	usa	Mesh
Program	usa	FastQuadricMeshSimplification
Program	usa	MeshDecimation
Program	usa	Vector4
FastQuadricMeshSimplification	hereda	DecimationAlgorithm
FastQuadricMeshSimplification	usa	Vector3d
FastQuadricMeshSimplification	usa	SymmetricMatrix
FastQuadricMeshSimplification	usa	BorderVertex

From	RelationType	To
FastQuadricMeshSimplification	usa	BorderVertexComparer
FastQuadricMeshSimplification	usa	Triangle
FastQuadricMeshSimplification	usa	Vertex
FastQuadricMeshSimplification	usa	Ref
FastQuadricMeshSimplification	usa	Vector3
FastQuadricMeshSimplification	usa	Vector4
FastQuadricMeshSimplification	usa	Vector2
FastQuadricMeshSimplification	usa	BoneWeight
FastQuadricMeshSimplification	usa	Logging
FastQuadricMeshSimplification	usa	MathHelper
FastQuadricMeshSimplification	usa	Mesh
FastQuadricMeshSimplification	usa	ResizableArray
FastQuadricMeshSimplification	usa	UVChannels
Triangle	usa	Vector3d
Vertex	usa	Vector3d
Vertex	usa	SymmetricMatrix
BorderVertexComparer	implementa	IComparer
BorderVertexComparer	usa	BorderVertex
Vector4d	implementa	IEquatable
Vector4d	usa	Vector4
Vector4d	usa	Vector4i
Vector4	implementa	IEquatable
Vector4	usa	Vector4d
Vector4	usa	Vector4i
Vector3i	implementa	IEquatable
Vector3i	usa	Vector3
Vector3i	usa	Vector3d
Vector3d	implementa	IEquatable
Vector3d	usa	Vector3
Vector3d	usa	Vector3i
Vector3d	usa	MathHelper
Vector4i	implementa	IEquatable
Vector4i	usa	Vector4
Vector4i	usa	Vector4d
MeshDecimation	usa	DecimationAlgorithm
MeshDecimation	usa	Algorithm
MeshDecimation	usa	FastQuadricMeshSimplification
MeshDecimation	usa	Mesh
Mesh	usa	Vector3d
Mesh	usa	Vector3
Mesh	usa	Vector4
Mesh	usa	Vector2
Mesh	usa	BoneWeight
Mesh	usa	MathHelper
Logging	usa	ILogger
Logging	usa	ConsoleLogger
BoneWeight	implementa	IEquatable
BoneWeight	usa	Vector4
MeshSimplifier	usa	MeshUtils
MeshSimplifier	usa	SimplificationOptions
MeshSimplifier	usa	Triangle
MeshSimplifier	usa	Vertex
MeshSimplifier	usa	Ref
MeshSimplifier	usa	Vector3
MeshSimplifier	usa	Vector4
MeshSimplifier	usa	Vector2
MeshSimplifier	usa	BoneWeight
MeshSimplifier	usa	BlendShapeContainer
MeshSimplifier	usa	Mesh
MeshSimplifier	usa	SymmetricMatrix
MeshSimplifier	usa	Vector3d
MeshSimplifier	usa	MathHelper
MeshSimplifier	usa	BorderVertex
MeshSimplifier	usa	BorderVertexComparer
MeshSimplifier	usa	BlendShape

From	RelationType	To
MeshSimplifier	usa	ValidateSimplificationOptionsException
MeshSimplifier	usa	ResizableArray
MeshSimplifier	usa	UVChannels
BlendShape	usa	BlendShapeFrame
BlendShapeFrame	usa	Vector3
MeshUtilsTest	usa	Mesh
MeshUtilsTest	usa	Vector3
MeshUtilsTest	usa	BlendShape
MeshUtilsTest	usa	BlendShapeFrame
MeshUtilsTest	usa	MeshUtils
MeshUtilsTest	usa	Vector4
MeshUtilsTest	usa	Vector2
MeshUtilsTest	usa	BoneWeight
ExportarGeometria	usa	Mesh
FastQuadricMeshSimplification	hereda	DecimationAlgorithm
FastQuadricMeshSimplification	usa	Vector3d
FastQuadricMeshSimplification	usa	SymmetricMatrix
FastQuadricMeshSimplification	usa	BorderVertex
FastQuadricMeshSimplification	usa	BorderVertexComparer
FastQuadricMeshSimplification	usa	Triangle
FastQuadricMeshSimplification	usa	Vertex
FastQuadricMeshSimplification	usa	Ref
FastQuadricMeshSimplification	usa	Vector3
FastQuadricMeshSimplification	usa	Vector4
FastQuadricMeshSimplification	usa	Vector2
FastQuadricMeshSimplification	usa	BoneWeight
FastQuadricMeshSimplification	usa	Logging
FastQuadricMeshSimplification	usa	MathHelper
FastQuadricMeshSimplification	usa	Mesh
FastQuadricMeshSimplification	usa	ResizableArray
FastQuadricMeshSimplification	usa	UVChannels
Triangle	usa	Vector3d
Vertex	usa	Vector3d
Vertex	usa	SymmetricMatrix
BorderVertexComparer	implementa	IComparer
BorderVertexComparer	usa	BorderVertex
DecimationAlgorithm	usa	MathHelper
DecimationAlgorithm	usa	Mesh
Vector3	implementa	IEquatable
Vector3	usa	Vector3d
Vector3	usa	Vector3i
Vector3	usa	MathHelper
Vector2i	implementa	IEquatable
Vector2i	usa	Vector2
Vector2i	usa	Vector2d
Vector2d	implementa	IEquatable
Vector2d	usa	Vector2
Vector2d	usa	Vector2i
Vector4d	implementa	IEquatable
Vector4d	usa	Vector4
Vector4d	usa	Vector4i
Vector4	implementa	IEquatable
Vector4	usa	Vector4d
Vector4	usa	Vector4i
Vector3i	implementa	IEquatable
Vector3i	usa	Vector3
Vector3i	usa	Vector3d
MathHelper	usa	Vector3
MathHelper	usa	Vector3d
MeshDecimation	usa	DecimationAlgorithm
MeshDecimation	usa	Algorithm
MeshDecimation	usa	FastQuadricMeshSimplification
MeshDecimation	usa	Mesh
Mesh	usa	Vector3d
Mesh	usa	Vector3

From	RelationType	To
Mesh	usa	Vector4
Mesh	usa	Vector2
Mesh	usa	BoneWeight
Mesh	usa	MathHelper
MeshCombiner	usa	Mesh
MeshCombiner	usa	Vector3
MeshCombiner	usa	Vector4
MeshCombiner	usa	BoneWeight
MeshCombiner	usa	MeshUtils
LODGenerator	usa	Mesh
LODGenerator	usa	LODGeneratorHelper
LODGenerator	usa	SimplificationOptions
LODGenerator	usa	LODLevel
LODGenerator	usa	MeshSimplifier
LODGenerator	usa	RendererInfo
LODGenerator	usa	MeshCombiner
LODGenerator	usa	Vector3
LODGenerator	usa	LODBackupComponent
RendererInfo	usa	Mesh

⚙ Métodos (methods.csv)

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
ILogger	LogVerbose	void	public	False	False	string text
ILogger	LogWarning	void	public	False	False	string text
ILogger	LogError	void	public	False	False	string text
Logging	Logging	«ctor»	private	True	False	
Logging	LogVerbose	void	public	True	False	string text
Logging	LogVerbose	void	public	True	False	string format; params object[] args
Logging	LogWarning	void	public	True	False	string text
Logging	LogWarning	void	public	True	False	string format; params object[] args
Logging	LogError	void	public	True	False	string text
Logging	LogError	void	public	True	False	string format; params object[] args
DecimationAlgorithm	ReportStatus	void	protected	False	False	int iteration; int originalTris; int currentTris; int targetTris
DecimationAlgorithm	Initialize	void	public	False	False	Mesh mesh
DecimationAlgorithm	DecimateMesh	void	public	False	False	int targetTrisCount
DecimationAlgorithm	DecimateMeshLossless	void	public	False	False	
DecimationAlgorithm	ToMesh	Mesh	public	False	False	
UVChannels	UVChannels	«ctor»	public	False	False	
UVChannels	Resize	void	public	False	False	int capacity; bool trimExess = false
ResizableArray	ResizableArray	«ctor»	public	False	False	int capacity
ResizableArray	ResizableArray	«ctor»	public	False	False	int capacity; int length
ResizableArray	IncreaseCapacity	void	private	False	False	int capacity
ResizableArray	Clear	void	public	False	False	
ResizableArray	Resize	void	public	False	False	int length; bool trimExess = false
ResizableArray	TrimExcess	void	public	False	False	
ResizableArray	Add	void	public	False	False	T item
ConsoleLogger	LogVerbose	void	public	False	False	string text
ConsoleLogger	LogWarning	void	public	False	False	string text
ConsoleLogger	LogError	void	public	False	False	string text
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double c
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double m0; double m1; double m2; double m3; double m4; double m5; double m6; double m7; double m8; double m9
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double a; double b; double c; double d
SymmetricMatrix	Determinant1	double	internal	False	False	
SymmetricMatrix	Determinant2	double	internal	False	False	
SymmetricMatrix	Determinant3	double	internal	False	False	
SymmetricMatrix	Determinant4	double	internal	False	False	
SymmetricMatrix	Determinant	double	public	False	False	int a11; int a12; int a13; int a21; int a22; int a23; int a31; int a32; int a33
ResizableArray	ResizableArray	«ctor»	public	False	False	int capacity
ResizableArray	ResizableArray	«ctor»	public	False	False	int capacity; int length
ResizableArray	ResizableArray	«ctor»	public	False	False	T[] initialArray
ResizableArray	IncreaseCapacity	void	private	False	False	int capacity
ResizableArray	Clear	void	public	False	False	
ResizableArray	Resize	void	public	False	False	int length; bool trimExess = false; bool clearMemory = false
ResizableArray	TrimExcess	void	public	False	False	
ResizableArray	Add	void	public	False	False	T item
ResizableArray	ToArray	T[]	public	False	False	
MeshUtils	CreateMesh	Mesh	public	True	False	Vector3[] vertices; int[][] indices; Vector3[] normals; Vector4[] tangents; Color[] colors; BoneWeight[] boneWeights; List<Vector2>[] uvs; Matrix4x4[] bindposes BlendShape[] blendShapes
MeshUtils	CreateMesh	Mesh	public	True	False	Vector3[] vertices; int[][] indices; Vector3[] normals; Vector4[] tangents; Color[] colors; BoneWeight[] boneWeights; List<Vector4>[] uvs; Matrix4x4[] bindposes BlendShape[] blendShapes
MeshUtils	CreateMesh	Mesh	public	True	False	Vector3[] vertices; int[][] indices; Vector3[] normals; Vector4[] tangents; Color[] colors; BoneWeight[] boneWeights; List<Vector2>[] uvs2D; List<Vector3>[] uvs3D; List<Vector4>[] uvs4D; Matrix4x4[] bindposes; BlendShape[] blendShapes
MeshUtils	GetMeshBlendShapes	BlendShape[]	public	True	False	Mesh mesh
MeshUtils	ApplyMeshBlendShapes	void	public	True	False	Mesh mesh; BlendShape[] blendShapes
MeshUtils	GetMeshUVs	IList<Vector4>[]	public	True	False	Mesh mesh
MeshUtils	GetMeshUVs2D	IList<Vector2>	public	True	False	Mesh mesh; int channel
MeshUtils	GetMeshUVs3D	IList<Vector3>	public	True	False	Mesh mesh; int channel
MeshUtils	GetMeshUVs	IList<Vector4>	public	True	False	Mesh mesh; int channel
MeshUtils	GetUsedUVComponents	int	public	True	False	IList<Vector4> uvs
MeshUtils	ConvertUVsTo2D	Vector2[]	public	True	False	IList<Vector4> uvs
MeshUtils	ConvertUVsTo3D	Vector3[]	public	True	False	IList<Vector4> uvs
MeshUtils	GetSubMeshIndexMinMax	Vector2Int[]	public	True	False	int[][] indices; out IndexFormat indexFormat

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
MeshUtils	GetIndexMinMax	void	private	True	False	int[] indices; out int minIndex; out int maxIndex
IOUtils	MakeSafeRelativePath	string	internal	True	False	string path
IOUtils	MakeSafeFileName	string	internal	True	False	string name
MeshDecimatorUtility	MeshDecimatorUtility	«ctor»	private	True	False	
MeshDecimatorUtility	ToSimplifyVertices	Vector3d[]	private	True	False	UVector3[] vertices
MeshDecimatorUtility	ToSimplifyVec	Vector2[]	private	True	False	UVector2[] vectors
MeshDecimatorUtility	ToSimplifyVec	Vector3[]	private	True	False	UVector3[] vectors
MeshDecimatorUtility	ToSimplifyVec	Vector4[]	private	True	False	UVector4[] vectors
MeshDecimatorUtility	ToSimplifyVec	Vector4[]	private	True	False	UColor[] colors
MeshDecimatorUtility	ToSimplifyBoneWeights	BoneWeight[]	private	True	False	UBoneWeight[] boneWeights
MeshDecimatorUtility	FromSimplifyVertices	UVector3[]	private	True	False	Vector3d[] vertices
MeshDecimatorUtility	FromSimplifyVec	UVector2[]	private	True	False	Vector2[] vectors
MeshDecimatorUtility	FromSimplifyVec	UVector3[]	private	True	False	Vector3[] vectors
MeshDecimatorUtility	FromSimplifyVec	UVector4[]	private	True	False	Vector4[] vectors
MeshDecimatorUtility	FromSimplifyColor	UColor[]	private	True	False	Vector4[] vectors
MeshDecimatorUtility	FromSimplifyBoneWeights	UBoneWeight[]	private	True	False	BoneWeight[] boneWeights
MeshDecimatorUtility	AddToList	void	private	True	False	List<Vector3d> list; UVector3[] arr; int previousVertexCount; int totalVertexCount
MeshDecimatorUtility	AddToList	void	private	True	False	ref List<Vector2> list; UVector2[] arr; int previousVertexCount; int currentVertexCount; int totalVertexCount; Vector2 defaultValue
MeshDecimatorUtility	AddToList	void	private	True	False	ref List<Vector3> list; UVector3[] arr; int previousVertexCount; int currentVertexCount; int totalVertexCount; Vector3 defaultValue
MeshDecimatorUtility	AddToList	void	private	True	False	ref List<Vector4> list; UVector4[] arr; int previousVertexCount; int currentVertexCount; int totalVertexCount; Vector4 defaultValue
MeshDecimatorUtility	AddToList	void	private	True	False	ref List<Vector4> list; UColor[] arr; int previousVertexCount; int currentVertexCount; int totalVertexCount
MeshDecimatorUtility	AddToList	void	private	True	False	ref List<BoneWeight> list; UBoneWeight[] arr; int previousVertexCount; int currentVertexCount; int totalVertexCount
MeshDecimatorUtility	TransformVertices	void	private	True	False	UVector3[] vertices; ref UMatrix transform
MeshDecimatorUtility	TransformVertices	void	private	True	False	UVector3[] vertices; UBoneWeight[] boneWeights; UMatrix[] oldBindposes; UMatrix[] newBindposes
MeshDecimatorUtility	ScaleMatrix	UMatrix	private	True	False	ref UMatrix m; float scale
MeshDecimatorUtility	MergeArrays	T[]	private	True	False	T[] arr1; T[] arr2
MeshDecimatorUtility	RemapBones	void	private	True	False	UBoneWeight[] boneWeights; int[] boneIndices
MeshDecimatorUtility	CreateMesh	UMesh	private	True	False	UMatrix[] bindposes; UVector3[] vertices; Mesh destMesh; bool recalculateNormals
MeshDecimatorUtility	DecimateMesh	UMesh	public	True	False	UMesh mesh; UMatrix transform; float quality; bool recalculateNormals; DecimationAlgorithm.StatusReportCallback statusCallback = null
MeshDecimatorUtility	DecimateMeshes	UMesh	public	True	False	UMesh[] meshes; UMatrix[] transforms; UMaterial[][] materials; float quality; bool recalculateNormals; out UMaterial[] resultMaterials; DecimationAlgorithm.StatusReportCallback statusCallback = null
MeshDecimatorUtility	DecimateMeshes	UMesh	public	True	False	UMesh[] meshes; UMatrix[] transforms; UMaterial[][] materials; UTransform[][] meshBones; float quality; bool recalculateNormals; out UMaterial[] resultMaterials; out UTransform[] mergedBones; DecimationAlgorithm.StatusReportCallback statusCallback = null
LODSettings	LODSettings	«ctor»	public	False	False	float quality
LODSettings	LODSettings	«ctor»	public	False	False	float quality; SkinQuality skinQuality
LODSettings	LODSettings	«ctor»	public	False	False	float quality; SkinQuality skinQuality; bool receiveShadows; ShadowCastingMode shadowCasting
LODSettings	LODSettings	«ctor»	public	False	False	float quality; SkinQuality skinQuality; bool receiveShadows; ShadowCastingMode shadowCasting; MotionVectorGenerationMode motionVectors; bool skinnedMotionVectors
LODGenerator	CombineRenderers	Renderer[]	private	True	False	MeshRenderer[] meshRenderers; SkinnedMeshRenderer[] skinnedRenderers
LODGenerator	GenerateStaticLOD	Mesh	private	True	False	Transform transform; MeshRenderer renderer; float quality; out Material[] materials; DecimationAlgorithm.StatusReportCallback statusCallback
LODGenerator	GenerateStaticLOD	Mesh	private	True	False	Transform transform; MeshRenderer[] renderers; float quality; out Material[] materials; DecimationAlgorithm.StatusReportCallback statusCallback
LODGenerator	GenerateSkinnedLOD	Mesh	private	True	False	Transform transform; SkinnedMeshRenderer renderer; float quality; out Material[] materials; out Transform[] mergedBones; DecimationAlgorithm.StatusReportCallback statusCallback
LODGenerator	GenerateSkinnedLOD	Mesh	private	True	False	Transform transform; SkinnedMeshRenderer[] renderers; float quality; out Material[] materials; out Transform[] mergedBones; DecimationAlgorithm.StatusReportCallback statusCallback
LODGenerator	FindRootBone	Transform	private	True	False	Transform transform; Transform[] transforms
LODGenerator	SetupLODRenderer	void	private	True	False	Renderer renderer; LODSettings settings
LODGenerator	GenerateLODs	void	public	True	False	GameObject gameObj; LODSettings[] levels; LODStatusReportCallback statusCallback = null
LODGenerator	DestroyLODs	void	public	True	False	GameObject gameObj
DecimatedObject	Reset	void	private	False	False	
DecimatedObject	GenerateLODs	void	public	False	False	LODStatusReportCallback statusCallback = null
DecimatedObject	ResetLODs	void	public	False	False	
Vector3	Vector3	«ctor»	public	False	False	float value
Vector3	Vector3	«ctor»	public	False	False	float x; float y; float z
Vector3	Vector3	«ctor»	public	False	False	Vector3d vector

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
Vector3	Set	void	public	False	False	float x; float y; float z
Vector3	Scale	void	public	False	False	ref Vector3 scale
Vector3	Normalize	void	public	False	False	
Vector3	Clamp	void	public	False	False	float min; float max
Vector3	GetHashCode	int	public	False	False	
Vector3	Equals	bool	public	False	False	object other
Vector3	Equals	bool	public	False	False	Vector3 other
Vector3	ToString	string	public	False	False	
Vector3	ToString	string	public	False	False	string format
Vector3	Dot	float	public	True	False	ref Vector3 lhs; ref Vector3 rhs
Vector3	Cross	void	public	True	False	ref Vector3 lhs; ref Vector3 rhs; out Vector3 result
Vector3	Angle	float	public	True	False	ref Vector3 from; ref Vector3 to
Vector3	Lerp	void	public	True	False	ref Vector3 a; ref Vector3 b; float t; out Vector3 result
Vector3	Scale	void	public	True	False	ref Vector3 a; ref Vector3 b; out Vector3 result
Vector3	Normalize	void	public	True	False	ref Vector3 value; out Vector3 result
Vector3	OrthoNormalize	void	public	True	False	ref Vector3 normal; ref Vector3 tangent
Vector2i	Vector2i	«ctor»	public	False	False	int value
Vector2i	Vector2i	«ctor»	public	False	False	int x; int y
Vector2i	Set	void	public	False	False	int x; int y
Vector2i	Scale	void	public	False	False	ref Vector2i scale
Vector2i	Clamp	void	public	False	False	int min; int max
Vector2i	GetHashCode	int	public	False	False	
Vector2i	Equals	bool	public	False	False	object other
Vector2i	Equals	bool	public	False	False	Vector2i other
Vector2i	ToString	string	public	False	False	
Vector2i	ToString	string	public	False	False	string format
Vector2i	Scale	void	public	True	False	ref Vector2i a; ref Vector2i b; out Vector2i result
Vector2d	Vector2d	«ctor»	public	False	False	double value
Vector2d	Vector2d	«ctor»	public	False	False	double x; double y
Vector2d	Set	void	public	False	False	double x; double y
Vector2d	Scale	void	public	False	False	ref Vector2d scale
Vector2d	Normalize	void	public	False	False	
Vector2d	Clamp	void	public	False	False	double min; double max
Vector2d	GetHashCode	int	public	False	False	
Vector2d	Equals	bool	public	False	False	object other
Vector2d	Equals	bool	public	False	False	Vector2d other
Vector2d	ToString	string	public	False	False	
Vector2d	ToString	string	public	False	False	string format
Vector2d	Dot	double	public	True	False	ref Vector2d lhs; ref Vector2d rhs
Vector2d	Lerp	void	public	True	False	ref Vector2d a; ref Vector2d b; double t; out Vector2d result
Vector2d	Scale	void	public	True	False	ref Vector2d a; ref Vector2d b; out Vector2d result
Vector2d	Normalize	void	public	True	False	ref Vector2d value; out Vector2d result
Vector2	Vector2	«ctor»	public	False	False	float value
Vector2	Vector2	«ctor»	public	False	False	float x; float y
Vector2	Set	void	public	False	False	float x; float y
Vector2	Scale	void	public	False	False	ref Vector2 scale
Vector2	Normalize	void	public	False	False	
Vector2	Clamp	void	public	False	False	float min; float max
Vector2	GetHashCode	int	public	False	False	
Vector2	Equals	bool	public	False	False	object other
Vector2	Equals	bool	public	False	False	Vector2 other
Vector2	ToString	string	public	False	False	
Vector2	ToString	string	public	False	False	string format
Vector2	Dot	float	public	True	False	ref Vector2 lhs; ref Vector2 rhs
Vector2	Lerp	void	public	True	False	ref Vector2 a; ref Vector2 b; float t; out Vector2 result
Vector2	Scale	void	public	True	False	ref Vector2 a; ref Vector2 b; out Vector2 result
Vector2	Normalize	void	public	True	False	ref Vector2 value; out Vector2 result
ShowExample	Update	void	private	False	False	
Triangle	Triangle	«ctor»	public	False	False	int index; int v0; int v1; int v2; int subMeshIndex
Triangle	GetAttributeIndices	void	public	False	False	int[] attributeIndices
Triangle	SetAttributeIndex	void	public	False	False	int index; int value
Triangle	GetErrors	void	public	False	False	double[] err
Triangle	GetHashCode	int	public	False	False	
Triangle	Equals	bool	public	False	False	object obj
Triangle	Equals	bool	public	False	False	Triangle other

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
Ref	Set	void	public	False	False	int tid; int tvertex
BorderVertex	BorderVertex	«ctor»	public	False	False	int index; int hash
BorderVertexComparer	Compare	int	public	False	False	BorderVertex x; BorderVertex y
BlendShapeFrameContainer	BlendShapeFrameContainer	«ctor»	public	False	False	BlendShapeFrame frame
BlendShapeFrameContainer	MoveVertexElement	void	public	False	False	int dst; int src
BlendShapeFrameContainer	InterpolateVertexAttributes	void	public	False	False	int dst; int i0; int i1; int i2; ref Vector3 barycentricCoord
BlendShapeFrameContainer	Resize	void	public	False	False	int length; bool trimExess = false
BlendShapeFrameContainer	ToBlendShapeFrame	BlendShapeFrame	public	False	False	
UnityLogger	LogVerbose	void	public	False	False	string text
UnityLogger	LogWarning	void	public	False	False	string text
UnityLogger	LogError	void	public	False	False	string text
BlendShapeContainer	BlendShapeContainer	«ctor»	public	False	False	BlendShape blendShape
BlendShapeContainer	MoveVertexElement	void	public	False	False	int dst; int src
BlendShapeContainer	InterpolateVertexAttributes	void	public	False	False	int dst; int i0; int i1; int i2; ref Vector3 barycentricCoord
BlendShapeContainer	Resize	void	public	False	False	int length; bool trimExess = false
BlendShapeContainer	ToBlendShape	BlendShape	public	False	False	
Vector3d	Vector3d	«ctor»	public	False	False	double value
Vector3d	Vector3d	«ctor»	public	False	False	double x; double y; double z
Vector3d	Vector3d	«ctor»	public	False	False	Vector3 vector
Vector3d	Set	void	public	False	False	double x; double y; double z
Vector3d	Scale	void	public	False	False	ref Vector3d scale
Vector3d	Normalize	void	public	False	False	
Vector3d	Clamp	void	public	False	False	double min; double max
Vector3d	GetHashCode	int	public	False	False	
Vector3d	Equals	bool	public	False	False	object obj
Vector3d	Equals	bool	public	False	False	Vector3d other
Vector3d	ToString	string	public	False	False	
Vector3d	ToString	string	public	False	False	string format
Vector3d	Dot	double	public	True	False	ref Vector3d lhs; ref Vector3d rhs
Vector3d	Cross	void	public	True	False	ref Vector3d lhs; ref Vector3d rhs; out Vector3d result
Vector3d	Angle	double	public	True	False	ref Vector3d from; ref Vector3d to
Vector3d	Lerp	void	public	True	False	ref Vector3d a; ref Vector3d b; double t; out Vector3d result
Vector3d	Scale	void	public	True	False	ref Vector3d a; ref Vector3d b; out Vector3d result
Vector3d	Normalize	void	public	True	False	ref Vector3d value; out Vector3d result
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double c
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double m0; double m1; double m2; double m3; double m4; double m5; double m6; double m7; double m8; double m9
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double a; double b; double c; double d
SymmetricMatrix	Determinant1	double	internal	False	False	
SymmetricMatrix	Determinant2	double	internal	False	False	
SymmetricMatrix	Determinant3	double	internal	False	False	
SymmetricMatrix	Determinant4	double	internal	False	False	
SymmetricMatrix	Determinant	double	public	False	False	int a11; int a12; int a13; int a21; int a22; int a23; int a31; int a32; int a33
MathHelper	Min	double	public	True	False	double val1; double val2; double val3
MathHelper	Clamp	double	public	True	False	double value; double min; double max
MathHelper	TriangleArea	double	public	True	False	ref Vector3d p0; ref Vector3d p1; ref Vector3d p2
SerializedPropertyExtensions	GetChildProperties	IEnumerable<SerializedProperty>	public	True	False	this SerializedProperty property
LODGeneratorHelperEditor	OnEnable	void	private	False	False	
LODGeneratorHelperEditor	OnInspectorGUI	void	public	False	False	
LODGeneratorHelperEditor	DrawGeneratedView	void	private	False	False	
LODGeneratorHelperEditor	DrawNotGeneratedView	void	private	False	False	
LODGeneratorHelperEditor	DrawSimplificationOptions	void	private	False	False	
LODGeneratorHelperEditor	DrawLevel	void	private	False	False	int index; SerializedProperty levelProperty; bool hasCrossFade
LODGeneratorHelperEditor	DrawRendererList	void	private	False	False	SerializedProperty renderersProperty; float availableWidth
LODGeneratorHelperEditor	DrawRendererButton	void	private	False	False	Rect position; SerializedProperty renderersProperty; int rendererIndex; Renderer renderer
LODGeneratorHelperEditor	HandleAddRenderer	void	private	False	False	Rect position; Rect listArea; SerializedProperty renderersProperty
LODGeneratorHelperEditor	AddRenderers	void	private	False	False	SerializedProperty renderersProperty; IEnumerable<Renderer> renderers; bool append
LODGeneratorHelperEditor	CreateLevel	void	private	False	False	
LODGeneratorHelperEditor	DeleteLevel	void	private	False	False	int index
LODGeneratorHelperEditor	GenerateLODs	void	private	False	False	
LODGeneratorHelperEditor	DestroyLODs	void	private	False	False	
LODGeneratorHelperEditor	VisibilitySettingsHaveChanged	bool	private	False	False	
LODGeneratorHelperEditor	CopyVisibilityChanges	void	private	False	False	
LODGeneratorHelperEditor	GetRenderers	Renderer[]	private	False	False	IEnumerable<GameObject> gameObjects; bool searchChildren

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
LODGeneratorHelperEditor	MarkSceneAsDirty	void	private	False	False	
LODGeneratorHelperEditor	DisplayError	void	private	True	False	string title; string message; string ok; Object context
LODGeneratorHelper	Reset	void	private	False	False	
UVChannels	UVChannels	«ctor»	public	False	False	
UVChannels	Resize	void	public	False	False	int capacity; bool trimExess = false
ResizableArray	ResizableArray	«ctor»	public	False	False	int capacity
ResizableArray	ResizableArray	«ctor»	public	False	False	int capacity; int length
ResizableArray	IncreaseCapacity	void	private	False	False	int capacity
ResizableArray	Clear	void	public	False	False	
ResizableArray	Resize	void	public	False	False	int length; bool trimExess = false
ResizableArray	TrimExcess	void	public	False	False	
ResizableArray	Add	void	public	False	False	T item
ConsoleLogger	LogVerbose	void	public	False	False	string text
ConsoleLogger	LogWarning	void	public	False	False	string text
ConsoleLogger	LogError	void	public	False	False	string text
Vector4i	Vector4i	«ctor»	public	False	False	int value
Vector4i	Vector4i	«ctor»	public	False	False	int x; int y; int z; int w
Vector4i	Set	void	public	False	False	int x; int y; int z; int w
Vector4i	Scale	void	public	False	False	ref Vector4i scale
Vector4i	Clamp	void	public	False	False	int min; int max
Vector4i	GetHashCode	int	public	False	False	
Vector4i	Equals	bool	public	False	False	object other
Vector4i	Equals	bool	public	False	False	Vector4i other
Vector4i	ToString	string	public	False	False	
Vector4i	ToString	string	public	False	False	string format
Vector4i	Scale	void	public	True	False	ref Vector4i a; ref Vector4i b; out Vector4i result
Vector3d	Vector3d	«ctor»	public	False	False	double value
Vector3d	Vector3d	«ctor»	public	False	False	double x; double y; double z
Vector3d	Vector3d	«ctor»	public	False	False	Vector3 vector
Vector3d	Set	void	public	False	False	double x; double y; double z
Vector3d	Scale	void	public	False	False	ref Vector3d scale
Vector3d	Normalize	void	public	False	False	
Vector3d	Clamp	void	public	False	False	double min; double max
Vector3d	GetHashCode	int	public	False	False	
Vector3d	Equals	bool	public	False	False	object other
Vector3d	Equals	bool	public	False	False	Vector3d other
Vector3d	ToString	string	public	False	False	
Vector3d	ToString	string	public	False	False	string format
Vector3d	Dot	double	public	True	False	ref Vector3d lhs; ref Vector3d rhs
Vector3d	Cross	void	public	True	False	ref Vector3d lhs; ref Vector3d rhs; out Vector3d result
Vector3d	Angle	double	public	True	False	ref Vector3d from; ref Vector3d to
Vector3d	Lerp	void	public	True	False	ref Vector3d a; ref Vector3d b; double t; out Vector3d result
Vector3d	Scale	void	public	True	False	ref Vector3d a; ref Vector3d b; out Vector3d result
Vector3d	Normalize	void	public	True	False	ref Vector3d value; out Vector3d result
ValidateSimplificationOptionsException	ValidateSimplificationOptionsException	«ctor»	public	False	False	string propertyName; string message
ValidateSimplificationOptionsException	ValidateSimplificationOptionsException	«ctor»	public	False	False	string propertyName; string message; Exception innerException
Vertex	Vertex	«ctor»	public	False	False	int index; Vector3d p
Vertex	GetHashCode	int	public	False	False	
Vertex	Equals	bool	public	False	False	object obj
Vertex	Equals	bool	public	False	False	Vertex other
UVChannels	UVChannels	«ctor»	public	False	False	
UVChannels	Resize	void	public	False	False	int capacity; bool trimExess = false
Vector2	Vector2	«ctor»	public	False	False	float value
Vector2	Vector2	«ctor»	public	False	False	float x; float y
Vector2	Set	void	public	False	False	float x; float y
Vector2	Scale	void	public	False	False	ref Vector2 scale
Vector2	Normalize	void	public	False	False	
Vector2	Clamp	void	public	False	False	float min; float max
Vector2	GetHashCode	int	public	False	False	
Vector2	Equals	bool	public	False	False	object other
Vector2	Equals	bool	public	False	False	Vector2 other
Vector2	ToString	string	public	False	False	
Vector2	ToString	string	public	False	False	string format
Vector2	Dot	float	public	True	False	ref Vector2 lhs; ref Vector2 rhs
Vector2	Lerp	void	public	True	False	ref Vector2 a; ref Vector2 b; float t; out Vector2 result

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
Vector2	Scale	void	public	True	False	ref Vector2 a; ref Vector2 b; out Vector2 result
Vector2	Normalize	void	public	True	False	ref Vector2 value; out Vector2 result
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double c
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double m0; double m1; double m2; double m3; double m4; double m5; double m6; double m7; double m8; double m9
SymmetricMatrix	SymmetricMatrix	«ctor»	public	False	False	double a; double b; double c; double d
SymmetricMatrix	Determinant1	double	internal	False	False	
SymmetricMatrix	Determinant2	double	internal	False	False	
SymmetricMatrix	Determinant3	double	internal	False	False	
SymmetricMatrix	Determinant4	double	internal	False	False	
SymmetricMatrix	Determinant	double	public	False	False	int a11; int a12; int a13; int a21; int a22; int a23; int a31; int a32; int a33
MathHelper	Min	int	public	True	False	int val1; int val2
MathHelper	Min	int	public	True	False	int val1; int val2; int val3
MathHelper	Min	float	public	True	False	float val1; float val2
MathHelper	Min	float	public	True	False	float val1; float val2; float val3
MathHelper	Min	double	public	True	False	double val1; double val2
MathHelper	Min	double	public	True	False	double val1; double val2; double val3
MathHelper	Max	int	public	True	False	int val1; int val2
MathHelper	Max	int	public	True	False	int val1; int val2; int val3
MathHelper	Max	float	public	True	False	float val1; float val2
MathHelper	Max	float	public	True	False	float val1; float val2; float val3
MathHelper	Max	double	public	True	False	double val1; double val2
MathHelper	Max	double	public	True	False	double val1; double val2; double val3
MathHelper	Clamp	float	public	True	False	float value; float min; float max
MathHelper	Clamp	double	public	True	False	double value; double min; double max
MathHelper	Clamp01	float	public	True	False	float value
MathHelper	Clamp01	double	public	True	False	double value
MathHelper	TriangleArea	float	public	True	False	ref Vector3 p0; ref Vector3 p1; ref Vector3 p2
MathHelper	TriangleArea	double	public	True	False	ref Vector3d p0; ref Vector3d p1; ref Vector3d p2
Program	Main	void	private	True	False	string[] args
Program	PrintUsage	void	private	True	False	
ObjMesh	ObjMesh	«ctor»	public	False	False	
ObjMesh	ObjMesh	«ctor»	public	False	False	Vector3d[] vertices; int[] indices
ObjMesh	ObjMesh	«ctor»	public	False	False	Vector3d[] vertices; int[][] indices
ObjMesh	ReadFile	void	public	False	False	string path
ObjMesh	WriteFile	void	public	False	False	string path
ObjMesh	WriteVertices	void	private	True	False	TextWriter writer; Vector3d[] vertices
ObjMesh	WriteNormals	void	private	True	False	TextWriter writer; Vector3[] normals
ObjMesh	WriteTextureCoords	void	private	True	False	TextWriter writer; Vector2[] texCoords2D; Vector3[] texCoords3D
ObjMesh	WriteSubMeshes	void	private	True	False	TextWriter writer; int[][] subMeshIndices; string[] subMeshMaterials; bool hasTexCoords; bool hasNormals
ObjMesh	WriteFaces	void	private	True	False	TextWriter writer; int[] indices; bool hasTexCoords; bool hasNormals
ObjMesh	ShiftIndex	int	private	True	False	int value; int count
ObjMesh	CountOccurrences	int	private	True	False	string text; char character
FaceIndex	FaceIndex	«ctor»	public	False	False	int vertexIndex; int texCoordIndex; int normalIndex
FaceIndex	GetHashCode	int	public	False	False	
FaceIndex	Equals	bool	public	False	False	object obj
FaceIndex	Equals	bool	public	False	False	FaceIndex other
FaceIndex	ToString	string	public	False	False	
DecimatedObjectEditor	OnEnable	void	private	False	False	
DecimatedObjectEditor	GenerateLODs	void	private	False	False	
DecimatedObjectEditor	ResetLODs	void	private	False	False	
DecimatedObjectEditor	OnInspectorGUI	void	public	False	False	
BoneWeight	BoneWeight	«ctor»	public	False	False	int boneIndex0; int boneIndex1; int boneIndex2; int boneIndex3; float boneWeight0; float boneWeight1; float boneWeight2; float boneWeight3
BoneWeight	MergeBoneWeight	void	private	False	False	int boneIndex; float weight
BoneWeight	Normalize	void	private	False	False	
BoneWeight	GetHashCode	int	public	False	False	
BoneWeight	Equals	bool	public	False	False	object obj
BoneWeight	Equals	bool	public	False	False	BoneWeight other
BoneWeight	ToString	string	public	False	False	
BoneWeight	Merge	void	public	True	False	ref BoneWeight a; ref BoneWeight b
Program	EsVidrioProtegido	bool	private	True	False	MeshData m
Program	Main	void	private	True	False	string[] args
Program	EstaBloqueado	bool	private	True	False	string path
Program	ProcesarArchivo	void	private	True	False	string filePath

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
Program	Log	void	private	True	False	string msg
Program	ConstruirReporte	string	private	True	False	PipelineStats s; List<PiezaRota> detectadas; List<PiezaRota> rotas; TimeSpan elapsed
Program	Pct	string	private	True	False	long now; long before
Program	ValidarPiezas	List<PiezaRota>	private	True	False	Dictionary<string, MeshData> originales; List<MeshData> finales
Program	RepararPiezas	void	private	True	False	List<PiezaRota> rotas; Dictionary<string, MeshData> originales; List<MeshData> finales; PipelineStats stats
Program	ClonarConNormales	MeshData	private	True	False	MeshData src
Program	BBoxStr	string	private	True	False	List<Vector3> verts
Program	OptimizeMeshes	List<MeshData>	private	True	False	List<MeshData> inputMeshes; PipelineStats stats; Dictionary<string, MeshData> weldedOriginals
Program	ComputeTarget	int	private	True	False	int originalTriangles
Program	TryDecimate	MeshData	private	True	False	MeshData source; int targetTriangles; PipelineStats stats
Program	TotalArea	double	private	True	False	MeshData mesh
Program	GetBounds	void	private	True	False	List<Vector3> verts; out Vector3 min; out Vector3 max
Program	WeldVertices	void	private	True	False	MeshData mesh
Program	RemoveDegenerateTriangles	long	private	True	False	MeshData mesh
Program	CompactVertices	void	private	True	False	MeshData mesh
Program	ComputeNormals	void	private	True	False	MeshData mesh
Program	LeerBinario	List<MeshData>	private	True	False	string path; PipelineStats stats
Program	ExportToObj	void	private	True	False	List<MeshData> meshes; string outputPath
Program	ExportToGlb	void	private	True	False	List<MeshData> meshes; string outputPath; PipelineStats stats
Program	GeometryHash	long	private	True	False	MeshData mesh
Program	EsCopiaTrasladada	bool	private	True	False	MeshData a; MeshData b; out Vector3 delta
Program	ExportToViewerBin	void	private	True	False	List<MeshData> meshes; string path; PipelineStats stats
Program	Snorm	sbyte	private	True	False	float f
FastQuadricMeshSimplification	FastQuadricMeshSimplification	«ctor»	public	False	False	
FastQuadricMeshSimplification	InitializeVertexAttribute	ResizableArray<T>	private	False	False	T[] attributeValues; string attributeName
FastQuadricMeshSimplification	VertexError	double	private	False	False	ref SymmetricMatrix q; double x; double y; double z
FastQuadricMeshSimplification	CalculateError	double	private	False	False	ref Vertex vert0; ref Vertex vert1; out Vector3d result; out int resultIndex
FastQuadricMeshSimplification	Flipped	bool	private	False	False	ref Vector3d p; int i0; int i1; ref Vertex v0; bool[] deleted
FastQuadricMeshSimplification	UpdateTriangles	void	private	False	False	int i0; int ia0; ref Vertex v; ResizableArray<bool> deleted; ref int deletedTriangles
FastQuadricMeshSimplification	MoveVertexAttributes	void	private	False	False	int i0; int i1
FastQuadricMeshSimplification	MergeVertexAttributes	void	private	False	False	int i0; int i1
FastQuadricMeshSimplification	AreUVsTheSame	bool	private	False	False	int channel; int indexA; int indexB
FastQuadricMeshSimplification	RemoveVertexPass	void	private	False	False	int startTrisCount; int targetTrisCount; double threshold; ResizableArray<bool> deleted0; ResizableArray<bool> deleted1; ref int deletedTris
FastQuadricMeshSimplification	UpdateMesh	void	private	False	False	int iteration
FastQuadricMeshSimplification	UpdateReferences	void	private	False	False	
FastQuadricMeshSimplification	CompactMesh	void	private	False	False	
FastQuadricMeshSimplification	Initialize	void	public	False	False	Mesh mesh
FastQuadricMeshSimplification	DecimateMesh	void	public	False	False	int targetTrisCount
FastQuadricMeshSimplification	DecimateMeshLossless	void	public	False	False	
FastQuadricMeshSimplification	ToMesh	Mesh	public	False	False	
Triangle	Triangle	«ctor»	public	False	False	int v0; int v1; int v2; int subMeshIndex
Triangle	GetAttributeIndices	void	public	False	False	int[] attributeIndices
Triangle	SetAttributeIndex	void	public	False	False	int index; int value
Triangle	GetErrors	void	public	False	False	double[] err
Vertex	Vertex	«ctor»	public	False	False	Vector3d p
Ref	Set	void	public	False	False	int tid; int tvertex
BorderVertex	BorderVertex	«ctor»	public	False	False	int index; int hash
BorderVertexComparer	Compare	int	public	False	False	BorderVertex x; BorderVertex y
Vector4d	Vector4d	«ctor»	public	False	False	double value
Vector4d	Vector4d	«ctor»	public	False	False	double x; double y; double z; double w
Vector4d	Set	void	public	False	False	double x; double y; double z; double w
Vector4d	Scale	void	public	False	False	ref Vector4d scale
Vector4d	Normalize	void	public	False	False	
Vector4d	Clamp	void	public	False	False	double min; double max
Vector4d	GetHashCode	int	public	False	False	
Vector4d	Equals	bool	public	False	False	object other
Vector4d	Equals	bool	public	False	False	Vector4d other
Vector4d	ToString	string	public	False	False	
Vector4d	ToString	string	public	False	False	string format
Vector4d	Dot	double	public	True	False	ref Vector4d lhs; ref Vector4d rhs
Vector4d	Lerp	void	public	True	False	ref Vector4d a; ref Vector4d b; double t; out Vector4d result
Vector4d	Scale	void	public	True	False	ref Vector4d a; ref Vector4d b; out Vector4d result

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
Vector4d	Normalize	void	public	True	False	ref Vector4d value; out Vector4d result
Vector4	Vector4	«ctor»	public	False	False	float value
Vector4	Vector4	«ctor»	public	False	False	float x; float y; float z; float w
Vector4	Set	void	public	False	False	float x; float y; float z; float w
Vector4	Scale	void	public	False	False	ref Vector4 scale
Vector4	Normalize	void	public	False	False	
Vector4	Clamp	void	public	False	False	float min; float max
Vector4	GetHashCode	int	public	False	False	
Vector4	Equals	bool	public	False	False	object other
Vector4	Equals	bool	public	False	False	Vector4 other
Vector4	ToString	string	public	False	False	
Vector4	ToString	string	public	False	False	string format
Vector4	Dot	float	public	True	False	ref Vector4 lhs; ref Vector4 rhs
Vector4	Lerp	void	public	True	False	ref Vector4 a; ref Vector4 b; float t; out Vector4 result
Vector4	Scale	void	public	True	False	ref Vector4 a; ref Vector4 b; out Vector4 result
Vector4	Normalize	void	public	True	False	ref Vector4 value; out Vector4 result
Vector3i	Vector3i	«ctor»	public	False	False	int value
Vector3i	Vector3i	«ctor»	public	False	False	int x; int y; int z
Vector3i	Set	void	public	False	False	int x; int y; int z
Vector3i	Scale	void	public	False	False	ref Vector3i scale
Vector3i	Clamp	void	public	False	False	int min; int max
Vector3i	GetHashCode	int	public	False	False	
Vector3i	Equals	bool	public	False	False	object other
Vector3i	Equals	bool	public	False	False	Vector3i other
Vector3i	ToString	string	public	False	False	
Vector3i	ToString	string	public	False	False	string format
Vector3i	Scale	void	public	True	False	ref Vector3i a; ref Vector3i b; out Vector3i result
Vector3d	Vector3d	«ctor»	public	False	False	double value
Vector3d	Vector3d	«ctor»	public	False	False	double x; double y; double z
Vector3d	Vector3d	«ctor»	public	False	False	Vector3 vector
Vector3d	Set	void	public	False	False	double x; double y; double z
Vector3d	Scale	void	public	False	False	ref Vector3d scale
Vector3d	Normalize	void	public	False	False	
Vector3d	Clamp	void	public	False	False	double min; double max
Vector3d	GetHashCode	int	public	False	False	
Vector3d	Equals	bool	public	False	False	object other
Vector3d	Equals	bool	public	False	False	Vector3d other
Vector3d	ToString	string	public	False	False	
Vector3d	ToString	string	public	False	False	string format
Vector3d	Dot	double	public	True	False	ref Vector3d lhs; ref Vector3d rhs
Vector3d	Cross	void	public	True	False	ref Vector3d lhs; ref Vector3d rhs; out Vector3d result
Vector3d	Angle	double	public	True	False	ref Vector3d from; ref Vector3d to
Vector3d	Lerp	void	public	True	False	ref Vector3d a; ref Vector3d b; double t; out Vector3d result
Vector3d	Scale	void	public	True	False	ref Vector3d a; ref Vector3d b; out Vector3d result
Vector3d	Normalize	void	public	True	False	ref Vector3d value; out Vector3d result
Vector4i	Vector4i	«ctor»	public	False	False	int value
Vector4i	Vector4i	«ctor»	public	False	False	int x; int y; int z; int w
Vector4i	Set	void	public	False	False	int x; int y; int z; int w
Vector4i	Scale	void	public	False	False	ref Vector4i scale
Vector4i	Clamp	void	public	False	False	int min; int max
Vector4i	GetHashCode	int	public	False	False	
Vector4i	Equals	bool	public	False	False	object other
Vector4i	Equals	bool	public	False	False	Vector4i other
Vector4i	ToString	string	public	False	False	
Vector4i	ToString	string	public	False	False	string format
Vector4i	Scale	void	public	True	False	ref Vector4i a; ref Vector4i b; out Vector4i result
MeshDecimation	CreateAlgorithm	DecimationAlgorithm	public	True	False	Algorithm algorithm
MeshDecimation	DecimateMesh	Mesh	public	True	False	Mesh mesh; int targetTriangleCount
MeshDecimation	DecimateMesh	Mesh	public	True	False	Algorithm algorithm; Mesh mesh; int targetTriangleCount
MeshDecimation	DecimateMesh	Mesh	public	True	False	DecimationAlgorithm algorithm; Mesh mesh; int targetTriangleCount
MeshDecimation	DecimateMeshLossless	Mesh	public	True	False	Mesh mesh
MeshDecimation	DecimateMeshLossless	Mesh	public	True	False	Algorithm algorithm; Mesh mesh
MeshDecimation	DecimateMeshLossless	Mesh	public	True	False	DecimationAlgorithm algorithm; Mesh mesh
Mesh	Mesh	«ctor»	public	False	False	Vector3d[] vertices; int[] indices
Mesh	Mesh	«ctor»	public	False	False	Vector3d[] vertices; int[][] indices

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
Mesh	ClearVertexAttributes	void	private	False	False	
Mesh	RecalculateNormals	void	public	False	False	
Mesh	RecalculateTangents	void	public	False	False	
Mesh	GetTriangleCount	int	public	False	False	int subMeshIndex
Mesh	GetIndices	int[]	public	False	False	int subMeshIndex
Mesh	GetSubMeshIndices	int[][]	public	False	False	
Mesh	SetIndices	void	public	False	False	int subMeshIndex; int[] indices
Mesh	GetUVDimension	int	public	False	False	int channel
Mesh	GetUVs2D	Vector2[]	public	False	False	int channel
Mesh	GetUVs3D	Vector3[]	public	False	False	int channel
Mesh	GetUVs4D	Vector4[]	public	False	False	int channel
Mesh	GetUVs	void	public	False	False	int channel; List<Vector2> uvs
Mesh	GetUVs	void	public	False	False	int channel; List<Vector3> uvs
Mesh	GetUVs	void	public	False	False	int channel; List<Vector4> uvs
Mesh	SetUVs	void	public	False	False	int channel; Vector2[] uvs
Mesh	SetUVs	void	public	False	False	int channel; Vector3[] uvs
Mesh	SetUVs	void	public	False	False	int channel; Vector4[] uvs
Mesh	SetUVs	void	public	False	False	int channel; List<Vector2> uvs
Mesh	SetUVs	void	public	False	False	int channel; List<Vector3> uvs
Mesh	SetUVs	void	public	False	False	int channel; List<Vector4> uvs
Mesh	ToString	string	public	False	False	
ILogger	LogVerbose	void	public	False	False	string text
ILogger	LogWarning	void	public	False	False	string text
ILogger	LogError	void	public	False	False	string text
Logging	Logging	«ctor»	private	True	False	
Logging	LogVerbose	void	public	True	False	string text
Logging	LogVerbose	void	public	True	False	string format; params object[] args
Logging	LogWarning	void	public	True	False	string text
Logging	LogWarning	void	public	True	False	string format; params object[] args
Logging	LogError	void	public	True	False	string text
Logging	LogError	void	public	True	False	string format; params object[] args
BoneWeight	BoneWeight	«ctor»	public	False	False	int boneIndex0; int boneIndex1; int boneIndex2; int boneIndex3; float boneWeight0; float boneWeight1; float boneWeight2; float boneWeight3
BoneWeight	MergeBoneWeight	void	private	False	False	int boneIndex; float weight
BoneWeight	Normalize	void	private	False	False	
BoneWeight	GetHashCode	int	public	False	False	
BoneWeight	Equals	bool	public	False	False	object obj
BoneWeight	Equals	bool	public	False	False	BoneWeight other
BoneWeight	ToString	string	public	False	False	
BoneWeight	Merge	void	public	True	False	ref BoneWeight a; ref BoneWeight b
MeshSimplifier	MeshSimplifier	«ctor»	public	False	False	
MeshSimplifier	MeshSimplifier	«ctor»	public	False	False	Mesh mesh
MeshSimplifier	InitializeVertexAttribute	void	private	False	False	T[] attributeValues; ref ResizableArray<T> attributeArray; string attributeName
MeshSimplifier	VertexError	double	private	True	False	ref SymmetricMatrix q; double x; double y; double z
MeshSimplifier	CurvatureError	double	private	False	False	ref Vertex vert0; ref Vertex vert1
MeshSimplifier	CalculateError	double	private	False	False	ref Vertex vert0; ref Vertex vert1; out Vector3d result
MeshSimplifier	CalculateBarycentricCoords	void	private	True	False	ref Vector3d point; ref Vector3d a; ref Vector3d b; ref Vector3d c; out Vector3 result
MeshSimplifier	NormalizeTangent	Vector4	private	True	False	Vector4 tangent
MeshSimplifier	Flipped	bool	private	False	False	ref Vector3d p; int i0; int i1; ref Vertex v0; bool[] deleted
MeshSimplifier	UpdateTriangles	void	private	False	False	int i0; int ia0; ref Vertex v; ResizableArray<bool> deleted; ref int deletedTriangles
MeshSimplifier	InterpolateVertexAttributes	void	private	False	False	int dst; int i0; int i1; int i2; ref Vector3 barycentricCoord
MeshSimplifier	AreUVsTheSame	bool	private	False	False	int channel; int indexA; int indexB
MeshSimplifier	RemoveVertexPass	void	private	False	False	int startTrisCount; int targetTrisCount; double threshold; ResizableArray<bool> deleted0; ResizableArray<bool> deleted1; ref int deletedTris
MeshSimplifier	UpdateMesh	void	private	False	False	int iteration
MeshSimplifier	UpdateReferences	void	private	False	False	
MeshSimplifier	CompactMesh	void	private	False	False	
MeshSimplifier	CalculateSubMeshOffsets	void	private	False	False	
MeshSimplifier	GetTrianglesContainingVertex	void	private	False	False	ref Vertex vert; HashSet<Triangle> tris
MeshSimplifier	GetTrianglesContainingBothVertices	void	private	False	False	ref Vertex vert0; ref Vertex vert1; HashSet<Triangle> tris
MeshSimplifier	GetAllSubMeshTriangles	int[][]	public	False	False	
MeshSimplifier	GetSubMeshTriangles	int[]	public	False	False	int subMeshIndex
MeshSimplifier	ClearSubMeshes	void	public	False	False	
MeshSimplifier	AddSubMeshTriangles	void	public	False	False	int[] triangles

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
MeshSimplifier	AddSubMeshTriangles	void	public	False	False	int[][] triangles
MeshSimplifier	GetUVs2D	Vector2[]	public	False	False	int channel
MeshSimplifier	GetUVs3D	Vector3[]	public	False	False	int channel
MeshSimplifier	GetUVs4D	Vector4[]	public	False	False	int channel
MeshSimplifier	GetUVs	void	public	False	False	int channel; List<Vector2> uvs
MeshSimplifier	GetUVs	void	public	False	False	int channel; List<Vector3> uvs
MeshSimplifier	GetUVs	void	public	False	False	int channel; List<Vector4> uvs
MeshSimplifier	SetUVs	void	public	False	False	int channel; IList<Vector2> uvs
MeshSimplifier	SetUVs	void	public	False	False	int channel; IList<Vector3> uvs
MeshSimplifier	SetUVs	void	public	False	False	int channel; IList<Vector4> uvs
MeshSimplifier	SetUVs	void	public	False	False	int channel; IList<Vector4> uvs; int uvComponentCount
MeshSimplifier	SetUVsAuto	void	public	False	False	int channel; IList<Vector4> uvs
MeshSimplifier	GetAllBlendShapes	BlendShape[]	public	False	False	
MeshSimplifier	GetBlendShape	BlendShape	public	False	False	int blendShapeIndex
MeshSimplifier	ClearBlendShapes	void	public	False	False	
MeshSimplifier	AddBlendShape	void	public	False	False	BlendShape blendShape
MeshSimplifier	AddBlendShapes	void	public	False	False	BlendShape[] blendShapes
MeshSimplifier	Initialize	void	public	False	False	Mesh mesh
MeshSimplifier	SimplifyMesh	void	public	False	False	float quality
MeshSimplifier	SimplifyMeshLossless	void	public	False	False	
MeshSimplifier	ToMesh	Mesh	public	False	False	
MeshSimplifier	ValidateOptions	void	public	True	False	SimplificationOptions options
BlendShape	BlendShape	«ctor»	public	False	False	string shapeName; BlendShapeFrame[] frames
BlendShapeFrame	BlendShapeFrame	«ctor»	public	False	False	float frameWeight; Vector3[] deltaVertices; Vector3[] deltaNormals; Vector3[] deltaTangents
MeshUtilsTest	ShouldApplyBlendShapes	void	public	False	False	
MeshUtilsTest	ShouldConvertUVsTo2D	void	public	False	False	
MeshUtilsTest	ShouldConvertUVsTo3D	void	public	False	False	
MeshUtilsTest	ShouldCreateMesh	void	public	False	False	
MeshUtilsTest	ShouldGetMeshBlendShapes	void	public	False	False	
MeshUtilsTest	ShouldGetMeshUVs	void	public	False	False	
MeshUtilsTest	ShouldGetSubMeshIndexMinMax	void	public	False	False	
MeshUtilsTest	ShouldGetUsedUVComponents	void	public	False	False	
ExportarGeometria	ExportRawDump	void	public	True	False	Document doc; string filePath = @"C:\.TBT\Proyectos_Revit_EXE_Geometrias\PostProcesadoEXE\IN\export2.bin
ExportarGeometria	ExportarElemento	void	private	True	False	Document doc; Element elem; Options geomOptions; BinaryWriter writer; Dictionary<int, byte[]> colorCache
ExportarGeometria	ObtenerColorMaterial	byte[]	private	True	False	Document doc; Element elem; ElementId materialElementId; Dictionary<int, byte[]> cache
ExportarGeometria	ObtenerTodosLosSolidos	List<Solid>	private	True	False	GeometryElement geomElem
FastQuadricMeshSimplification	FastQuadricMeshSimplification	«ctor»	public	False	False	
FastQuadricMeshSimplification	InitializeVertexAttribute	ResizableArray<T>	private	False	False	T[] attributeValues; string attributeName
FastQuadricMeshSimplification	VertexError	double	private	False	False	ref SymmetricMatrix q; double x; double y; double z
FastQuadricMeshSimplification	CalculateError	double	private	False	False	ref Vertex vert0; ref Vertex vert1; out Vector3d result; out int resultIndex
FastQuadricMeshSimplification	Flipped	bool	private	False	False	ref Vector3d p; int i0; int i1; ref Vertex v0; bool[] deleted
FastQuadricMeshSimplification	UpdateTriangles	void	private	False	False	int i0; int ia0; ref Vertex v; ResizableArray<bool> deleted; ref int deletedTriangles
FastQuadricMeshSimplification	MoveVertexAttributes	void	private	False	False	int i0; int i1
FastQuadricMeshSimplification	MergeVertexAttributes	void	private	False	False	int i0; int i1
FastQuadricMeshSimplification	AreUVsTheSame	bool	private	False	False	int channel; int indexA; int indexB
FastQuadricMeshSimplification	RemoveVertexPass	void	private	False	False	int startTrisCount; int targetTrisCount; double threshold; ResizableArray<bool> deleted0; ResizableArray<bool> deleted1; ref int deletedTris
FastQuadricMeshSimplification	UpdateMesh	void	private	False	False	int iteration
FastQuadricMeshSimplification	UpdateReferences	void	private	False	False	
FastQuadricMeshSimplification	CompactMesh	void	private	False	False	
FastQuadricMeshSimplification	Initialize	void	public	False	False	Mesh mesh
FastQuadricMeshSimplification	DecimateMesh	void	public	False	False	int targetTrisCount
FastQuadricMeshSimplification	DecimateMeshLossless	void	public	False	False	
FastQuadricMeshSimplification	ToMesh	Mesh	public	False	False	
Triangle	Triangle	«ctor»	public	False	False	int v0; int v1; int v2; int subMeshIndex
Triangle	GetAttributeIndices	void	public	False	False	int[] attributeIndices
Triangle	SetAttributeIndex	void	public	False	False	int index; int value
Triangle	GetErrors	void	public	False	False	double[] err
Vertex	Vertex	«ctor»	public	False	False	Vector3d p
Ref	Set	void	public	False	False	int tid; int tvertex
BorderVertex	BorderVertex	«ctor»	public	False	False	int index; int hash
BorderVertexComparer	Compare	int	public	False	False	BorderVertex x; BorderVertex y

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
DecimationAlgorithm	ReportStatus	void	protected	False	False	int iteration; int originalTris; int currentTris; int targetTris
DecimationAlgorithm	Initialize	void	public	False	False	Mesh mesh
DecimationAlgorithm	DecimateMesh	void	public	False	False	int targetTrisCount
DecimationAlgorithm	DecimateMeshLossless	void	public	False	False	
DecimationAlgorithm	ToMesh	Mesh	public	False	False	
Vector3	Vector3	«ctor»	public	False	False	float value
Vector3	Vector3	«ctor»	public	False	False	float x; float y; float z
Vector3	Vector3	«ctor»	public	False	False	Vector3d vector
Vector3	Set	void	public	False	False	float x; float y; float z
Vector3	Scale	void	public	False	False	ref Vector3 scale
Vector3	Normalize	void	public	False	False	
Vector3	Clamp	void	public	False	False	float min; float max
Vector3	GetHashCode	int	public	False	False	
Vector3	Equals	bool	public	False	False	object other
Vector3	Equals	bool	public	False	False	Vector3 other
Vector3	ToString	string	public	False	False	
Vector3	ToString	string	public	False	False	string format
Vector3	Dot	float	public	True	False	ref Vector3 lhs; ref Vector3 rhs
Vector3	Cross	void	public	True	False	ref Vector3 lhs; ref Vector3 rhs; out Vector3 result
Vector3	Angle	float	public	True	False	ref Vector3 from; ref Vector3 to
Vector3	Lerp	void	public	True	False	ref Vector3 a; ref Vector3 b; float t; out Vector3 result
Vector3	Scale	void	public	True	False	ref Vector3 a; ref Vector3 b; out Vector3 result
Vector3	Normalize	void	public	True	False	ref Vector3 value; out Vector3 result
Vector3	OrthoNormalize	void	public	True	False	ref Vector3 normal; ref Vector3 tangent
Vector2i	Vector2i	«ctor»	public	False	False	int value
Vector2i	Vector2i	«ctor»	public	False	False	int x; int y
Vector2i	Set	void	public	False	False	int x; int y
Vector2i	Scale	void	public	False	False	ref Vector2i scale
Vector2i	Clamp	void	public	False	False	int min; int max
Vector2i	GetHashCode	int	public	False	False	
Vector2i	Equals	bool	public	False	False	object other
Vector2i	Equals	bool	public	False	False	Vector2i other
Vector2i	ToString	string	public	False	False	
Vector2i	ToString	string	public	False	False	string format
Vector2i	Scale	void	public	True	False	ref Vector2i a; ref Vector2i b; out Vector2i result
Vector2d	Vector2d	«ctor»	public	False	False	double value
Vector2d	Vector2d	«ctor»	public	False	False	double x; double y
Vector2d	Set	void	public	False	False	double x; double y
Vector2d	Scale	void	public	False	False	ref Vector2d scale
Vector2d	Normalize	void	public	False	False	
Vector2d	Clamp	void	public	False	False	double min; double max
Vector2d	GetHashCode	int	public	False	False	
Vector2d	Equals	bool	public	False	False	object other
Vector2d	Equals	bool	public	False	False	Vector2d other
Vector2d	ToString	string	public	False	False	
Vector2d	ToString	string	public	False	False	string format
Vector2d	Dot	double	public	True	False	ref Vector2d lhs; ref Vector2d rhs
Vector2d	Lerp	void	public	True	False	ref Vector2d a; ref Vector2d b; double t; out Vector2d result
Vector2d	Scale	void	public	True	False	ref Vector2d a; ref Vector2d b; out Vector2d result
Vector2d	Normalize	void	public	True	False	ref Vector2d value; out Vector2d result
Vector4d	Vector4d	«ctor»	public	False	False	double value
Vector4d	Vector4d	«ctor»	public	False	False	double x; double y; double z; double w
Vector4d	Set	void	public	False	False	double x; double y; double z; double w
Vector4d	Scale	void	public	False	False	ref Vector4d scale
Vector4d	Normalize	void	public	False	False	
Vector4d	Clamp	void	public	False	False	double min; double max
Vector4d	GetHashCode	int	public	False	False	
Vector4d	Equals	bool	public	False	False	object other
Vector4d	Equals	bool	public	False	False	Vector4d other
Vector4d	ToString	string	public	False	False	
Vector4d	ToString	string	public	False	False	string format
Vector4d	Dot	double	public	True	False	ref Vector4d lhs; ref Vector4d rhs
Vector4d	Lerp	void	public	True	False	ref Vector4d a; ref Vector4d b; double t; out Vector4d result
Vector4d	Scale	void	public	True	False	ref Vector4d a; ref Vector4d b; out Vector4d result
Vector4d	Normalize	void	public	True	False	ref Vector4d value; out Vector4d result

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
Vector4	Vector4	«ctor»	public	False	False	float value
Vector4	Vector4	«ctor»	public	False	False	float x; float y; float z; float w
Vector4	Set	void	public	False	False	float x; float y; float z; float w
Vector4	Scale	void	public	False	False	ref Vector4 scale
Vector4	Normalize	void	public	False	False	
Vector4	Clamp	void	public	False	False	float min; float max
Vector4	GetHashCode	int	public	False	False	
Vector4	Equals	bool	public	False	False	object other
Vector4	Equals	bool	public	False	False	Vector4 other
Vector4	ToString	string	public	False	False	
Vector4	ToString	string	public	False	False	string format
Vector4	Dot	float	public	True	False	ref Vector4 lhs; ref Vector4 rhs
Vector4	Lerp	void	public	True	False	ref Vector4 a; ref Vector4 b; float t; out Vector4 result
Vector4	Scale	void	public	True	False	ref Vector4 a; ref Vector4 b; out Vector4 result
Vector4	Normalize	void	public	True	False	ref Vector4 value; out Vector4 result
Vector3i	Vector3i	«ctor»	public	False	False	int value
Vector3i	Vector3i	«ctor»	public	False	False	int x; int y; int z
Vector3i	Set	void	public	False	False	int x; int y; int z
Vector3i	Scale	void	public	False	False	ref Vector3i scale
Vector3i	Clamp	void	public	False	False	int min; int max
Vector3i	GetHashCode	int	public	False	False	
Vector3i	Equals	bool	public	False	False	object other
Vector3i	Equals	bool	public	False	False	Vector3i other
Vector3i	ToString	string	public	False	False	
Vector3i	ToString	string	public	False	False	string format
Vector3i	Scale	void	public	True	False	ref Vector3i a; ref Vector3i b; out Vector3i result
MathHelper	Min	int	public	True	False	int val1; int val2
MathHelper	Min	int	public	True	False	int val1; int val2; int val3
MathHelper	Min	float	public	True	False	float val1; float val2
MathHelper	Min	float	public	True	False	float val1; float val2; float val3
MathHelper	Min	double	public	True	False	double val1; double val2
MathHelper	Min	double	public	True	False	double val1; double val2; double val3
MathHelper	Max	int	public	True	False	int val1; int val2
MathHelper	Max	int	public	True	False	int val1; int val2; int val3
MathHelper	Max	float	public	True	False	float val1; float val2
MathHelper	Max	float	public	True	False	float val1; float val2; float val3
MathHelper	Max	double	public	True	False	double val1; double val2
MathHelper	Max	double	public	True	False	double val1; double val2; double val3
MathHelper	Clamp	float	public	True	False	float value; float min; float max
MathHelper	Clamp	double	public	True	False	double value; double min; double max
MathHelper	Clamp01	float	public	True	False	float value
MathHelper	Clamp01	double	public	True	False	double value
MathHelper	TriangleArea	float	public	True	False	ref Vector3 p0; ref Vector3 p1; ref Vector3 p2
MathHelper	TriangleArea	double	public	True	False	ref Vector3d p0; ref Vector3d p1; ref Vector3d p2
MeshDecimation	CreateAlgorithm	DecimationAlgorithm	public	True	False	Algorithm algorithm
MeshDecimation	DecimateMesh	Mesh	public	True	False	Mesh mesh; int targetTriangleCount
MeshDecimation	DecimateMesh	Mesh	public	True	False	Algorithm algorithm; Mesh mesh; int targetTriangleCount
MeshDecimation	DecimateMesh	Mesh	public	True	False	DecimationAlgorithm algorithm; Mesh mesh; int targetTriangleCount
MeshDecimation	DecimateMeshLossless	Mesh	public	True	False	Mesh mesh
MeshDecimation	DecimateMeshLossless	Mesh	public	True	False	Algorithm algorithm; Mesh mesh
MeshDecimation	DecimateMeshLossless	Mesh	public	True	False	DecimationAlgorithm algorithm; Mesh mesh
Mesh	Mesh	«ctor»	public	False	False	Vector3d[] vertices; int[] indices
Mesh	Mesh	«ctor»	public	False	False	Vector3d[] vertices; int[][] indices
Mesh	ClearVertexAttributes	void	private	False	False	
Mesh	RecalculateNormals	void	public	False	False	
Mesh	RecalculateTangents	void	public	False	False	
Mesh	GetTriangleCount	int	public	False	False	int subMeshIndex
Mesh	GetIndices	int[]	public	False	False	int subMeshIndex
Mesh	GetSubMeshIndices	int[][]	public	False	False	
Mesh	SetIndices	void	public	False	False	int subMeshIndex; int[] indices
Mesh	GetUVDimension	int	public	False	False	int channel
Mesh	GetUVs2D	Vector2[]	public	False	False	int channel
Mesh	GetUVs3D	Vector3[]	public	False	False	int channel
Mesh	GetUVs4D	Vector4[]	public	False	False	int channel
Mesh	GetUVs	void	public	False	False	int channel; List<Vector2> uvs

ClassName	MethodName	ReturnType	AccessLevel	Static	Async	Parameters
Mesh	GetUVs	void	public	False	False	int channel; List<Vector3> uvs
Mesh	GetUVs	void	public	False	False	int channel; List<Vector4> uvs
Mesh	SetUVs	void	public	False	False	int channel; Vector2[] uvs
Mesh	SetUVs	void	public	False	False	int channel; Vector3[] uvs
Mesh	SetUVs	void	public	False	False	int channel; Vector4[] uvs
Mesh	SetUVs	void	public	False	False	int channel; List<Vector2> uvs
Mesh	SetUVs	void	public	False	False	int channel; List<Vector3> uvs
Mesh	SetUVs	void	public	False	False	int channel; List<Vector4> uvs
Mesh	ToString	string	public	False	False	
MeshCombiner	CombineMeshes	Mesh	public	True	False	Transform rootTransform; MeshRenderer[] renderers; out Material[] resultMaterials
MeshCombiner	CombineMeshes	Mesh	public	True	False	Transform rootTransform; SkinnedMeshRenderer[] renderers; out Material[] resultMaterials; out Transform[] resultBones
MeshCombiner	CombineMeshes	Mesh	public	True	False	Mesh[] meshes; Matrix4x4[] transforms; Material[][] materials; out Material[] resultMaterials
MeshCombiner	CombineMeshes	Mesh	public	True	False	Mesh[] meshes; Matrix4x4[] transforms; Material[][] materials; Transform[][] bones; out Material[] resultMaterials; out Transform[] resultBones
MeshCombiner	CopyVertexPositions	void	private	True	False	ICollection<Vector3> list; Vector3[] arr
MeshCombiner	CopyVertexAttributes	void	private	True	False	ref List<T> dest; IEnumerable<T> src; int previousVertexCount; int meshVertexCount; int totalVertexCount; T defaultValue
MeshCombiner	MergeArrays	T[]	private	True	False	T[] arr1; T[] arr2
MeshCombiner	TransformVertices	void	private	True	False	Vector3[] vertices; ref Matrix4x4 transform
MeshCombiner	TransformNormals	void	private	True	False	Vector3[] normals; ref Matrix4x4 transform
MeshCombiner	TransformTangents	void	private	True	False	Vector4[] tangents; ref Matrix4x4 transform
MeshCombiner	RemapBones	void	private	True	False	BoneWeight[] boneWeights; int[] boneIndices
MeshCombiner	CanReadMesh	bool	private	True	False	Mesh mesh
LODLevel	LODLevel	«ctor»	public	False	False	float screenRelativeTransitionHeight; float quality
LODLevel	LODLevel	«ctor»	public	False	False	float screenRelativeTransitionHeight; float fadeTransitionWidth; float quality; bool combineMeshes; bool combineSubMeshes
LODLevel	LODLevel	«ctor»	public	False	False	float screenRelativeTransitionHeight; float fadeTransitionWidth; float quality; bool combineMeshes; bool combineSubMeshes; Renderer[] renderers
LODGenerator	GenerateLODs	LODGroup	public	True	False	LODGeneratorHelper generatorHelper
LODGenerator	GenerateLODs	LODGroup	public	True	False	GameObject gameObject; LODLevel[] levels; bool autoCollectRenderers; SimplificationOptions simplificationOptions
LODGenerator	GenerateLODs	LODGroup	public	True	False	GameObject gameObject; LODLevel[] levels; bool autoCollectRenderers; SimplificationOptions simplificationOptions; string saveAssetsPath
LODGenerator	DestroyLODs	bool	public	True	False	LODGeneratorHelper generatorHelper
LODGenerator	DestroyLODs	bool	public	True	False	GameObject gameObject
LODGenerator	GetStaticRenderers	RendererInfo[]	private	True	False	MeshRenderer[] renderers
LODGenerator	GetSkinnedRenderers	RendererInfo[]	private	True	False	SkinnedMeshRenderer[] renderers
LODGenerator	CombineStaticMeshes	RendererInfo[]	private	True	False	Transform transform; int levelIndex; MeshRenderer[] renderers
LODGenerator	CombineSkinnedMeshes	RendererInfo[]	private	True	False	Transform transform; int levelIndex; SkinnedMeshRenderer[] renderers
LODGenerator	ParentAndResetTransform	void	private	True	False	Transform transform; Transform parentTransform
LODGenerator	ParentAndOffsetTransform	void	private	True	False	Transform transform; Transform parentTransform; Transform originalTransform
LODGenerator	CreateLevelRenderer	Renderer	private	True	False	GameObject gameObject; int levelIndex; in LODLevel level; Transform levelTransform; int rendererIndex; in RendererInfo renderer; in SimplificationOptions simplificationOptions; string saveAssetsPath
LODGenerator	CreateStaticLevelRenderer	MeshRenderer	private	True	False	string name; Transform parentTransform; Transform originalTransform; Mesh mesh; Material[] materials; in LODLevel level
LODGenerator	CreateSkinnedLevelRenderer	SkinnedMeshRenderer	private	True	False	string name; Transform parentTransform; Transform originalTransform; Mesh mesh; Material[] materials; Transform rootBone; Transform[] bones; in LODLeve level
LODGenerator	FindBestRootBone	Transform	private	True	False	Transform transform; SkinnedMeshRenderer[] skinnedMeshRenderers
LODGenerator	SetupLevelRenderer	void	private	True	False	Renderer renderer; in LODLevel level
LODGenerator	GetChildRenderersForLOD	Renderer[]	private	True	False	GameObject gameObject
LODGenerator	CollectChildRenderersForLOD	void	private	True	False	Transform transform; List<Renderer> resultRenderers
LODGenerator	SimplifyMesh	Mesh	private	True	False	Mesh mesh; float quality; in SimplificationOptions options
LODGenerator	DestroyObject	void	private	True	False	Object obj
LODGenerator	CreateBackup	void	private	True	False	GameObject gameObject; Renderer[] originalRenderers
LODGenerator	RestoreBackup	void	private	True	False	GameObject gameObject
LODGenerator	ValidateSaveAssetsPath	string	private	True	False	string saveAssetsPath

Fuentes de diagramas

namespaces.mmd

```
flowchart LR
    ns_ConvertidorGeometrias["ConvertidorGeometrias"]
    ns_MeshDecimator["MeshDecimator"]
    ns_MeshDecimator_Algorithms["MeshDecimator.Algorithms"]
    ns_MeshDecimator_Collections["MeshDecimator.Collections"]
    ns_MeshDecimator_Loggers["MeshDecimator.Loggers"]
    ns_MeshDecimator_Math["MeshDecimator.Math"]
    ns_MeshDecimator_Unity["MeshDecimator.Unity"]
    ns_MeshDecimator_Unity_Loggers["MeshDecimator.Unity.Loggers"]
    ns_MeshDecimator_UnityEditor["MeshDecimator.UnityEditor"]
    ns_MeshDecimatorTool["MeshDecimatorTool"]
    ns_UnityMeshSimplifier["UnityMeshSimplifier"]
    ns_UnityMeshSimplifier_Editor["UnityMeshSimplifier.Editor"]
    ns_UnityMeshSimplifier_Editor_Tests["UnityMeshSimplifier.Editor.Tests"]
    ns_UnityMeshSimplifier_Internal["UnityMeshSimplifier.Internal"]

    ns_MeshDecimator -->|2| ns_MeshDecimator_Loggers
    ns_MeshDecimator_Algorithms -->|10| ns_UnityMeshSimplifier
    ns_MeshDecimator_Algorithms -->|8| ns_MeshDecimator
    ns_MeshDecimator_Collections -->|2| ns_MeshDecimator
    ns_MeshDecimator_Loggers -->|2| ns_MeshDecimator
    ns_UnityMeshSimplifier -->|8| ns_MeshDecimator
    ns_UnityMeshSimplifier -->|12| ns_MeshDecimator_Math
    ns_MeshDecimator_Unity -->|6| ns_MeshDecimator
    ns_MeshDecimator_Unity -->|1| ns_MeshDecimator_Loggers
    ns_MeshDecimator_Unity -->|1| ns_MeshDecimator_Unity_Loggers
    ns_MeshDecimator_Unity -->|1| ns_UnityMeshSimplifier
    ns_MeshDecimator_Unity -->|4| ns_MeshDecimator_Math
    ns_MeshDecimator_Unity -->|2| ns_MeshDecimator_Algorithms
    ns_MeshDecimator_Math -->|10| ns_UnityMeshSimplifier
    ns__global_ -->|1| ns_MeshDecimator_Math
    ns_UnityMeshSimplifier_Internal -->|6| ns_UnityMeshSimplifier
    ns_UnityMeshSimplifier_Internal -->|3| ns_MeshDecimator_Math
    ns_UnityMeshSimplifier_Internal -->|2| ns_MeshDecimator_Collections
    ns_MeshDecimator_Unity_Loggers -->|1| ns_MeshDecimator
    ns_UnityMeshSimplifier_Editor -->|2| ns_UnityMeshSimplifier
    ns_UnityMeshSimplifier_Editor -->|1| ns_MeshDecimator_Unity
    ns_MeshDecimatorTool -->|2| ns_UnityMeshSimplifier
    ns_MeshDecimatorTool -->|3| ns_MeshDecimator
    ns_MeshDecimatorTool -->|2| ns_MeshDecimator_Math
    ns_MeshDecimator_UnityEditor -->|1| ns_MeshDecimator_Unity
    ns_MeshDecimator -->|8| ns_MeshDecimator_Math
    ns_ConvertidorGeometrias -->|3| ns_MeshDecimator_Math
    ns_ConvertidorGeometrias -->|1| ns_UnityMeshSimplifier
    ns_ConvertidorGeometrias -->|2| ns_MeshDecimator
    ns_ConvertidorGeometrias -->|1| ns_MeshDecimator_Algorithms
    ns_MeshDecimator_Algorithms -->|10| ns_MeshDecimator_Math
    ns_MeshDecimator_Algorithms -->|12| ns_UnityMeshSimplifier_Internal
    ns_MeshDecimator_Algorithms -->|4| ns_MeshDecimator_Collections
    ns_MeshDecimator -->|4| ns_MeshDecimator_Algorithms
    ns_MeshDecimator -->|4| ns_UnityMeshSimplifier
    ns_UnityMeshSimplifier -->|6| ns_UnityMeshSimplifier_Internal
    ns_UnityMeshSimplifier -->|2| ns_MeshDecimator_Collections
    ns_UnityMeshSimplifier_Editor_Tests -->|2| ns_MeshDecimator
    ns_UnityMeshSimplifier_Editor_Tests -->|3| ns_MeshDecimator_Math
    ns_UnityMeshSimplifier_Editor_Tests -->|3| ns_UnityMeshSimplifier
    ns__global_ -->|1| ns_MeshDecimator
```

flowchart.mmd

```
flowchart LR
    direction LR
    MeshSimplifier["MeshSimplifier"]
    LODGeneratorHelperEditor["LODGeneratorHelperEditor"]
    Mesh["Mesh"]
    Mesh["Mesh"]
    FastQuadricMeshSimplification["FastQuadricMeshSimplification"]
    FastQuadricMeshSimplification["FastQuadricMeshSimplification"]
    Program["Program"]
    ObjMesh["ObjMesh"]
    LODLevel["LODLevel"]
    MeshDecimatorUtility["MeshDecimatorUtility"]
    Vector3["Vector3"]
    Vector3["Vector3"]
    LODGenerator["LODGenerator"]
    Vector3d["Vector3d"]
    Vector3d["Vector3d"]
    Vector3d["Vector3d"]
    MathHelper["MathHelper"]
    Vector4d["Vector4d"]
    Vector4["Vector4"]
    Vector4d["Vector4d"]
    Vector4["Vector4"]
    MathHelper["MathHelper"]
    Vector2d["Vector2d"]
    Vector2["Vector2"]
    Triangle["Triangle"]
    Vector2["Vector2"]
    Vector2d["Vector2d"]
    PipelineStats["PipelineStats"]
    SymmetricMatrix["SymmetricMatrix"]
    SymmetricMatrix["SymmetricMatrix"]
    Vector4i["Vector4i"]
    SymmetricMatrix["SymmetricMatrix"]
    Triangle["Triangle"]
    Vector4i["Vector4i"]
    Triangle["Triangle"]
    Vector3i["Vector3i"]
    Vector3i["Vector3i"]
    Vector2i["Vector2i"]
    BoneWeight["BoneWeight"]
    BoneWeight["BoneWeight"]
    Vector2i["Vector2i"]
    MeshUtils["MeshUtils"]
    LODGeneratorHelper["LODGeneratorHelper"]
    DecimationAlgorithm["DecimationAlgorithm"]
    ResizableArray["ResizableArray"]
    DecimationAlgorithm["DecimationAlgorithm"]
    LODSettings["LODSettings"]
    ResizableArray["ResizableArray"]
    ResizableArray["ResizableArray"]
    Vertex["Vertex"]
    MeshData["MeshData"]
    MeshCombiner["MeshCombiner"]
    SimplificationOptions["SimplificationOptions"]
    Logging["Logging"]
    LODGenerator["LODGenerator"]
    DecimatedObjectEditor["DecimatedObjectEditor"]
    Logging["Logging"]
    ShowExample["ShowExample"]
    BlendShapeFrameContainer["BlendShapeFrameContainer"]
    MathHelper["MathHelper"]
    FaceIndex["FaceIndex"]
    Vertex["Vertex"]
    MeshUtilsTest["MeshUtilsTest"]
    Vertex["Vertex"]
```

```
    RendererInfo["RendererInfo"]
    DecimatedObject["DecimatedObject"]
    BlendShapeContainer["BlendShapeContainer"]
    MeshDecimation["MeshDecimation"]
    MeshDecimation["MeshDecimation"]
    UVChannels["UVChannels"]
    ExportarGeometria["ExportarGeometria"]
    UVChannels["UVChannels"]
    UVChannels["UVChannels"]
    ValidateSimplificationOptionsException["ValidateSimplificationOptio..."]
    BlendShapeFrame["BlendShapeFrame"]
    PiezaRota["PiezaRota"]
    ILogger(["ILogger"])
    ConsoleLogger["ConsoleLogger"]
    Ref["Ref"]
    BorderVertex["BorderVertex"]

    MeshSimplifier -->|usa| MeshUtils
    MeshSimplifier -->|usa| SimplificationOptions
    MeshSimplifier -->|usa| Triangle
    MeshSimplifier -->|usa| Vertex
    MeshSimplifier -->|usa| Ref
    MeshSimplifier -->|usa| Vector3
    MeshSimplifier -->|usa| Vector4
    MeshSimplifier -->|usa| Vector2
    MeshSimplifier -->|usa| BoneWeight
    MeshSimplifier -->|usa| BlendShapeContainer
    MeshSimplifier -->|usa| Mesh
    MeshSimplifier -->|usa| SymmetricMatrix
    MeshSimplifier -->|usa| Vector3d
    MeshSimplifier -->|usa| MathHelper
    MeshSimplifier -->|usa| BorderVertex
    MeshSimplifier -->|usa| ValidateSimplificationOptionsException
    MeshSimplifier -->|usa| ResizableArray
    MeshSimplifier -->|usa| UVChannels
    LODGeneratorHelperEditor -->|usa| LODGeneratorHelper
    LODGeneratorHelperEditor -->|usa| LODGenerator
    Mesh -->|usa| Vector3d
    Mesh -->|usa| Vector3
    Mesh -->|usa| Vector4
    Mesh -->|usa| Vector2
    Mesh -->|usa| BoneWeight
    Mesh -->|usa| MathHelper
    Mesh -->|usa| Vector3d
    Mesh -->|usa| Vector3
    Mesh -->|usa| Vector4
    Mesh -->|usa| Vector2
    Mesh -->|usa| BoneWeight
    Mesh -->|usa| MathHelper
    FastQuadricMeshSimplification -->|hereda| DecimationAlgorithm
    FastQuadricMeshSimplification -->|usa| Vector3d
    FastQuadricMeshSimplification -->|usa| SymmetricMatrix
    FastQuadricMeshSimplification -->|usa| BorderVertex
    FastQuadricMeshSimplification -->|usa| Triangle
    FastQuadricMeshSimplification -->|usa| Vertex
    FastQuadricMeshSimplification -->|usa| Ref
    FastQuadricMeshSimplification -->|usa| Vector3
    FastQuadricMeshSimplification -->|usa| Vector4
    FastQuadricMeshSimplification -->|usa| Vector2
    FastQuadricMeshSimplification -->|usa| BoneWeight
    FastQuadricMeshSimplification -->|usa| Logging
    FastQuadricMeshSimplification -->|usa| MathHelper
    FastQuadricMeshSimplification -->|usa| Mesh
    FastQuadricMeshSimplification -->|usa| ResizableArray
    FastQuadricMeshSimplification -->|usa| UVChannels
    FastQuadricMeshSimplification -->|hereda| DecimationAlgorithm
    FastQuadricMeshSimplification -->|usa| Vector3d
    FastQuadricMeshSimplification -->|usa| SymmetricMatrix
    FastQuadricMeshSimplification -->|usa| BorderVertex
    FastQuadricMeshSimplification -->|usa| Triangle
    FastQuadricMeshSimplification -->|usa| Vertex
    FastQuadricMeshSimplification -->|usa| Ref
    FastQuadricMeshSimplification -->|usa| Vector3
    FastQuadricMeshSimplification -->|usa| Vector4
    FastQuadricMeshSimplification -->|usa| Vector2
    FastQuadricMeshSimplification -->|usa| BoneWeight
    FastQuadricMeshSimplification -->|usa| Logging
    FastQuadricMeshSimplification -->|usa| MathHelper
    FastQuadricMeshSimplification -->|usa| Mesh
    FastQuadricMeshSimplification -->|usa| ResizableArray
    FastQuadricMeshSimplification -->|usa| UVChannels
    Program -->|usa| MeshData
    Program -->|usa| PipelineStats
    Program -->|usa| PiezaRota
    Program -->|usa| Vector3
    Program -->|usa| Vector3d
    Program -->|usa| Mesh
    Program -->|usa| FastQuadricMeshSimplification
    Program -->|usa| MeshDecimation
    Program -->|usa| Vector4
    ObjMesh -->|usa| FaceIndex
    ObjMesh -->|usa| Vector3d
    ObjMesh -->|usa| Vector3
    ObjMesh -->|usa| Vector2
    MeshDecimatorUtility -->|usa| Logging
    MeshDecimatorUtility -->|usa| ConsoleLogger
    MeshDecimatorUtility -->|usa| Vector3d
    MeshDecimatorUtility -->|usa| Vector2
    MeshDecimatorUtility -->|usa| Vector3
    MeshDecimatorUtility -->|usa| Vector4
    MeshDecimatorUtility -->|usa| BoneWeight
    MeshDecimatorUtility -->|usa| Mesh
    MeshDecimatorUtility -->|usa| DecimationAlgorithm
    MeshDecimatorUtility -->|usa| MeshDecimation
    Vector3 -->|usa| Vector3d
    Vector3 -->|usa| Vector3i
    Vector3 -->|usa| MathHelper
    Vector3 -->|usa| Vector3d
    Vector3 -->|usa| Vector3i
    Vector3 -->|usa| MathHelper
    LODGenerator -->|usa| Mesh
    LODGenerator -->|usa| LODGeneratorHelper
    LODGenerator -->|usa| SimplificationOptions
    LODGenerator -->|usa| LODLevel
    LODGenerator -->|usa| MeshSimplifier
    LODGenerator -->|usa| RendererInfo
    LODGenerator -->|usa| MeshCombiner
    LODGenerator -->|usa| Vector3
    Vector3d -->|usa| Vector3
    Vector3d -->|usa| MathHelper
    Vector3d -->|usa| Vector3
    Vector3d -->|usa| Vector3i
    Vector3d -->|usa| MathHelper
    Vector3d -->|usa| Vector3
    Vector3d -->|usa| Vector3i
    Vector3d -->|usa| MathHelper
    MathHelper -->|usa| Vector3
    MathHelper -->|usa| Vector3d
    Vector4d -->|usa| Vector4
    Vector4d -->|usa| Vector4i
    Vector4 -->|usa| Vector4d
    Vector4 -->|usa| Vector4i
    Vector4d -->|usa| Vector4
    Vector4d -->|usa| Vector4i
    Vector4 -->|usa| Vector4d
    Vector4 -->|usa| Vector4i
    MathHelper -->|usa| Vector3
    MathHelper -->|usa| Vector3d
```

```
    Vector2d -->|usa| Vector2
    Vector2d -->|usa| Vector2i
    Vector2 -->|usa| Vector2d
    Vector2 -->|usa| Vector2i
    Triangle -->|usa| Vector3d
    Vector2 -->|usa| Vector2d
    Vector2 -->|usa| Vector2i
    Vector2d -->|usa| Vector2
    Vector2d -->|usa| Vector2i
    Vector4i -->|usa| Vector4
    Vector4i -->|usa| Vector4d
    Triangle -->|usa| Vector3d
    Vector4i -->|usa| Vector4
    Vector4i -->|usa| Vector4d
    Triangle -->|usa| Vector3d
    Vector3i -->|usa| Vector3
    Vector3i -->|usa| Vector3d
    Vector3i -->|usa| Vector3
    Vector3i -->|usa| Vector3d
    Vector2i -->|usa| Vector2
    Vector2i -->|usa| Vector2d
    BoneWeight -->|usa| Vector4
    BoneWeight -->|usa| Vector4
    Vector2i -->|usa| Vector2
    Vector2i -->|usa| Vector2d
    MeshUtils -->|usa| Mesh
    MeshUtils -->|usa| Vector3
    MeshUtils -->|usa| Vector4
    MeshUtils -->|usa| BoneWeight
    MeshUtils -->|usa| Vector2
    MeshUtils -->|usa| BlendShapeFrame
    LODGeneratorHelper -->|usa| SimplificationOptions
    LODGeneratorHelper -->|usa| LODLevel
    DecimationAlgorithm -->|usa| MathHelper
    DecimationAlgorithm -->|usa| Mesh
    DecimationAlgorithm -->|usa| MathHelper
    DecimationAlgorithm -->|usa| Mesh
    Vertex -->|usa| Vector3d
    Vertex -->|usa| SymmetricMatrix
    MeshData -->|usa| Vector3
    MeshCombiner -->|usa| Mesh
    MeshCombiner -->|usa| Vector3
    MeshCombiner -->|usa| Vector4
    MeshCombiner -->|usa| BoneWeight
    MeshCombiner -->|usa| MeshUtils
    Logging -->|usa| ILogger
    Logging -->|usa| ConsoleLogger
    LODGenerator -->|usa| Mesh
    LODGenerator -->|usa| DecimationAlgorithm
    LODGenerator -->|usa| MeshDecimatorUtility
    LODGenerator -->|usa| LODSettings
    LODGenerator -->|usa| Vector3
    DecimatedObjectEditor -->|usa| DecimatedObject
    Logging -->|usa| ILogger
    Logging -->|usa| ConsoleLogger
    ShowExample -->|usa| Vector3
    BlendShapeFrameContainer -->|usa| Vector3
    BlendShapeFrameContainer -->|usa| BlendShapeFrame
    BlendShapeFrameContainer -->|usa| ResizableArray
    MathHelper -->|usa| Vector3d
    Vertex -->|usa| Vector3d
    Vertex -->|usa| SymmetricMatrix
    MeshUtilsTest -->|usa| Mesh
    MeshUtilsTest -->|usa| Vector3
    MeshUtilsTest -->|usa| BlendShapeFrame
    MeshUtilsTest -->|usa| MeshUtils
    MeshUtilsTest -->|usa| Vector4
    MeshUtilsTest -->|usa| Vector2
    MeshUtilsTest -->|usa| BoneWeight
    Vertex -->|usa| Vector3d
    Vertex -->|usa| SymmetricMatrix
    RendererInfo -->|usa| Mesh
    DecimatedObject -->|usa| LODSettings
    DecimatedObject -->|usa| LODGenerator
    BlendShapeContainer -->|usa| BlendShapeFrameContainer
    BlendShapeContainer -->|usa| Vector3
    BlendShapeContainer -->|usa| BlendShapeFrame
    MeshDecimation -->|usa| DecimationAlgorithm
    MeshDecimation -->|usa| FastQuadricMeshSimplification
    MeshDecimation -->|usa| Mesh
    MeshDecimation -->|usa| DecimationAlgorithm
    MeshDecimation -->|usa| FastQuadricMeshSimplification
    MeshDecimation -->|usa| Mesh
    UVChannels -->|usa| MeshUtils
    UVChannels -->|usa| ResizableArray
    ExportarGeometria -->|usa| Mesh
    UVChannels -->|usa| Mesh
    UVChannels -->|usa| ResizableArray
    UVChannels -->|usa| Mesh
    UVChannels -->|usa| ResizableArray
    BlendShapeFrame -->|usa| Vector3
    ConsoleLogger -.->|implementa| ILogger
```

classDiagram.mmd

```
classDiagram
    %%{init: {'flowchart': {'htmlLabels': true}}}%%
    class MeshSimpl...
    class LODGenera...
    class Mesh
    class Mesh
    class FastQuadr...
    class FastQuadr...
    class Program
    class ObjMesh
    class LODLevel
    class MeshDecim...
    class Vector3
    class Vector3
    class LODGenerator
    class Vector3d
    class Vector3d
    class Vector3d
    class MathHelper
    class Vector4d
    class Vector4
    class Vector4d
    class Vector4
    class MathHelper
    class Vector2d
    class Vector2
    class Triangle
    class Vector2
    class Vector2d
    class PipelineS...
    class Symmetric...
    class Symmetric...
    class Vector4i
    class Symmetric...
    class Triangle
    class Vector4i
    class Triangle
    class Vector3i
    class Vector3i
    class Vector2i
```

```
    class BoneWeight
    class BoneWeight
    class Vector2i
    class MeshUtils
    class LODGenera...
    class Decimatio...
    class Resizable...
    class Decimatio...
    class LODSettings
    class Resizable...
    class Resizable...
    class Vertex
    class MeshData
    class MeshCombiner
    class Simplific...
    class Logging
    class LODGenerator
    class Decimated...
    class Logging
    class ShowExample
    class BlendShap...
    class MathHelper
    class FaceIndex
    class Vertex
    class MeshUtils...
    class Vertex
    class RendererInfo
    class Decimated...
    class BlendShap...
    class MeshDecim...
    class MeshDecim...
    class UVChannels
    class ExportarG...
    class UVChannels
    class UVChannels
    class ValidateS...
    class BlendShap...
    class PiezaRota
    class ILogger
    class ConsoleLo...
    class Ref
    class BorderVertex

    Decimatio... <|-- FastQuadr...
    Decimatio... <|-- FastQuadr...
    ILogger <|.. ConsoleLo...
```

classDiagram.puml

```
@startuml
title Diagrama de Clases - _Revit_EXE_Geometrias
skinparam classAttributeIconSize 0
skinparam shadowing false
left to right direction
skinparam linetype ortho

!include C:/.TBT/Proyectos/_Revit_EXE_Geometrias/_Documentos generados/classDiagram.part1.puml

@enduml
```

namespaces.puml

```
@startuml
title Diagrama de Namespaces - _Revit_EXE_Geometrias
skinparam packageStyle rectangle
left to right direction

package "ConvertidorGeometrias  (4 tipos)" as ns_ConvertidorGeometrias
package "MeshDecimator  (12 tipos)" as ns_MeshDecimator
package "MeshDecimator.Algorithms  (14 tipos)" as ns_MeshDecimator_Algorithms
package "MeshDecimator.Collections  (4 tipos)" as ns_MeshDecimator_Collections
package "MeshDecimator.Loggers  (2 tipos)" as ns_MeshDecimator_Loggers
package "MeshDecimator.Math  (22 tipos)" as ns_MeshDecimator_Math
package "MeshDecimator.Unity  (4 tipos)" as ns_MeshDecimator_Unity
package "MeshDecimator.Unity.Loggers  (1 tipos)" as ns_MeshDecimator_Unity_Loggers
package "MeshDecimator.UnityEditor  (1 tipos)" as ns_MeshDecimator_UnityEditor
package "MeshDecimatorTool  (3 tipos)" as ns_MeshDecimatorTool
package "UnityMeshSimplifier  (17 tipos)" as ns_UnityMeshSimplifier
package "UnityMeshSimplifier.Editor  (2 tipos)" as ns_UnityMeshSimplifier_Editor
package "UnityMeshSimplifier.Editor.Tests  (1 tipos)" as ns_UnityMeshSimplifier_Editor_Tests
package "UnityMeshSimplifier.Internal  (8 tipos)" as ns_UnityMeshSimplifier_Internal

ns_MeshDecimator --> ns_MeshDecimator_Loggers : 2
ns_MeshDecimator_Algorithms --> ns_UnityMeshSimplifier : 10
ns_MeshDecimator_Algorithms --> ns_MeshDecimator : 8
ns_MeshDecimator_Collections --> ns_MeshDecimator : 2
ns_MeshDecimator_Loggers --> ns_MeshDecimator : 2
ns_UnityMeshSimplifier --> ns_MeshDecimator : 8
ns_UnityMeshSimplifier --> ns_MeshDecimator_Math : 12
ns_MeshDecimator_Unity --> ns_MeshDecimator : 6
ns_MeshDecimator_Unity --> ns_MeshDecimator_Loggers : 1
ns_MeshDecimator_Unity --> ns_MeshDecimator_Unity_Loggers : 1
ns_MeshDecimator_Unity --> ns_UnityMeshSimplifier : 1
ns_MeshDecimator_Unity --> ns_MeshDecimator_Math : 4
ns_MeshDecimator_Unity --> ns_MeshDecimator_Algorithms : 2
ns_MeshDecimator_Math --> ns_UnityMeshSimplifier : 10
ns__global__ --> ns_MeshDecimator_Math : 1
ns_UnityMeshSimplifier_Internal --> ns_UnityMeshSimplifier : 6
ns_UnityMeshSimplifier_Internal --> ns_MeshDecimator_Math : 3
ns_UnityMeshSimplifier_Internal --> ns_MeshDecimator_Collections : 2
ns_MeshDecimator_Unity_Loggers --> ns_MeshDecimator : 1
ns_UnityMeshSimplifier_Editor --> ns_UnityMeshSimplifier : 2
ns_UnityMeshSimplifier_Editor --> ns_MeshDecimator_Unity : 1
ns_MeshDecimatorTool --> ns_UnityMeshSimplifier : 2
ns_MeshDecimatorTool --> ns_MeshDecimator : 3
ns_MeshDecimatorTool --> ns_MeshDecimator_Math : 2
ns_MeshDecimator_UnityEditor --> ns_MeshDecimator_Unity : 1
ns_MeshDecimator --> ns_MeshDecimator_Math : 8
ns_ConvertidorGeometrias --> ns_MeshDecimator_Math : 3
ns_ConvertidorGeometrias --> ns_UnityMeshSimplifier : 1
ns_ConvertidorGeometrias --> ns_MeshDecimator : 2
ns_ConvertidorGeometrias --> ns_MeshDecimator_Algorithms : 1
ns_MeshDecimator_Algorithms --> ns_MeshDecimator_Math : 10
ns_MeshDecimator_Algorithms --> ns_UnityMeshSimplifier_Internal : 12
ns_MeshDecimator_Algorithms --> ns_MeshDecimator_Collections : 4
ns_MeshDecimator --> ns_MeshDecimator_Algorithms : 4
ns_MeshDecimator --> ns_UnityMeshSimplifier : 4
ns_UnityMeshSimplifier --> ns_UnityMeshSimplifier_Internal : 6
ns_UnityMeshSimplifier --> ns_MeshDecimator_Collections : 2
ns_UnityMeshSimplifier_Editor_Tests --> ns_MeshDecimator : 2
ns_UnityMeshSimplifier_Editor_Tests --> ns_MeshDecimator_Math : 3
ns_UnityMeshSimplifier_Editor_Tests --> ns_UnityMeshSimplifier : 3
ns__global__ --> ns_MeshDecimator : 1
@enduml
```

🗂️ Índice de archivos

```
ÍNDICE DE ARCHIVOS
================================================================================

C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Logging.cs    176 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Algorithms\DecimationAlgorithm.cs    163 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Collections\UVChannels.cs     80 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Collections\ResizableArray.cs    179 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Loggers\ConsoleLogger.cs     63 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\SymmetricMatrix.cs    303 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Components\LODBackupComponent.cs     44 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Utility\ResizableArray.cs    219 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Utility\MeshUtils.cs    473 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Utility\IOUtils.cs    102 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\SimplificationOptions.cs    123 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\UnityExample\Assets\Plugins\MeshDecimator\Scripts\MeshDecimatorUtility.cs
924 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\UnityExample\Assets\Plugins\MeshDecimator\Scripts\LODGenerator.cs    552
líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\UnityExample\Assets\Plugins\MeshDecimator\Scripts\DecimatedObject.cs    102
líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector3.cs    494 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector2i.cs    348 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector2d.cs    425 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector2.cs    425 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimatorTool\Properties\AssemblyInfo.cs     27 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\UnityExample\Assets\Scripts\ShowExample.cs     64 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Internal\Triangle.cs    165 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Internal\Ref.cs     44 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Internal\BorderVertex.cs     56 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Internal\BlendShapeFrameContainer.cs     79 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\UnityExample\Assets\Plugins\MeshDecimator\Scripts\UnityLogger.cs     63
líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Internal\BlendShapeContainer.cs     84 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Math\Vector3d.cs    507 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Math\SymmetricMatrix.cs    317 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Math\MathHelper.cs    117 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Editor\SerializedPropertyExtensions.cs     51 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Editor\LODGeneratorHelperEditor.cs    693 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Components\LODGeneratorHelper.cs    173 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Collections\UVChannels.cs     80 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Collections\ResizableArray.cs    179 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Loggers\ConsoleLogger.cs     63 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector4i.cs    388 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector3d.cs    481 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Exceptions\ValidateSimplificationOptionsException.cs     52 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Internal\Vertex.cs     78 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\Internal\UVChannels.cs     93 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector2.cs    425 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\SymmetricMatrix.cs    303 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\MathHelper.cs    286 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Properties\AssemblyInfo.cs     27 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimatorTool\Program.cs    146 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimatorTool\ObjMesh.cs    891 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\UnityExample\Assets\Plugins\MeshDecimator\Scripts\Editor\DecimatedObjectEdito
r.cs    211 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\BoneWeight.cs    249 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\Program.cs   1266 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Algorithms\FastQuadricMeshSimplification.cs   1540 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector4d.cs    467 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector4.cs    467 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector3i.cs    368 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\Vector3d.cs    481 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector4i.cs    388 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\MeshDecimation.cs    180 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Mesh.cs    955 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Logging.cs    176 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\BoneWeight.cs    249 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\MeshSimplifier.cs   2322 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\BlendShape.cs    101 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\AssemblyAttributes.cs      4 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Tests\Editor\MeshUtilsTest.cs    543 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\RevitMacro\ExportarGeometria.cs    177 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Algorithms\FastQuadricMeshSimplification.cs   1540 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Algorithms\DecimationAlgorithm.cs    163 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector3.cs    494 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector2i.cs    348 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector2d.cs    425 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector4d.cs    467 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector4.cs    467 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_decimator\MeshDecimator\Math\Vector3i.cs    368 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Math\MathHelper.cs    286 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\MeshDecimation.cs    180 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\ConvertidorGeometrias\MeshDecimatorLib\Mesh.cs    955 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\MeshCombiner.cs    481 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\LODLevel.cs    247 líneas
C:\.TBT\Proyectos\_Revit_EXE_Geometrias\PostProcesadoEXE\Codigo\references\temp_simplifier\Runtime\LODGenerator.cs    824 líneas
```