## 126 Data Project, Step 4

Sam Ream, Valeria Lopez, Skyler Yee

```
##
## Call:
## lm(formula = RUNS ~ HOME_RUNS + SINGLES + WALKS + STOLEN_BASES,
       data = batting)
##
##
## Residuals:
##
       Min
                  1Q
                       Median
                                     3Q
                                             Max
                       -0.528
## -124.140
              -8.110
                                  6.956
                                          88.759
##
## Coefficients:
##
                 Estimate Std. Error t value Pr(>|t|)
## (Intercept)
                -0.781728
                            1.280636
                                        -0.61
                                                 0.542
## HOME_RUNS
                 0.977261
                            0.031560
                                        30.96
                                                <2e-16 ***
## SINGLES
                 0.400909
                            0.007306
                                        54.87
                                                <2e-16 ***
## WALKS
                 0.268561
                            0.013396
                                        20.05
                                                <2e-16 ***
## STOLEN_BASES
                 0.490476
                            0.028537
                                        17.19
                                                <2e-16 ***
## Signif. codes: 0 '***' 0.001 '**' 0.05 '.' 0.1 ' ' 1
## Residual standard error: 21.6 on 495 degrees of freedom
## Multiple R-squared: 0.9925, Adjusted R-squared: 0.9925
## F-statistic: 1.642e+04 on 4 and 495 DF, p-value: < 2.2e-16
```


## Ridge Regression

#### Fit the Ridge Regression Model

```
##
              Length Class
                                Mode
## a0
                                numeric
              100
                     -none-
## beta
              900
                     dgCMatrix S4
              100
## df
                     -none-
                                numeric
## dim
                2
                     -none-
                                numeric
## lambda
              100
                     -none-
                                numeric
## dev.ratio 100
                     -none-
                                numeric
## nulldev
                1
                     -none-
                                numeric
## npasses
                1
                     -none-
                                numeric
## jerr
                1
                     -none-
                                numeric
## offset
                1
                     -none-
                                logical
## call
                     -none-
                                call
## nobs
                1
                                numeric
                     -none-
```


### Choose an Optimal Value for Lambda

## [1] 24.53741

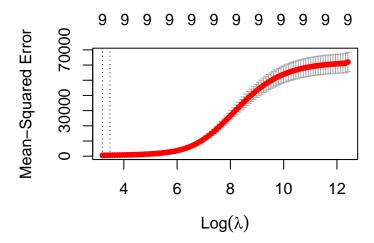

The lambda value that minimizes the test MSE is 24.53741.

#### Analyze Final Model

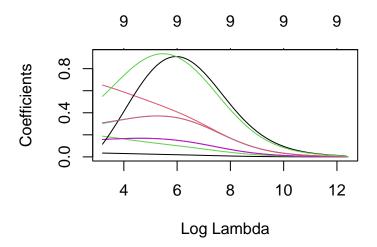

## [1] 0.9913522

The R-Squared is 0.9914, so the best model explains 99.14% of the variation in the response values.


# LASSO

### Fit the Lasso Regression Model

##		Length	Class	Mode
##	a0	71	-none-	${\tt numeric}$
##	beta	639	${\tt dgCMatrix}$	S4
##	df	71	-none-	${\tt numeric}$
##	dim	2	-none-	${\tt numeric}$
##	lambda	71	-none-	${\tt numeric}$
##	${\tt dev.ratio}$	71	-none-	${\tt numeric}$
##	nulldev	1	-none-	${\tt numeric}$
##	npasses	1	-none-	${\tt numeric}$
##	jerr	1	-none-	${\tt numeric}$
##	offset	1	-none-	logical
##	call	4	-none-	call
##	nobs	1	-none-	numeric


### Choose an Optimal Value for Lambda

## [1] 0.3643727

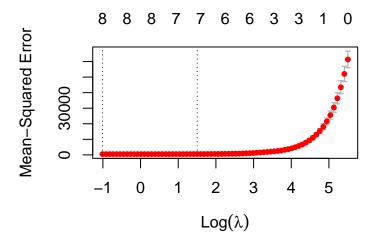

The lambda value that minimizes the test MSE is 0.364.

### Analyze Final Model

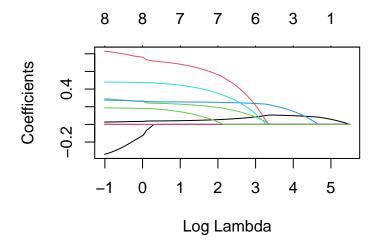

#### ## [1] 0.9935687

The R-Squared is 0.9936, so the best model explains 99.36% of the variation in the response values.

#### ## [1] 0.3643727

