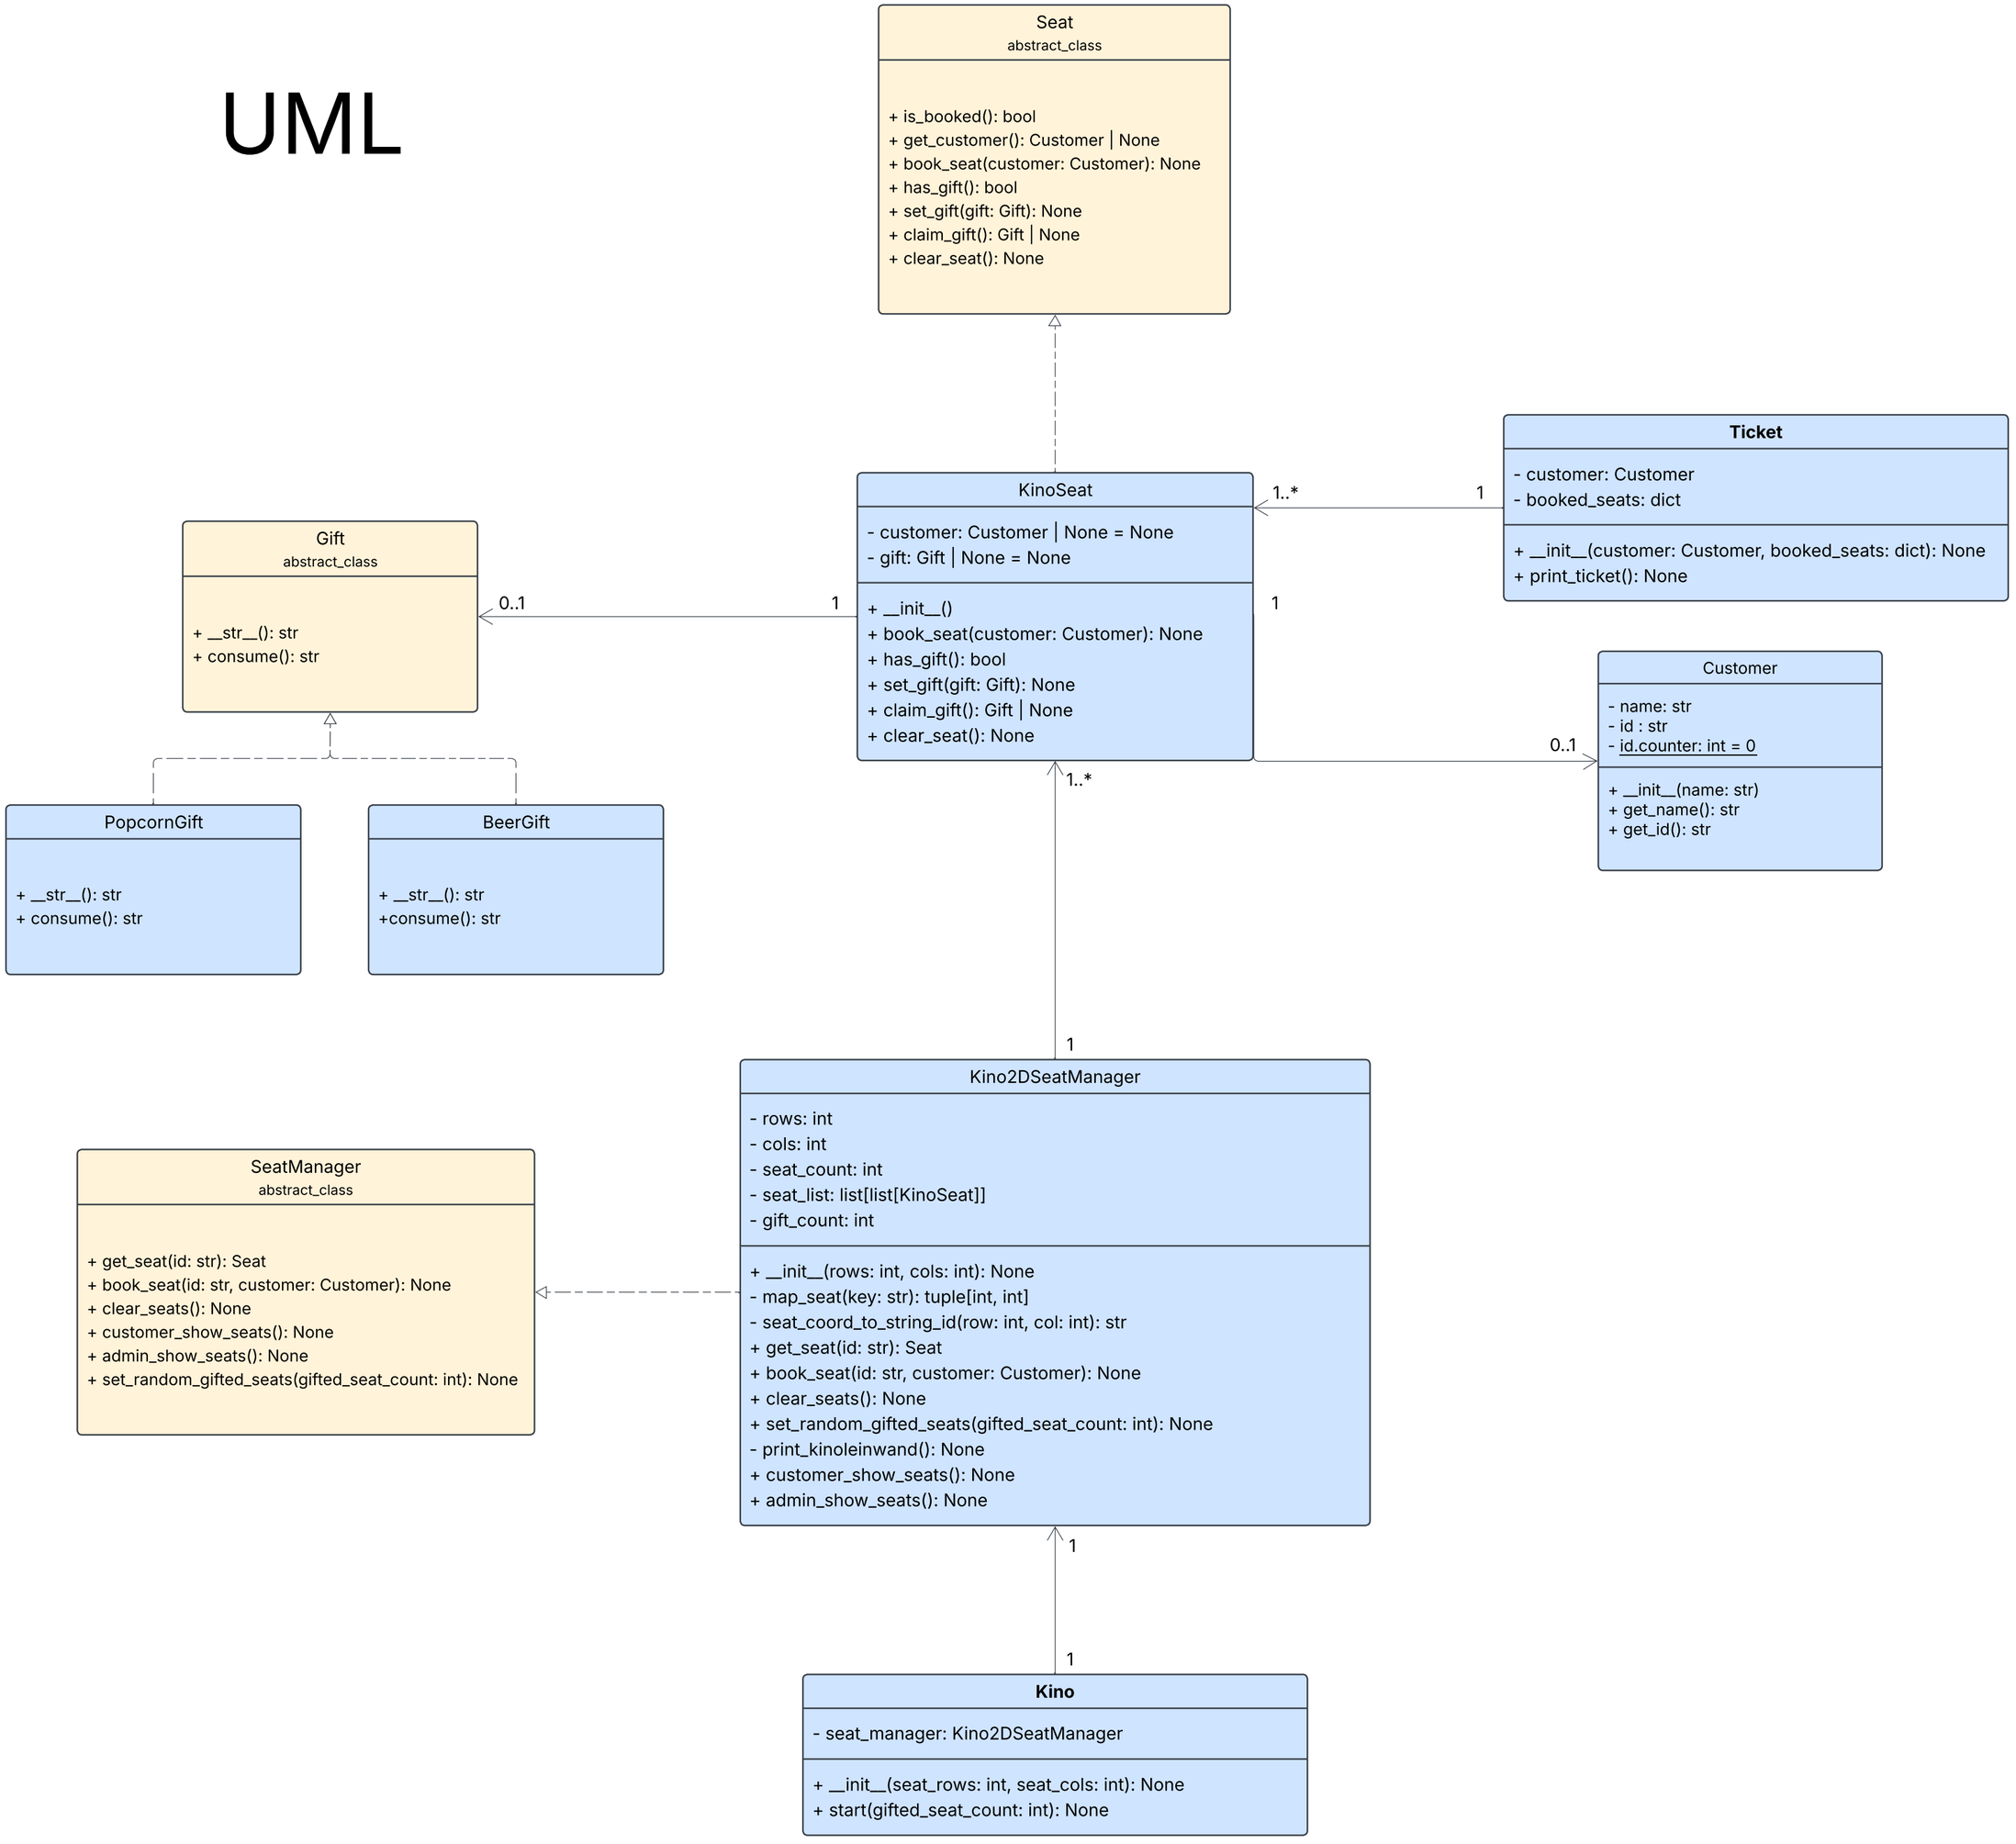
UML


Seat
abstract_class
+ is_booked(): bool
+ get_customer(): Customer | None
+ book_seat(customer: Customer): None
+ has_gift(): bool
+ set_gift(gift: Gift): None
+ claim_gift(): Gift | None
+ clear_seat(): None
Ticket
- customer: Customer
- booked_seats: dict
+ __init__(customer: Customer, booked_seats: dict): None
+ print_ticket(): None
KinoSeat
- customer: Customer | None = None
- gift: Gift | None = None
+ __init__()
+ book_seat(customer: Customer): None
+ has_gift(): bool
+ set_gift(gift: Gift): None
+ claim_gift(): Gift | None
+ clear_seat(): None
1..*
1
1
1
Gift
abstract_class
+ __str__(): str
+ consume(): str
0..1
1
Customer
- name: str
- id : str
- id.counter: int = 0
+ __init__(name: str)
+ get_name(): str
+ get_id(): str
0..1
1..*
PopcornGift
+ __str__(): str
+ consume(): str
BeerGift
+ __str__(): str
+consume(): str
1
Kino2DSeatManager
- rows: int
- cols: int
- seat_count: int
- seat_list: list[list[KinoSeat]]
- gift_count: int
+ __init__(rows: int, cols: int): None
- map_seat(key: str): tuple[int, int]
- seat_coord_to_string_id(row: int, col: int): str
+ get_seat(id: str): Seat
+ book_seat(id: str, customer: Customer): None
+ clear_seats(): None
+ set_random_gifted_seats(gifted_seat_count: int): None
- print_kinoleinwand(): None
+ customer_show_seats(): None
+ admin_show_seats(): None
SeatManager
abstract_class
+ get_seat(id: str): Seat
+ book_seat(id: str, customer: Customer): None
+ clear_seats(): None
+ customer_show_seats(): None
+ admin_show_seats(): None
set_random_gifted_seats(gifted_seat_count: int): None
1
1
Kino
- seat_manager: Kino2DSeatManager
+ __init__(seat_rows: int, seat_cols: int): None
+ start(gifted_seat_count: int): None