

B.M.S. COLLEGE OF ENGINEERING
(Autonomous Institution under VTU)
BENGALURU-560019
Sep-2020 to Jan-2021



Department of Computer Science and Engineering

DATA STRUCTURE LAB REPORT
(19CS3PCDST)

Submitted by

JOEL NINAN JOHNSON

USN: - 1BM19CS199

3RD SEMESTER

D – SECTION

Lab In charge

Madhavi R. P.

Associate Professor

Dept. Of Computer Science

LAB 1

Q. Write a program to simulate the working of stack using an array with the following

- A) Push
- B) Pop
- C) Display

The Program should print appropriate messages for stack overflow and stack underflow.

PROGRAM

```
#include<stdio.h>

#include<stdlib.h>

#define SIZE 10

void push(int);
void pop();
void display();
int S[SIZE],top=-1;
int main()
{
    int x,a;
    while(1)
    {
        printf("[1]PUSH\n[2]POP\n[3]DISPLAY\n[4]EXIT\n");
        printf("-----");
        printf("\nEnter Your Choice: ");
        scanf("%d",&a);

        switch(a)
```

```

        {
            case 1: printf("\nEnter the value to be inserted: ");
                    scanf("%d",&x);
                    push(x);
                    break;
            case 2: pop();
                    break;
            case 3: display();
                    break;
            case 4: exit(0);
            default: printf("\nWrong Selection!!!Select Again!!!\n");
        }
    }
}

```

void push(int x)

```

{
    if(top==SIZE-1)
        printf("\nStack is Full!!!\n\n");
    else
    {
        top++;
        S[top]=x;
        printf("\nElement successsfully Inserted!!!\n\n");
    }
}

```

void pop()

```

{

```

```
        if(top== -1)
            printf("\nStack is Empty!!!\n\n");
        else
        {
            printf("\nDeleted: %d\n\n",S[top]);
            top--;
        }
    }
```

```
void display()
{
    if (top== -1)
        printf("\nStack is Empty!!!\n\n");
    else
    {
        int i;
        printf("\nStack Elements are:\n");
        for(i=top;i>=0;i--)
            printf("%d\n",S[i]);
        printf("\n\n");
    }
}
```

OUTPUT

```
C:\Windows\SYSTEM32\cmd.exe
[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 1
Enter the value to be inserted: 20
Element successsfully Inserted!!!

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 1
Enter the value to be inserted: 40
Element successsfully Inserted!!!

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 1
Enter the value to be inserted: 15
Element successsfully Inserted!!!

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 1
Enter the value to be inserted: 12
Element successsfully Inserted!!!

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 1
```

```
C:\Windows\SYSTEM32\cmd.exe
Element successsfully Inserted!!!

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 1
Enter the value to be inserted: 27
Element successsfully Inserted!!!

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 3
Stack Elements are:
27
12
15
40
20

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 2
Deleted: 27

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 3
Stack Elements are:
12
15
40
20
```

```
C:\Windows\SYSTEM32\cmd.exe
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 3
Stack Elements are:
12
15
40
20

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 2
Deleted: 12

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 3
Stack Elements are:
15
40
20

[1]PUSH
[2]POP
[3]DISPLAY
[4]EXIT
-----
Enter Your Choice: 4
-----
(program exited with code: 0)
Press any key to continue . . .
```

LAB 2

Q. WAP to convert a given valid parenthesized infix arithmetic expression to postfix expression. The expression consists of single character operands and the binary operators +(plus), -(minus), *(multiply) and /(divide)

PROGRAM

```
#include<stdio.h>

#include<ctype.h>

#define SIZE 50

char stack[SIZE];

int top=-1;

push(char a)
```

```
{  
    stack[++top]=a;  
}  
char pop()  
{  
    return(stack[top--]);  
}  
int operator(char symbol)  
{  
    if(symbol=='^')  
    {  
        return(3);  
    }  
    else if(symbol=='*' || symbol=='/')  
    {  
        return(2);  
    }  
    else if(symbol=='+' || symbol=='-')  
    {  
        return (1);  
    }  
    else  
    {  
        return(0);  
    }  
}
```

```
int main()
```

```

{

    char infix[50],postfix[50],x,elem;

    int i=0,k=0;

    printf("Conversion of Infix expression to Postfix:\n\n");

    printf("Enter the infix expression: ");

    scanf("%s",infix);

    push('#');

    while((x=infix[i++])!='\0')
    {

        if(x=='(')push(x);

        else

            if(isalnum(x))postfix[k++]=x;

            else

                if(x==')')

                {

                    while(stack[top]!='(')

                    {

                        postfix[k++]=pop();

                    }

                    elem=pop();

                }

                else

                {

                    while(operator(stack[top])>=operator(x))

                    {

                        postfix[k++]=pop();

                    }

                    push(x);

                }

            }

    }

}

```




```

    }
    while(stack[top]!='#')
    {
        postfix[k++]=pop();
    }
    postfix[k]='\0';
    printf("\nPostfix Expression=%s\n",postfix);
    return 0;
}

```

OUTPUT

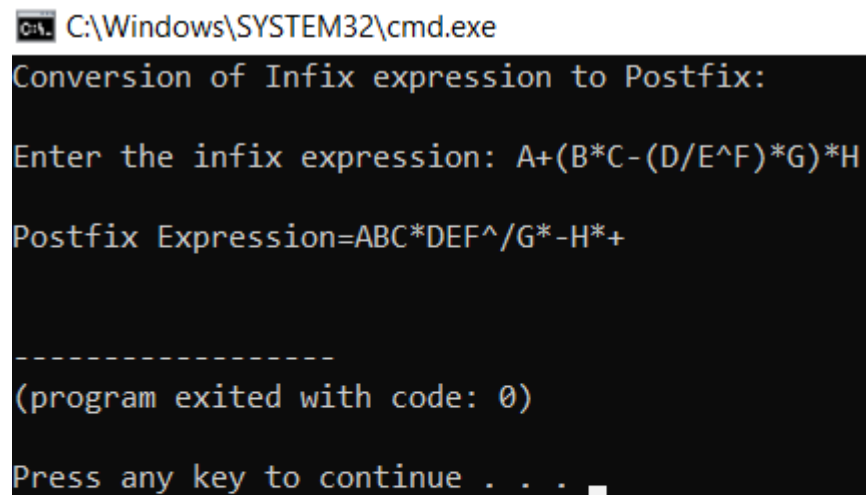

C:\Windows\SYSTEM32\cmd.exe

Conversion of Infix expression to Postfix:

Enter the infix expression: A+(B*C-(D/E^F)*G)*H

Postfix Expression=ABC*DEF^/G*-H*+

(program exited with code: 0)

Press any key to continue . . .

LAB 3

Q. WAP to simulate the working of a queue of integers using an array. Provide the following operations

- a) Insert
- b) Delete
- c) Display

The program should print appropriate messages for queue empty and queue overflow conditions

PROGRAM

```
#include<stdio.h>

#include<stdlib.h>

#define MAX 50

int Q[MAX];

int front = -1;

int rear = -1;

void insert()
{
    int elem;

    if(rear==MAX-1)
        printf("\nQueue Overflow!!!\n");
    else
    {
        if(front== -1)
            front=0;

        printf("\nEnter the element to be inserted into the Queue: ");

        scanf("%d",&elem);

        Q[++rear]=elem;
```

```
        printf("\nElement successfully inserted!!!\n");
    }
}
```

```
void delete()
```

```
{
    if(front== -1 || front>rear)
        printf("\nQueue underflow!!!\n");
    else
    {
        printf("\nDeleted Element: %d\n",Q[front++]);
        if(front>rear)
        {
            front=-1;
            rear=-1;
        }
    }
}
```

```
void display()
```

```
{
    int i;
    if(front== -1)
        printf("\nQueue is empty!!!\n");
    else
    {
        printf("\nQueue Elements are: \n");
        for(i=front;i<=rear;i++)
            printf("\n%d",Q[i]);
    }
}
```

```
        printf("\n");
    }
}

int main()
{
    int choice;
    while(1)
    {
        printf("\n-----MENU-----");
        printf("\n[1]INSERT\n[2]DELETE\n[3]DISPLAY\n[4]EXIT");
        printf("\nEnter you choice: ");
        scanf("%d",&choice);
        switch(choice)
        {
            case 1:
                insert();
                break;
            case 2:
                delete();
                break;
            case 3:
                display();
                break;
            case 4:
                exit(1);
            default:
                printf("\nInvalid choice!!!\n");
        }
    }
}
```

```
        return 0;
    }
}
```

OUTPUT

```
C:\Windows\SYSTEM32\cmd.exe
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 2
Deleted Element: 10
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 3
Queue Elements are:
12
30
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 1
Enter the element to be inserted into the Queue: 10
Element successfully inserted!!!
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 3
Queue Elements are:
12
30
10
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
```

```
C:\Windows\SYSTEM32\cmd.exe
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 1
Enter the element to be inserted into the Queue: 10
Element successfully inserted!!!
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 1
Enter the element to be inserted into the Queue: 12
Element successfully inserted!!!
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 1
Enter the element to be inserted into the Queue: 30
Element successfully inserted!!!
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 3
Queue Elements are:
10
12
30
-----MENU-----
[1]INSERT
[2]DELETE
```

```
C:\Windows\SYSTEM32\cmd.exe
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 2
Deleted Element: 12
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 2
Deleted Element: 30
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 3
Queue Elements are:
10
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 4
-----
(program exited with code: 1)
Press any key to continue . . .
```

LAB 4

Q. WAP to simulate the working of a circular queue of integers using an array. Provide the following operations.

- a) Insert
- b) Delete
- c) Display

The program should print appropriate messages for queue empty and queue overflow conditions

PROGRAM

```
#include<stdio.h>

#include<stdlib.h>

#define size 5
```

```
int Q[size];
```

```
int front=-1,rear=-1;
```

```
int isfull()
```

```
{  
    if(front==rear+1 || (front==0&&rear==size-1))  
    {  
        return 1;  
    }  
    return 0;  
}
```

```
int isempty()
```

```
{  
    if(front== -1)  
    {  
        return 1;  
    }  
    return 0;  
}
```

```
void enqueue()
```

```
{  
    int elem;  
    if(isfull())  
    {  
        printf("\nQueue Overflow!!!\n");  
    }  
    else
```

```

    {
        if(front==-1)
        {
            front=0;
        }
        printf("\nEnter the element to be inserted into the Queue: ");
        scanf("%d",&elem);
        rear = (rear+1)%size;
        Q[rear]=elem;
        printf("\nInserted-->%d\n",elem);
    }
}

```

```

void dequeue()
{
    int elem;
    if(isempty())
    {
        printf("\nQueue Underflow!!!\n");
    }
    else
    {
        elem=Q[front];
        if(front==rear)
        {
            front=-1;
            rear=-1;
        }
        else

```



```

        {
            front=(front+1)%size;
        }
        printf("\nDeleted Element-->%d\n",elem);
    }
}

void display()
{
    int i;
    if(isempty())
    {
        printf("\nQueue is Empty!!!Enter some Elements!!!\n");
    }
    else
    {
        printf("\nFront--> %d",front);
        printf("\nQueue Elements--> \n");
        for(i=front;i!=rear;i=(i+1)%size)
        {
            printf("%d\n",Q[i]);
        }
        printf("%d",Q[i]);
        printf("\nRear--> %d\n",rear);
    }
}

int main()
{
    int choice;

```

```
while(1)
{
    printf("\n-----MENU-----");
    printf("\n[1]INSERT\n[2]DELETE\n[3]DISPLAY\n[4]EXIT");
    printf("\nEnter you choice: ");
    scanf("%d",&choice);

    switch(choice)
    {
        case 1:
            enqueue();
            break;
        case 2:
            dequeue();
            break;
        case 3:
            display();
            break;
        case 4:
            exit(1);
        default:
            printf("\nInvalid choice!!!\n");
    }
}
return 0;
}
```

OUTPUT

```
Select C:\Windows\SYSTEM32\cmd.exe

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
Enter you choice: 1

Enter the element to be inserted into the Queue: 5
Inserted-->5

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
Enter you choice: 1

Queue Overflow!!!

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
Enter you choice: 3

Front--> 0
Queue Elements-->
1
2
3
4
5
Rear--> 4

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
Enter you choice: 2

Deleted Element-->1

-----MENU-----
(1)INSERT
(2)DELETE
```

```
Select C:\Windows\SYSTEM32\cmd.exe

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
Enter you choice: 1

Enter the element to be inserted into the Queue: 1
Inserted-->1

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
Enter you choice: 1

Enter the element to be inserted into the Queue: 2
Inserted-->2

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
Enter you choice: 1

Enter the element to be inserted into the Queue: 3
Inserted-->3

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
Enter you choice: 1

Enter the element to be inserted into the Queue: 4
Inserted-->4

-----MENU-----
(1)INSERT
(2)DELETE
(3)DISPLAY
(4)EXIT
```

```
Select C:\Windows\SYSTEM32\cmd.exe
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 3
Front--> 1
Queue Elements-->
2
3
4
5
Rear--> 4
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 2
Deleted Element-->2
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 3
Front--> 2
Queue Elements-->
3
4
5
Rear--> 4
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 1
Enter the element to be inserted into the Queue: 3
Inserted-->3
```

```
Select C:\Windows\SYSTEM32\cmd.exe
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 3
Front--> 2
Queue Elements-->
3
4
5
Rear--> 0
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 2
Deleted Element-->3
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 3
Front--> 3
Queue Elements-->
4
5
Rear--> 0
-----MENU-----
[1]INSERT
[2]DELETE
[3]DISPLAY
[4]EXIT
Enter you choice: 4
(program exited with code: 1)
Press any key to continue . . .
```

LAB 5 & LAB 6

Q. WAP to Implement Singly Linked List with following operations

- a) Create a linked list.
- b) Insertion of a node at first position, at any position and at end of list.
- c) Deletion of first element, specified element and last element in the list.
- d) Display the contents of the linked list.

PROGRAM

```
#include<stdio.h>
```

```
#include<stdlib.h>
```

```
struct node
```

```
{
```

```
    int data;
```

```
    struct node *next;
```

```
};
```

```
struct node *head;
```

```
void insert_front()
```

```
{
```

```
    struct node *ptr;
```

```
    int new_data;
```

```
    ptr = (struct node *)malloc(sizeof(struct node));
```

```
    if(ptr == NULL)
```

```
    {
```

```
        printf("\nOVERFLOW!!!");
    }
    else
    {
        printf("\nEnter the Value to be inserted:");
        scanf("%d",&new_data);
        ptr->data = new_data;
        ptr->next = head;
        head = ptr;
        printf("\nNODE INSERTED AT THE FRONT\n");
    }
}
```

void insert_end()

```
{
    struct node *ptr,*temp;
    int new_data;
    ptr = (struct node *)malloc(sizeof(struct node));

    if(ptr == NULL)
    {
        printf("\nOVERFLOW!!!\n");
    }
    else
    {
        printf("\nEnter the Value to be inserted:");
        scanf("%d",&new_data);
        ptr->data = new_data;
        if(head == NULL)
```

```

        {
            ptr->next = NULL;
            head = ptr;
            printf("\nNODE INSERTED\n");
        }
        else
        {
            temp = head;
            while(temp->next != NULL)
            {
                temp = temp->next;
            }
            temp->next = ptr;
            ptr->next = NULL;
            printf("\nNODE INSERTED AT THE END\n");
        }
    }
}

```

```

void insert_specificpos()
{
    int i,position,new_data;
    struct node *ptr,*temp;
    ptr = (struct node *)malloc(sizeof(struct node));

    if(ptr == NULL)
    {
        printf("\nOVERFLOW!!!\n");
    }
}

```

```

else
{
    printf("\nEnter the Value to be inserted:");
    scanf("%d",&new_data);
    ptr->data = new_data;
    printf("\nEnter the position to insert the element:");
    scanf("%d",&position);
    temp = head;
    if(position == 1)
    {
        ptr->next = temp;
        head = ptr;
        return;
    }
    for(i=1;i<position-1;i++)
    {
        temp = temp->next;
    }
    ptr->next = temp->next;
    temp->next = ptr;
    printf("\nNODE INSERTED AT %d POSITION \n",position);
}
}

```

```

void delete_front()
{
    struct node *ptr;
    if(head == NULL)
    {

```



```

        printf("EMPTY LIST!!!");
    }
    else
    {
        ptr = head;
        head = ptr->next;
        free(ptr);
        printf("\nNODE DELETED FROM THE BEGINING\n");
    }
}

```

```

void delete_end()
{
    struct node *ptr,*ptr1;
    if(head == NULL)
    {
        printf("EMPTY LIST!!!");
    }
    else if(head->next == NULL)
    {
        head = NULL;
        free(head);
        printf("\nONLY NODE IN THE LIST DELETED\n");
    }
    else
    {
        ptr = head;
        while(ptr->next != NULL)
        {

```

```

        ptr1 = ptr;
        ptr = ptr->next;
    }
    ptr1->next = NULL;
    free(ptr);
    printf("\nNODE DELETED FROM THE END\n");
}
}

```

```

void delete_specificpos()

```

```

{
    struct node *ptr,*ptr1;
    int position,i;
    printf("\nEnter the position to delete the element:");
    scanf("%d",&position);
    ptr = head;
    for(i=0;i<position;i++)
    {
        ptr1 = ptr;
        ptr = ptr->next;

        if(ptr == NULL)
        {
            printf("\nLess Than Required Elements in the List!");
            return;
        }
    }
    ptr1->next = ptr->next;
    free(ptr);
}

```

```

        printf("\nNODE DELETED %d\n",position+1);
    }

void display_list()
{
    struct node *ptr;
    ptr = head;
    if(ptr == NULL)
    {
        printf("EMPTY LIST!!!INSERT FEW ELEMENTS!!!");
    }
    else
    {
        printf("\n\nLIST-->");
        while(ptr != NULL)
        {
            printf("\t%d",ptr->data);
            ptr = ptr->next;
        }
    }
}

int main()
{
    int choice = 0;
    while(1)
    {
        printf("\n\n-----MENU-----\n");
        printf("Choose an option from the list:");
    }
}

```

```
printf("\n[1]Insert in the Begining\n[2]Insert at the End\n[3]Insert at Specific  
Position\n[4]Delete from the Begining\n[5]Delete from the End\n[6]Delete at a Specific  
Position\n[7]Display Linked List\n[8]EXIT\n");
```

```
printf("\nEnter your choice:");
```

```
scanf("%d",&choice);
```

```
switch(choice)
```

```
{
```

```
    case 1: insert_front();
```

```
        break;
```

```
    case 2: insert_end();
```

```
        break;
```

```
    case 3: insert_specificpos();
```

```
        break;
```

```
    case 4: delete_front();
```

```
        break;
```

```
    case 5: delete_end();
```

```
        break;
```

```
    case 6: delete_specificpos();
```

```
        break;
```

```
    case 7: display_list();
```

```
        break;
```

```
    case 8: exit(1);
```

```
    default:
```

```
        printf("\nINVALID CHOICE!!!\n");
```

```
    }
```

```
}
```

```
}
```

OUTPUT

```
C:\Windows\SYSTEM32\cmd.exe

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:1
Enter the Value to be inserted:10
NODE INSERTED AT THE FRONT

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7

LIST--> 10

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked list
(8)EXIT

Enter your choice:2
Enter the Value to be inserted:20
```

```
C:\Windows\SYSTEM32\cmd.exe

Enter the Value to be inserted:20
NODE INSERTED AT THE END

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:2
Enter the Value to be inserted:30
NODE INSERTED AT THE END

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:2
Enter the Value to be inserted:40
NODE INSERTED AT THE END

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
```

```
C:\Windows\SYSTEM32\cmd.exe
-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7

LIST--> 10    20    30    40    40    50

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:1

Enter the Value to be inserted:5

NODE INSERTED AT THE FRONT

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7

LIST--> 5     10    20    30    40    40    50
```

```
C:\Windows\SYSTEM32\cmd.exe
-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:2

Enter the Value to be inserted:40

NODE INSERTED AT THE END

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:2

Enter the Value to be inserted:50

NODE INSERTED AT THE END

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7
```

```
C:\Windows\SYSTEM32\cmd.exe

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:3

Enter the Value to be inserted:25

Enter the position to insert the element:4

NODE INSERTED AT 4 POSITION

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7

LIST--> 5    10    20    25    30    40    40    50

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:6
```

```
C:\Windows\SYSTEM32\cmd.exe

Enter your choice:6

Enter the position to delete the element:6

NODE DELETED 7

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7

LIST--> 5    10    20    25    30    40    50

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:6

Enter the position to delete the element:5

NODE DELETED 6

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
```

```
C:\Windows\SYSTEM32\cmd.exe
LIST--> 5    10   20   25   30   50

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:1
Enter the Value to be inserted:60
NODE INSERTED AT THE FRONT

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7

LIST--> 60   5    10   20   25   30   50

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:5
```

```
C:\Windows\SYSTEM32\cmd.exe
Enter your choice:5
NODE DELETED FROM THE END

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7

LIST--> 60   5    10   20   25   30

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:4
NODE DELETED FROM THE BEGINNING

-----MENU-----
Choose an option from the list:
(1)Insert in the Beginning
(2)Insert at the End
(3)Insert at Specific Position
(4)Delete from the Beginning
(5)Delete from the End
(6)Delete at a Specific Position
(7)Display Linked List
(8)EXIT

Enter your choice:7
```


LAB 7 & LAB 8

Q. WAP Implement Singly Linked List with following operations

- a) Sort the linked list.
- b) Reverse the linked list.
- c) Concatenation of two linked lists
- d) Implementation of Stacks & Queues using Linked Lists

PROGRAM

```
#include<stdio.h>
#include<stdlib.h>

struct node
{
    int data;
    struct node *next;
};
struct node *head;
struct node *head2;

//stack operations
void push()
{
    struct node *ptr;
    int new_data;
    ptr = (struct node *)malloc(sizeof(struct node));
```

```
    if(ptr == NULL)
    {
        printf("\nOVERFLOW!!!");
    }
    else
    {
        printf("\nEnter the Value to be inserted:");
        scanf("%d",&new_data);
        ptr->data = new_data;
        ptr->next = head;
        head = ptr;
        printf("\nNODE INSERTED AT THE TOP OF THE STACK\n");
    }
}

void pop()
{
    struct node *ptr;
    if(head == NULL)
    {
        printf("EMPTY LIST!!!");
    }
    else
    {
        ptr = head;
        head = ptr->next;
        free(ptr);
        printf("\nNODE DELETED FROM TOP OF THE STACK\n");
    }
}
```

```
//queue operations
void enqueue()
{
    struct node *ptr,*temp;
    int new_data;
    ptr = (struct node *)malloc(sizeof(struct node));

    printf("\nEnter the Value to be inserted:");
    scanf("%d",&new_data);
    ptr->data = new_data;
    if(head == NULL)
    {
        ptr->next = NULL;
        head = ptr;
        printf("\nNODE INSERTED AT REAR OF THE QUEUE\n");
    }
    else
    {
        temp = head;
        while(temp->next != NULL)
        {
            temp = temp->next;
        }
        temp->next = ptr;
        ptr->next = NULL;
        printf("\nNODE INSERTED AT REAR OF THE QUEUE\n");
    }
}
```

```
void dequeue()
{
    struct node *ptr;
    if(head == NULL)
    {
        printf("EMPTY LIST!!!");
    }
    else
    {
        ptr = head;
        head = ptr->next;
        free(ptr);
        printf("\nNODE DELETED FROM FRONT OF THE QUEUE\n");
    }
}
```

//Display List

```
void display()
{
    struct node *ptr;
    ptr = head;
    if(ptr == NULL)
    {
        printf("EMPTY LIST!!!INSERT FEW ELEMENTS!!!");
    }
    else
    {
        printf("\n\nLIST-->");
        while(ptr != NULL)
```

```

        {
            printf("\t%d",ptr->data);
            ptr = ptr->next;
        }
    }
}

```

//sort Linked list in ascending order

```

void sort()
{
    struct node *ptr = head;
    struct node *temp = NULL;
    int i;

    if(head == NULL)
    {
        return;
    }
    else
    {
        while(ptr != NULL)
        {
            temp = ptr->next;
            while(temp != NULL)
            {
                if(ptr->data > temp->data)
                {
                    i = ptr->data;
                    ptr->data = temp->data;

```

```

        temp->data = i;
    }
    temp = temp->next;
}
ptr = ptr->next;
}
}
}
//reverse Linked List
void reverse()
{
    struct node *prev = NULL;
    struct node *next = NULL;
    struct node *ptr = head;
    while(ptr != NULL)
    {
        next = ptr->next;
        ptr->next = prev;
        prev = ptr;
        ptr = next;
    }
    head = prev;
}
//create list
struct node *create_list(struct node *head)
{
    struct node *ptr,*temp;
    int i,n,new_data;
    printf("\nEnter the number of nodes : ");

```

```

scanf("%d",&n);

    head = NULL;

    if(n == 0)
    {
        return head;
    }

    for(i=1;i<=n;i++)
    {

        ptr = (struct node *)malloc(sizeof(struct node));

        printf("Enter the element to be inserted : ");

        scanf("%d",&new_data);

        ptr->data = new_data;

        if(head == NULL)
        {

            ptr->next = NULL;

            head = ptr;

        }
        else
        {

            temp = head;

            while(temp->next != NULL)
            {

                temp = temp->next;

            }

            temp->next = ptr;

            ptr->next = NULL;

        }

    }

    return head;

```

```

}

//concatenate two lists
struct node *concatenate(struct node *head, struct node *head2)
{
    struct node *ptr;
    if(head == NULL)
    {
        head = head2;
        return head;
    }
    if(head2 == NULL)
    {
        return head;
    }
    ptr = head;
    while(ptr->next != NULL)
    {
        ptr = ptr->next;
    }
    ptr->next = head2;
    return head;
}

int main()
{
    int choice = 0;
    while(1)
    {
        printf("\n\n*****MENU*****\n");
        printf("Choose an option from the list:");
    }
}

```



```

printf("\n-----STACK OPERATIONS-----\n[1]PUSH\n[2]POP");
printf("\n-----QUEUE OPERATIONS-----\n[3]ENQUEUE\n[4]DEQUEUE");
printf("\n-----");
printf("\n[5]DISPLAY\n[6]SORT\n[7]REVERSE\n[8]CONCATENATION\n[9]EXIT\n");
printf("\nEnter your choice:");
scanf("%d",&choice);
switch(choice)
{
    case 1: push();
            break;
    case 2: pop();
            break;
    case 3: enqueue();
            break;
    case 4: dequeue();
            break;
    case 5: display();
            break;
    case 6: sort();
            printf("\nSorted List::");
            display();
            break;
    case 7: reverse();
            printf("\nReversed List::");
            display();
            break;
    case 8: printf("\nCreate a Second list-->");
            head2 = create_list(head2);
            printf("\nList1:");

```

```

        display();
        struct node *ptr;
        ptr = head2;
        if(ptr == NULL)
        {
            printf("LIST2 IS EMPTY!!!");
        }
        else
        {
            printf("\n\nLIST2-->");
            while(ptr != NULL)
            {
                printf("\t%d",ptr->data);
                ptr = ptr->next;
            }
        }
        head = concatenate(head,head2);
        printf("\n\nConcatenated List:");
        display();
        break;
case 9: exit(1);
default:
    printf("\nINVALID CHOICE!!!\n");
}
}
}

```

OUTPUT

```
C:\Windows\SYSTEM32\cmd.exe

*****MENU*****
Choose an option from the list:
----STACK OPERATIONS----
[1]PUSH
[2]POP
----QUEUE OPERATIONS----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:1

Enter the Value to be inserted:10

NODE INSERTED AT THE TOP OF THE STACK

*****MENU*****
Choose an option from the list:
----STACK OPERATIONS----
[1]PUSH
[2]POP
----QUEUE OPERATIONS----
```

```
C:\Windows\SYSTEM32\cmd.exe

[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:3

Enter the Value to be inserted:20

NODE INSERTED AT REAR OF THE QUEUE

*****MENU*****
Choose an option from the list:
----STACK OPERATIONS----
[1]PUSH
[2]POP
----QUEUE OPERATIONS----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT
```

```
C:\Windows\SYSTEM32\cmd.exe

Enter your choice:5

LIST--> 10      20

*****MENU*****
Choose an option from the list:
-----STACK OPERATIONS-----
[1]PUSH
[2]POP
-----QUEUE OPERATIONS-----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:1

Enter the Value to be inserted:40

NODE INSERTED AT THE TOP OF THE STACK

*****MENU*****
Choose an option from the list:
```

```
C:\Windows\SYSTEM32\cmd.exe

*****MENU*****
Choose an option from the list:
-----STACK OPERATIONS-----
[1]PUSH
[2]POP
-----QUEUE OPERATIONS-----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:4

NODE DELETED FROM FRONT OF THE QUEUE

*****MENU*****
Choose an option from the list:
-----STACK OPERATIONS-----
[1]PUSH
[2]POP
-----QUEUE OPERATIONS-----
[3]ENQUEUE
[4]DEQUEUE
-----
```

```
C:\Windows\SYSTEM32\cmd.exe

[8]CONCATENATION
[9]EXIT

Enter your choice:2

NODE DELETED FROM TOP OF THE STACK

*****MENU*****
Choose an option from the list:
----STACK OPERATIONS----
[1]PUSH
[2]POP
----QUEUE OPERATIONS----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:5

LIST--> 20

*****MENU*****
Choose an option from the list:
```

```
C:\Windows\SYSTEM32\cmd.exe

*****MENU*****
Choose an option from the list:
----STACK OPERATIONS----
[1]PUSH
[2]POP
----QUEUE OPERATIONS----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:1

Enter the Value to be inserted:10

NODE INSERTED AT THE TOP OF THE STACK

*****MENU*****
Choose an option from the list:
----STACK OPERATIONS----
[1]PUSH
[2]POP
----QUEUE OPERATIONS----
[3]ENQUEUE
```

```
C:\Windows\SYSTEM32\cmd.exe

[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:8

Create a Second list-->
Enter the number of nodes : 3
Enter the element to be inserted : 100
Enter the element to be inserted : 40
Enter the element to be inserted : 70

List1:

LIST--> 10      20

LIST2-->      100      40      70

Concatenated List:

LIST--> 10      20      100      40      70

*****MENU*****
Choose an option from the list:
-----STACK OPERATIONS-----
[1]PUSH
```

```
C:\Windows\SYSTEM32\cmd.exe

Choose an option from the list:
-----STACK OPERATIONS-----
[1]PUSH
[2]POP
-----QUEUE OPERATIONS-----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:6

Sorted List::

LIST--> 10      20      40      70      100

*****MENU*****
Choose an option from the list:
-----STACK OPERATIONS-----
[1]PUSH
[2]POP
-----QUEUE OPERATIONS-----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
```

```
C:\Windows\SYSTEM32\cmd.exe
[2]POP
-----QUEUE OPERATIONS-----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:7

Reversed List::

LIST--> 100    70    40    20    10

*****MENU*****
Choose an option from the list:
-----STACK OPERATIONS-----
[1]PUSH
[2]POP
-----QUEUE OPERATIONS-----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
```

```
C:\Windows\SYSTEM32\cmd.exe
LIST--> 100    70    40    20    10

*****MENU*****
Choose an option from the list:
-----STACK OPERATIONS-----
[1]PUSH
[2]POP
-----QUEUE OPERATIONS-----
[3]ENQUEUE
[4]DEQUEUE
-----
[5]DISPLAY
[6]SORT
[7]REVERSE
[8]CONCATENATION
[9]EXIT

Enter your choice:9

-----
(program exited with code: 1)

Press any key to continue . . .
```

LAB 9

Q. WAP Implement doubly link list with primitive operations

- a) Create a doubly linked list.
- b) Insert a new node to the left of the node.
- c) Delete the node based on a specific value
- d) Display the contents of the list

PROGRAM

```
#include<stdio.h>
```

```
#include<stdlib.h>
```

```
struct node
```

```
{
```

```
    struct node *prev;
```

```
    int data;
```

```
    struct node *next;
```

```
};
```

```
struct node *head;
```

```
struct node *last;
```

```
//Create DLL
```

```
void create_list()
```

```
{
```

```
    struct node *ptr;
```

```
    int i,n,new_data;
```

```
    printf("\nEnter the number of nodes:");
```

```
    scanf("%d",&n);
```



```

if(n>=1)
{
    head = (struct node *)malloc(sizeof(struct node));
    if(head != NULL)
    {
        printf("\nEnter the value to be inserted for Node 1 :\t");
        scanf("%d",&new_data);

        head->data = new_data;
        head->prev = NULL;
        head->next = NULL;

        last = head;

        for(i=2;i<=n;i++)
        {
            ptr = (struct node *)malloc(sizeof(struct node));

            if(ptr != NULL)
            {
                printf("Enter the value to be inserted for Node %d
:\t",i);

                scanf("%d",&new_data);

                ptr->data = new_data;
                ptr->prev = last;
                ptr->next = NULL;

                last->next = ptr;

```

```

                                last = ptr;
                                }
                                }
                                printf("\n\nLinked List Created!!");
                                }
                                }
                                else
                                {
                                printf("\n\nInvalid!!Enter valid number of nodes!!");
                                }
                                }

```

```

//display
void display_list()
{
    struct node *ptr = head;
    if(ptr == NULL)
    {
        printf("\nList is Empty!!");
    }
    else
    {
        printf("\n\nLIST-->");
        while(ptr != NULL)
        {
            printf("\t%d",ptr->data);
            ptr = ptr->next;
        }
    }
}

```

```
}
```

```
//Insert at the left of a given node
```

```
void insert_left()
```

```
{
```

```
    int i,pos,new_data;
```

```
    struct node *ptr,*temp;
```

```
    ptr = (struct node *)malloc(sizeof(struct node));
```

```
    printf("\nEnter the Node to insert the value: ");
```

```
    scanf("%d",&pos);
```

```
    printf("\nEnter the value to be inserted: ");
```

```
    scanf("%d",&new_data);
```

```
    ptr->data = new_data;
```

```
    if(head == NULL)
```

```
    {
```

```
        printf("\nList is empty!!");
```

```
    }
```

```
    else
```

```
    {
```

```
        temp = head;
```

```
        i=1;
```

```
        while(i<pos-1 && temp!=NULL)
```

```
        {
```

```
            temp = temp->next;
```

```
            i++;
```

```
        }
```

```
if(pos == 1)
{
    ptr->next = head;
    ptr->prev = NULL;
    head->prev = ptr;
    head = ptr;
    printf("\n\nNode Inserted at %d position!!",pos);
}
else if(temp == last)
{
    ptr->next = NULL;
    ptr->prev = last;
    last->next = ptr;
    last = ptr;
    printf("\n\nNode Inserted at %d position!!",pos);
}
else if(temp != NULL)
{
    ptr->next = temp->next;
    ptr->prev = temp;
    if(temp->next != NULL)
    {
        temp->next->prev = ptr;
    }
    temp->next = ptr;
    printf("\n\nNode Inserted at %d position!!",pos);
}
else
{

```

```

        printf("\n\nInvalid Position!!");

    }

}

//Delete node by Value
void delete()
{
    struct node* temp = head;
    struct node* ptr = (struct node*) malloc(sizeof(struct node));
    int val;
    printf("\nEnter the Value to be deleted: ");
    scanf("%d",&val);

    if(temp->next == NULL)
    {
        head = NULL;
        free(temp);
        printf("\n\nValue %d, deleted \n",val);
        return;
    }

    if(temp!=NULL && temp->data == val)
    {
        head = temp->next;
        head->prev = NULL;
        free(temp);
        printf("\n\nValue %d, deleted ",val);
        return;
    }
}

```

```

    }
    while(temp!=NULL && temp->data != val)
    {
        ptr = temp;
        temp = temp->next;
    }
    if(temp==NULL)
    {
        printf("\n\nValue not found");
        return;
    }
    ptr->next = temp->next;

    if(temp->next == NULL)
    {
        printf("\n\nValue %d, deleted \n",val);
        free(temp);
        return;
    }

    struct node* temp2 = (struct node*) malloc(sizeof(struct node));
    temp2 = temp->next;
    temp2->prev = ptr;
    free(temp);
    printf("Value %d, deleted \n",val);
}

int main()
{

```

```

int choice = 0;
while(1)
{
    printf("\n\n*****MENU*****\n");
    printf("Choose an option from the list:");
    printf("\n[1]CREATE A LIST\n[2]INSERT TO THE LEFT OF A NODE\n[3]DELETE
NODE \n[4]DISPLAY\n[5]EXIT\n");
    printf("\nEnter your choice:");
    scanf("%d",&choice);
    switch(choice)
    {
        case 1: create_list();
                break;
        case 2: insert_left();
                break;
        case 3: delete();
                break;
        case 4: display_list();
                break;
        case 5: exit(1);
        default:
                printf("\nINVALID CHOICE!!!\n");
    }
}
}

```

OUTPUT

```
C:\Windows\SYSTEM32\cmd.exe
*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT
Enter your choice:1
Enter the number of nodes:3
Enter the value to be inserted for Node 1 : 10
Enter the value to be inserted for Node 2 : 20
Enter the value to be inserted for Node 3 : 30

Linked List Created!!

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT
Enter your choice:2
Enter the Node to insert the value: 2
Enter the value to be inserted: 15

Node Inserted at 2 position!!

*****MENU*****
```

```
C:\Windows\SYSTEM32\cmd.exe
*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT
Enter your choice:4
LIST--> 10 15 20 30

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT
Enter your choice:2
Enter the Node to insert the value: 4
Enter the value to be inserted: 25

Node Inserted at 4 position!!

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
```



```
C:\Windows\SYSTEM32\cmd.exe

Enter your choice:4

LIST--> 10      15      20      25      30

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT

Enter your choice:3

Enter the Value to be deleted: 10

Value 10, deleted

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT

Enter your choice:4

LIST--> 15      20      25      30

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
```

```
C:\Windows\SYSTEM32\cmd.exe

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT

Enter your choice:3

Enter the Value to be deleted: 20

Value 20, deleted

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT

Enter your choice:4

LIST--> 15      25      30

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT

Enter your choice:3
```

```
C:\Windows\SYSTEM32\cmd.exe
Enter the Value to be deleted: 30

Value 30, deleted

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT
Enter your choice:4

LIST--> 15      25

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
[2]INSERT TO THE LEFT OF A NODE
[3]DELETE NODE
[4]DISPLAY
[5]EXIT
Enter your choice:3

Enter the Value to be deleted: 10

Value not found

*****MENU*****
Choose an option from the list:
[1]CREATE A LIST
```

LAB 10

Q. Write a program

- To construct a binary Search tree.
- To traverse the tree using all the methods i.e., in-order, preorder and post order
- To display the elements in the tree.

PROGRAM

```
#include<stdlib.h>
```

```
#include<stdio.h>
```

```
struct node
{
    int key;
    struct node *left;
    struct node *right;
};
struct node *root;
```

```
struct node *create(int data)
{
    struct node *temp;
    temp = (struct node*)malloc(sizeof(struct node));
    temp->key = data;
    temp->left = temp->right = NULL;
    return temp;
}
```

```
void insert(struct node *root,struct node *temp)
{
    if(temp->key < root->key)
    {
        if(root->left != NULL)
        {
            insert(root->left,temp);
        }
        else
        {
            root->left = temp;
        }
    }
```

```

    }
    if(temp->key > root->key)
    {
        if(root->right != NULL)
        {
            insert(root->right,temp);
        }
        else
        {
            root->right = temp;
        }
    }
}

```

```

void display(struct node *root)
{
    if(root != NULL)
    {
        display(root->left);
        printf("%d\t",root->key);
        display(root->right);
    }
}

```

```

void inorder(struct node *root)
{
    if(root != NULL)
    {
        inorder(root->left);
    }
}

```

```

        printf("%d\t",root->key);
        inorder(root->right);
    }
}

void preorder(struct node *root)
{
    if(root != NULL)
    {
        printf("%d\t",root->key);
        preorder(root->left);
        preorder(root->right);
    }
}

void postorder(struct node *root)
{
    if(root != NULL)
    {
        postorder(root->left);
        postorder(root->right);
        printf("%d\t",root->key);
    }
}

int main()
{
    char ch;
    struct node *temp;
    root = NULL;
    int choice = 0;
    int data;

```

```

while(1)
{
    printf("\n\n*****MENU*****\n");
    printf("Choose an option from the list:");
    printf("\n[1]CREATE A TREE\n[2]INORDER TRAVERSAL\n[3]PREORDER
    TRAVERSAL\n[4]POSTORDER TRAVERSAL\n[5]DISPLAY\n[6]EXIT\n");
    printf("\nEnter your choice:");
    scanf("%d",&choice);
    switch(choice)
    {
        case 1: do{
            printf("\nEnter the value:");
            scanf("%d",&data);
            temp = create(data);
            if(root == NULL)
            {
                root = temp;
            }
            else
            {
                insert(root,temp);
            }
            printf("\nDo you Want to Enter more(Y/N)? ");
            getchar();
            scanf("%c",&ch);
        }while(ch=='y' || ch=='Y');
        break;
    }
}

```

```
        case 2: printf("\nINORDER TRAVERSAL-->\t");
                inorder(root);
                break;

        case 3: printf("\nPREORDER TRAVERSAL-->\t");
                preorder(root);
                break;

        case 4: printf("\nPOSTORDER TRAVERSAL-->\t");
                postorder(root);
                break;

        case 5: display(root);
                break;

        case 6: exit(1);
        default:
                printf("\nINVALID CHOICE!!!\n");

    }

}

return 0;

}
```

OUTPUT

```
C:\Windows\SYSTEM32\cmd.exe
Choose an option from the list:
[1]CREATE A TREE
[2]INORDER TRAVERSAL
[3]PREORDER TRAVERSAL
[4]POSTORDER TRAVERSAL
[5]DISPLAY
[6]EXIT

Enter your choice:1
Enter the value:2
Do you Want to Enter more(Y/N)? y
Enter the value:5
Do you Want to Enter more(Y/N)? y
Enter the value:8
Do you Want to Enter more(Y/N)? y
Enter the value:10
Do you Want to Enter more(Y/N)? y
Enter the value:12
Do you Want to Enter more(Y/N)? y
```

```
C:\Windows\SYSTEM32\cmd.exe
Enter the value:4
Do you Want to Enter more(Y/N)? n

*****MENU*****
Choose an option from the list:
[1]CREATE A TREE
[2]INORDER TRAVERSAL
[3]PREORDER TRAVERSAL
[4]POSTORDER TRAVERSAL
[5]DISPLAY
[6]EXIT

Enter your choice:5
2      3      4      5      8      10      12

*****MENU*****
Choose an option from the list:
[1]CREATE A TREE
[2]INORDER TRAVERSAL
[3]PREORDER TRAVERSAL
[4]POSTORDER TRAVERSAL
[5]DISPLAY
[6]EXIT

Enter your choice:4
POSTORDER TRAVERSAL--> 4      3      12      10      8      5      2
```



```
C:\Windows\SYSTEM32\cmd.exe

*****MENU*****
Choose an option from the list:
[1]CREATE A TREE
[2]INORDER TRAVERSAL
[3]PREORDER TRAVERSAL
[4]POSTORDER TRAVERSAL
[5]DISPLAY
[6]EXIT

Enter your choice:3

PREORDER TRAVERSAL-->  2      5      3      4      8      10      12

*****MENU*****
Choose an option from the list:
[1]CREATE A TREE
[2]INORDER TRAVERSAL
[3]PREORDER TRAVERSAL
[4]POSTORDER TRAVERSAL
[5]DISPLAY
[6]EXIT

Enter your choice:2

INORDER TRAVERSAL-->  2      3      4      5      8      10      12

*****MENU*****
Choose an option from the list:
[1]CREATE A TREE
```