

# MCP servers

## Overview

In this section, you will connect external services to your Flappy Kiro game using MCP servers for sprite generation, audio assets, and analytics integration.

## Model Context Protocol (MCP)

[Model Context Protocol](#) (MCP) extends Kiro's capabilities by connecting to specialized servers that provide additional tools and context. For example, the AWS Documentation MCP server provides tools to search, read, and get recommendations from AWS documentation directly within Kiro.

With MCP, you can:


- Access specialized knowledge bases and documentation.
- Integrate with external services and APIs.
- Extend Kiro's capabilities with domain-specific tools.
- Create custom tools for your specific workflows.

## Install Playwright MCP Server

The [Playwright](#) MCP server enables automated browser testing and web scraping capabilities within Kiro, allowing you to programmatically interact with web pages, capture screenshots, and validate application functionality across different browsers.


1. On your browser, navigate to the [Kiro Server Directory](#).
2. For Playwright, select **+ Add to Kiro**.
3. If prompted, select **Open Kiro**.

The MCP configuration file will be displayed, and will be configured to enable the Playwright server.

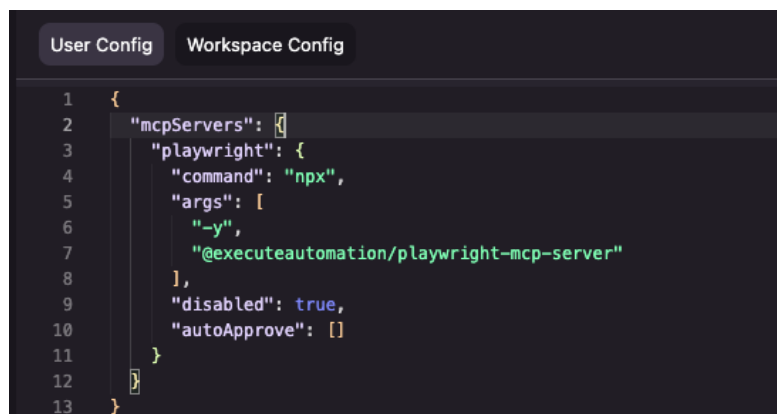


```
1  {
2    "mcpServers": {
3      "playwright": {
4        "command": "npx",
5        "args": [
6          "-y",
7          "@executeautomation/playwright-mcp-server"
8        ],
9        "disabled": true,
10       "autoApprove": []
11     }
12   }
13 }
```

4. Select the **Kiro** icon in the view panel. You will see `playwright` listed under **MCP SERVERS** with a status of `Disabled`.
5. Using the context menu, select **Enable**. In a few seconds, the status will change to `Connected`.

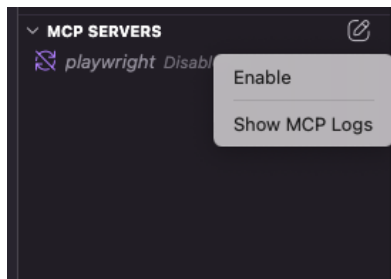


**Note**

If the MCP server doesn't connect, select **Ask Kiro** to send the logs to the Kiro chat window. Kiro will help resolve the failure.

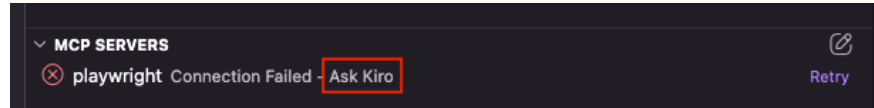

6. Expand the Playwright server to see the available tools.

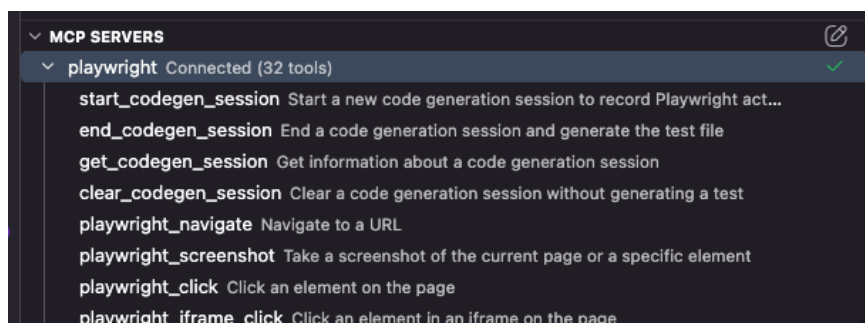


## Using the MCP server

1. Use the Playwright MCP server to check your application is running with no errors.

► **Example prompts**

2. When prompted, choose **Auto-approve and accept**.

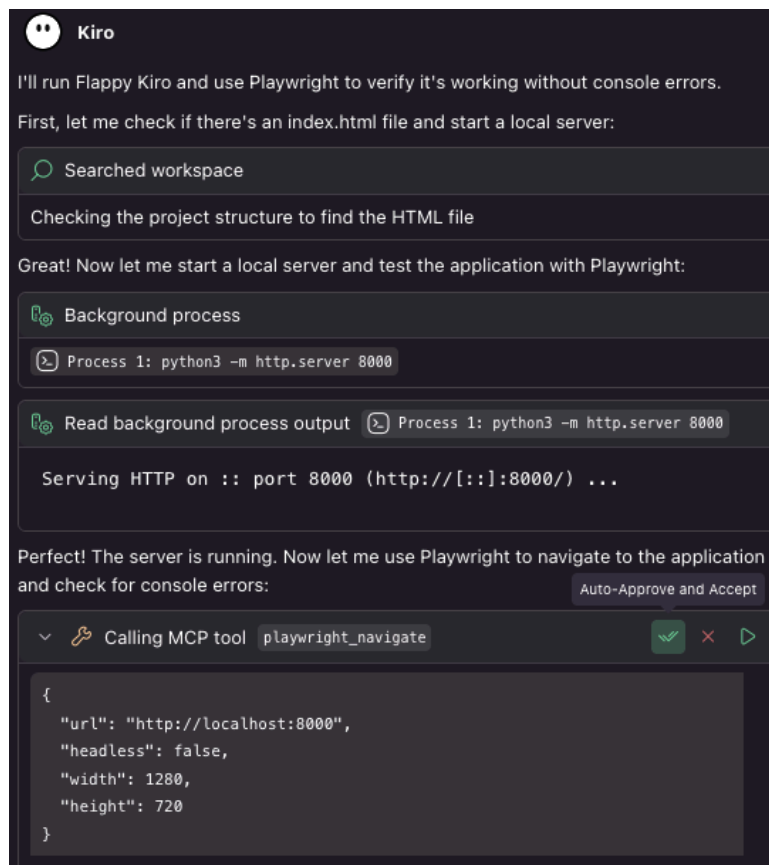

© 2008 - 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved. [Privacy policy](#) [Terms of use](#) [Cookie preferences](#)

## (Optional) Set up sprite generation MCP servers

In the chat panel, ask Kiro to configure sprite generation MCP servers.

### ► Example prompts

## (Optional) Add an audio MCP server

Ask Kiro to create audio generation and management functionality.

### ► Example prompts

## (Optional) Add a game analytics MCP server

Ask Kiro to integrate game analytics and leaderboard services.

### ► Example prompts

## Summary

You integrated MCP servers into Kiro, providing powerful extensions that will be automatically accessed when required.

[Previous](#)[Next](#)