



Temporal structure of screened flags, and comparison with sensor-free screening

Run lengths of consecutive classifier-screened non-Normal flags
269 runs | max 39 | 49 singletons | n = 4,745 rows

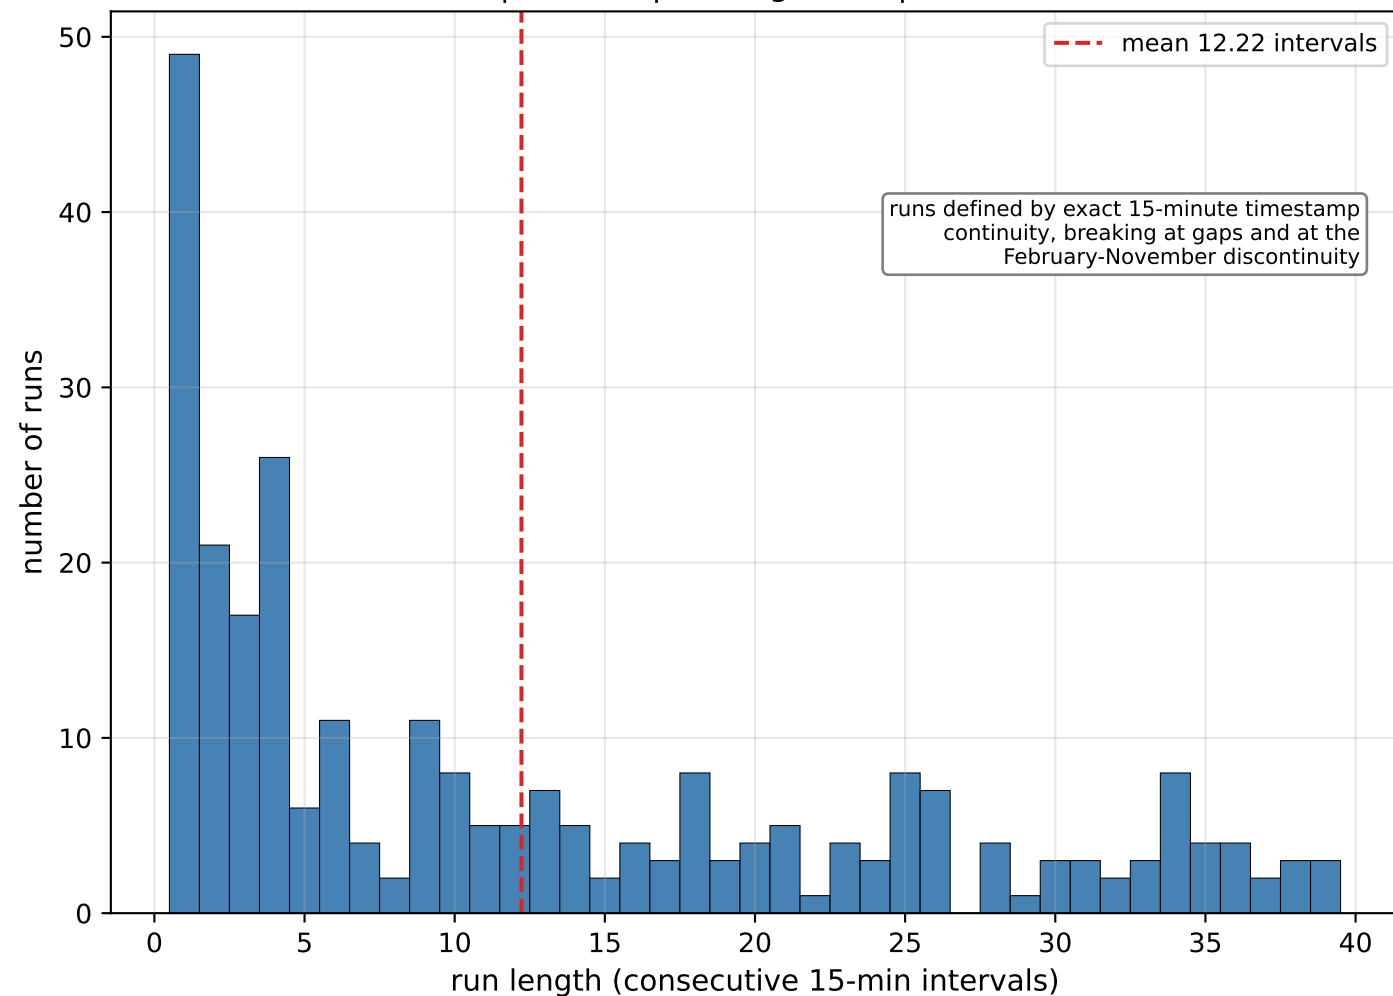

Objective 3 vs Objective 2 sensor-free screening
4,745 overlapping rows — descriptive comparison only

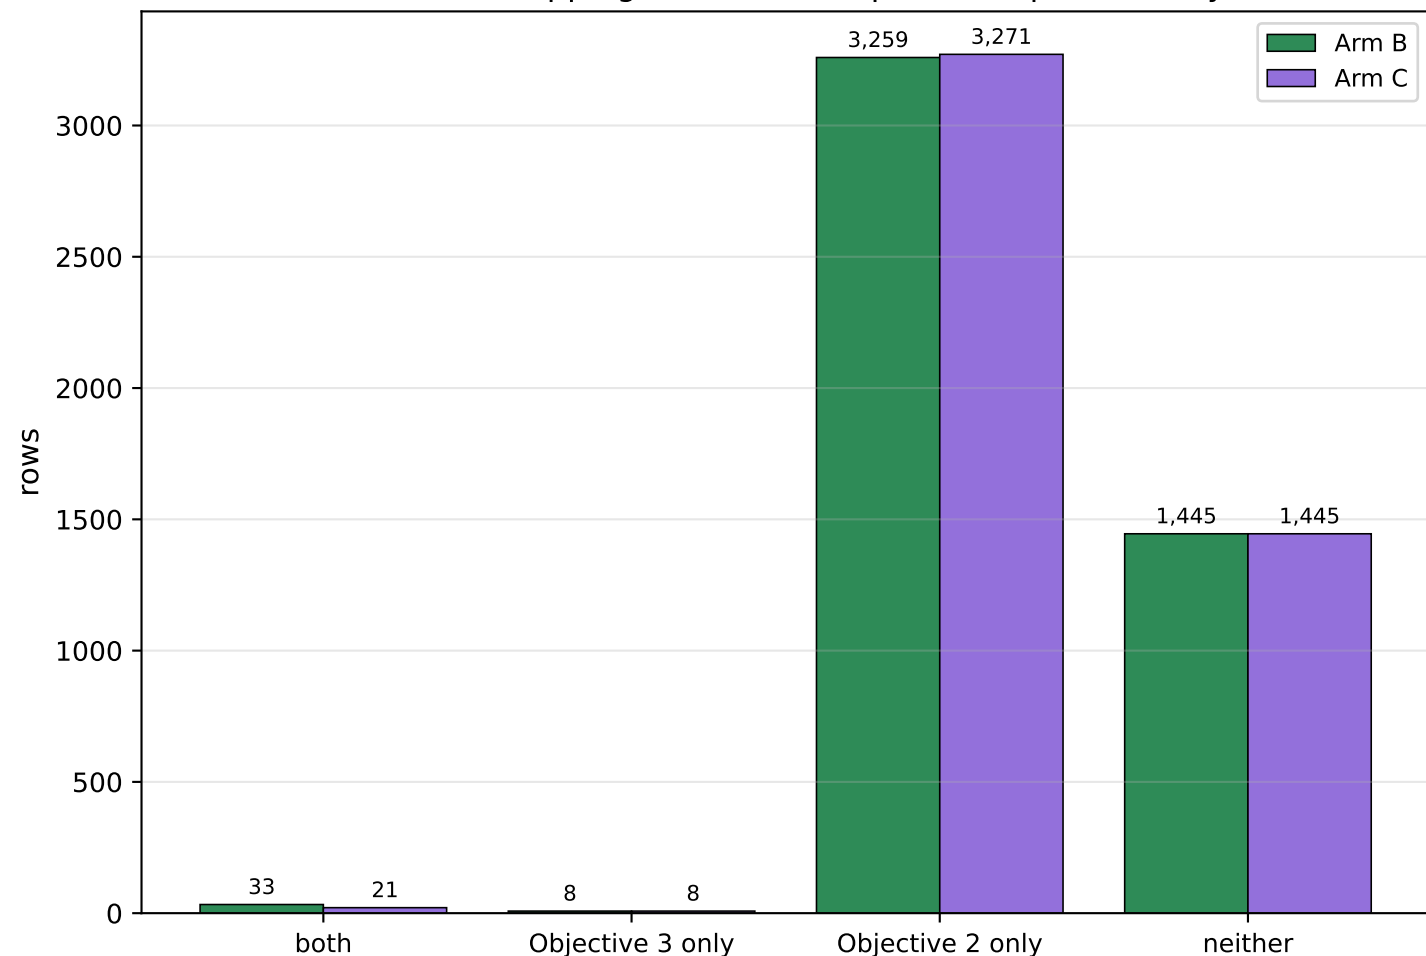

Agreement with Objective 2 sensor-free Arm B / Arm C screening is descriptive only and is not independent fault validation. Arms B/C do not consume the corrupted measured-irradiance signal used by Objective 3, but both analyses concern the same HK site and period and neither has verified HK fault labels; therefore agreement cannot be presented as corroboration of a true PV event.

Flags form long coherent daytime blocks rather than scattered isolated timestamps. The two screening signals differ markedly - Objective 3 screens approximately 69% of rows where Objective 2 flags under 1%.