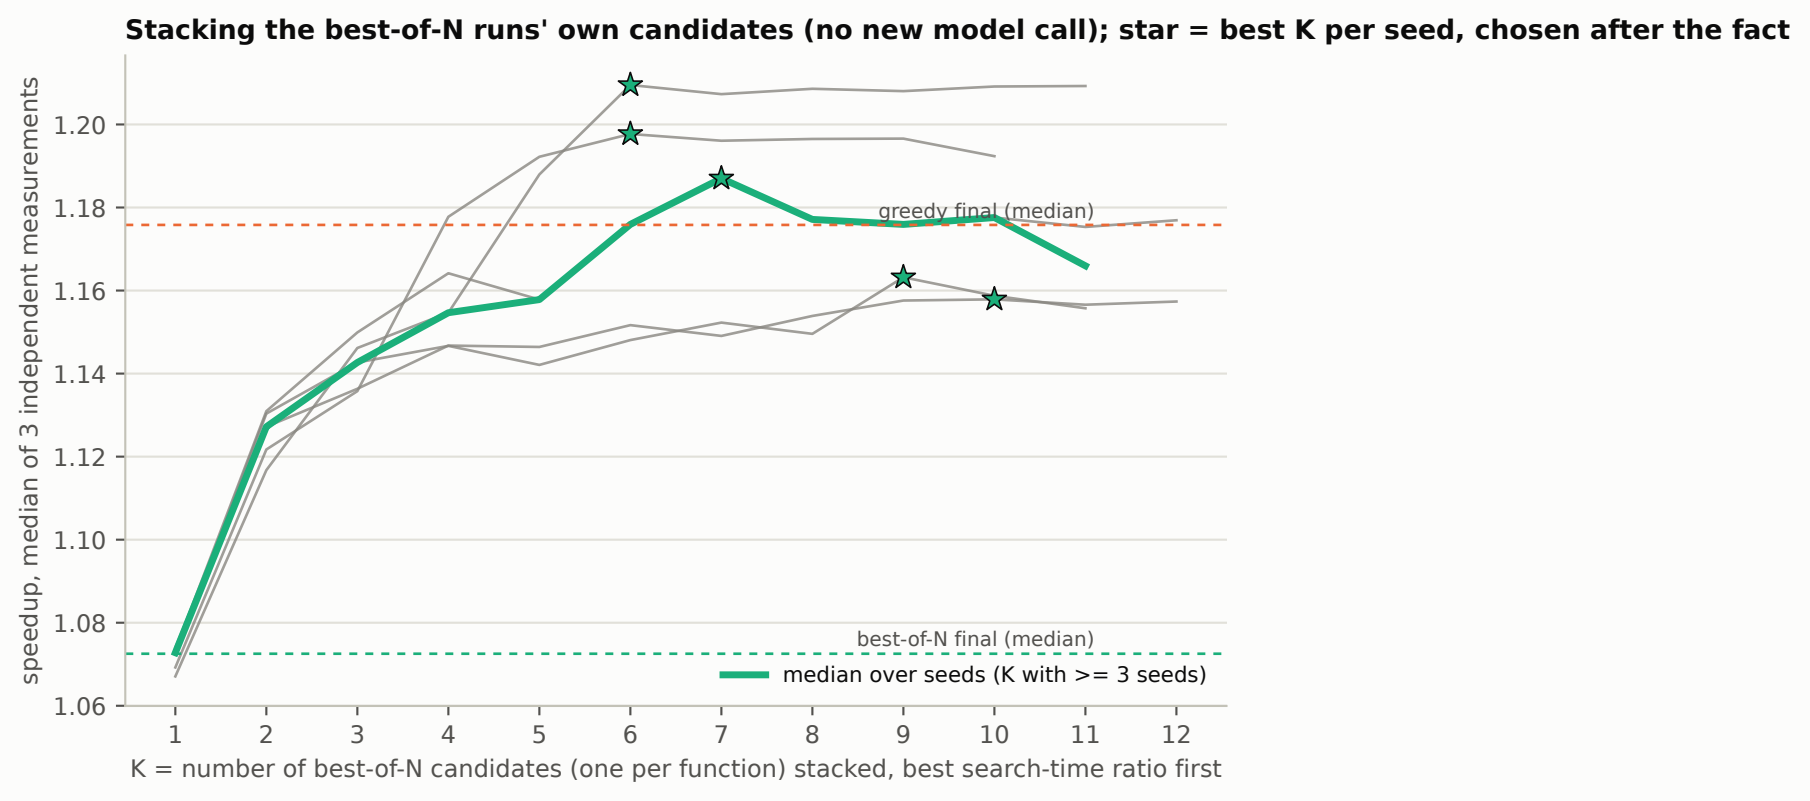
Stacking the best-of-N runs' own candidates (no new model call); star = best K per seed, chosen after the fact
speedup, median of 3 independent measurements
1.20
1.18
1.16
1.14
1.12
1.10
1.08
1.06
greedy final (median)
best-of-N final (median)
median over seeds (K with >= 3 seeds)
1
2
3
4
5
6
7
8
9
10
11
12
K = number of best-of-N candidates (one per function) stacked, best search-time ratio first