
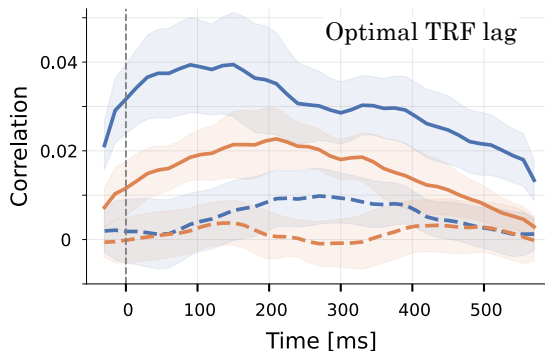


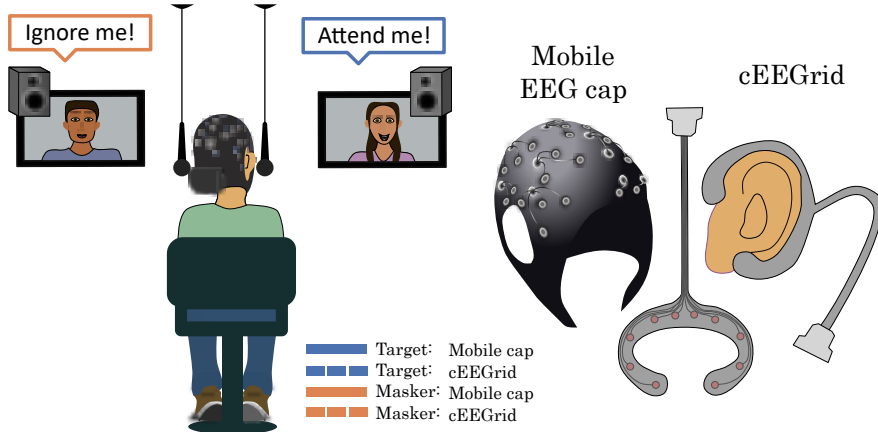

Neural tracking based electroencephalography (EEG) needs to generalize between listening scenarios. Participants perform various listening tasks, including sustained attention and attention-switching paradigms, using audio-visual material featuring both single speakers and multi-speaker conversations. Models based on mobile EEG systems demonstrate robust generalization across different listening tasks and speech material.