




(a) faithful: reconstruction controls

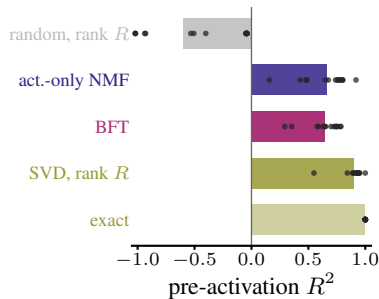


(b) reconstruction per node




(c) projection round-trip




(d) robust: stability across NMF seeds




(e) sensitivity to the rank




(f) rank vs. arbor explained



(g) vs. baselines: fingerprint or activations

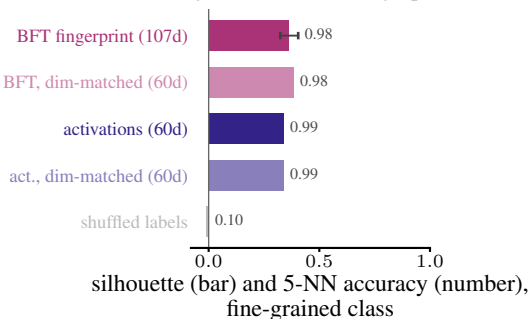

(h) weights vs. activations only



(i) vs. pixel attribution

