INTRODUCTION

An E-Business portal for connecting sellers to customers. It helps the sellers to grow the business by connecting to the customers in a very easy, smart way. Electronic Commerce is process of doing business through computer networks. A person sitting on his chair in front of a computer can access all the facilities of the Internet to buy or sell the products. Unlike traditional commerce that is carried out physically with effort of a person to go & get products, ecommerce has made it easier for human to reduce physical work and to save time.

For increasing the use of e-commerce in developing countries the B2B e-commerce is implemented for improving access to global markets for firms in developing countries. For a developing country advancement in the field of e-commerce is essential. The research strategy shows the importance of the e-commerce in developing countries for business applications.

PROBLEM STATEMENT

When person wants to buy any product for example book he first have to drive to books store then walk throughout the store until he locates the book he need. After finding the product if he wants to purchase, he may often need to stand in long queue at cash counter for long time.

The online shopping is the best and convince way for shopping. Online shopping helps consumer avoid this disadvantage.

With the help of online shopping consumer can buy a variety of items from the online store. With the online shopping consumer can purchase just above any things from companies that provide online household appliances, books, clothing, toys, furniture and many more products.

SYSTEM APPROACH

3.1 MOTIVATION

3.1 PHP:

PHP is a server-side scripting language designed for web development but also used as a general-purpose programming language .Originally created by Rasmus Lerdorf in 1994, the reference implementation of PHP (powered by the Zend Engine) is now produced by The PHP Group. While PHP originally stood for *Personal Home Page* it now stands for *PHP: HypertextPre-processor*, which is a recursive backronym. PHP code can be simply mixed with HTML code, or it can be used in combination with various templating engines and web frameworks. PHP code is usually processed by a PHP interpreter, which is usually implemented as a web server's native module or a Common Gateway Interface (CGI) executable.

3.2 CSS:

Cascading Style Sheets (CSS) is a style sheet language used for describing the look and formatting of a document written in a mark-up language. While most often used to change the style web pages and user interfaces written in HTML and XHTML, the language can be applied to any kind of XML document, including plain XML, SVG and XUL. CSS is a cornerstone specification of the web, and almost all web pages use CSS style sheets to describe their presentation.

CSS is designed primarily to enable the separation of document content from document presentation, including elements such as the layout, colors, and fonts. This separation can improve content accessibility, provide more flexibility and control in the specification of presentation characteristics, enable multiple pages to share formatting, and reduce complexity and repetition in the structural content (such as by allowing for table less web design). It obviates those portions of markup that would specify presentation by instead providing that information in a separate file.

3.3 JAVASCRIPT:

JavaScript is a dynamic computer programming language. It is most commonly used as part of web browsers, whose implementations allow client-side scripts to interact with the user, control the browser, communicate asynchronously, and alter the document content that is displayed. It is also being used in server-side network programming (with Node.js), game development and the creation of desktop and mobile applications.

JavaScript is classified as a prototype-based scripting language with dynamic typing and has first-class functions. This mix of features makes it a multi-paradigm language, supporting object-oriented, imperative, and functional programming styles.

Despite some naming, syntactic, and standard library similarities, JavaScript and Java are otherwise unrelated and have very differentsemantics.

SYSTEM IMPLEMENTATION

The consumer moves through the internet to the merchant's web site. From there, he decides that he wants to purchase something, so he is moved to the online transaction server, where all of the information he gives is encrypted. Once he has placed his order, the information moves through a private gateway to a Processing Network, where the issuing and acquiring banks complete or deny the transaction. This generally takes place in no more than 5-7seconds.

Online shopping is aimed towards the vendors who want to reach out to the maximum cross-section of customers and common people who can be potential customer. This study envisages bridging the gap between the sellers.

The retailer and the customer. OS is user-friendly, quick to learn and reliable software for thepurpose.

Section A (Coding)

1. Main (index.php)

```
<?php
  session_start();
if(isset($_SESSION['emailID']))
    $user_name_first = $_SESSION['firstname'];
    $user name last = $ SESSION['lastname'];
    $user_email = $_SESSION['emailID'];
  }
?>
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1">
<!-- The above 3 meta tags *must* come first in the head; any other head content must come *after* these tags
<title>Online Shopping: Catalog</title>
k rel="shortcut icon" href="images/logo.png" />
<style>
font-family: Open Sans, Tahoma;
       .se-pre-con {
position: fixed;
left: 0px;
top: 0px;
width: 100%;
height: 100%;
z-index: 9999;
background: url(images/loading.gif) center no-repeat #fff;
</style>
<script src="js/jquery.min.js"></script>
<script>
       //paste this code under head tag or in a seperate is file.
       // Wait for window load
       $(window).load(function() {
         // Animate loader off screen
         $(".se-pre-con").fadeOut("slow");;
       });
</script>
```

```
<!-- Bootstrap -->
<link href="css/bootstrap.min.css" rel="stylesheet">
<!-- HTML5 shim and Respond.js for IE8 support of HTML5 elements and media queries -->
<!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
<!--[if lt IE 9]>
<script src="https://oss.maxcdn.com/html5shiv/3.7.3/html5shiv.min.js"></script>
<script src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
<![endif]-->
</head>
<body style="font-family: Open Sans, Tahoma">
<div class="se-pre-con"></div>
<div class="container">
<nav class="navbar navbar-default" style="background-color: white;">
<div class="container-fluid">
<!-- Brand and toggle get grouped for better mobile display -->
<div class="navbar-header">
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#bs-example-
navbar-collapse-1" aria-expanded="false">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
<a class="navbar-brand" href="index.php"><img src="images/logo.png" height=20></a>
<a class="navbar-brand" href="index.php"><span style="font-family: Tahoma;">Catalog Kart</span></a>
</div>
<?php
if(!isset($user_email))
<!-- Collect the nav links, forms, and other content for toggling -->
<div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
style="margin: -3%;"><a href="seller/index.php"><button type="button" class="btn btn-default">Click
Here if you're a Seller</button></a>
cli class="dropdown">
<a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-
expanded="false">Login</a>
<br>>
<form action="validate.php" method="GET">
\langle li \rangle
<div class="form-group">
<label for="exampleInputEmail1">Email address</label>
<input type="email" class="form-control" name="email1" id="email1" placeholder="Email" required>
```

```
</div>
<1i>>
<div class="form-group">
<label for="exampleInputPassword1">Password</label>
<input type="password" class="form-control" id="pass1" name="pass1" placeholder="Password" required>
</div>
<center><input type="submit" class="btn btn-default" id="login1" name="login1"</pre>
value="Login!"></center>
</form>
<a href="register.php">Register</a>
cli class="dropdown">
<a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-
expanded="false"><span class="glyphicon glyphicon-th"></span></a>
<a href="#">About Catalog</a>
</div><!--/.navbar-collapse -->
<?php
else
<div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
<a href="history.php"><img src="images/acc.png" width="20" data-placement="left" data-
toggle="tooltip" title="Orders"></a>
<a href="mycart.php"><span class="glyphicon glyphicon-shopping-cart"><span class="badge"</a>
style="background-color: red;"><?php
require 'init.php';
                   id = "";
if(isset($user email))
                    $id = $user_email;
else
                    $id = $ SESSION['emailID'];
                   $get_cart_details = "SELECT * FROM `$db_name`.`cart` WHERE `buyer_id`='$id'";
                   $result = mysqli query($conn, $get cart details);
if($result)
                    $count = mysqli num rows($result);
echo $count;
```

```
}
else
echo "-1";
               ?></span></span>
<a href="index.php" data-placement="bottom" data-toggle="tooltip" title="<?php echo $user email;</li>
?>">Welcome <?php if(isset($user name first)) echo $user name first; ?></a>
<a href="logout.php" data-placement="bottom" data-toggle="tooltip" title="Log Out">Log Out</a>
</u1>
</div><!--/.navbar-collapse -->
<?php
     ?>
</div><!-- /.container-fluid -->
</nav>
<div class="adv" style="margin-top: -1.8%;">
<div id="carousel-example-generic" class="carousel slide" data-ride="carousel" data-interval="1700">
<!-- Indicators -->

    class="carousel-indicators">

data-target="#carousel-example-generic" data-slide-to="0" class="active">
data-target="#carousel-example-generic" data-slide-to="1">
data-target="#carousel-example-generic" data-slide-to="2">
data-target="#carousel-example-generic" data-slide-to="3">
data-target="#carousel-example-generic" data-slide-to="4">
data-target="#carousel-example-generic" data-slide-to="5">
data-target="#carousel-example-generic" data-slide-to="6">
data-target="#carousel-example-generic" data-slide-to="7">
data-target="#carousel-example-generic" data-slide-to="8">
data-target="#carousel-example-generic" data-slide-to="9">
data-target="#carousel-example-generic" data-slide-to="10">
<!-- Wrapper for slides -->
<div class="carousel-inner" role="listbox">
<div class="item active">
<img src="images/Advt/img2.jpg" alt="">
<div class="carousel-caption">
</div>
</div>
<div class="item">
<img src="images/Advt/img4.jpg" alt="...">
<div class="carousel-caption">
</div>
</div>
<div class="item">
<img src="images/Advt/img5.jpg" alt="...">
<div class="carousel-caption">
```

```
</div>
</div>
<div class="item">
<img src="images/Advt/img6.jpg" alt="...">
<div class="carousel-caption">
</div>
</div>
<div class="item">
<img src="images/Advt/img7.jpg" alt="...">
<div class="carousel-caption">
</div>
</div>
<div class="item">
<img src="images/Advt/img8.jpg" alt="...">
<div class="carousel-caption">
</div>
</div>
<div class="item">
<img src="images/Advt/img9.jpg" alt="...">
<div class="carousel-caption">
</div>
</div>
<div class="item">
<img src="images/Advt/img10.jpg" alt="...">
<div class="carousel-caption">
</div>
</div>
</div>
<!-- Controls -->
<a class="left carousel-control" href="#carousel-example-generic" role="button" data-slide="prev">
<span class="glyphicon glyphicon-chevron-left" aria-hidden="true"></span>
<span class="sr-only">Previous</span>
</a>
<a class="right carousel-control" href="#carousel-example-generic" role="button" data-slide="next">
<span class="glyphicon glyphicon-chevron-right" aria-hidden="true"></span>
<span class="sr-only">Next</span>
</a>
</div>
</div>
<hr>
<h4><center>ITEMS</center></h4>
<div class="products">
```

```
<div class="row">
<form action="addToCart.php">
<?php
require 'init.php';
         $sql_select = "SELECT * FROM `$db_name`.`products` where `quantity`>0 order by
`product_title`";
         $result = mysqli_query($conn, $sql_select);
if($result)
if(mysqli_num_rows($result)==0)
echo "<div class='col-md-4 col-md-offset-4'>No products in the catalog. Sorry try again tomorrow.</div>";
else if(mysqli_num_rows($result) > 0)
while($row = mysqli_fetch_assoc($result))
       ?>
<div class="col-md-4" style=" padding: 20px;">
<center><h5><?php $len = strlen($row['product_title']); echo $row['product_title']; ?></h5></center>
<?php if($len<48) echo "<br/>; ?>
<br>
<center><img src="<?php echo 'images/db dir/'.$row['upload file']; ?>" alt="Product Image"
height="100"><span class="badge">₹<?php echo $row['product price'];?></span>
<hr style="margin-top: <?php if($len<48) echo "15px"; ?>"></center>
<center>Seller: <?php echo $row['Seller_name']; ?></center>
<center><button type="submit" id="buyButton" <?php if($row['quantity']<5) echo "data-placement='right'</pre>
data-toggle='tooltip' title='Hurry! Only ".$row['quantity']." left ""; ?> class="btn btn-default"
name="productID" value="<?php echo $row['id']; ?>">Add to Cart</button></center>
</div>
<?php
                }
             }
else
echo "<div class='col-md-4 col-md-offset-4'>Something went wrong! Please contact the administrator</div>";
</form>
<div>
</div>
</div>
<hr>
<div class="container">
<center>© 2016 Catalog. All rights reserved.</center>
</div>
<hr><br><br>>
<!-- Include all compiled plugins (below), or include individual files as needed -->
<script src="js/bootstrap.min.js"></script>
<script>
```

```
$(document).ready(function(){
       $('[data-toggle="tooltip"]').tooltip('enable');
    });
</script>
</body>
</html>
2. Register
<?php
  session start();
require 'init.php';
if(isset($_GET['submit1']))
         $email_id = $_GET['email1'];
         $password = $_GET['pass1'];
         $fname = $_GET['fname'];
         $lname = $ GET['lname'];
         p = GET['phone'];
         $address = $_GET['address'];
         $log_text = "New User Registration : " . $email_id ." -- Contact : " . $p_num;
         $log_register = "INSERT INTO `$db_name`.`logs`(`logs_text`) values('$log_text')";
         $query_register = "INSERT INTO
`$db_name`.`users`(`email_id`,`pass_key`,`first_name`,`last_name`,`phone_number`,`address_details`)
values('$email id','$password','$fname','$lname','$p num', '$address')";
         $result0 = mysqli_query($conn, $log_register);
         $result1 = mysqli_query($conn, $query_register);
if($result0&&$result1)
            $ SESSION['firstname'] = $fname;
            $ SESSION['lastname'] = $lname;
            $_SESSION['emailID'] = $email_id;
header('Location: index.php');
         }
else
echo "Something went wrong.";
```

?>

```
<!doctype html>
<html>
<head>
<title>Online Shopping: Catalog</title>
k rel="shortcut icon" href="images/logo.png" />
<style>
html {
background-color: black;
body {
font-family: Open Sans, arial, verdana;
       /*form styles*/
       #msform {
margin: 50px auto;
text-align: center;
position: relative;
       #msform fieldset {
background: white;
border: 0 none;
border-radius: 20px;
box-shadow: 0 0 15px 1px rgba(0, 0, 0, 0.4);
padding: 30px 40px;
box-sizing: border-box;
         /*stacking fieldsets above each other*/
position: relative;
       /*Hide all except first fieldset*/
       #msform fieldset:not(:first-of-type) {
display: none;
       /*inputs*/
       #msform input, #msform textarea {
padding: 10px;
border: 1px solid #ccc;
border-radius: 3px;
margin-bottom: 10px;
width: 100%;
box-sizing: border-box;
font-family: Open Sans;
color: #2C3E50;
font-size: 13px;
       /*buttons*/
```

```
#msform .action-button {
width: 100px;
background: #27AE60;
font-weight: bold;
color: white;
border: 0 none;
border-radius: 1px;
cursor: pointer;
padding: 10px 5px;
margin: 10px 5px;
       #msform .action-button:hover, #msform .action-button:focus {
box-shadow: 0 0 0 2px white, 0 0 0 3px #27AE60;
       /*headings*/
       .fs-title {
font-size: 15px;
text-transform: uppercase;
color: #2C3E50;
margin-bottom: 10px;
       .fs-subtitle {
font-weight: normal;
font-size: 13px;
color: #666;
margin-bottom: 20px;
       /*progressbar*/
       #progressbar {
margin-bottom: 30px;
overflow: hidden;
         /*CSS counters to number the steps*/
counter-reset: step;}
       #progressbar li {
list-style-type: none;
color: white;
text-transform: uppercase;
font-size: 9px;
width: 33.33%;
float: left;
position: relative;
       #progressbar li:before {
content: counter(step);
counter-increment: step;
width: 20px;
line-height: 20px;
display: block;
font-size: 10px;
```

```
color: #333;
background: white;
border-radius: 3px;
margin: 0 auto 5px auto;
       /*progressbar connectors*/
       #progressbar li:after {
content: ";
width: 100%;
height: 2px;
background: white;
position: absolute;
left: -50%;
top: 9px;
z-index: -1; /*put it behind the numbers*/}
       #progressbar li:first-child:after {
         /*connector not needed before the first step*/
content: none; }
       /*marking active/completed steps green*/
       /*The number of the step and the connector before it = green*/
       #progressbar li.active:before, #progressbar li.active:after{
background: #27AE60:
color: white;
</style>
</head>
<body style="font-family: Open Sans;">
<form id="msform" action="register.php" method="GET">
<fieldset>
<center><img src="images/logo.png" height=30></center>
<h2 class="fs-title">Create your account</h2>
<hr><br>>
<input type="text" name="email1" placeholder="Email" />
<input type="password" name="pass1" placeholder="Password" />
<input type="password" name="cpass" placeholder="Confirm Password" />
<h2 class="fs-title">Personal Details</h2>
<hr><
<input type="text" name="fname" placeholder="First Name" />
<input type="text" name="lname" placeholder="Last Name" />
<input type="text" name="phone" placeholder="Phone" />
<textarea name="address" placeholder="Address"></textarea>
<input type="submit" name="submit1" id="submit1" class="submit action-button" value="Submit" />
</fieldset>
</form>
</body>
</html>
3. Admin
```

```
<?php
require 'init.php';
  session start();
if(isset($_SESSION['emailID']))
if($ SESSION['emailID']!='admin@catalog.com')
header('Location: index.php');
  }
else
header('Location: index.php')
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1">
<title>Online Shopping: Catalog</title>
k rel="shortcut icon" href="images/logo.png" />
<link href="css/bootstrap.min.css" rel="stylesheet">
k href="https://cdn.datatables.net/1.10.12/css/dataTables.bootstrap.min.css" rel="stylesheet">
<script src="https://oss.maxcdn.com/html5shiv/3.7.3/html5shiv.min.js"></script>
<script src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
</head>
<body>
<div class="container">
<nav class="navbar navbar-default" style="background-color: white;">
<div class="container-fluid">
<div class="navbar-header">
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#bs-example-
navbar-collapse-1" aria-expanded="false">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
<a class="navbar-brand" href="index.php"><img src="images/logo.png" height=20></a>
<a class="navbar-brand" href="index.php"><span style="font-family: Tahoma;">Catalog Kart</span></a>
</div>
<div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
<a href="admin.php">Welcome <span style="color: red;">Admin!</span></a>
<a href="logout.php">Log Out</a>
</div>
</div>
</nav>
</div>
```

```
<div class="container">
role="presentation" class="active"><a data-toggle="tab" href="#home"><img src="images/home.png"</li>
align="middle" height="15" /> Home</a>
role="presentation"><a data-toggle="tab" href="#accounts"><img src="images/acc.png" align="middle"</pre>
height="15" /> Accounts</a>
role="presentation"><a data-toggle="tab" href="#products"><img src="images/product.png"</pre>
align="middle" height="15" /> Products</a>
role="presentation"><a data-toggle="tab" href="#logs"><img src="images/monitor.png" align="middle"</pre>
height="15" /> Logs</a>
role="presentation"><a data-toggle="tab" href="#request"><img src="images/friend-request.png"</pre>
align="middle" height="15" /> Requests</a>
role="presentation"><a data-toggle="tab" href="#sellers"><img src="images/team.png" align="middle"</pre>
height="15" /> Sellers</a>
role="presentation"><a data-toggle="tab" href="#users"><img src="images/user.png" align="middle"</pre>
height="15" /> Users</a>
</div>
<div class="container">
<hr>>
<div class="tab-content">
<div id="home" class="tab-pane fade in active">
<center><h3>Transactions</h3></center>
<br>
<form action="settle.php">
<thead>
ID
User ID
Seller Name
Product Name
Product Image
Amount Paid
Time
Settle?
</thead>
<?php
            $sql_sellers_pending = "SELECT * FROM `$db_name`.`transaction`";
            $result_sellers_pending = mysqli_query($conn,$sql_sellers_pending);
while($row = mysqli_fetch_array($result_sellers_pending))
            { ?>
<?php echo $row['id'];?>
<?php echo $row['email id'];?>
<?php echo $row['seller name'];?>
<?php echo $row['product_name'];?>
```

```
<img src="<?php echo "images/db_dir/".$row['product_image'];?>" width="30">
<?php echo "₹".$row['price_paid'];?>
<?php echo $row['time']; ?>
<?php
if($row['settle_status']=="Pending")
           ?>
<center><button type="submit" class="btn btn-warning btn-sm" name="settle" value="<?php echo</pre>
$row['id']; ?>">Settle</button></center>
<?php
else
Settled
<?php
<?php
         ?>
</form>
</div>
<div id="accounts" class="tab-pane fade">
<div class="row">
<div class="col-md-4 col-md-offset-4"><h3>Accounts</h3></div>
<div class="col-md-1 col-md-offset-3"><button class="btn btn-success"</pre>
onclick="printDiv('printTable')">Print</button></div>
</div>
<br/>br>
<div id="printTable">
<thead>
ID
Seller Name
Product
Amount
Commission
Shipping
Collection Fee
Fixed Fee
MarketPlace Fee
Service Tax
Total Deduction
```

```
Settlement Value
Time
</thead>
<?php
                               $sql_settlement = "SELECT * FROM `$db_name`.`settlement`";
                               $result settlement = mysqli query($conn,$sql settlement);
while($row = mysqli fetch array($result settlement))
                          ?>
<?php echo $row['id'];?>
<?php echo $row['seller_name'];?>
<?php echo $row['product_name'];?>
<?php echo "₹".$row['amount'];?>
<?php echo "₹".$row['commission'];?>
<?php echo "₹".$row['shipping'];?>
<?php echo "₹".$row['collection'];?>
<?php echo "₹".$row['fixed_fee'];?>
<?php echo "₹".$row['marketplace'];?>
<?php echo "₹".$row['service'];?>
<center><span style="background-color: yellow; color: green;padding: 10px;"><b><?php echo
"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\(\frac{\tangle}{\tangle}\)"\
<center><span style="background-color: yellow; color: red; padding: 10px;"><b><?php echo
"\forall \text{".\span} \text{center} \text{/td}
<?php echo $row['time'];?>
<?php
                          ?>
</div>
</div>
<div id="products" class="tab-pane fade">
<center><h3>Showing All Products in Catalog</h3></center>
<thead>
ID
Product Title
Product Desc
Price
Quantity
Image
Seller
```

```
Time
</thead>
<?php
          $sql_sellers_pending = "SELECT * FROM `$db_name`.`products`";
          $result_sellers_pending = mysqli_query($conn,$sql_sellers_pending);
while($row = mysqli fetch array($result sellers pending))
        ?>
<?php echo $row['id'];?>
<?php echo $row['product_title'];?>
<?php echo $row['product_desc'];?>
<?php echo "₹".$row['product_price'];?>
<?php echo $row['quantity'];?>
<img src="<?php echo "images/db_dir/".$row['upload_file'];?>" width="30">
<?php echo $row['Seller_name']; ?>
<?php echo $row['time'];?>
<?php
        ?>
</div>
<div id="logs" class="tab-pane fade">
<h3>Logs</h3>
<thead>
Token No.
Log
Time
</thead>
<?php
          $sql logs = "SELECT * FROM `$db name`.`logs`";
          $result_logs = mysqli_query($conn,$sql_logs);
while($row = mysqli_fetch_array($result_logs))
        ?>
<?php echo $row['tokenid'];?>
<?php echo $row['logs_text'];?>
<?php echo $row['timeoflog'];?>
<?php
```

```
} ?>
</div>
<div id="request" class="tab-pane fade">
<form action="verifyRequest.php">
<thead>
ID
Email Address
Seller Name
Contact Number
Address
Date of Joining
Validate?
</thead>
<?php
require 'init.php';
         $sql_sellers_pending = "SELECT * FROM `$db_name`.`sellers` where status='Pending'";
         $result_sellers_pending = mysqli_query($conn,$sql_sellers_pending);
while($row = mysqli_fetch_array($result_sellers_pending))
        ?>
<?php echo $row['id'];?>
<?php echo $row['email_id'];?>
<?php echo $row['seller_name'];?>
<?php echo $row['phone number'];?>
<?php echo $row['address_details'];?>
<?php echo $row['doj'];?>
<center><button type="submit" class="btn btn-warning btn-sm" name="validate" value="<?php echo</pre>
$row['email_id']; ?>">Validate</button></center>
<?php
        ?>
</form>
</div>
<div id="sellers" class="tab-pane fade">
<thead>
ID
```

```
Email Address
Seller Name
Contact Number
Address
Date of Joining
</thead>
<?php
         $sql_sellers = "SELECT * FROM `$db_name`.`sellers` where status!='Pending'";
         $result_sellers = mysqli_query($conn,$sql_sellers);
while($row = mysqli_fetch_array($result_sellers))
        ?>
<?php echo $row['id'];?>
<?php echo $row['email id'];?>
<?php echo $row['seller_name'];?>
<?php echo $row['phone_number'];?>
<?php echo $row['address_details'];?>
<?php echo $row['doj'];?>
<?php
        ?>
</div>
<div id="users" class="tab-pane fade">
<thead>
ID
Email Address
First Name
Last Name
Contact Number
Address
Date of Joining
</thead>
<?php
         $sql_users = "SELECT * FROM `$db_name`.`users`";
         $result_users = mysqli_query($conn,$sql_users);
while($row = mysqli_fetch_array($result_users))
        ?>
```

```
<?php echo $row['id'];?>
<?php echo $row['email_id'];?>
<?php echo $row['first_name'];?>
<?php echo $row['last_name'];?>
<?php echo $row['phone_number'];?>
<?php echo $row['address_details'];?>
<?php echo $row['doj'];?>
<?php
           ?>
</div>
</div>
</div>
<script src="js/jquery.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<script src="https://cdn.datatables.net/1.10.12/js/jquery.dataTables.min.js"></script>
<script>
    $(document).ready(function(){
      $('#sellerTable').DataTable({
          "order": [[ 5, "desc" ]]
       });
    });
    $(document).ready(function(){
      $('#usersTable').DataTable(
          "order": [[ 5, "desc" ]]
       });
    });
    $(document).ready(function(){
      $('#sellerRequestTable').DataTable({
          "order": [[ 5, "desc" ]]
       });
    });
    $(document).ready(function(){
      $('#logsTable').DataTable( {
          "order": [[ 2, "desc" ]]
       });
    });
    $(document).ready(function(){
      $('#transTable').DataTable( {
          "order": [[ 7, "asc" ]]
       });
    });
```

```
$(document).ready(function(){
       $('#settleTable').DataTable( {
          "order": [[ 12, "desc" ]]
       });
    });
     $(document).ready(function(){
       $('#productTable').DataTable( {
          "order": [[ 7, "desc" ]]
                                         } );
                                                 });
function printDiv(divName) {
var printContents = document.getElementById(divName).innerHTML;
var originalContents = document.body.innerHTML;
       document.body.innerHTML = printContents;
window.print();
       document.body.innerHTML = originalContents;
</script>
</body>
</html>
4. Logout
<?php
       session_start();
       session_destroy();
       header("Location: index.php");
?>
5. Validate
<?php
       session start();
       require 'init.php';
       if(isset($_GET['login1']))
               $username = $_GET['email1'];
               $password = $_GET['pass1'];
               $query_login = "SELECT * FROM `$db_name`.`users` WHERE `email_id`='$username'
AND `pass_key`='$password''';
               $result = mysqli query($conn, $query login);
```

```
if(mysqli_num_rows($result) == 1)
                       $row = mysqli_fetch_assoc($result);
                       $_SESSION['firstname'] = $row['first_name'];
                       $_SESSION['lastname'] = $row['last_name'];
                       $_SESSION['emailID'] = $row['email_id'];
                       if($username == "admin@catalog.com")
                               header('Location: admin.php');
                       else
                               header('Location: index.php');
               }
               else
                       echo "failed_user_login";
       else if(isset($_GET['login_seller']))
               $username = $_GET['email1'];
               $password = $_GET['pass1'];
               $query_login = "SELECT * FROM `$db_name`.`sellers` WHERE `email_id`='$username'
AND `pass key`='$password'";
               $result = mysqli_query($conn, $query_login);
               if(mysqli_num_rows($result) == 1)
                       $log_text = "Logged in";
       $log_login = "INSERT INTO `$db_name`.`sellerlogs`(`email_id`,`log_text`)
values('$username','$log_text')";
       $result0 = mysqli_query($conn, $log_login);
if($result0)
       {
                               $row = mysqli_fetch_assoc($result);
                               $_SESSION['sellername'] = $row['seller_name'];
                               $_SESSION['emailID'] = $row['email_id'];
                               header('Location: seller/dashboard.php');
                       }
                       else
                               echo "Failed in logs";
               }
               else
                       echo "failed_seller_login";
       }
?>
```

6. Verify Request

```
<?php
       require 'init.php';
  session start();
if(isset($_SESSION['emailID'])&&isset($_GET['validate']))
       if($ SESSION['emailID']!='admin@catalog.com')
       header('Location: index.php');
               else
                       $user_id = $_GET['validate'];
                       $verify_query = "UPDATE `$db_name`.`sellers` SET `status`='Confirmed' WHERE
`email id`='$user id'";
                       $result = mysqli_query($conn, $verify_query);
                       if($result)
                       {
                               header("location: admin.php");
                        }
                       else
                               echo "Error in updating the status of the seller";
                }
  }
else
header('Location: index.php')
7. Sold out
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1">
<!-- The above 3 meta tags *must* come first in the head; any other head content must come *after* these tags
-->
<title>Online Shopping: Catalog</title>
<link rel="shortcut icon" href="images/logo.png" />
<style>
font-family: Open Sans, Tahoma;
       .se-pre-con {
position: fixed;
left: 0px;
top: 0px;
```

```
width: 100%;
height: 100%:
z-index: 9999;
background: url(images/loading.gif) center no-repeat #fff;
</style>
<script src="js/jquery.min.js"></script>
<script>
       //paste this code under head tag or in a seperate is file.
       // Wait for window load
       $(window).load(function() {
         // Animate loader off screen
         $(".se-pre-con").fadeOut("slow");;
       });
</script>
<!-- Bootstrap -->
<link href="css/bootstrap.min.css" rel="stylesheet">
<!-- HTML5 shim and Respond.js for IE8 support of HTML5 elements and media queries -->
<!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
<!--[if lt IE 9]>
<script src="https://oss.maxcdn.com/html5shiv/3.7.3/html5shiv.min.js"></script>
<script src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
<![endif]-->
</head>
<body style="margin:80px">
        <center><img src="images/soldout.jpeg" width="350px" height="300px"></center>
        <center><h4>This is embarrassing but the product you are looking for is sold out.
        <br>Availibilty of the product will be notified to you via email.
        <center><a href="index.php">Goback</a></center>
</body>
<!-- Include all compiled plugins (below), or include individual files as needed -->
<script src="js/bootstrap.min.js"></script>
</html>
8. MyCart
<?php
  session start();
if(isset($_SESSION['emailID']))
  {
    $user name first = $ SESSION['firstname'];
    $user_name_last = $_SESSION['lastname'];
    $user_email = $_SESSION['emailID'];
  }
else
header("Location: index.php");
?>
```

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1">
<!-- The above 3 meta tags *must* come first in the head; any other head content must come *after* these tags
-->
<title>Online Shopping: Catalog</title>
<link rel="shortcut icon" href="images/logo.png" />
<style>
font-family: Open Sans, Tahoma;
    }
       .se-pre-con {
position: fixed;
left: 0px;
top: 0px;
width: 100%;
height: 100%;
z-index: 9999:
background: url(images/loading.gif) center no-repeat #fff;
</style>
<script src="js/jquery.min.js"></script>
<script>
       //paste this code under head tag or in a seperate is file.
       // Wait for window load
       $(window).load(function() {
         // Animate loader off screen
         $(".se-pre-con").fadeOut("slow");;
       });
</script>
<!-- Bootstrap -->
<link href="css/bootstrap.min.css" rel="stylesheet">
<!-- HTML5 shim and Respond.js for IE8 support of HTML5 elements and media queries -->
<!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
<!--[if lt IE 9]>
<script src="https://oss.maxcdn.com/html5shiv/3.7.3/html5shiv.min.js"></script>
<script src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
<![endif]-->
</head>
<body style="font-family: Open Sans, Tahoma">
<div class="se-pre-con"></div>
<div class="container">
<nav class="navbar navbar-default" style="background-color: white;">
<div class="container-fluid">
<!-- Brand and toggle get grouped for better mobile display -->
```

```
<div class="navbar-header">
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#bs-example-
navbar-collapse-1" aria-expanded="false">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
<a class="navbar-brand" href="index.php"><img src="images/logo.png" height=20></a>
<a class="navbar-brand" href="index.php"><span style="font-family: Tahoma;">Catalog Kart</span></a>
</div>
<?php
if(!isset($user_email))
<!-- Collect the nav links, forms, and other content for toggling -->
<div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
style="margin: -3%;"><a href="seller/index.php"><button type="button" class="btn btn-default">Click
Here if you're a Seller</button></a>
cli class="dropdown">
<a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-
expanded="false">Login</a>
<br>>
<form action="validate.php" method="GET">
\langle li \rangle
<div class="form-group">
<label for="exampleInputEmail1">Email address</label>
<input type="email" class="form-control" name="email1" id="email1" placeholder="Email" required>
</div>
<
<div class="form-group">
<label for="exampleInputPassword1">Password</label>
<input type="password" class="form-control" id="pass1" name="pass1" placeholder="Password" required>
</div>
<center><input type="submit" class="btn btn-default" id="login1" name="login1"</pre>
value="Login!"></center>
</form>
<a href="register.php">Register</a>
cli class="dropdown">
```

```
<a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-
expanded="false"><span class="glyphicon glyphicon-th"></span></a>
<a href="#">About Catalog</a>
</div><!--/.navbar-collapse -->
<?php
else
<div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
<a href="history.php"><img src="images/acc.png" width="20" data-placement="left" data-
toggle="tooltip" title="Orders"></a>
<a href="mycart.php"><span class="glyphicon glyphicon-shopping-cart"><span class="badge"</a>
style="background-color: red;"><?php
require 'init.php';
                   id = "":
if(isset($user email))
                    $id = $user_email;
else
                    $id = $_SESSION['emailID'];
                   $get_cart_details = "SELECT * FROM `$db_name`.`cart` WHERE `buyer_id`='$id'";
                   $result = mysqli_query($conn, $get_cart_details);
if($result)
                    $count = mysqli num rows($result);
echo $count;
                   }
else
echo "-1";
              ?></span></span>
<a href="index.php" data-placement="bottom" data-toggle="tooltip" title="<?php echo $user email;</li>
?>">Welcome <?php if(isset($user_name_first)) echo $user_name_first; ?></a>
<a href="logout.php" data-placement="bottom" data-toggle="tooltip" title="Log Out">Log Out</a>
</div><!--/.navbar-collapse -->
<?php
</div><!--/.container-fluid -->
</nav>
</div>
```

```
<!-- Cart Panel -->
<div class="container">
<div class="panel panel-primary">
<div class="panel-heading"><center><img src="images/logo.png" width="25">&nbsp;My
Cart</center></div>
<?php
       total value = 0;
        \$get id = "";
if($result)
if(mysqli_num_rows($result)>0)
              total_value = 0;
while($row = mysqli_fetch_assoc($result))
               $get id = $get id . $row['id'] . '&';
               $total_value += $row['product_value'];
<div class="panel panel-default" style="border-radius: 0;">
<div class="panel-heading">
<div class="row">
<div class="col-md-10"><b><?php echo $row['product name']; ?></b></div>
<div class="col-md-1"><b><i><?php echo " ₹ ".$row['product_value']; ?></i></div>
</div></div>
<div class="panel-body">
<div class="row">
<div class="col-md-3 col-md-offset-2">
<img src="<?php echo "images/db_dir/".$row['product_image']; ?>" width="100">
</div>
<div class="col-md-4">
<h4><u>Description</u></h4><br><?php echo $row['product desc']; ?>
</div>
<div class="col-md-3">
<h4><u>Seller</u></h4><br><?php echo $row['seller_name']; ?></div>
</div></div>
</div><?php
                                         else
echo "<span style='color: red; paddding: 20px; text-align: center'>No Products Found in cart.</span>";
<div class="panel-footer" style="background-color: #337AB7;color: white">
<div class="row">
<div class="col-md-10">Total Items : <?php echo $count; ?></div>
<div class="col-md-2"><b><em>Total Value : <?php echo " ₹ ".$total value; ?></em><b></div></div>
</div></div>
<!-- End of Panel -->
<center><button type="button" class="btn btn-success btn-sm" data-toggle="modal" data-target="#confirm"</pre>
<?php if($total_value <= 0) echo "disabled"; ?>>Checkout</button></center>
<hr>>
```

```
<!-- Modal -->
<form action="payment.php">
<div id="confirm" class="modal fade" role="dialog">
<div class="modal-dialog">
<!-- Modal content-->
<div class="modal-content">
<div class="modal-header">
<button type="button" class="close" data-dismiss="modal">&times;</button>
<h4 class="modal-title">Confirmation</h4></div>
<div class="modal-body">
Confirm to pay <?php echo " ₹ ".$total_value; ?></div>
<div class="modal-footer">
<button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
<button type="submit" value="<?php echo $user email; ?>" name="paymentConfirm" class="btn btn-
warning" >Pay</button>
</div></div>
</div></div>
</form>
<div class="container">
<center>© 2016 Catalog. All rights reserved.</center>
</div>
<hr><br><br>>
<!-- Include all compiled plugins (below), or include individual files as needed -->
<script src="js/bootstrap.min.js"></script>
<script>
    $(document).ready(function(){
       $('[data-toggle="tooltip"]').tooltip('enable');
</script>
</body>
</html>
10. Settle
<?php
require 'init.php';
  session start():
if(isset($_SESSION['emailID']))
if($_SESSION['emailID']=='admin@catalog.com')
               if(isset($_GET['settle']))
                       $id val = $ GET['settle'];
                       $fetch_id = "SELECT * FROM `$db_name`.`transaction` WHERE `id`='$id_val'";
                       $result0 = mysqli_query($conn, $fetch_id);
                       if($result0)
                       {
```

```
if(mysqli_num_rows($result0)==1)
                                                $row = mysqli_fetch_assoc($result0);
                                                $seller_name = $row['seller_name'];
                                                $p_name = $row['product_name'];
                                                $price = $row['price paid'];
                                                /* Actual Calculation on the price */
                                                        commission fee = price * 0.1;
                                                        $shipping_fee = 30;
                                                        $collection_fee = 0.025 * $price;
                                                        if($collection fee<20)
                                                                collection fee = 20;
                                                        fixed fee = 30;
        $marketplace fee = $commission fee + $shipping fee + $collection fee + $fixed fee;
        $serviceTax = 0.15 * $marketplace fee;
        $total deduction = $marketplace fee + $serviceTax;
        $settlement_value = $price - $total_deduction;
                                                // End of calculation
$sql_insert = "INSERT INTO
`$db name`.`settlement`(`seller name`,`product name`,`amount`,`commission`,`shipping`,`collection`,`fixed
fee', marketplace', service', total ded', settle value')
VALUES('$seller_name', '$p_name', '$price', '$commission_fee', '$shipping_fee', '$collection_fee', '$fixed_fee', '$
marketplace_fee', '$serviceTax', '$total_deduction', '$settlement_value')";
                                                        $result1 = mysqli_query($conn, $sql_insert);
                                                        if($result1)
                                                                $sql_update = "UPDATE
`$db_name`.`transaction` SET `settle_status` = 'Settled' WHERE `id` = '$id_val''';
                                                $result2 = mysqli_query($conn, $sql_update);
                                                                if($result2)
                                                                {
header("Location: admin.php");
        }
                        else
                                                                        echo "Error in updating the
settlement";
                                                                        else
                                                                echo "Error in calculation";
echo "More than one product found with the same id";
                        }
                                                else
                                echo "Error in fetching the product";
   } else
header('Location: index.php');
```

```
else
header('Location: index.php')
?>
11. Payment
<?php
  session start();
require 'init.php';
if(isset($_SESSION['emailID']))
    flag = false;
       //Taking the cart details from user
       $val = $ GET['paymentConfirm'];
       //Fetching all the values of the products from cart table
        $fetch_from_cart = "SELECT * FROM `$db_name`.`cart` WHERE `buyer_id`='$val''';
        $result0 = mysqli_query($conn, $fetch_from_cart);
       if($result0)
       {
       flag = false;
               while($row = mysqli fetch assoc($result0))
                       id = \text{srow}[id'];
                       $buyer = $row['buyer_id'];
                       $p_name = $row['product_name'];
                       $p_value = $row['product_value'];
                       $s name = $row['seller name'];
                       $p_image = $row['product_image'];
                       $insert_transc = "INSERT INTO
`$db_name`.`transaction`(`email_id`,`seller_name`,`product_name`,`product_image`,`price_paid`,`settle_status
`) VALUES('$buyer', '$s_name', '$p_name', '$p_image', '$p_value', 'Pending')";
                       $result1 = mysqli_query($conn, $insert_transc);
                       if($result1)
                               $update quantity = "UPDATE `$db name`.`products` SET `quantity` =
`quantity` - 1 WHERE `product title`='$p name' and `quantity` > 0";
                               $result2 = mysqli query($conn, $update quantity);
                               if($result2)
                               {
                                       $text = "Product Bought : " . $p_name ." by " .
$_SESSION['emailID'];
                                               $update_logs = "INSERT INTO
`$db name`.`logs`(`logs text`) VALUES('$text')";
                                               $result3 = mysqli query($conn, $update logs);
                                               if($result3)
                                               {
```

```
$clear_cart = "DELETE FROM `$db_name`.`cart`
WHERE `id`='$id'";
                                                         $result4 = mysqli_query($conn, $clear_cart);
                                                         if($result4)
                                                         {
                                                                 flag = true;
                                                                                 else
                      flag = false;
                                                                 echo "Error in clearing cart";
                                else
                   $flag = false;
                        echo "Error updating the logs table";
                 }
                                }else
                                        header("location: soldout.php");
                           else
                                echo "Error inserting values in transaction table";
if($flag == true)
header("location: thankyou.php");
echo "Something went wrong. Stop";
        else
                echo "Error fetching values from cart";
       //Delete the rows from the cart table
        //Updating the logs table
  }
else
header("Location: index.php");
?>
12. AddToCart
<?php
                session_start();
                require 'init.php';
                if(isset($_SESSION['emailID']))
                        if(isset($_GET['productID']))
                                $get_id = $_GET['productID'];
```

```
$fetching_query = "SELECT * FROM `$db_name`.`products` WHERE
`id`='$get_id'";
                               $result0 = mysqli_query($conn, $fetching_query);
                               if($result0)
                                       if(mysqli num rows($result0)==1)
                                               $row = mysqli fetch assoc($result0);
                                               $buyer id = $ SESSION['emailID'];
                                               $product_name = $row['product_title'];
                                               $product_desc = $row['product_desc'];
                                               $product value = $row['product price'];
                                               $seller_name = $row['Seller_name'];
                                               $image_file = $row['upload_file'];
$updating cart = "INSERT INTO
`$db_name`.`cart`(`buyer_id`,`product_name`,`product_value`,`seller_name`,`product_desc`,`product_image`)
VALUES('$buyer_id', '$product_name', '$product_value', '$seller_name', '$product_desc', '$image_file')'';
                                               $result1 = mysqli_query($conn, $updating_cart);
                                               if($result1){
                                                      header("location: index.php");
                                               }Else
                                               echo "Error in updating the cart ";
                                       }else
                               echo "Toomany products to fetch.";
                       echo "Something went wrong in fetching the product.";
                       }else
                               header("location: index.php");
               }else
                       header("location: index.php");?>
13. History
<?php
  session start();
if(isset($ SESSION['emailID']))
    $user_name_first = $_SESSION['firstname'];
    $user_name_last = $_SESSION['lastname'];
    $user_email = $_SESSION['emailID'];
}else
header("Location: index.php");
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="utf-8">
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1">
<!-- The above 3 meta tags *must* come first in the head; any other head content must come *after* these tags
-->
<title>Online Shopping: Catalog</title>
k rel="shortcut icon" href="images/logo.png" />
<stvle>
    *{
font-family: Open Sans, Tahoma;
       .se-pre-con {
position: fixed;
left: 0px;
top: 0px;
width: 100%;
height: 100%;
z-index: 9999;
background: url(images/loading.gif) center no-repeat #fff;
</style>
<script src="js/jquery.min.js"></script>
<script>
       //paste this code under head tag or in a seperate is file.
       // Wait for window load
       $(window).load(function() {
         // Animate loader off screen
         $(".se-pre-con").fadeOut("slow");;
       });
</script>
<!-- Bootstrap -->
<link href="css/bootstrap.min.css" rel="stylesheet">
<!-- HTML5 shim and Respond.js for IE8 support of HTML5 elements and media queries -->
<!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
<!--[if lt IE 9]>
<script src="https://oss.maxcdn.com/html5shiv/3.7.3/html5shiv.min.js"></script>
<script src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
<![endif]-->
</head>
<body style="font-family: Open Sans, Tahoma">
<div class="se-pre-con"></div>
<div class="container">
<nav class="navbar navbar-default" style="background-color: white;">
<div class="container-fluid">
<!-- Brand and toggle get grouped for better mobile display -->
<div class="navbar-header">
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#bs-example-
navbar-collapse-1" aria-expanded="false">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
<a class="navbar-brand" href="index.php"><img src="images/logo.png" height=20></a>
<a class="navbar-brand" href="index.php"><span style="font-family: Tahoma;">Catalog Kart</span></a>
</div>
<?php
if(!isset($user email))
<!-- Collect the nav links, forms, and other content for toggling -->
<div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
style="margin: -3%;"><a href="seller/index.php"><button type="button" class="btn btn-default">Click
Here if you're a Seller</button></a>
cli class="dropdown">
<a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-
expanded="false">Login</a>
<form action="validate.php" method="GET">
<
<div class="form-group">
<label for="exampleInputEmail1">Email address</label>
<input type="email" class="form-control" name="email1" id="email1" placeholder="Email" required>
</div>
<
<div class="form-group">
<label for="exampleInputPassword1">Password</label>
<input type="password" class="form-control" id="pass1" name="pass1" placeholder="Password" required>
</div>
<center><input type="submit" class="btn btn-default" id="login1" name="login1"</pre>
value="Login!"></center>
</form>
<a href="register.php">Register</a>
cli class="dropdown">
<a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-
expanded="false"><span class="glyphicon glyphicon-th"></span></a>
<a href="#">About Catalog</a>
</div><!--/.navbar-collapse -->
<?php}
else
<div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
```

```
<a href="history.php"><img src="images/acc.png" width="20" data-placement="left" data-
toggle="tooltip" title="Orders"></a>
<a href="mycart.php"><span class="glyphicon glyphicon-shopping-cart"><span class="badge"</a>
style="background-color: red;"><?php
require 'init.php';
                     $id = "":
if(isset($user email))
                      $id = $user email;
else
  $id = $_SESSION['emailID'];
                     $get_cart_details = "SELECT * FROM `$db_name`.`cart` WHERE `buyer_id`='$id'";
                     $result = mysqli_query($conn, $get_cart_details);
if($result)
                      $count = mysqli num rows($result);
echo $count:
                     }
else
echo "-1";
               ?></span></span>
<a href="index.php" data-placement="bottom" data-toggle="tooltip" title="<?php echo $user_email;</pre>
?>">Welcome <?php if(isset($user name first)) echo $user name first; ?></a>
<a href="logout.php" data-placement="bottom" data-toggle="tooltip" title="Log Out">Log Out</a>
</div><!-- /.navbar-collapse -->
<?php
        }?>
</div><!--/.container-fluid -->
</nav>
</div>
<!-- Cart Panel -->
<div class="container">
<div class="panel panel-primary">
<div class="panel-heading"><center><img src="images/logo.png" width="25">&nbsp;My
Orders</center></div>
<?php
                     id = "";
if(isset($user email))
                      $id = $user_email;
else
  $id = $_SESSION['emailID'];
                     $get_orders = "SELECT * FROM `$db_name`.`transaction` WHERE `email_id`='$id'";
                     $result = mysqli_query($conn, $get_orders);
if($result)
if(mysqli_num_rows($result)>0)
           \text{$count} = 1;
                              ?>
```

```
<thead>
ID
Product Title
Image
Price
Seller Name
Time
</thead>
<?php
while($row = mysqli_fetch_array($result))
              {?>
<?php echo $count++; ?>
<?php echo $row['product_name'];?>
<img src="<?php echo "images/db_dir/".$row['product_image']; ?>" width="30">
<?php echo "₹".$row['price_paid'];?>
<?php echo $row['seller name']; ?>
<?php echo $row['time'];?>
<?php
                     ?>
<?php
            } else
echo "<span style='color: red; paddding: 20px; text-align: center'>No Orders placed.</span>";
echo "<span style='color: red; paddding: 20px; text-align: center'>No Orders placed.</span>";
<div class="panel-footer" style="background-color: #337AB7;color: white">
</div></div></div>
<div class="container">
<center>© 2016 Catalog. All rights reserved.</center>
</div>
<hr><br><br>>
<!-- Include all compiled plugins (below), or include individual files as needed -->
<script src="is/bootstrap.min.js"></script>
<script>
    $(document).ready(function(){
     $('[data-toggle="tooltip"]').tooltip('enable');
    });
    $(document).ready(function(){
      $('#orderTable').DataTable( {
        "order": [[ 0, "desc" ]]
      } ); });
</script>
</body></html>
```


SECTION B (SCREENSHOTS)

• Database Design




Users

• Home Page

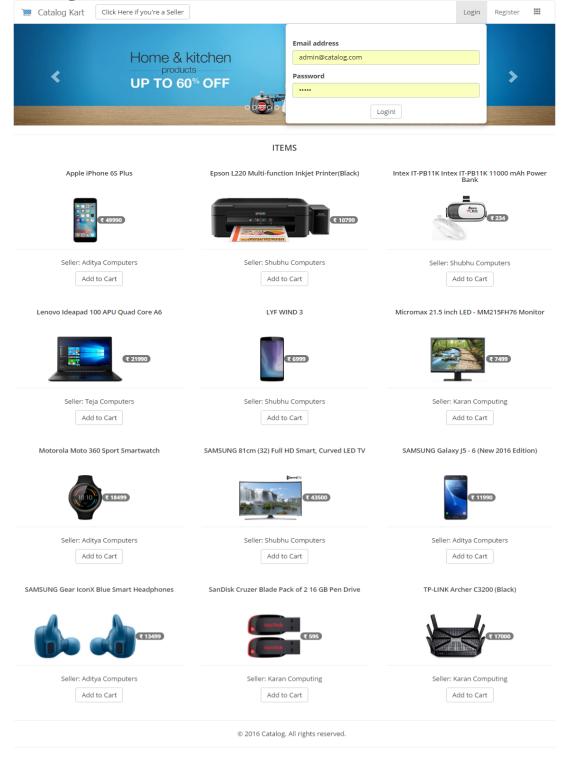

• Seller Home Page



Grow your business with the leader in Indian e-commerce



PRICING

We make the fastest payments in the industry. For every sale you make, you get paid within the next 7-14 business days. You decide the price of your products and we charge you a small fee on the successful orders you make.

PRICING STRUCTURE



ITEM	AMOUNT (RS.)
Selling Price (decided by you)	1000
Commission Fee (varies across sub-categories/verticals)	100(assuming 10%
Shipping Fee (Local shipping, weight 0-500 grams)	30
Collection Fee (2.5 % on the Order item value or Rs 20 whichever is higher)	25
Fixed Fee	30
Total Marketplace Fee	185
Service Tax (15% of Marketplace Fee including Swachh Bharat & Krishi Kalyan cess)	27.75
Total deductions	212.75
Settlement Value	787.25

SELL ON CATALOG


Catalog marketplace is India's leading platform for selling online. Be it a manufacturer, vendor or supplier, simply sell your products online on Catalog and become a top ecommerce player with minimum investment. Through a team of experts offering exclusive seller workshops, training, seller support and convenient seller portal, Catalog focuses on educating and empowering sellers across india.

Selling on Catalog.com is easy and absolutely free. All you need is to register, list your catalogue and start selling your products.


What's more! We have third party 'Ecommerce Service Providers' who provide logistics, cataloging support, product photo shoot and packaging materials. We have Seller Protection Program to safeguard sellers from losses via compensation from Seller Protection Fund (SPF). We provide Catalog Advantage servicing which you can ensure feater delivery of your items, quality check by our experts and delightful packaging. Combine these with fastest payments in the industry and an excellent seller portal. No wonder Catalog is India's favourite place to sell online.

© 2016 Catalog. All rights reserved.

• User Registration

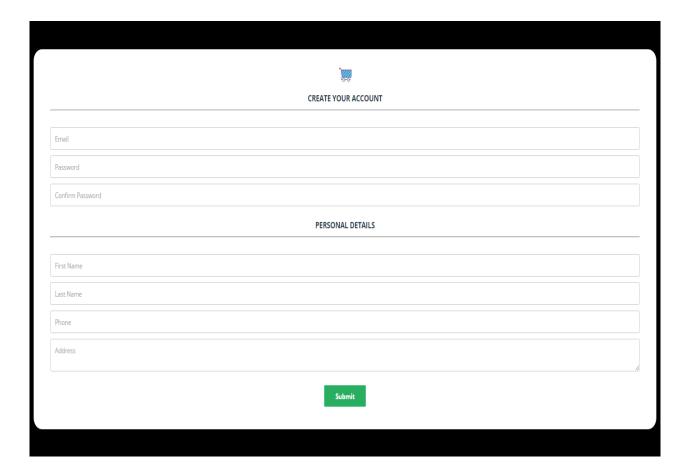


• Orders History

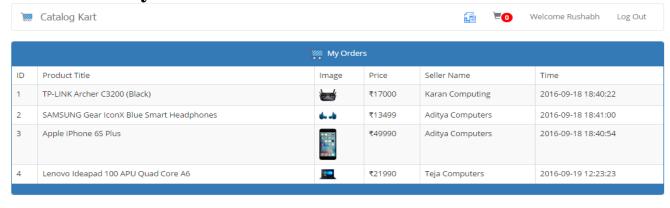


© 2016 Catalog. All rights reserved.

• Cart and Order Confirmation

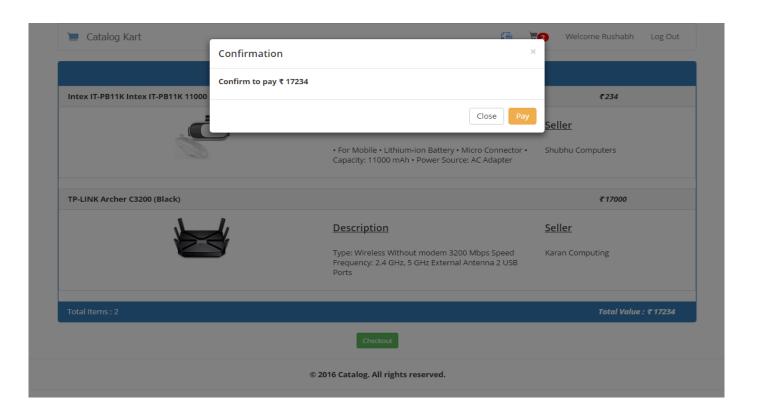

Admin Account


• Admin Home Page

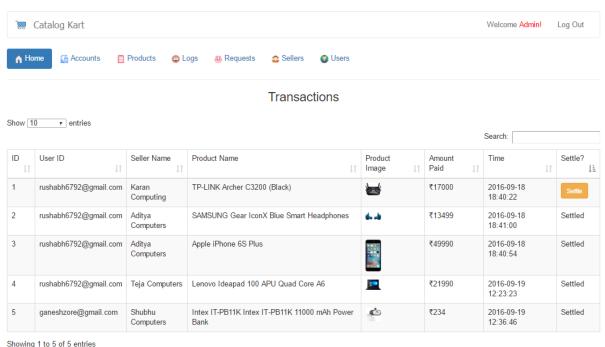

Showing 1 to 5 or 5 entries

Provings 1Nex


Accounts

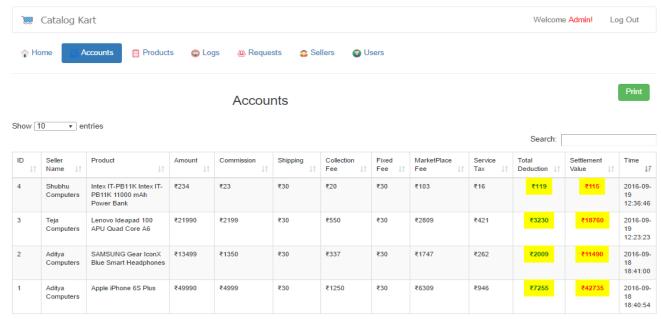

Showing 1 to 4 of 4 entries


Previous1Next

• Number of Products

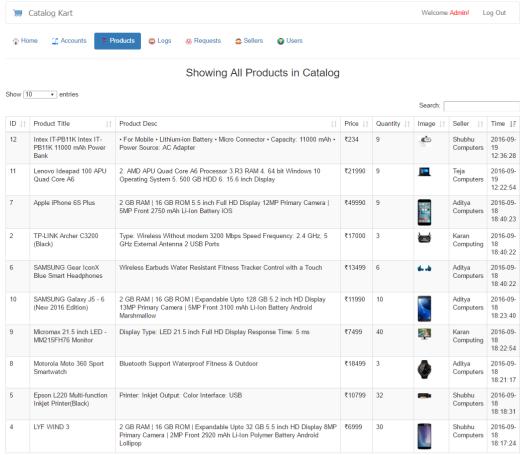


Showing 1 to 10 of 12 entries

Listing the number of seller and their Details

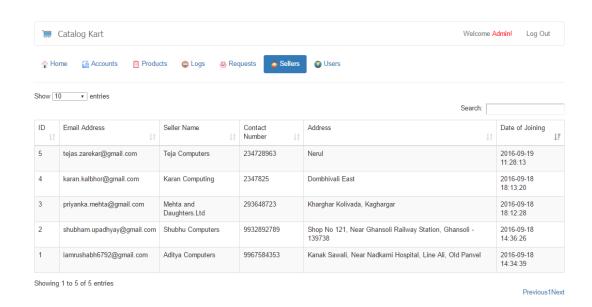


• Listing the number of users and their Details

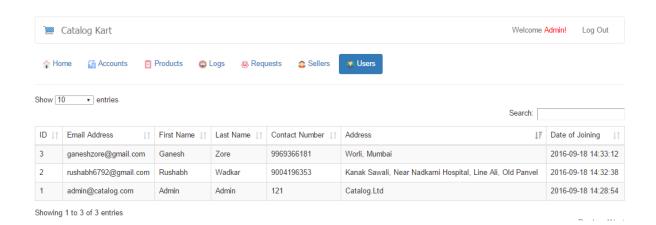


Seller Account

• Seller Home Page

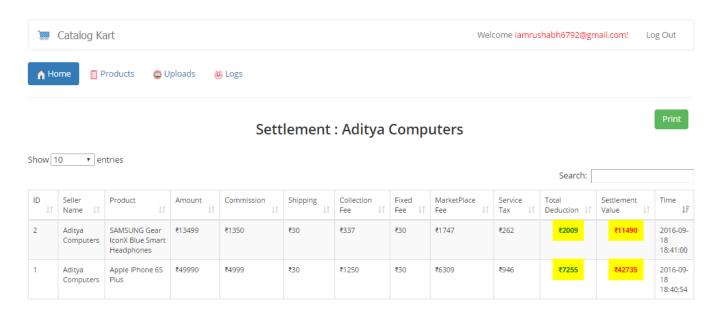

• Listing the number of products from the seller

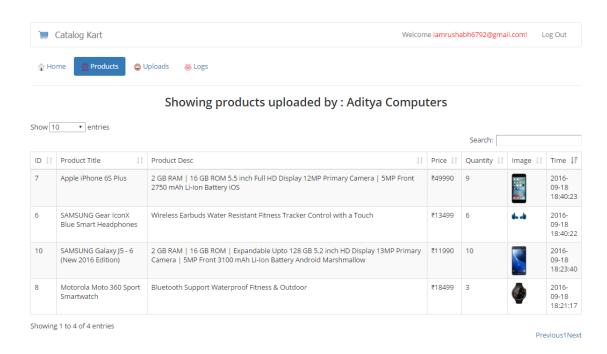

• Product Upload Form for the seller

