


Reuse computation in time, or store it in space

Three ways to answer the same 40-hop pointer query with a frozen controller

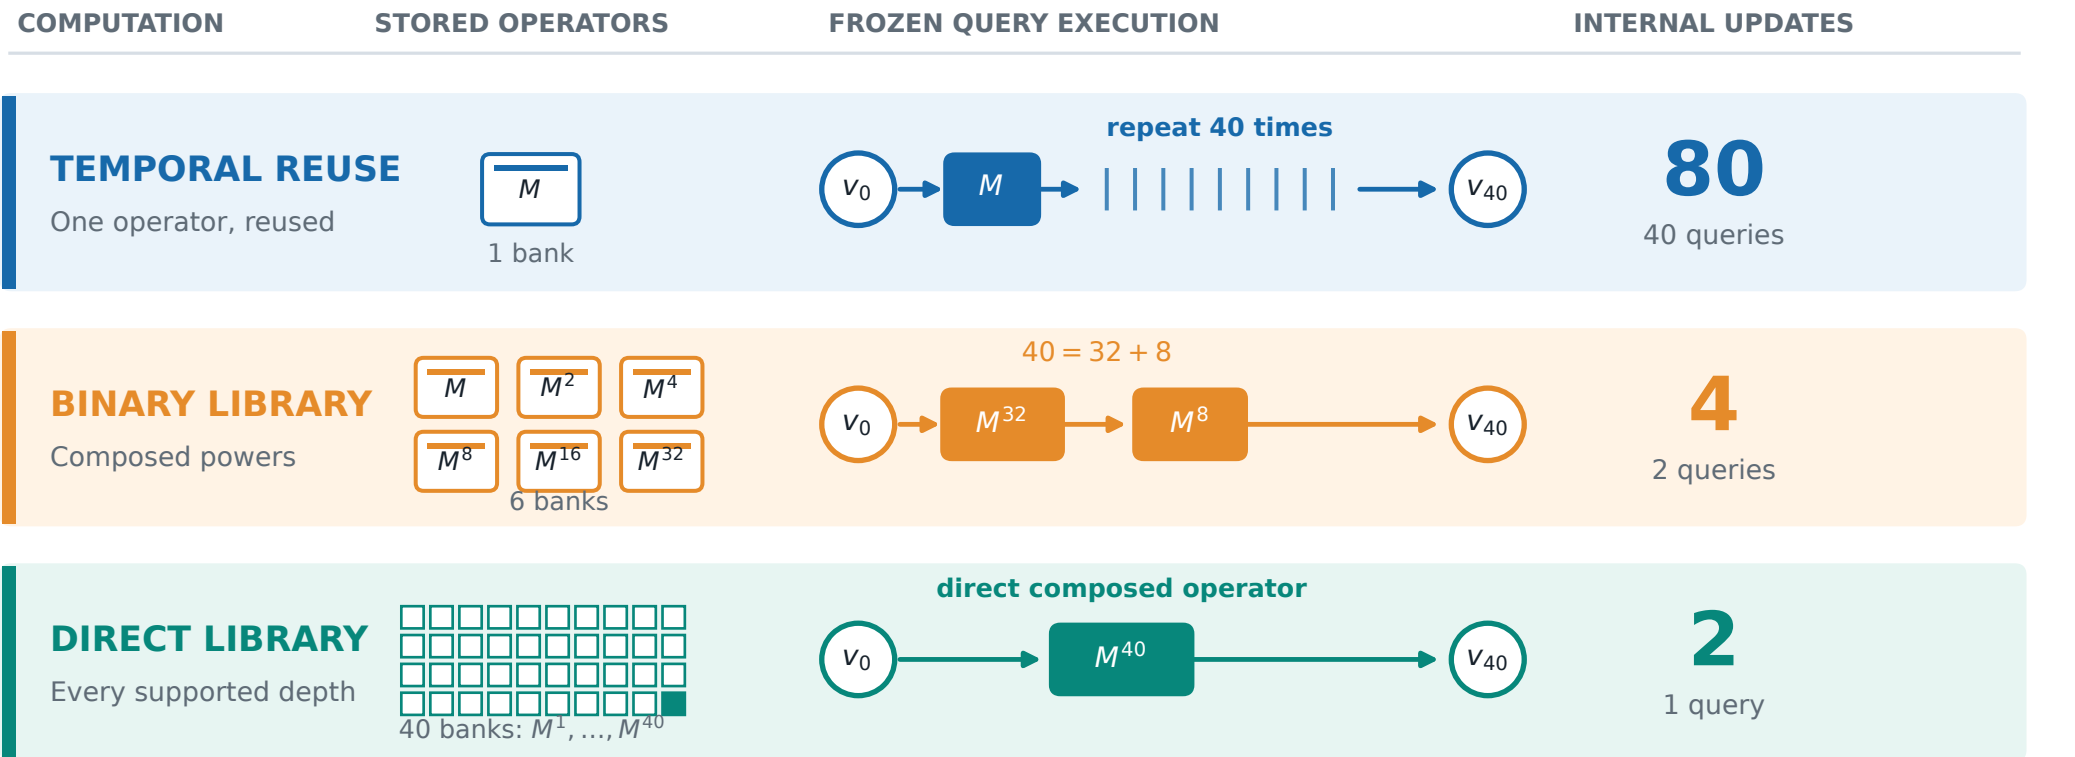

LESS STORED STRUCTURE  MORE PRECOMPUTED STRUCTURE

Query cost uses the modular pointer controller's two-update memory operation. Compiling and writing additional banks is a separate setup cost.