backend:

timer.sh ⟶ calls go.cgi
                          ↓
                    calls m.py,
                     gets X
                          ↓
                    back to
                       go
                          if
          X=1 ↙   ↘ X=0
                ↓   ↓
Status   status
.txt ⟵ 1.sh   0.sh ⟶ .txt

frontend:

index.html ⟶ webpage ⟶ test.cgi
                                          ↓
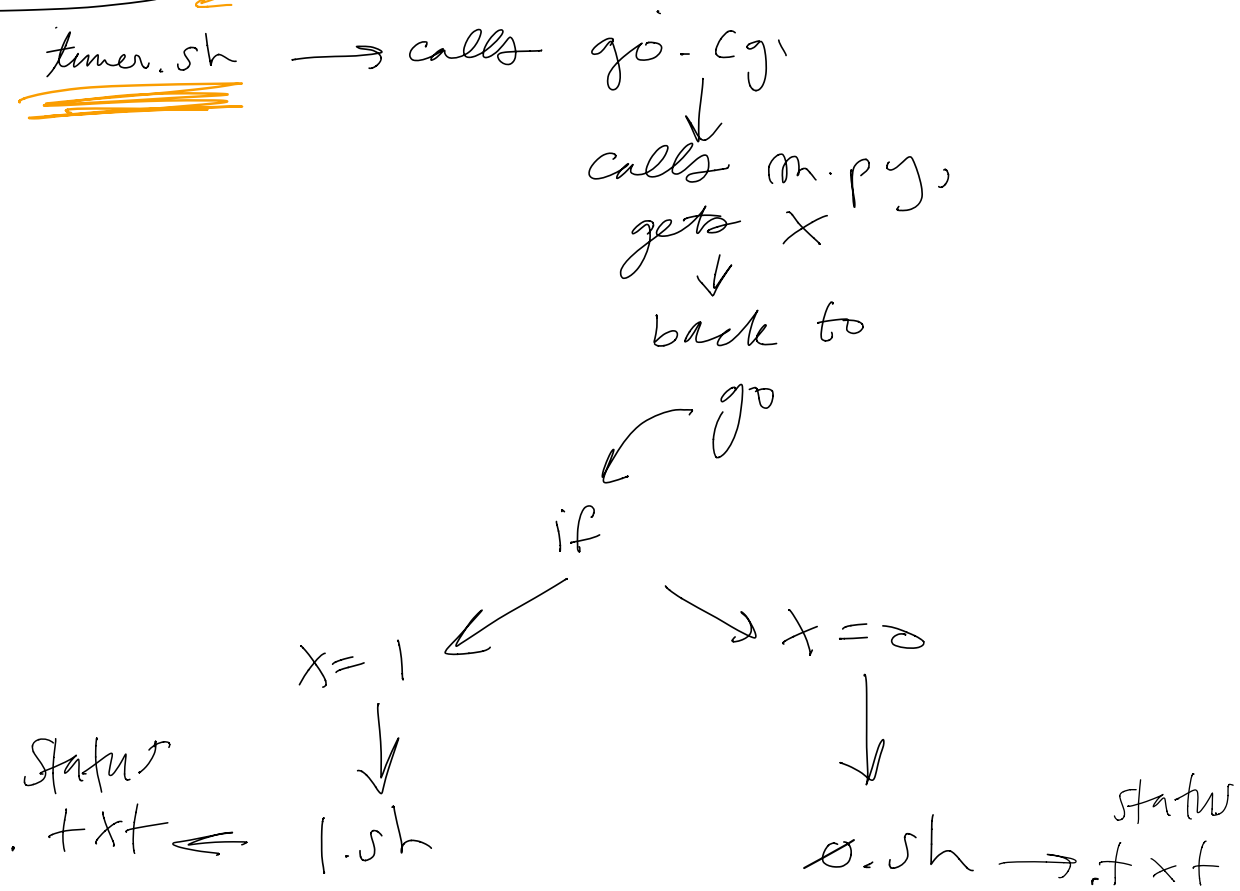   cat Status.txt
                                  in html