


Sistema de vendas: Perfumes


Migrations, Models, Controllers, Views, Layout, Styles, Routes

Migrations:

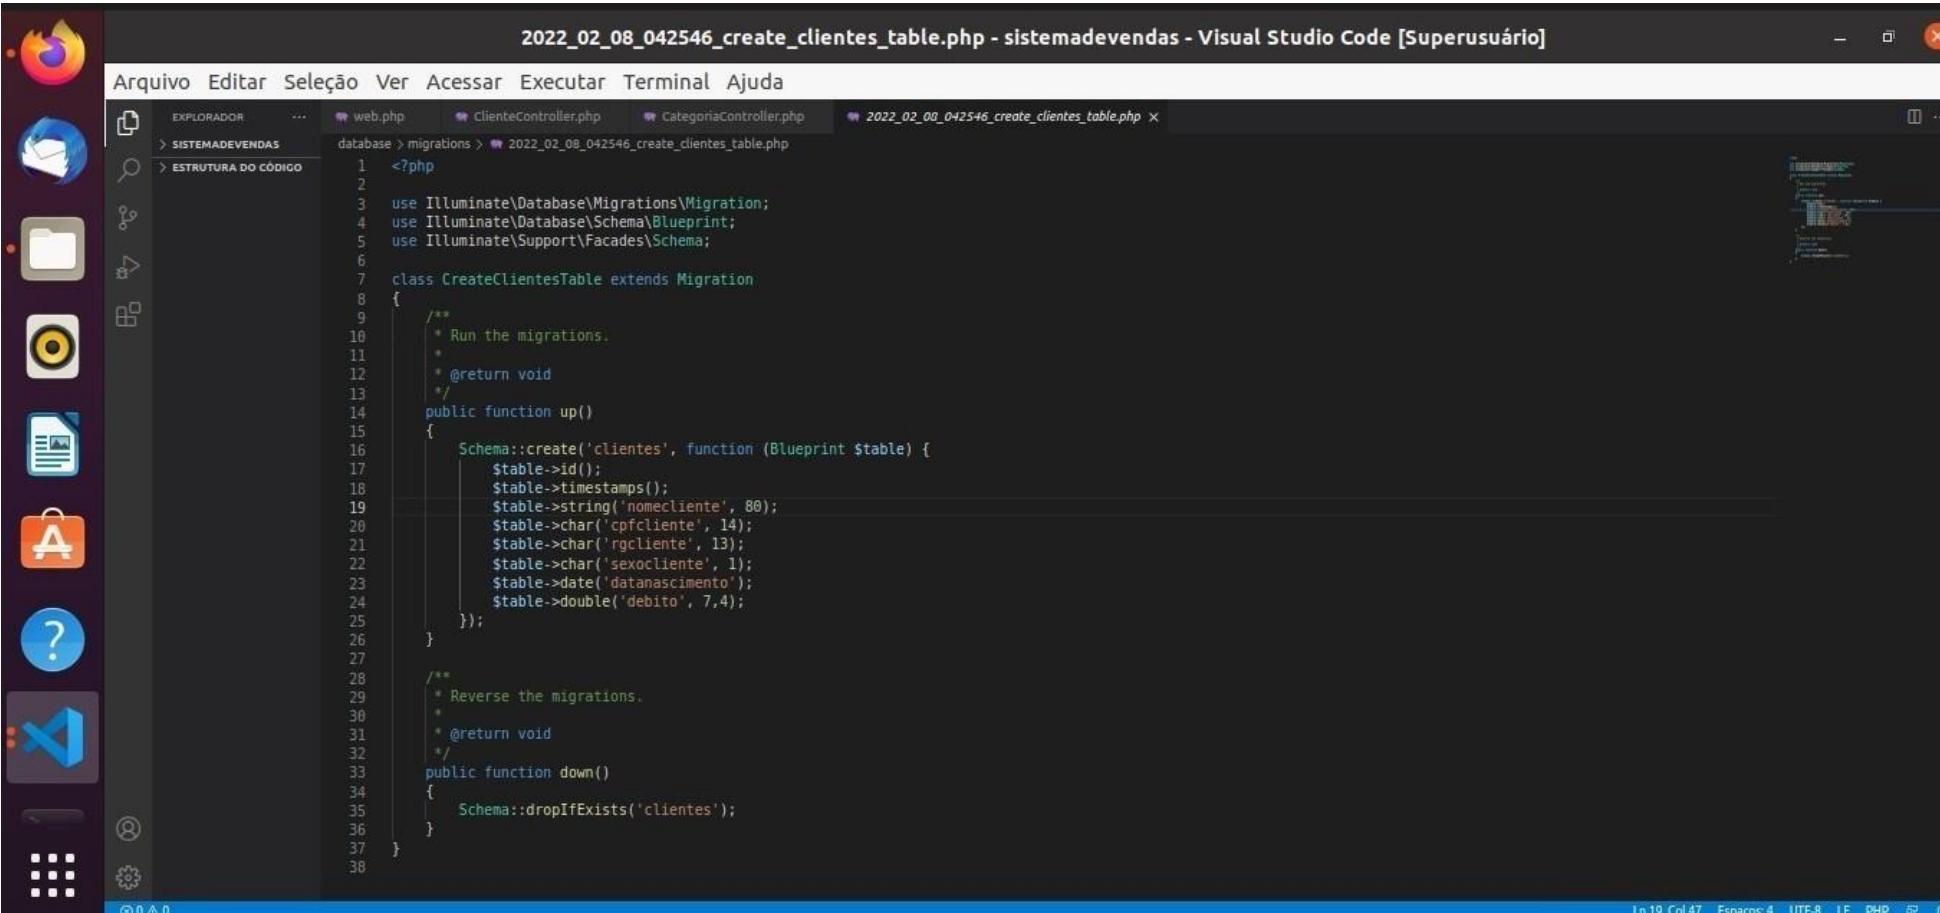

The screenshot shows a Visual Studio Code interface with a dark theme. The title bar reads "2022_02_08_042546_create_clientes_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various tools like browser, email, file explorer, search, and help. The main editor area displays a PHP migration file named "2022_02_08_042546_create_clientes_table.php". The code defines a class "CreateClientesTable" that extends "Migration". The "up()" method creates a table named "clientes" with columns: id (int), timestamps (timestamps), nomecliente (string 80), cpfcliente (char 14), rgcliente (char 13), sexocliente (char 1), dataascimento (date), and debito (double 7,4). The "down()" method drops the "clientes" table if it exists. The status bar at the bottom shows "Ln 19 Col 47 Espacos: 4 UTF-8 LF PHP ⚡".

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreateClientesTable extends Migration  
{  
    /**  
     * Run the migrations.  
     *  
     * @return void  
     */  
    public function up()  
    {  
        Schema::create('clientes', function (Blueprint $table) {  
            $table->id();  
            $table->timestamps();  
            $table->string('nomecliente', 80);  
            $table->char('cpfcliente', 14);  
            $table->char('rgcliente', 13);  
            $table->char('sexocliente', 1);  
            $table->date('datanascimento');  
            $table->double('debito', 7,4);  
        });  
    }  
    /**  
     * Reverse the migrations.  
     *  
     * @return void  
     */  
    public function down()  
    {  
        Schema::dropIfExists('clientes');  
    }  
}
```

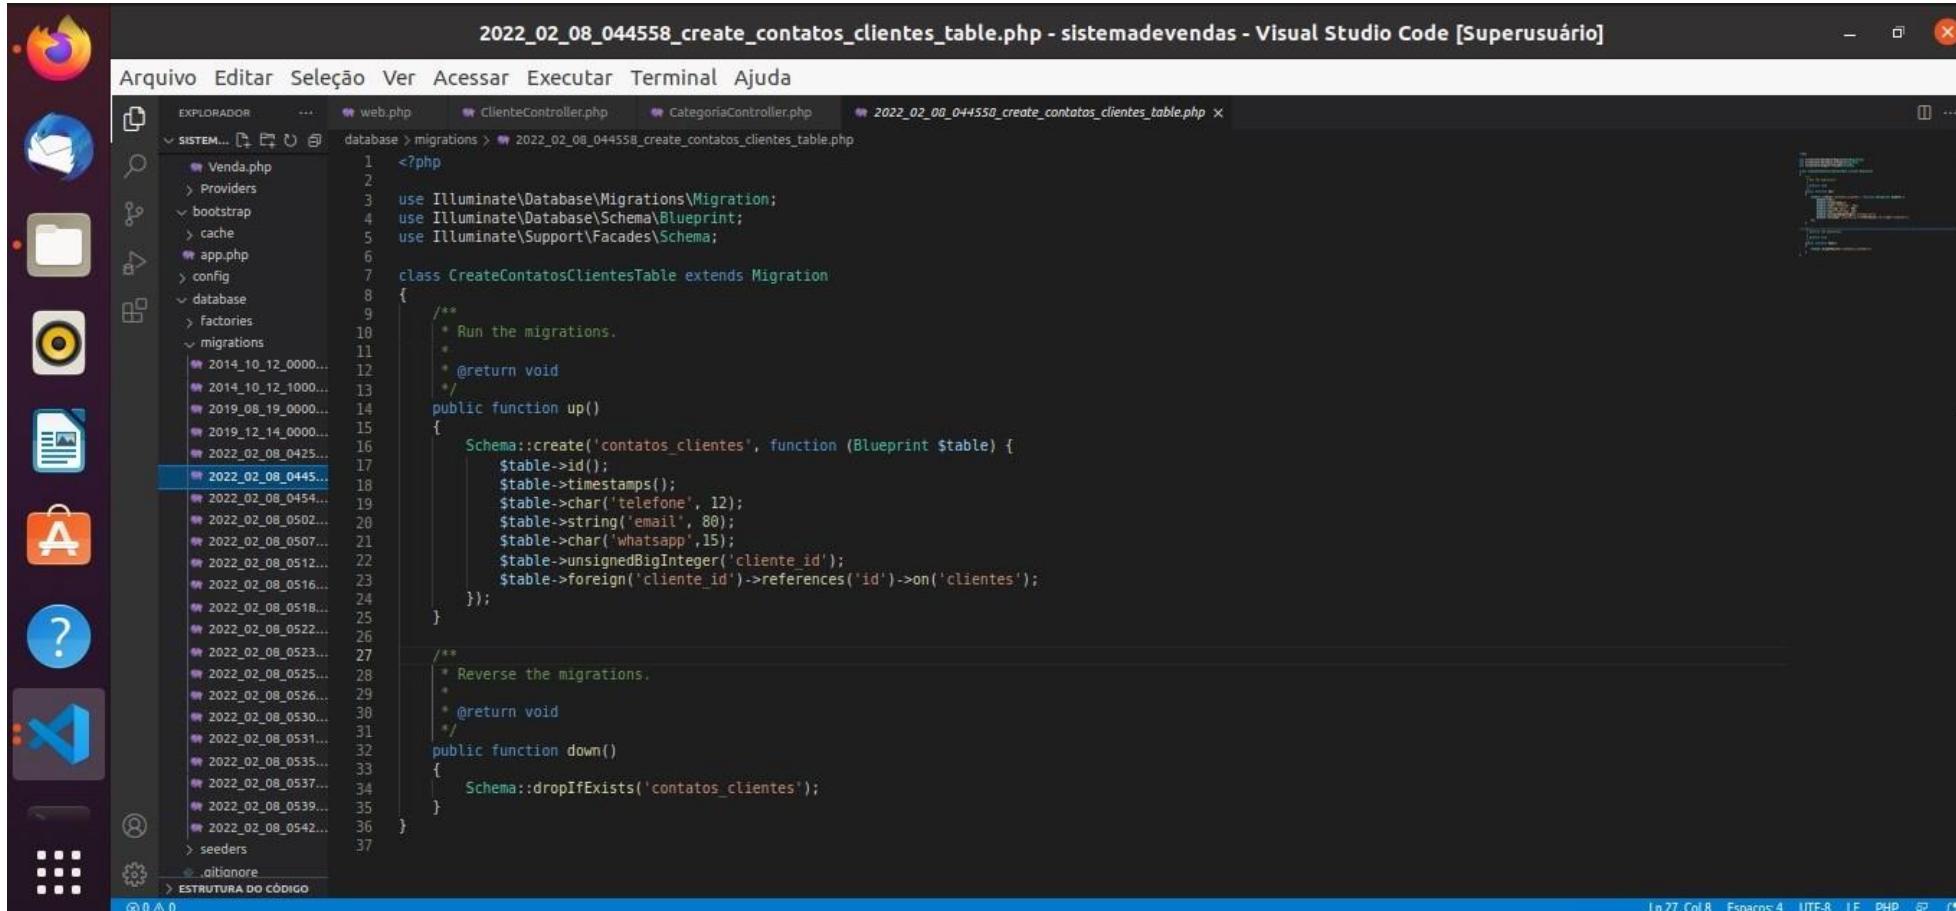

A screenshot of the Visual Studio Code interface, showing a migration file for a Laravel application. The file is named `2022_02_08_045458_create_enderecos_clientes_table.php`. The code defines a migration class `CreateEnderecosClientesTable` that extends `Migration`. It uses the `Blueprint` facade to define the table structure, including columns for id, timestamps, rua, numero, bairro, cidade, uf, cep, and cliente_id (a foreign key). The migration also includes a down() method to drop the table if it exists.

```
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

class CreateEnderecosClientesTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('enderecos_clientes', function (Blueprint $table) {
            $table->id();
            $table->timestamps();
            $table->string('rua', 70);
            $table->double('numero', 7, 2);
            $table->string('bairro', 80);
            $table->string('cidade', 80);
            $table->char('uf', 2);
            $table->double('cep', 7, 2);
            $table->unsignedBigInteger('cliente_id');
            $table->foreign('cliente_id')->references('id')->on('clientes');
        });
    }


    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        Schema::dropIfExists('enderecos_clientes');
    }
}
```

The left sidebar shows the project structure under `SISTEMADEVENDAS`, including files like `Venda.php`, `Providers`, `bootstrap`, `cache`, `app.php`, `config`, `database`, `factories`, and various `migrations` files from 2014 to 2022. The bottom status bar indicates the file is at line 29, column 1, with 4 spaces, in UTF-8 encoding, and is a PHP file.

The screenshot shows a Visual Studio Code window with the title bar "2022_02_08_050207_create_usuarios_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various applications like Firefox, Mail, and File Explorer. The main area has a dark theme with a code editor showing a PHP migration file. The file content is as follows:

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreateUsuariosTable extends Migration  
{  
    /**  
     * Run the migrations.  
     *  
     * @return void  
     */  
    public function up()  
    {  
        Schema::create('usuarios', function (Blueprint $table) {  
            $table->id();  
            $table->timestamps();  
            $table->string('nomeusuario', 80);  
            $table->string('login', 70);  
            $table->string('senha', 70);  
            $table->string('cargo', 90);  
            $table->float('adm');  
        });  
    }  
  
    /**  
     * Reverse the migrations.  
     *  
     * @return void  
     */  
    public function down()  
    {  
        Schema::dropIfExists('usuarios');  
    }  
}
```

The status bar at the bottom right shows "Ln 25, Col 6 Espaços: 4 UTF-8 LF PHP ⚙".

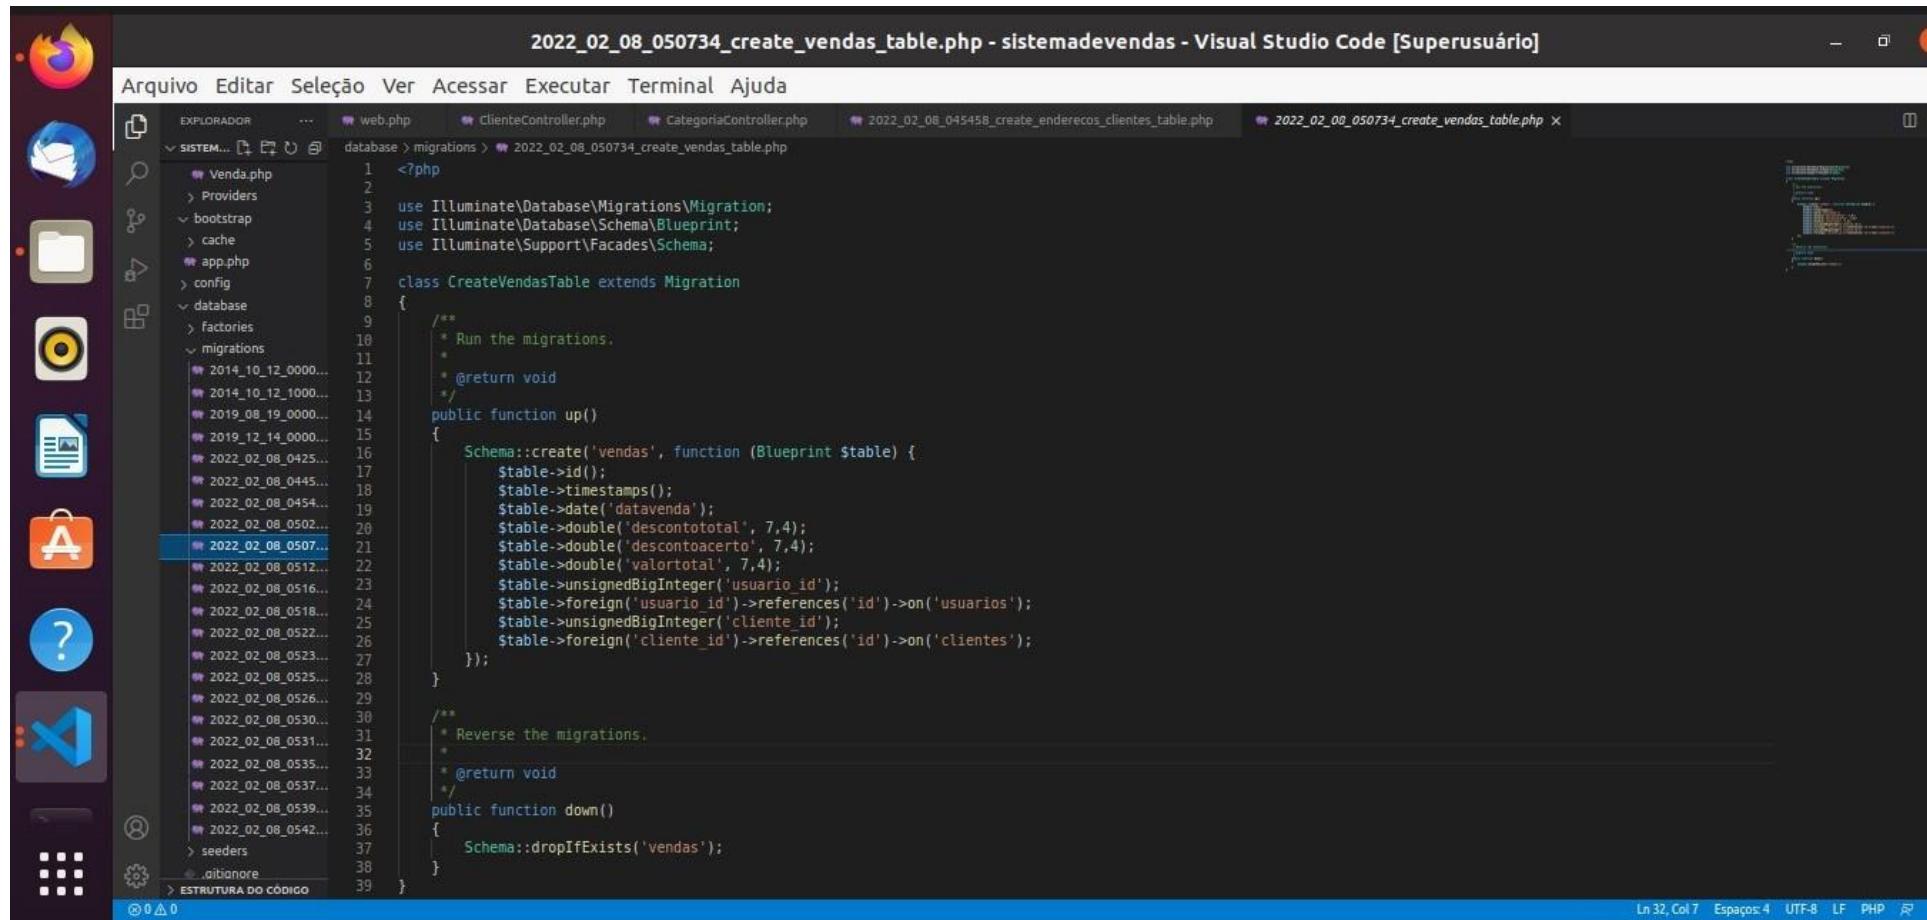

A screenshot of the Visual Studio Code (VS Code) interface, showing a PHP migration file named `2022_02_08_050734_create_vendas_table.php`. The file is part of a project named `sistemadevendas`.

The code defines a `CreateVendasTable` class that extends the `Migration` class from the Illuminate\Database\Migrations namespace. The `up()` method creates a table named `vendas` with the following schema:

- `$table->id();`
- `$table->timestamps();`
- `$table->date('datavenda');`
- `$table->double('descontototal', 7, 4);`
- `$table->double('descontoacerto', 7, 4);`
- `$table->double('valortotal', 7, 4);`
- `$table->unsignedBigInteger('usuario_id');`
- `$table->foreign('usuario_id')->references('id')->on('usuarios');`
- `$table->unsignedBigInteger('cliente_id');`
- `$table->foreign('cliente_id')->references('id')->on('clientes');`


The `down()` method is also defined, which drops the `vendas` table if it exists.

The VS Code interface includes a sidebar with icons for various tools like browser, email, file manager, terminal, and help. The status bar at the bottom shows file statistics: Line 32, Column 7, Spaces: 4, UTF-8, LF, PHP, and a refresh icon.

```
<?php
use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

class CreateVendasTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('vendas', function (Blueprint $table) {
            $table->id();
            $table->timestamps();
            $table->date('datavenda');
            $table->double('descontototal', 7, 4);
            $table->double('descontoacerto', 7, 4);
            $table->double('valortotal', 7, 4);
            $table->unsignedBigInteger('usuario_id');
            $table->foreign('usuario_id')->references('id')->on('usuarios');
            $table->unsignedBigInteger('cliente_id');
            $table->foreign('cliente_id')->references('id')->on('clientes');
        });
    }

    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        Schema::dropIfExists('vendas');
    }
}
```

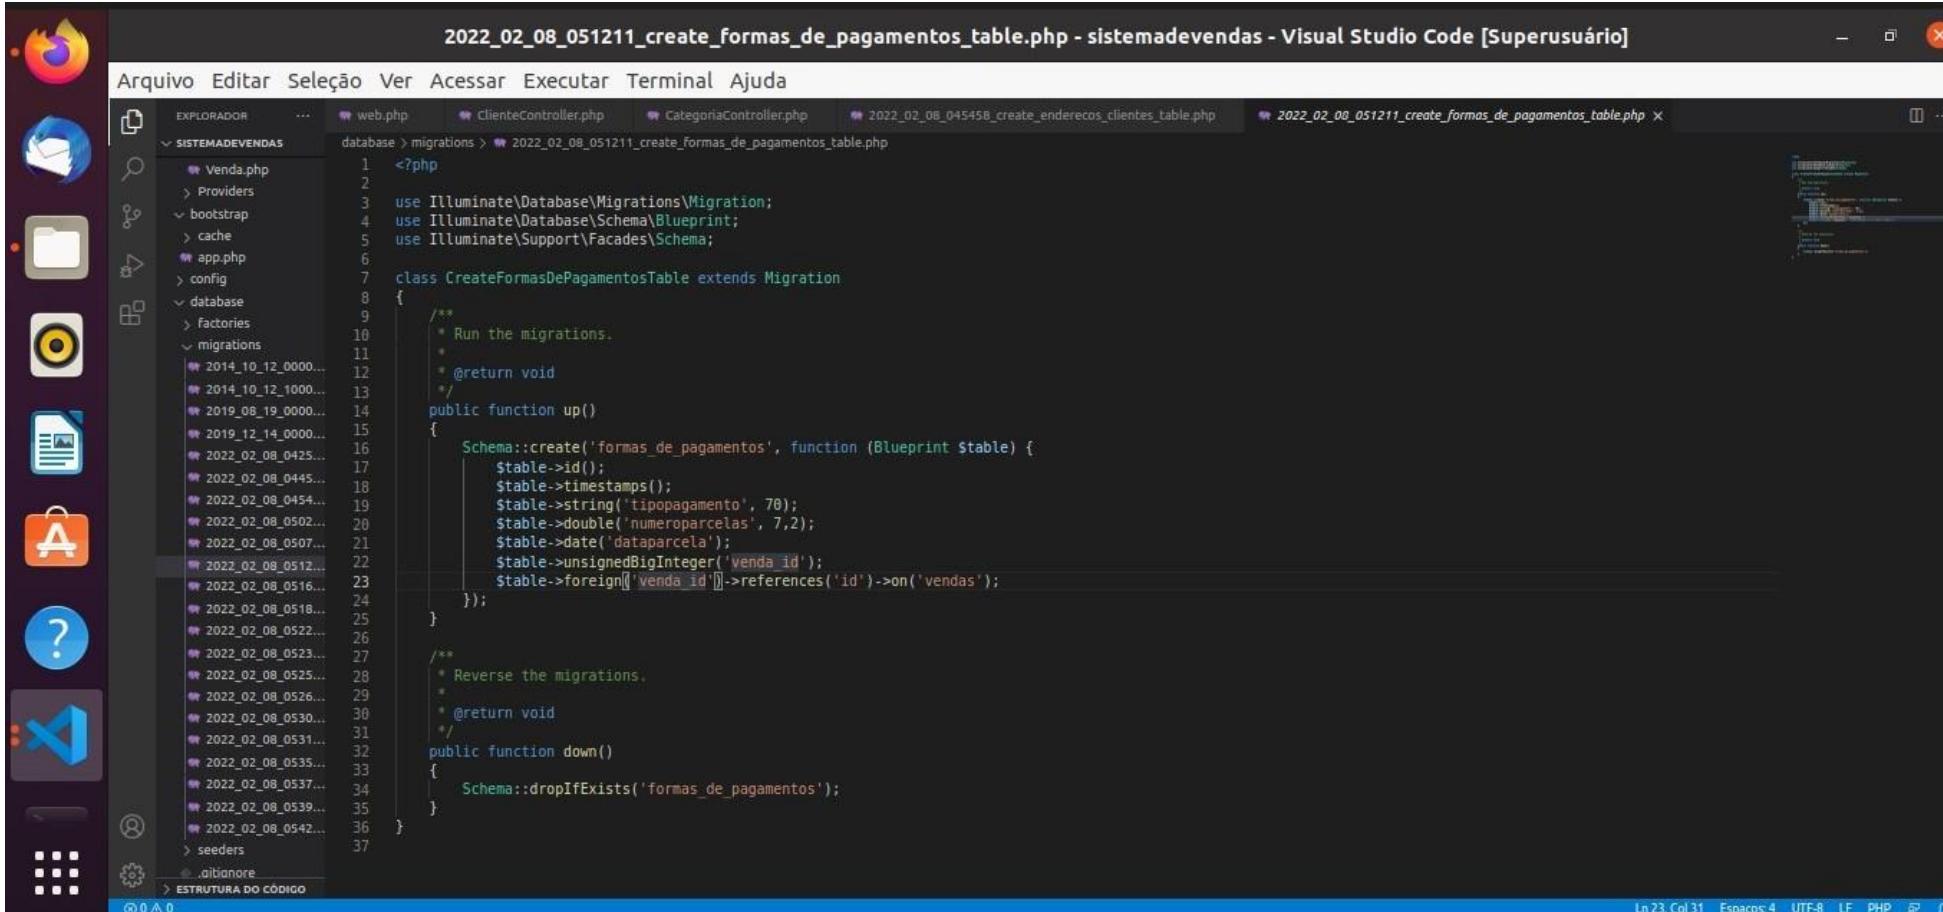

A screenshot of the Visual Studio Code interface, showing a migration file for a Laravel application. The title bar reads "2022_02_08_051211_create_formas_de_pagamentos_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for file operations, a search function, and a project tree labeled "SISTEMADEVENDAS" which includes "Providers", "bootstrap", "cache", "app.php", "config", "database" (with "factories" and "migrations" subfolders), and "seeders". The main editor area displays the PHP code for the migration:

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreateFormasDePagamentosTable extends Migration  
{  
    /**  
     * Run the migrations.  
     *  
     * @return void  
     */  
    public function up()  
    {  
        Schema::create('formas_de_pagamentos', function (Blueprint $stable) {  
            $stable->id();  
            $stable->timestamps();  
            $stable->string('tipopagamento', 70);  
            $stable->double('numeroparcelas', 7,2);  
            $stable->date('dataparcela');  
            $stable->unsignedBigInteger('venda_id');  
            $stable->foreign(['venda_id'])->references('id')->on('vendas');  
        });  
    }  
    /**  
     * Reverse the migrations.  
     *  
     * @return void  
     */  
    public function down()  
    {  
        Schema::dropIfExists('formas_de_pagamentos');  
    }  
}
```

The status bar at the bottom shows "Ln 23, Col 31" and "Espaços: 4, UTF-8, LF, PHP, JS".

A screenshot of the Visual Studio Code interface, showing a code editor with a dark theme. The title bar reads "2022_02_08_051657_create_pagamentos_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various tools like browser, email, file explorer, terminal, and help. The main area shows a PHP migration file named "2022_02_08_051657_create_pagamentos_table.php". The code defines a class "CreatePagamentosTable" that extends "Migration". It includes methods for "up()" and "down()", which define the schema for the "pagamentos" table, including columns for id, timestamps, valorpagamento (double precision), datapagamento (date), and numerosdeparcelas (double precision). The file is part of a project structure under "SISTEMADEVENDAS" in the Explorer view.

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreatePagamentosTable extends Migration  
{  
    /**  
     * Run the migrations.  
     *  
     * @return void  
     */  
    public function up()  
    {  
        Schema::create('pagamentos', function (Blueprint $table) {  
            $table->id();  
            $table->timestamps();  
            $table->double('valorpagamento', 7, 4);  
            $table->date('datapagamento');  
            $table->double('numerosdeparcelas', 7, 2);  
        });  
    }  
    /**  
     * Reverse the migrations.  
     *  
     * @return void  
     */  
    public function down()  
    {  
        Schema::dropIfExists('pagamentos');  
    }  
}
```

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR SISTEMADEVENDAS web.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php 2022_02_08_051657_create_pagamentos_table.php

database > migrations > 2022_02_08_051657_create_pagamentos_table.php

Venda.php Providers bootstrap cache app.php config database factories migrations 2014_10_12_0000... 2014_10_12_1000... 2019_08_19_0000... 2019_12_14_0000... 2022_02_08_0425... 2022_02_08_0445... 2022_02_08_0454... 2022_02_08_0502... 2022_02_08_0507... 2022_02_08_0512... 2022_02_08_0516... 2022_02_08_0518... 2022_02_08_0522... 2022_02_08_0523... 2022_02_08_0525... 2022_02_08_0526... 2022_02_08_0530... 2022_02_08_0531... 2022_02_08_0535... 2022_02_08_0537... 2022_02_08_0539... 2022_02_08_0542... > seeders .aitianore ESTRUTURA DO CÓDIGO

Lin 30, Col 27 Espaços: 4 UTF-8 LF PHP ⚡

A screenshot of the Visual Studio Code interface, showing a PHP migration file for creating a 'parcelas' table. The file is located in the 'migrations' directory of a project named 'SISTEMADEVENDAS'. The code defines a 'CreateParcelasTable' class that extends the 'Migration' class from the Illuminate\Database\Migrations namespace. The 'up()' method creates the 'parcelas' table with columns for id, timestamps, numerosdeparcelas (double precision), valorparcela (double precision), status (string), vencimento (date), valortotaldaparcela (double precision), and references to 'formas_de_pagamentos' and 'pagamentos' tables. The 'down()' method drops the 'parcelas' table if it exists.

```
2022_02_08_051855_create_parcelas_table.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR SISTEMADEVENDAS database > migrations > 2022_02_08_051855_create_parcelas_table.php
  Venda.php
  Providers
  bootstrap
  cache
  app.php
  config
  database
    factories
    migrations
      2014_10_12_0000...
      2014_10_12_1000...
      2019_08_19_0000...
      2019_12_14_0000...
      2022_02_08_0425...
      2022_02_08_0445...
      2022_02_08_0454...
      2022_02_08_0502...
      2022_02_08_0507...
      2022_02_08_0512...
      2022_02_08_0516...
      2022_02_08_0518...
      2022_02_08_0522...
      2022_02_08_0523...
      2022_02_08_0525...
      2022_02_08_0526...
      2022_02_08_0530...
      2022_02_08_0531...
      2022_02_08_0535...
      2022_02_08_0537...
      2022_02_08_0539...
      2022_02_08_0542...
    seeders
      .alitionore
ESTRUTURA DO CÓDIGO

1  <?php
2
3  use Illuminate\Database\Migrations\Migration;
4  use Illuminate\Database\Schema\Blueprint;
5  use Illuminate\Support\Facades\Schema;
6
7  class CreateParcelasTable extends Migration
{
8
9      /**
10     * Run the migrations.
11     *
12     * @return void
13     */
14    public function up()
15    {
16        Schema::create('parcelas', function (Blueprint $table) {
17            $table->id();
18            $table->timestamps();
19            $table->double('numerosdeparcelas', 7,2);
20            $table->double('valorparcela', 7,4);
21            $table->string('status', 50);
22            $table->date('vencimento');
23            $table->double('valortotaldaparcela', 7,4);
24            $table->unsignedBigInteger('forma_de_pagamento_id');
25            $table->foreign('forma_de_pagamento_id')->references('id')->on('formas_de_pagamentos');
26            $table->unsignedBigInteger('pagamento_id');
27            $table->foreign('pagamento_id')->references('id')->on('pagamentos');
28        });
29
30        /**
31         * Reverse the migrations.
32         *
33         * @return void
34         */
35        public function down()
36        {
37            Schema::dropIfExists('parcelas');
38        }
39    }
}

Ln 28, Col 12  Espaços: 4  UTF-8  LF  PHP  ⚡  🔍
```

A screenshot of the Visual Studio Code interface, showing a PHP migration file for creating a 'marcas' table. The file is located in the 'SISTEMADEVENDAS' project under the 'database/migrations' directory. The code uses the Illuminate\Database\Migrations\Migration class and the Schema facade to define the table structure.

```
2022_02_08_052258_create_marcas_table.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR  web.php  ClienteController.php  CategoriaController.php  2022_02_08_045458_create_enderecos_clientes_table.php  2022_02_08_052258_create_marcas_table.php

SISTEMADEVENDAS
  database > migrations > 2022_02_08_052258_create_marcas_table.php
    Providers
    bootstrap
    cache
    app.php
    config
    database
      factories
      migrations
        2014_10_12_0000...
        2014_10_12_1000...
        2019_08_19_0000...
        2019_12_14_0000...
        2022_02_08_0425...
        2022_02_08_0445...
        2022_02_08_0454...
        2022_02_08_0502...
        2022_02_08_0507...
        2022_02_08_0512...
        2022_02_08_0516...
        2022_02_08_0518...
        2022_02_08_0522...
        2022_02_08_0523...
        2022_02_08_0525...
        2022_02_08_0526...
        2022_02_08_0530...
        2022_02_08_0531...
        2022_02_08_0535...
        2022_02_08_0537...
        2022_02_08_0539...
        2022_02_08_0542...
      seeders
        .abianore

ESTRUTURA DO CÓDIGO

2022_02_08_052258_create_marcas_table.php

1  <?php
2
3  use Illuminate\Database\Migrations\Migration;
4  use Illuminate\Database\Schema\Blueprint;
5  use Illuminate\Support\Facades\Schema;
6
7  class CreateMarcasTable extends Migration
8  {
9
10     /**
11      * Run the migrations.
12      *
13      * @return void
14      */
15
16     public function up()
17     {
18         Schema::create('marcas', function (Blueprint $table) {
19             $table->id();
20             $table->timestamps();
21             $table->string('nomedamarca', 100);
22         });
23
24     }
25
26     /**
27      * Reverse the migrations.
28      *
29      * @return void
30      */
31     public function down()
32     {
33         Schema::dropIfExists('marcas');
34     }
35
36 }

Ln 22, Col 1  Espaços: 4  UTF-8  LF  PHP  🔍  ⌂
```

The screenshot shows a Visual Studio Code window with the title "2022_02_08_052356_create_categorias_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various tools like browser, email, file explorer, terminal, and help. The main area displays a PHP migration file:

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreateCategoriasTable extends Migration  
{  
    /**  
     * Run the migrations.  
     *  
     * @return void  
     */  
    public function up()  
    {  
        Schema::create('categorias', function (Blueprint $table) {  
            $table->id();  
            $table->timestamps();  
            $table->string('nomecategoria', 80);  
        });  
    }  
  
    /**  
     * Reverse the migrations.  
     *  
     * @return void  
     */  
    public function down()  
    {  
        Schema::dropIfExists('categorias');  
    }  
}
```

The code editor has syntax highlighting for PHP. The status bar at the bottom shows "Ln 23, Col 8 Espaços: 4 UTF-8 LF PHP".

The screenshot shows a Visual Studio Code window with the title "2022_02_08_052530_create_prateleiras_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for file operations like Open, Save, Find, and Refresh, along with a folder icon for the project structure. The main area displays a PHP migration file named "2022_02_08_052530_create_prateleiras_table.php". The code defines a class "CreatePrateleirasTable" that extends "Migration". The "up()" method creates a table named "prateleiras" with columns: id (int), timestamps (timestamps), descricao (string), quantidade (double), and categoria_id (unsigned integer). The "down()" method drops the table if it exists. The code uses the Illuminate\Database\Migrations\Migration and Illuminate\Database\Schema\Blueprint classes. The file is located in the "migrations" directory of the "database" folder within the "sistemadevendas" project.

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreatePrateleirasTable extends Migration  
{  
    /**  
     * Run the migrations.  
     *  
     * @return void  
     */  
    public function up()  
    {  
        Schema::create('prateleiras', function (Blueprint $table) {  
            $table->id();  
            $table->timestamps();  
            $table->string('descricaoaprateleira', 120);  
            $table->double('quantidadedefrascos', 7,2);  
            $table->unsignedBigInteger('categoria_id');  
            $table->foreign('categoria_id')->references('id')->on('categorias');  
        });  
    }  
    /**  
     * Reverse the migrations.  
     *  
     * @return void  
     */  
    public function down()  
    {  
        Schema::dropIfExists('prateleiras');  
    }  
}  
  
> seeders  
  > .alitionore
```

A screenshot of the Visual Studio Code interface, showing a file named `2022_02_08_052654_create_produtos_table.php` in the editor. The code is a PHP migration for Laravel, specifically for creating a `'produtos'` table.

```
2022_02_08_052654_create_produtos_table.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR database > migrations > 2022_02_08_052654_create_produtos_table.php
SISTEMADEVENDAS
  Venda.php
  Providers
  bootstrap
  > cache
  app.php
  > config
  database
    > factories
    migrations
      2014_10_12_0000...
      2014_10_12_1000...
      2019_08_19_0000...
      2019_12_14_0000...
      2022_02_08_0425...
      2022_02_08_0445...
      2022_02_08_0454...
      2022_02_08_0502...
      2022_02_08_0507...
      2022_02_08_0512...
      2022_02_08_0516...
      2022_02_08_0518...
      2022_02_08_0522...
      2022_02_08_0523...
      2022_02_08_0525...
      2022_02_08_0526...
      2022_02_08_0530...
      2022_02_08_0531...
      2022_02_08_0535...
      2022_02_08_0537...
      2022_02_08_0539...
      2022_02_08_0542...
    > seeders
    .gitignore
    ESTRUTURA DO CÓDIGO

2022_02_08_052654_create_produtos_table.php - sistemadevendas - Visual Studio Code [Superusuário]

class CreateProdutosTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('produtos', function (Blueprint $table) {
            $table->id();
            $table->timestamps();
            $table->string('nomedoproduto', 120);
            $table->double('icms', 7,4);
            $table->double('ipi', 7,4);
            $table->double('frete', 7,4);
            $table->double('valornafabricao', 7,4);
            $table->double('valordecompra', 7,4);
            $table->double('lucro', 7,4);
            $table->double('valorvenda', 7,4);
            $table->double('desconto', 7,4);
            $table->double('quantidade', 7,2);
            $table->date('datavencimento');
            $table->unsignedBigInteger('marca_id');
            $table->foreign('marca_id')->references('id')->on('marcas');
            $table->unsignedBigInteger('categoria_id');
            $table->foreign('categoria_id')->references('id')->on('categorias');
        });
    }

    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        Schema::dropIfExists('produtos');
    }
}
```

The code defines a `CreateProdutosTable` class that extends `Migration`. The `up()` method creates a `'produtos'` table using the `Schema::create` method. The table has columns for `id`, `timestamps`, `nomedoproduto` (string, 120 characters), `icms` (double, 7 decimal places), `ipi` (double, 7 decimal places), `frete` (double, 7 decimal places), `valornafabricao` (double, 7 decimal places), `valordecompra` (double, 7 decimal places), `lucro` (double, 7 decimal places), `valorvenda` (double, 7 decimal places), `desconto` (double, 7 decimal places), `quantidade` (double, 7 decimal places), `datavencimento` (date), `marca_id` (unsigned integer), and `categoria_id` (unsigned integer). The `down()` method uses `Schema::dropIfExists` to drop the `'produtos'` table.

A screenshot of the Visual Studio Code interface, showing a PHP migration file for creating a 'fornecedores' table. The file is located at `database/migrations/2022_02_08_053014_create_fornecedores_table.php`. The code defines a `CreateFornecedoresTable` class that extends `Migration`. The `up()` method creates the 'fornecedores' table with columns for `id`, `razaosocial` (string, 100), `cnpj` (string, 80), and a foreign key `usuario_id` referencing the `usuarios` table. The `down()` method drops the table if it exists.

```
2022_02_08_053014_create_fornecedores_table.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR  web.php  ClienteController.php  CategoriaController.php  2022_02_08_045458_create_enderecos_clientes_table.php  2022_02_08_053014_create_fornecedores_table.php

SISTEMADEVENDAS
  Venda.php
  > Providers
  > bootstrap
  > cache
  app.php
  > config
  > database
    > factories
    > migrations
      2014_10_12_0000...
      2014_10_12_1000...
      2019_08_19_0000...
      2019_12_14_0000...
      2022_02_08_0425...
      2022_02_08_0445...
      2022_02_08_0454...
      2022_02_08_0502...
      2022_02_08_0507...
      2022_02_08_0512...
      2022_02_08_0516...
      2022_02_08_0518...
      2022_02_08_0522...
      2022_02_08_0523...
      2022_02_08_0525...
      2022_02_08_0526...
      2022_02_08_0530...
      2022_02_08_0531...
      2022_02_08_0535...
      2022_02_08_0537...
      2022_02_08_0539...
      2022_02_08_0542...
    > seeders
    .albianore
  ESTRUTURA DO CÓDIGO

  1  <?php
  2
  3  use Illuminate\Database\Migrations\Migration;
  4  use Illuminate\Database\Schema\Blueprint;
  5  use Illuminate\Support\Facades\Schema;
  6
  7  class CreateFornecedoresTable extends Migration
  8  {
  9
 10     /**
 11      * Run the migrations.
 12      *
 13      * @return void
 14      */
 15
 16     public function up()
 17     {
 18         Schema::create('fornecedores', function (Blueprint $table) {
 19             $table->id();
 20             $table->timestamps();
 21             $table->string('razaosocial', 100);
 22             $table->string('cnpj', 80);
 23             $table->unsignedBigInteger('usuario_id');
 24             $table->foreign('usuario_id')->references('id')->on('usuarios');
 25         });
 26
 27         /**
 28          * Reverse the migrations.
 29          *
 30          * @return void
 31          */
 32         public function down()
 33         {
 34             Schema::dropIfExists('fornecedores');
 35         }
 36     }
 37
 38 
```

Ln 28, Col 7 Espaços: 4 UTF-8 LF PHP 🔍 ⌂

The screenshot shows a Visual Studio Code window with the title bar "2022_02_08_053158_create_contatos_fornecedores_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various tools like browser, email, file manager, terminal, and help. The main area displays a PHP migration file:

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreateContatosFornecedoresTable extends Migration  
{  
    /**  
     * Run the migrations.  
     */  
    public function up()  
    {  
        Schema::create('contatos_fornecedores', function (Blueprint $table) {  
            $table->id();  
            $table->timestamps();  
            $table->char('telefonefornecedor', 12);  
            $table->char('whatsappfornecedor', 15);  
            $table->string('emailfornecedor', 80);  
            $table->unsignedBigInteger('fornecedor_id');  
            $table->foreign('fornecedor_id')->references('id')->on('fornecedores');  
        });  
    }  
  
    /**  
     * Reverse the migrations.  
     */  
    public function down()  
    {  
        Schema::dropIfExists('contatos_fornecedores');  
    }  
}
```

The status bar at the bottom shows "Ln 28, Col 31 Espaços: 4 UTF-8 LF PHP".

The screenshot shows a Visual Studio Code window with the title bar "2022_02_08_053158_create_contatos_fornecedores_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various tools like browser, email, file manager, terminal, and help. The main area displays a PHP migration file:

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreateContatosFornecedoresTable extends Migration  
{  
    /**  
     * Run the migrations.  
     */  
    public function up()  
    {  
        Schema::create('contatos_fornecedores', function (Blueprint $table) {  
            $table->id();  
            $table->timestamps();  
            $table->char('telefonefornecedor', 12);  
            $table->char('whatsappfornecedor', 15);  
            $table->string('emailfornecedor', 80);  
            $table->unsignedBigInteger('fornecedor_id');  
            $table->foreign('fornecedor_id')->references('id')->on('fornecedores');  
        });  
    }  
  
    /**  
     * Reverse the migrations.  
     */  
    public function down()  
    {  
        Schema::dropIfExists('contatos_fornecedores');  
    }  
}
```

The status bar at the bottom shows "Ln 28, Col 31 Espaços: 4 UTF-8 LF PHP".

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR SISTEMADEVENDAS database > migrations > 2022_02_08_053728_create_itensentradas_table.php

```
<?php  
use Illuminate\Database\Migrations\Migration;  
use Illuminate\Database\Schema\Blueprint;  
use Illuminate\Support\Facades\Schema;  
  
class CreateItensentradasTable extends Migration  
{  
    /**  
     * Run the migrations.  
     *  
     * @return void  
     */  
    public function up()  
    {  
        Schema::create('itensentradas', function (Blueprint $table) {  
            $table->id();  
            $table->timestamps();  
            $table->double('precocompra', 7,4);  
            $table->double('quantidadeentrada', 7,2);  
            $table->string('unidade', 20);  
            $table->double('ipr', 7,4);  
            $table->double('frete', 7,4);  
            $table->double('icms', 7,4);  
            $table->unsignedBigInteger('entrada_id');  
            $table->foreign('entrada_id')->references('id')->on('entradas');  
            $table->unsignedBigInteger('produto_id');  
            $table->foreign('produto_id')->references('id')->on('produtos');  
        });  
    }  
  
    /**  
     * Reverse the migrations.  
     *  
     * @return void  
     */  
    public function down()  
    {  
        Schema::dropIfExists('itensentradas');  
    }  
}
```

ESTRUTURA DO CÓDIGO

Ln 28, Col 33 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the title bar "2022_02_08_053932_create_itensvendas_table.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various tools like browser, email, file explorer, and help. The main area displays a PHP migration file:

```
1 <?php
2
3 use Illuminate\Database\Migrations\Migration;
4 use Illuminate\Database\Schema\Blueprint;
5 use Illuminate\Support\Facades\Schema;
6
7 class CreateItensvendasTable extends Migration
8 {
9
10    /**
11     * Run the migrations.
12     *
13     * @return void
14     */
15    public function up()
16    {
17        Schema::create('itensvendas', function (Blueprint $table) {
18            $table->id();
19            $table->timestamps();
20            $table->double('quantidadeitens', 7,2);
21            $table->double('valor', 7,4);
22            $table->double('desconto', 7,4);
23            $table->unsignedBigInteger('venda_id');
24            $table->foreign('venda_id')->references('id')->on('vendas');
25            $table->unsignedBigInteger('produto_id');
26            $table->foreign('produto_id')->references('id')->on('produtos');
27        });
28
29        /**
30         * Reverse the migrations.
31         *
32         * @return void
33         */
34        public function down()
35        {
36            Schema::dropIfExists('itensvendas');
37        }
38    }
39}
```

The status bar at the bottom shows "Ln 30, Col 26 Espaços: 4 UTF-8 LF PHP ⚙".

The screenshot shows a Linux desktop environment with a dark theme. A Visual Studio Code window is open, displaying a PHP migration file named `2022_02_08_054244_create_devolucoes_table.php`. The code implements a database migration for creating a `'devolucoes'` table. The migration includes fields for `id`, `datadevolucao` (date), `descricao` (string), `quantidadedevolvida` (double), and a foreign key `itensvendas_id` referencing the `itensvendas` table. The file is part of a project named `SISTEMADEVENDAS`.

```
2022_02_08_054244_create_devolucoes_table.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda


EXPLORADOR  web.php  ClienteController.php  CategoriaController.php  2022_02_08_045458_create_enderecos_clientes_table.php  2022_02_08_054244_create_devolucoes_table.php

SISTEMADEVENDAS
  database > migrations > 2022_02_08_054244_create_devolucoes_table.php
    Providers
    > bootstrap
    > cache
    app.php
      > config
      > database
        > factories
        > migrations
          2014_10_12_0000...
          2014_10_12_1000...
          2019_08_19_0000...
          2019_12_14_0000...
          2022_02_08_0425...
          2022_02_08_0445...
          2022_02_08_0454...
          2022_02_08_0502...
          2022_02_08_0507...
          2022_02_08_0512...
          2022_02_08_0516...
          2022_02_08_0518...
          2022_02_08_0522...
          2022_02_08_0523...
          2022_02_08_0525...
          2022_02_08_0526...
          2022_02_08_0530...
          2022_02_08_0531...
          2022_02_08_0535...
          2022_02_08_0537...
          2022_02_08_0539...
          2022_02_08_0542...
        > seeders
        > .alitionre
        ESTRUTURA DO CÓDIGO

1  <?php
2
3  use Illuminate\Database\Migrations\Migration;
4  use Illuminate\Database\Schema\Blueprint;
5  use Illuminate\Support\Facades\Schema;
6
7  class CreateDevolucoesTable extends Migration
8  {
9
10   /**
11   * Run the migrations.
12   *
13   * @return void
14   */
15   public function up()
16   {
17     Schema::create('devolucoes', function (Blueprint $table) {
18       $table->id();
19       $table->timestamps();
20       $table->date('datadevolucao');
21       $table->string('descricao', 120);
22       $table->double('quantidadedevolvida', 7,2);
23       $table->unsignedBigInteger('itensvendas_id');
24       $table->foreign('itensvendas_id')->references('id')->on('itensvendas');
25     });
26
27   /**
28   * Reverse the migrations.
29   *
30   * @return void
31   */
32   public function down()
33   {
34     Schema::dropIfExists('devolucoes');
35   }
36 }

Ln 31, Col 8  Espaços:4  UTF-8  LF  PHP  🔍  ⌂
```

Models:

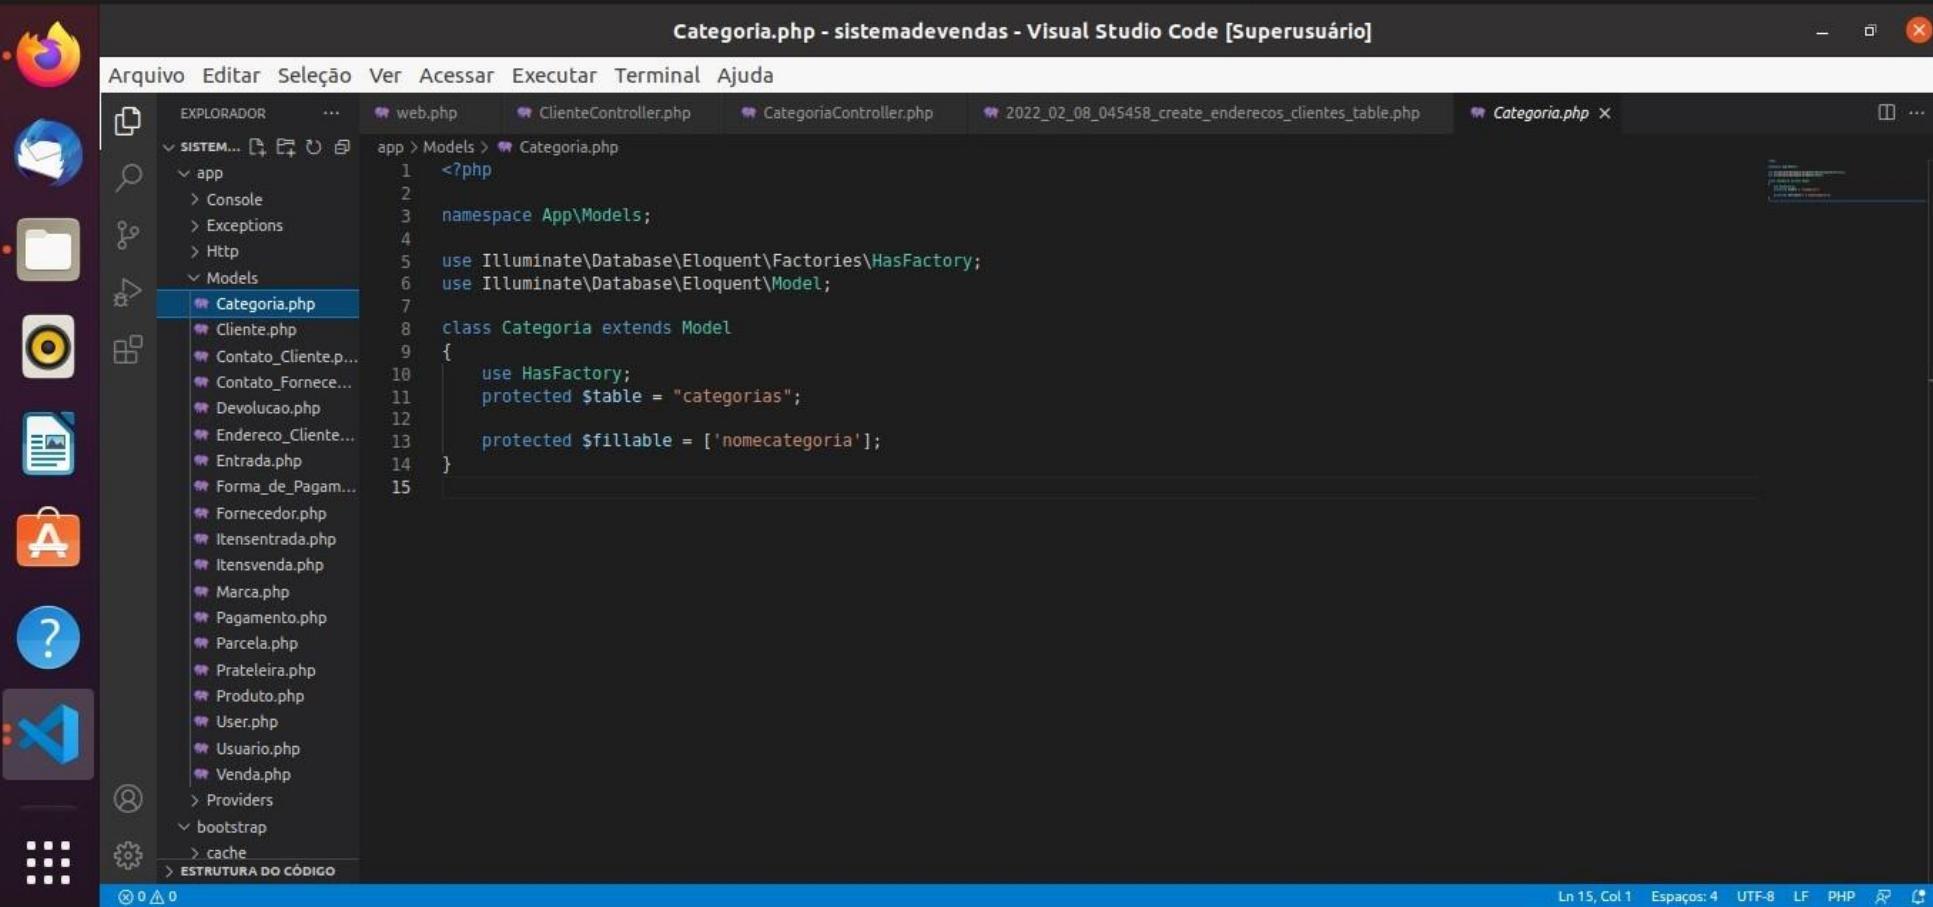

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** Categoria.php - sistemadevendas - Visual Studio Code [Superusuário]
- File Explorer:** Shows the project structure under "SISTEM...". The "Models" folder is expanded, and "Categoria.php" is selected.
- Code Editor:** Displays the PHP code for the Categoria model:

```
<?php  
namespace App\Models;  
  
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;  
  
class Categoria extends Model  
{  
    use HasFactory;  
    protected $table = "categorias";  
  
    protected $fillable = ['nomecategoria'];  
}
```

- Status Bar:** Shows line 15, column 1, and other settings like "Espaços: 4", "UTF-8", "LF", "PHP", and icons for file operations.

A screenshot of the Visual Studio Code interface. The title bar reads "Cliente.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various applications like Firefox, Mail, and File Explorer, along with a large icon for Visual Studio Code itself. The main area shows the code for "Cliente.php" in the "Models" directory of the "app" folder. The code is as follows:

```
<?php  
namespace App\Models;  
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;  
  
class Cliente extends Model  
{  
    use HasFactory;  
    protected $table = "clientes";  
    protected $fillable = ['nomecliente', 'cpfcliente', 'rgcliente', 'sexocliente', 'datanascimento', 'debito'];  
}
```

The status bar at the bottom shows "Ln 10, Col 20 Espaços: 4 UTF-8 LF PHP ⚙️ 🔍".

The screenshot shows a Visual Studio Code window with the title "Contato_Cliente.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains a file tree with a dark theme, showing a project structure under "SISTEM...". The main editor area displays the "Contato_Cliente.php" file, which is a PHP class definition:

```
<?php  
namespace App\Models;  
  
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;  
  
class Contato_Cliente extends Model  
{  
    use HasFactory;  
    protected $table = "contatos_clientes";  
  
    protected $fillable = ['telefone', 'email', 'whatsapp', 'cliente_id'];  
}
```

The status bar at the bottom indicates "Ln 13, Col 72 (10 selecionado)" and "Espaços: 4 UTF-8 LF PHP".

The screenshot shows a Visual Studio Code interface with the following details:

- Title Bar:** Contato_Fornecedor.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Left Sidebar:** Shows various icons for different applications and files.
- Explorer View:** Shows the project structure:
 - SISTEMAS...
 - app
 - Console
 - Exceptions
 - Http
 - Models
 - Categoria.php
 - Cliente.php
 - Contato_Cliente.php
 - Contato_Fornecedor.php
 - Devolucao.php
 - Endereco_Cliente.php
 - Entrada.php
 - Forma_de_Pagamento.php
 - Fornecedor.php
 - Itensentrada.php
 - Itensvenda.php
 - Marca.php
 - Pagamento.php
 - Parcela.php
 - Prateleira.php
 - Produto.php
 - User.php
 - Usuario.php
 - Venda.php
 - Providers
 - bootstrap
 - cache
- Code Editor:** Displays the PHP code for Contato_Fornecedor.php:

```
<?php
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Contato_Fornecedor extends Model
{
    use HasFactory;
    protected $table = "contatos_fornecedores";
    protected $fillable = ['telefonefornecedor', 'whatsappfornecedor', 'emailfornecedor', 'fornecedor_id'];
```
- Bottom Status Bar:** Ln 13, Col 107 Espaços: 4 UTF-8 LF PHP

The screenshot shows a Visual Studio Code window titled "Devolucao.php - sistemadevendas - Visual Studio Code [Superusuário]". The window includes a dark-themed sidebar with various icons for file operations like Open, Save, Find, and Refresh. The main area displays the PHP code for the "Devolucao" model:

```
<?php  
namespace App\Models;  
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;  
class Devolucao extends Model  
{  
    use HasFactory;  
    protected $table = "devolucoes";  
    protected $fillable = ['data_devolucao', 'descricao_da_devolucao', 'quantidade_devolvida', 'itensvendas_id'];  
}
```

The code editor has syntax highlighting for PHP, with purple for comments and functions, green for strings, and blue for variables. The status bar at the bottom indicates the current line (Ln 13), column (Col 107), and selection count (14). It also shows the encoding (UTF-8), line separator (LF), and file type (PHP).

Endereco_Cliente.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ...

SISTEM... app web.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Endereco_Cliente.php

```
<?php
namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Endereco_Cliente extends Model
{
    use HasFactory;
    protected $table = "enderecos_clientes";

    protected $fillable = ['rua', 'numero', 'bairro', 'cidade', 'uf', 'cep', 'cliente_id'];
}
```

Ln 15, Col 1 Espaços: 4 UTF-8 LF PHP ⚙️ 🔍

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** Entrada.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo, Editar, Seleção, Ver, Acessar, Executar, Terminal, Ajuda
- Sidebar:** Shows various icons for file operations like Open, Save, Find, and Copy.
- File Explorer:** Shows the project structure:
 - SISTEMAS...
 - app
 - Console
 - Exceptions
 - Http
 - Models
 - Categoria.php
 - Cliente.php
 - Contato_Cliente.php
 - Contato_Fornecedor.php
 - Devolucao.php
 - Endereco_Cliente.php
 - Entrada.php**
 - Forma_de_Pagamento.php
 - Fornecedor.php
 - ItensEntrada.php
 - ItensVenda.php
 - Marca.php
 - Pagamento.php
 - Parcela.php
 - Prateleira.php
 - Produto.php
 - User.php
 - Usuario.php
 - Venda.php
 - Providers
 - bootstrap
 - cache
 - ESTRUTURA DO CÓDIGO
- Code Editor:** Displays the Entrada.php file content:

```
<?php
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Entrada extends Model
{
    use HasFactory;
    protected $table = "entradas";
    protected $fillable = ['valortotalnota', 'dataentrada', 'fornecedor_id', 'usuario_id'];
```
- Status Bar:** Linha 13, Coluna 91 (10 selecionado), Espaços: 4, UTF-8, LF, PHP,

Forma_de_Pagamento.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Forma_de_Pagamento.php

SISTEM... app > Models > Forma_de_Pagamento.php

app

Console

Exceptions

Http

Models

Categoria.php

Cliente.php

Contato_Cliente.php

Contato_Fornecedor.php

Devolucao.php

Endereco_Cliente.php

Entrada.php

Forma_de_Pagamento.php

Fornecedor.php

Itensentradap.php

Itensvenda.php

Marca.php

Pagamento.php

Parcela.php

Prateleira.php

Produto.php

User.php

Usuario.php

Venda.php

Providers

bootstrap

cache

ESTRUTURA DO CÓDIGO

```
<?php
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
class Forma_de_Pagamento extends Model
{
    use HasFactory;
    protected $table = "formas_de_pagamentos";
    protected $fillable = ['tipopagamento', 'numeroparcelas', 'dataparcela', 'venda_id'];
}
```

Ln 13, Col 87 (8 selecionado) Espaços: 4 UTF-8 LF PHP

The screenshot shows a Visual Studio Code window with the title "Fornecedor.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains a file tree with a dark theme, showing a project structure under "SISTEM...". The main editor area displays the "Fornecedor.php" file, which is a PHP class definition:

```
<?php  
namespace App\Models;  
  
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;  
  
class Fornecedor extends Model  
{  
    use HasFactory;  
    protected $table = "fornecedores";  
  
    protected $fillable = ['razaoocial', 'cnpj', 'usuario_id'];  
}
```

The status bar at the bottom indicates the code is in "Ln 13, Col 62 (10 selecionado)" with "Espaços: 4" and "UTF-8".

Itensentrada.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Itensentrada.php

app > Models > Itensentrada.php

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Itensentrada extends Model
9 {
10     use HasFactory;
11     protected $table = "itensentradas";
12
13     protected $fillable = ['precocompra', 'quantidadeentrada', 'unidade', 'ipi', 'frete', 'icms', 'entrada_id', 'produto_id'];
14 }
15
```

Itensentrada.php

Itensvenda.php Marca.php Pagamento.php Parcela.php Prateleira.php Produto.php User.php Usuario.php Venda.php

Console Exceptions Http Models

Categoria.php Cliente.php Contato_Cliente.php Contato_Fornecedor.php Devolucao.php Endereco_Cliente.php Entrada.php Forma_de_Pagamento.php Fornecedor.php

bootstrap

cache

ESTRUTURA DO CÓDIGO

Ln 13, Col 124 (10 selecionado) Espaços: 4 UTF-8 LF PHP ⚡

Itensvenda.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Itensvenda.php

SISTEM... app Models Itensvenda.php

app > Models > Itensvenda.php

```
1  <?php
2
3  namespace App\Models;
4
5  use Illuminate\Database\Eloquent\Factories\HasFactory;
6  use Illuminate\Database\Eloquent\Model;
7
8  class Itensvenda extends Model
9  {
10     use HasFactory;
11     protected $table = "itensvendas";
12
13     protected $fillable = ['quantidadeitens', 'valor', 'desconto', 'venda_id', 'produto_id'];
14 }
```

Itensvenda.php

Arquivo Explorador Terminal Ajuda

ESTRUTURA DO CÓDIGO

Ln 13, Col 91 (10 selecionado) Espaços: 4 UTF-8 LF PHP 🔍

Marca.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Marca.php

SISTEM... app > Models > Marca.php

app

> Console

> Exceptions

> Http

> Models

> Categoria.php

> Cliente.php

> Contato_Cliente.p...

> Contato_Fornece...

> Devolucao.php

> Endereco_Cliente...

> Entrada.php

> Forma_de_Pagam...

> Fornecedor.php

> Itensentrada.php

> Itensvenda.php

> Marca.php

> Pagamento.php

> Parcela.php

> Prateleira.php

> Produto.php

> User.php

> Usuario.php

> Venda.php

> Providers

> bootstrap

> cache

ESTRUTURA DO CÓDIGO

```
<?php
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Marca extends Model
{
    use HasFactory;
    protected $table = "marcas";
    protected $fillable = ['nomedamarca'];
}
```

Ln 13, Col 41 Espaços: 4 UTF-8 LF PHP ⚙️

A screenshot of the Visual Studio Code interface, showing the code editor with the file `Pagamento.php` open. The file is located in the `app/Models` directory of a Laravel application. The code defines a `Pagamento` model that extends the `Model` class and implements the `HasFactory` trait. It specifies the database table as `"pagamentos"` and defines threefillable fields: `'valorpagamento'`, `'datapagamento'`, and `'numerosdeparcelas'`.

```
<?php  
namespace App\Models;  
  
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;  
  
class Pagamento extends Model  
{  
    use HasFactory;  
    protected $table = "pagamentos";  
  
    protected $fillable = ['valorpagamento', 'datapagamento', 'numerosdeparcelas'];  
}
```

Parcela.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Parcela.php

SISTEMADEVENDAS

app > Models > Parcela.php

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Parcela extends Model
9 {
10     use HasFactory;
11     protected $table = "parcelas";
12
13     protected $fillable = ['numerodeparcelas', 'valorparcela', 'status', 'vencimento', 'valortotaldaparcela',
14     | 'forma_de_pagamento_id', 'pagamento_id'];
15 }
```

ESTRUTURA DO CÓDIGO

Ln 14, Col 5 Espaços: 4 UTF-8 LF PHP

Prateleira.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Parcela.php Prateleira.php

SISTEMADEVENDAS

app > Models > Prateleira.php

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Factories\HasFactory;
6 use Illuminate\Database\Eloquent\Model;
7
8 class Prateleira extends Model
9 {
10     use HasFactory;
11     protected $table = "prateleiras";
12
13     protected $fillable = ['descricao_prateleira', 'quantidadedefrascos', 'categoria_id'];
14 }
15
```

ESTRUTURA DO CÓDIGO

Ln 15, Col 1 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** Produto.php - sistemadevendas - Visual Studio Code [Superusuário]
- File Explorer (Left):** Shows the project structure under "SISTEMADEVENDAS". The "Produto.php" file is selected in the "Models" folder.
- Code Editor (Center):** Displays the PHP code for the Produto model. The code includes imports for Illuminate\Database\Eloquent\Factories\HasFactory and Illuminate\Database\Eloquent\Model, and defines the Produto class extending Model with protected properties \$table and \$fillable.
- Bottom Status Bar:** Shows file statistics (Ln 16, Col 1), code style settings (Espaços: 4, UTF-8, LF, PHP), and other icons.

```
<?php  
namespace App\Models;  
  
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;  
  
class Produto extends Model  
{  
    use HasFactory;  
    protected $table = "produtos";  
  
    protected $fillable = ['nomedoproduto', 'icms', 'ipi', 'frete', 'valornafabrica', 'valordecompra', 'lucro',  
    'valorvenda', 'desconto', 'quantidade', 'datavencimento', 'marca_id', 'categoria_id'];  
}
```

Usuario.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... lib.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Parcela.php Produto.php Usuario.php ...

SISTEM... app > Models > Usuario.php

app > Models > Usuario.php

```
<?php
namespace App\Models;

use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Usuario extends Model
{
    use HasFactory;
    protected $table = "usuarios";

    protected $fillable = ['nomeusuario', 'login', 'senha', 'cargo', 'adm'];
}
```

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

ESTRUTURA DO CÓDIGO

Ln 15, Col 1 Espaços: 4 UTF-8 LF PHP

Venda.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... /eb.php ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Parcela.php Produto.php Venda.php ...

SISTEM... [+] [?] [?] [?] app > Models > Venda.php


- app
- > Console
- > Exceptions
- > Http
- Models
- Categoria.php
- Cliente.php
- Contato_Cliente.p...
- Contato_Fornece...
- Devolucao.php
- Endereco_Ciente...
- Entrada.php
- Forma_de_Pagam...
- Fornecedor.php
- Itensentrada.php
- Itensvenda.php
- Marca.php
- Pagamento.php
- Parcela.php
- Prateleira.php
- Produto.php
- User.php
- Usuario.php
- Venda.php

Venda.php

```
<?php  
namespace App\Models;  
  
use Illuminate\Database\Eloquent\Factories\HasFactory;  
use Illuminate\Database\Eloquent\Model;  
  
class Venda extends Model  
{  
    use HasFactory;  
    protected $table = "vendas";  
  
    protected $fillable = ['datavenda', 'descontototal', 'descontoacerto', 'valortotal', 'usuario_id', 'cliente_id'];  
}
```

Ln 13, Col 115 (10 selecionado) Espaços: 4 UTF-8 LF PHP 🔍 🔍


Controllers:

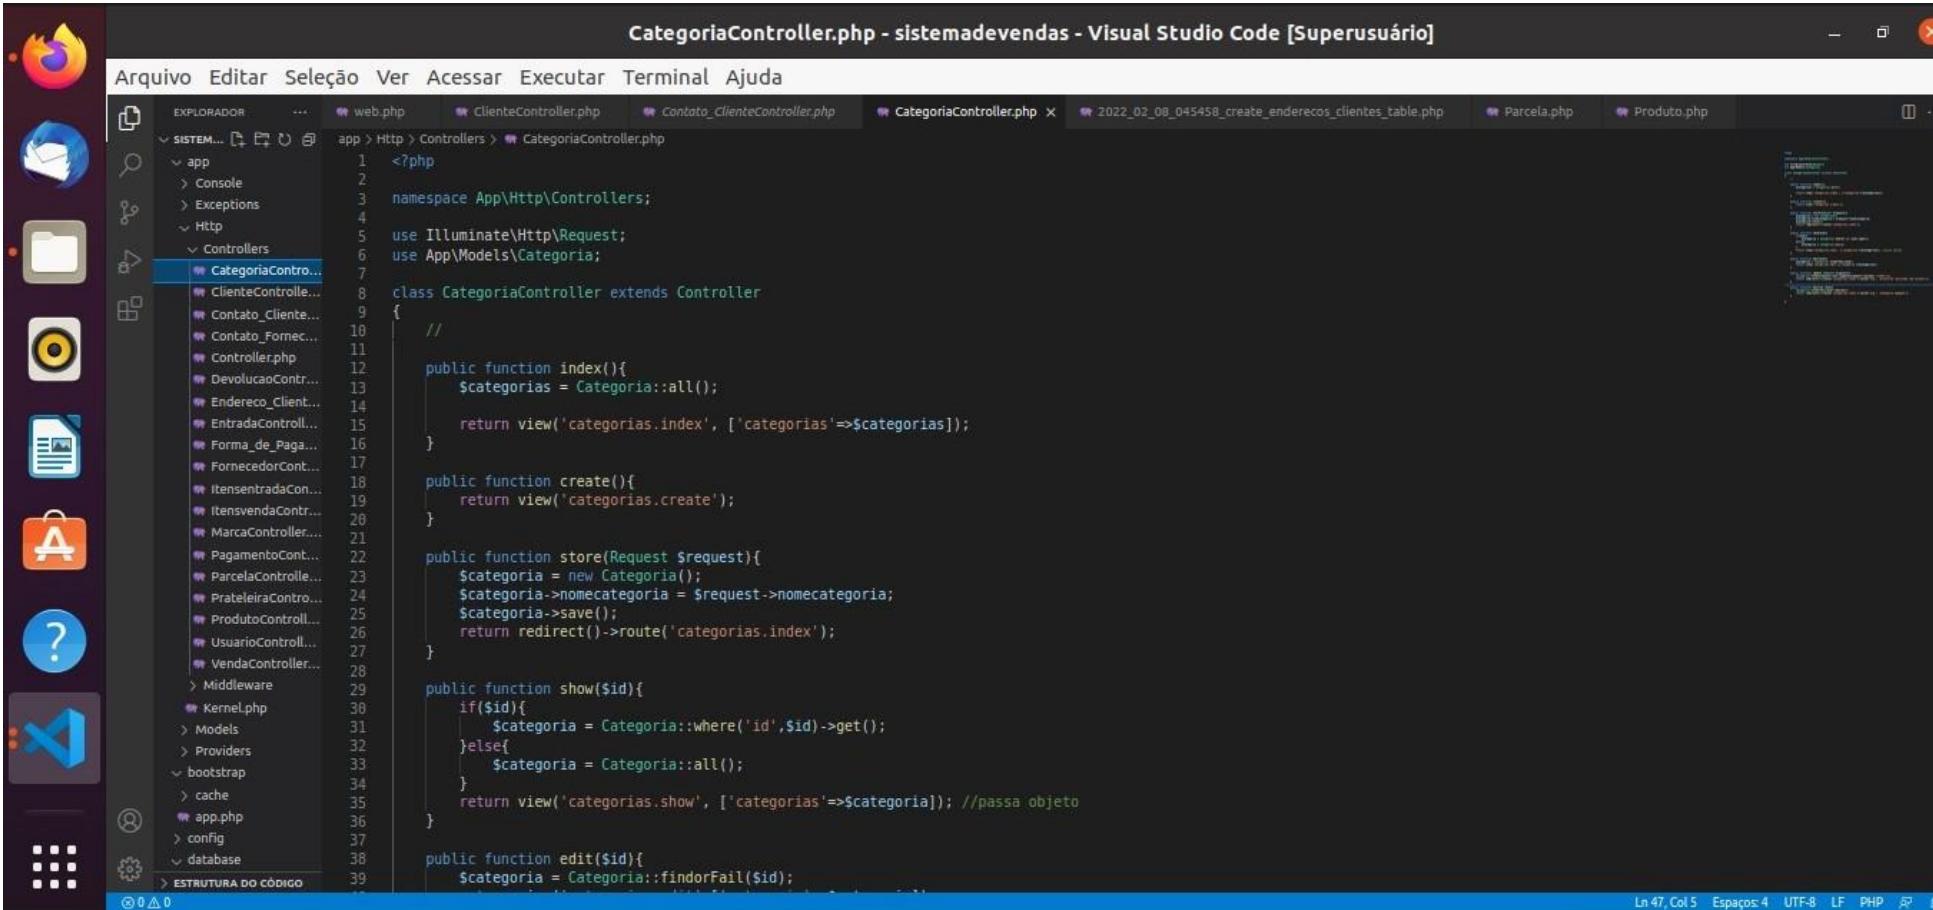

The screenshot shows a Visual Studio Code window with the title "CategoriaController.php - sistemadevendas - Visual Studio Code [Superusuário]". The code editor displays the PHP file "CategoriaController.php" from a Laravel application. The file contains methods for managing categories, including index, create, store, show, and edit actions. The code uses Illuminate\Http\Request and App\Models\Category. The sidebar shows the project structure under the "app" directory, including Controllers, Models, Providers, and Services. The status bar at the bottom indicates the code is 47 lines long, has 5 spaces, is in UTF-8 encoding, and is a PHP file.

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Category;

class CategoriaController extends Controller
{
    //
    public function index(){
        $categorias = Categoria::all();
        return view('categorias.index', ['categorias'=>$categorias]);
    }
    public function create(){
        return view('categorias.create');
    }
    public function store(Request $request){
        $categoria = new Categoria();
        $categoria->nomecategoria = $request->nomecategoria;
        $categoria->save();
        return redirect()->route('categorias.index');
    }
    public function show($id){
        if($id){
            $categoria = Categoria::where('id',$id)->get();
        }else{
            $categoria = Categoria::all();
        }
        return view('categorias.show', ['categorias'=>$categoria]); //passa objeto
    }
    public function edit($id){
        $categoria = Categoria::findorFail($id);
    }
}
```

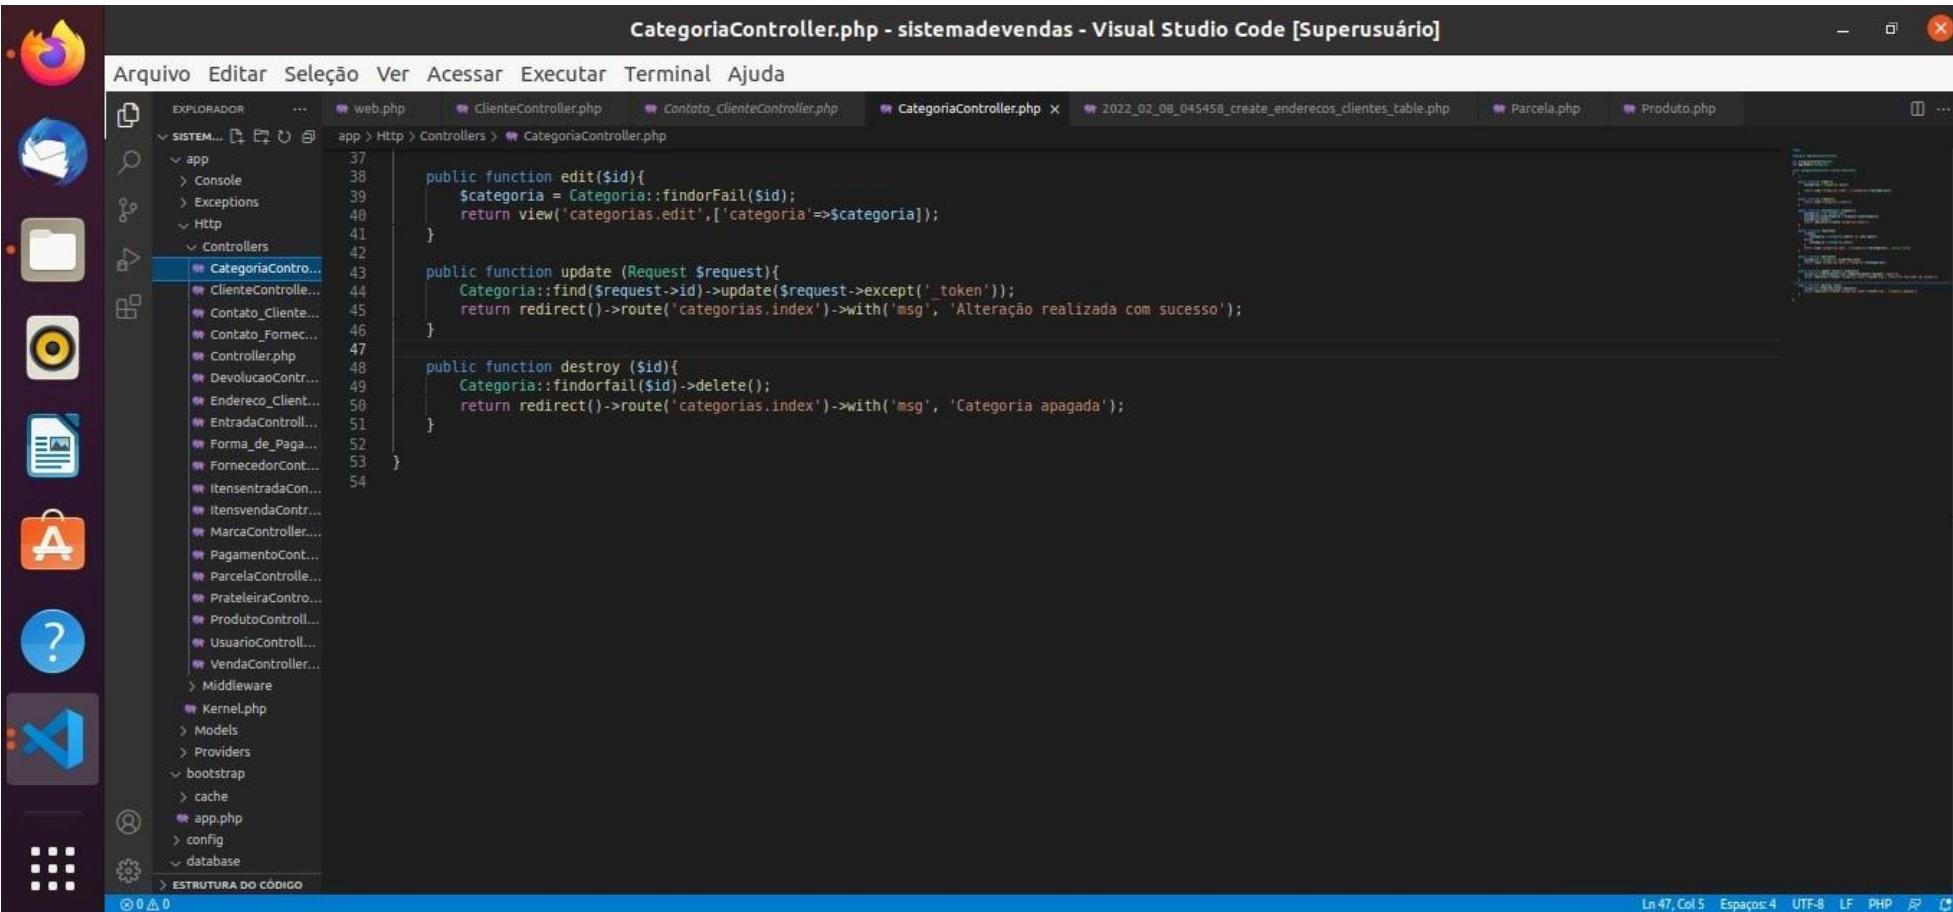

CategoriaController.php - sistemadevendas - Visual Studio Code [Superusuário]

```
Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
```

```
EXPLORADOR ... web.php ClienteController.php Contato_ClienteController.php CategoriaController.php x 2022_02_08_045458_create_enderecos_clientes_table.php Parcela.php Produto.php
```

```
public function edit($id){  
    $categoria = Categoria::findorFail($id);  
    return view('categorias.edit',['categoria'=>$categoria]);  
}  
  
public function update (Request $request){  
    Categoria::find($request->id)->update($request->except('token'));  
    return redirect()->route('categorias.index')->with('msg', 'Alteração realizada com sucesso');  
}  
  
public function destroy ($id){  
    Categoria::findorfail($id)->delete();  
    return redirect()->route('categorias.index')->with('msg', 'Categoria apagada');  
}
```

ESTRUTURA DO CÓDIGO

Ln 47, Col 5 Espaços: 4 UTF-8 LF PHP ⚡

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php Contato_ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Parcela.php Produto.php

```
<?php
namespace App\Http\Controllers;

use Illuminate\Http\Request;
use App\Models\Cliente;

class ClienteController extends Controller
{
    //

    public function index(){
        $clientes = Cliente::all();
        return view('clientes.index', ['clientes'=>$clientes]);
    }

    public function create(){
        return view('clientes.create');
    }

    public function store(Request $request){
        $cliente = new Cliente();
        $cliente->nomecliente = $request->nomecliente;
        $cliente->cpfcliente = $request->cpfcliente;
        $cliente->rgcliente = $request->rgcliente;
        $cliente->sexcliente = $request->sexcliente;
        $cliente->datanascimento = $request->datanascimento;
        $cliente->debito = $request->debito;
        $cliente->save();
        return redirect()->route('clientes.index');
    }

    public function show($id){
        if($id){
            $cliente = Cliente::where('id',$id)->get();
        }else{
            $cliente = Cliente::all();
        }
        return view('clientes.show', ['clientes'=>$cliente]); //passa objeto
    }
}
```

Ln 55, Col 6 (164 selecionado) Espaços: 4 UTF-8 LF PHP

ClienteController.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php x Contato_ClienteController.php CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table.php Parcela.php Produto.php

SISTEMADEVENDAS app > Http > Controllers > ClienteController.php

```
public function show($id){
    if($id){
        $cliente = Cliente::where('id',$id)->get();
    }else{
        $cliente = Cliente::all();
    }
    return view('clientes.show', ['clientes'=>$cliente]); //passa objeto
}

public function edit($id){
    $cliente = Cliente::findorFail($id);
    return view('clientes.edit',['cliente'=>$cliente]);
}

public function update (Request $request){
    Cliente::find($request->id)->update($request->except('_token'));
    return redirect()->route('clientes.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Cliente::findorfail($id)->delete();
    return redirect()->route('clientes.index')->with('msg', 'Cliente apagado');
}
```

ESTRUTURA DO CÓDIGO

Ln 51, Col 1 Espaços: 4 UTF-8 LF PHP ⚡

The screenshot shows a Visual Studio Code window with the title "Contato_ClienteController.php - sistemadevendas - Visual Studio Code [Superusuário]". The code editor displays the PHP file "Contato_ClienteController.php" from the "Http\Controllers" directory. The file contains the following code:

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Contato_Cliente;

class Contato_ClienteController extends Controller
{
    //

    public function index(){
        $contatosclientes = Contato_Cliente::all();
        return view('contatosclientes.index', ['contatosclientes'=>$contatosclientes]);
    }

    public function create(){
        return view('contatosclientes.create');
    }

    public function store(Request $request){
        $contatocliente = new Contato_Cliente();
        $contatocliente->telefone = $request->telefone;
        $contatocliente->email = $request->email;
        $contatocliente->whatsapp = $request->whatsapp;
        $contatocliente->cliente_id = $request->cliente_id;
        $contatocliente->save();
        return redirect()->route('contatosclientes.index');
    }

    public function show($id){
        if($id){
            $contatocliente = Contato_Cliente::where('id',$id)->get();
        }else{
            $contatocliente = Contato_Cliente::all();
        }
        return view('contatosclientes.show', ['contatosclientes'=>$contatocliente]); //passa objeto
    }
}
```

The sidebar on the left shows the project structure under "SISTEMAS", including "app", "Http", "Controllers", and various model files like "CategoriaController.php", "Parcela.php", and "Produto.php". The status bar at the bottom indicates "Ln 54, Col 85 Espaços: 4 UTF-8 LF PHP".

The screenshot shows the Visual Studio Code interface with the title bar "Contato_ClienteController.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various applications like a browser, email, and file explorer. The main area displays the PHP code for the Contato_ClienteController.php file:

```
public function show($id){
    if($id){
        $contatocliente = Contato_Cliente::where('id',$id)->get();
    }else{
        $contatocliente = Contato_Cliente::all();
    }
    return view('contatosclientes.show', ['contatosclientes'=>$contatocliente]); //passa objeto
}

public function edit($id){
    $contatocliente = Contato_Cliente::findorFail($id);
    return view('contatosclientes.edit',[ 'contatocliente'=>$contatocliente]);
}

public function update (Request $request){
    Contato_Cliente::find($request->id)->update($request->except('_token'));
    return Redirect()->route('contatosclientes.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Contato_Cliente::findorfail($id)->delete();
    return redirect()->route('contatosclientes.index')->with('msg', 'Contato do Cliente apagado');
}
```

The code editor shows syntax highlighting for PHP and includes a status bar at the bottom with "Ln 54, Col 85 Espaços: 4 UTF-8 LF PHP ⚡".

Contato_FornecedorController.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

SISTEM... app > Http > Controllers > Contato_FornecedorController.php

1 <?php
2 namespace App\Http\Controllers;
3 use Illuminate\Http\Request;
4 use App\Models\Contato_Fornecedor;
5
6 class Contato_FornecedorController extends Controller
7 {
8 //
9
10 public function index(){
11 \$contatosfornecedores = Contato_Fornecedor::all();
12
13 return view('contatosfornecedores.index', ['contatosfornecedores'=>\$contatosfornecedores]);
14 }
15
16 public function create(){
17 return view('contatosfornecedores.create');
18 }
19
20 public function store(Request \$request){
21 \$contatofornecedor = new Contato_Fornecedor();
22 \$contatofornecedor->telefonefornecedor = \$request->telefonefornecedor;
23 \$contatofornecedor->whatsappfornecedor = \$request->whatsappfornecedor;
24 \$contatofornecedor->emailfornecedor = \$request->emailfornecedor;
25 \$contatofornecedor->fornecedor_id = \$request->fornecedor_id;
26 \$contatofornecedor->save();
27 return redirect()->route('contatosfornecedores.index');
28 }
29
30 public function show(\$id){
31 if(\$id){
32 \$contatofornecedor = Contato_Fornecedor::where('id',\$id)->get();
33 }else{
34 \$contatofornecedor = Contato_Fornecedor::all();
35 }
36 return view('contatosfornecedores.show', ['contatosfornecedores'=>\$contatofornecedor]); //passa objeto
37 }
38
39 }

Ln 54, Col 99 Espaços: 4 UTF-8 LF PHP ⚙️

The screenshot shows the Visual Studio Code interface with the title bar "Contato_FornecedorController.php - sistemadevendas - Visual Studio Code [Superusuário]". The menu bar includes Arquivo, Editar, Seleção, Ver, Acessar, Executar, Terminal, and Ajuda. The left sidebar displays a file tree with the current file path: SISTEM... > app > Http > Controllers > Contato_FornecedorController.php. The main editor area contains the following PHP code:

```
32     public function show($id){
33         if($id){
34             $contatofornecedor = Contato_Fornecedor::where('id',$id)->get();
35         }else{
36             $contatofornecedor = Contato_Fornecedor::all();
37         }
38         return view('contatosfornecedores.show', ['contatosfornecedores'=>$contatofornecedor]); //passa objeto
39     }
40
41     public function edit($id){
42         $contatofornecedor = Contato_Fornecedor::findorFail($id);
43         return view('contatosfornecedores.edit',[ 'contatofornecedor'=>$contatofornecedor]);
44     }
45
46     public function update (Request $request){
47         Contato_Fornecedor::find($request->id)->update($request->except('_token'));
48         return redirect()->route('contatosfornecedores.index')->with('msg', 'Alteração realizada com sucesso');
49     }
50
51     public function destroy ($id){
52         Contato_Fornecedor::findorfail($id)->delete();
53         return redirect()->route('contatosfornecedores.index')->with('msg', 'Contato do fornecedor apagado');
54     }
55
56 }
57 }
```

The status bar at the bottom shows "Ln 54, Col 99 Espaços: 4 UTF-8 LF PHP ⚡".

DevolucaoController.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR app > Http > Controllers > DevolucaoController.php

```
<?php
namespace App\Http\Controllers;

use Illuminate\Http\Request;
use App\Models\Devolucao;

class DevolucaoController extends Controller
{
    public function index(){
        $devolucoes = Devolucao::all();

        return view('devolucoes.index', ['devolucoes'=>$devolucoes]);
    }

    public function create(){
        return view('devolucoes.create');
    }

    public function store(Request $request){
        $devolucao = new Devolucao();
        $devolucao->datadevolucao = $request->datadevolucao;
        $devolucao->descricaoadevolucao = $request->descricaoadevolucao;
        $devolucao->quantidadedevolvida = $request->quantidadedevolvida;
        $devolucao->itensvendas_id = $request->itensvendas_id;
        $devolucao->save();
        return redirect()->route('devolucoes.index');
    }

    public function show($id){
        if($id){
            $devolucao = Devolucao::where('id',$id)->get();
        }else{
            $devolucao = Devolucao::all();
        }
        return view('devolucoes.show', ['devolucoes'=>$devolucao]); //passa objeto
    }
}
```

Ln 54, Col 70 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the title bar "DevolucaoController.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar displays a dark-themed file tree with various PHP files and folders under the "app > Http > Controllers" path. The main editor area contains the code for the DevolucaoController.php file, which includes methods for show, edit, update, and destroy. The status bar at the bottom right shows "Ln 54, Col 70 Espaços: 4 UTF-8 LF PHP" and other icons.

```
public function show($id){
    if($id){
        $devolucao = Devolucao::where('id',$id)->get();
    }else{
        $devolucao = Devolucao::all();
    }
    return view('devolucoes.show', ['devolucoes'=>$devolucao]); //passa objeto
}

public function edit($id){
    $devolucao = Devolucao::findorFail($id);
    return view('devolucoes.edit',['devolucao'=>$devolucao]);
}

public function update (Request $request){
    Devolucao::find($request->id)->update($request->except('token'));
    return redirect()->route('devolucoes.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Devolucao::findorfail($id)->delete();
    return redirect()->route('devolucoes.index')->with('msg', 'Devolução apagada');
}
```

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** Endereco_ClienteController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Left Sidebar:** Icons for various applications like Firefox, Mail, File Explorer, and VS Code.
- File Explorer:** Shows the project structure under 'SISTEMAS' / 'app' / 'Http' / 'Controllers'. The 'Endereco_ClienteController.php' file is selected and highlighted in blue.
- Code Editor:** Displays the PHP code for the Endereco_ClienteController. The code includes methods for index, create, store, and show, along with logic for handling requests and saving data to the database.
- Bottom Status Bar:** Shows file information: Ln 57, Col 84, Espaços: 4, UTF-8, LF, PHP, and icons for Save, Undo, Redo, and Find.

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Endereco_Cliente;

class Endereco_ClienteController extends Controller
{
    //

    public function index(){
        $enderecosclientes = Endereco_Cliente::all();

        return view('enderecosclientes.index', ['enderecosclientes'=>$enderecosclientes]);
    }

    public function create(){
        return view('enderecosclientes.create');
    }

    public function store(Request $request){
        $enderecocliente = new Endereco_Cliente();
        $enderecocliente->rua = $request->rua;
        $enderecocliente->numero = $request->numero;
        $enderecocliente->bairro = $request->bairro;
        $enderecocliente->cidade = $request->cidade;
        $enderecocliente->uf = $request->uf;
        $enderecocliente->cep = $request->cep;
        $enderecocliente->cliente_id = $request->cliente_id;
        $enderecocliente->save();
        return redirect()->route('enderecosclientes.index');
    }

    public function show($id){
        if($id){
            $enderecocliente = Endereco_Cliente::where('id',$id)->get();
        }else{
    
```

The screenshot shows a Visual Studio Code interface with the title bar "Endereco_ClienteController.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various applications like Firefox, Mail, and File Explorer. The main area displays the code for the Endereco_ClienteController.php file:

```
public function show($id){
    if($id){
        $enderecocliente = Endereco_Cliente::where('id',$id)->get();
    }else{
        $enderecocliente = Endereco_Cliente::all();
    }
    return view('enderecosclientes.show', ['enderecosclientes'=>$enderecocliente]); //passa objeto
}

public function edit($id){
    $enderecocliente = Endereco_Cliente::findorFail($id);
    return view('enderecosclientes.edit',['enderecocliente'=>$enderecocliente]);
}

public function update (Request $request){
    Endereco_Cliente::find($request->id)->update($request->except(['token']));
    return redirect()->route('enderecosclientes.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Endereco_Cliente::findorfail($id)->delete();
    return redirect()->route('enderecosclientes.index')->with('msg', 'Endereço Cliente apagado');
}
```

The code uses Laravel's Eloquent ORM and blade templating. The file is located at app/Http/Controllers/Endereco_ClienteController.php. The status bar at the bottom shows "Ln 57, Col 84 Espaços: 4 UTF-8 LF PHP".

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** EntradaController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo, Editar, Seleção, Ver, Acessar, Executar, Terminal, Ajuda
- Sidebar:** Shows icons for File Explorer, Search, Find, Open, Save, and others.
- File Explorer:** Shows the project structure under 'SISTEM...'. The current file, EntradaController.php, is highlighted in blue.
- Code Editor:** Displays the PHP code for the EntradaController class. The code includes imports for Illuminate\Http\Request and App\Models\Entrada, and defines methods for index, create, and store.
- Bottom Status Bar:** Shows file statistics (Ln 54, Col 81, Espaços: 4, UTF-8, LF, PHP) and icons for save, close, and other operations.

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Entrada;

class EntradaController extends Controller
{
    public function index(){
        $entradas = Entrada::all();

        return view('entradas.index', ['entradas'=>$entradas]);
    }

    public function create(){
        return view('entradas.create');
    }

    public function store(Request $request){
        $entrada = new Entrada();
        $entrada->valortotaldanota = $request->valortotaldanota;
        $entrada->dataentrada = $request->dataentrada;
        $entrada->fornecedor_id = $request->fornecedor_id;
        $entrada->usuario_id = $request->usuario_id;
        $entrada->save();
        return redirect()->route('entradas.index');
    }
}
```

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** EntradaController.php - sistemadevendas - Visual Studio Code [Superusuário]
- File Explorer (Left):** Shows the project structure under 'SISTEM...'. The 'app' folder contains 'Http' which has 'Controllers' and several other files like 'CategoriaController.php', 'ClienteController.php', etc.
- Code Editor (Center):** Displays the code for 'EntradaController.php'. The code handles requests for 'Entradas' (Entradas) and performs actions like show, edit, update, and destroy.
- Status Bar (Bottom):** Shows file statistics (Ln 54, Col 81), encoding (UTF-8), and other settings.

```
public function show($id){
    if($id){
        $entrada = Entrada::where('id',$id)->get();
    }else{
        $entrada = Entrada::all();
    }
    return view('entradas.show', ['entradas'=>$entrada]); //passa objeto
}

public function edit($id){
    $entrada = Entrada::findorFail($id);
    return view('entradas.edit',[ 'entrada'=>$entrada]);
}

public function update (Request $request){
    Entrada::find($request->id)->update($request->except('_token'));
    return redirect()->route('entradas.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Entrada::findorfail($id)->delete();
    return redirect()->route('entradas.index')->with('msg', 'Entrada apagada');
}
```

The screenshot shows a Visual Studio Code interface with the following details:

- Title Bar:** Forma_de_PagamentoController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Sidebar:** Shows various icons for file operations like Open, Save, Find, and Copy.
- Explorer:** Shows the project structure under "SISTEM...". The "Forma_de_PagamentoController.php" file is currently selected.
- Editor:** Displays the PHP code for the controller:

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Forma_de_Pagamento;

class Forma_de_PagamentoController extends Controller
{
    public function index(){
        $formasdepagamentos = Forma_de_Pagamento::all();
        return view('formasdepagamentos.index', ['formasdepagamentos'=>$formasdepagamentos]);
    }

    public function create(){
        return view('formasdepagamentos.create');
    }

    public function store(Request $request){
        $formadepagamento = new Forma_de_Pagamento();
        $formadepagamento->tipopagamento = $request->tipopagamento;
        $formadepagamento->numeroparcelas = $request->numeroparcelas;
        $formadepagamento->dataparcela = $request->dataparcela;
        $formadepagamento->venda_id = $request->venda_id;
        $formadepagamento->save();
        return redirect()->route('formasdepagamentos.index');
    }
}
```
- Bottom Status Bar:** Linha 54, Coluna 102 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** Forma_de_PagamentoController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Left Sidebar:** Icons for various tools like browser, email, file manager, terminal, help, and VS Code settings.
- Explorer View:** Shows the project structure under "SISTEM...". The "Forma_de_PagamentoController.php" file is selected in the tree view.
- Code Editor:** Displays the PHP code for the controller:

```
public function show($id){
    if($id){
        $formadepagamento = Forma_de_Pagamento::where('id',$id)->get();
    }else{
        $formadepagamento = Forma_de_Pagamento::all();
    }
    return view('formasdepagamentos.show', ['formasdepagamentos'=>$formadepagamento]); //passa objeto
}

public function edit($id){
    $formadepagamento = Forma_de_Pagamento::findorFail($id);
    return view('formasdepagamentos.edit',['formadepagamento'=>$formadepagamento]);
}

public function update (Request $request){
    Forma_de_Pagamento::find($request->id)->update($request->except('_token'));
    return redirect()->route('formasdepagamentos.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Forma_de_Pagamento::findorfail($id)->delete();
    return redirect()->route('formasdepagamentos.index')->with('msg', 'Forma de pagamento apagada');
}
```
- Bottom Status Bar:** Ln 54, Col 102 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the title bar "FornecedorController.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various applications like Firefox, Mail, and VS Code, along with a file explorer showing the project structure under "SISTEM...". The main editor area displays the PHP code for the FornecedorController.php file:

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Fornecedor;

class FornecedorController extends Controller
{
    //
    public function index(){
        $fornecedores = Fornecedor::all();
        return view('fornecedores.index', ['fornecedores'=>$fornecedores]);
    }
    public function create(){
        return view('fornecedores.create');
    }
    public function store(Request $request){
        $fornecedor = new Fornecedor();
        $fornecedor->razaosocial = $request->razaosocial;
        $fornecedor->cnpj = $request->cnpj;
        $fornecedor->usuario_id = $request->usuario_id;
        $fornecedor->save();
        return redirect()->route('fornecedores.index');
    }
    public function show($id){
    }
}
```

The status bar at the bottom shows "Ln 53, Col 80 Espaços: 4 UTF-8 LF PHP" and includes icons for search, replace, and file operations.

The screenshot shows the Visual Studio Code interface with the title bar "FornecedorController.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various tools like browser, email, file explorer, and help. The main area displays the PHP code for the FornecedorController.php file:

```
public function show($id){
    if($id){
        $fornecedor = Fornecedor::where('id',$id)->get();
    }else{
        $fornecedor = Fornecedor::all();
    }
    return view('fornecedores.show', ['fornecedores'=>$fornecedor]); //passa objeto
}

public function edit($id){
    $fornecedor = Fornecedor::findorFail($id);
    return view('fornecedores.edit',['fornecedor'=>$fornecedor]);
}

public function update (Request $request){
    Fornecedor::find($request->id)->update($request->except('_token'));
    return redirect()->route('fornecedores.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Fornecedor::findorfail($id)->delete();
    return redirect()->route('fornecedores.index')->with('msg', 'Fornecedor apagado');
}
```

The status bar at the bottom shows "Ln 53, Col 80 Espaços: 4 UTF-8 LF PHP" and a few other icons.

The screenshot shows a Visual Studio Code interface with the following details:

- Title Bar:** ItensentradaController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Left Sidebar:** Icons for various applications like Firefox, Mail, File Explorer, and VS Code.
- File Explorer:** Shows the project structure under "SISTEMADEVENDAS". The "Controllers" folder contains several files, including "ItensentradaController.php", which is currently selected.
- Code Editor:** The content of "ItensentradaController.php" is displayed:

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Itensentra;
class ItensentradaController extends Controller
{
    public function index(){
        $itensentradas = Itensentra::all();
        return view('itensentradas.index', ['itensentradas'=>$itensentradas]);
    }
    public function create(){
        return view('itensentradas.create');
    }
    public function store(Request $request){
        $itensentra = new Itensentra();
        $itensentra->precocompra = $request->precocompra;
        $itensentra->quantidadeentra = $request->quantidadeentra;
        $itensentra->unidade = $request->unidade;
        $itensentra->ipi = $request->ipi;
        $itensentra->frete = $request->frete;
        $itensentra->icms = $request->icms;
        $itensentra->entrada_id = $request->entrada_id;
        $itensentra->produto_id = $request->produto_id;
        $itensentra->save();
        return redirect()->route('itensentradas.index');
```
- Bottom Status Bar:** Linha 1, Coluna 6 | Espaços: 4 | UTF-8 | LF | PHP | 🔍

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** ItensentradaController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Sidebar:** Shows icons for various applications like browser, email, file manager, terminal, and help.
- File Explorer:** Shows the project structure under SISTEMADEVENDAS / app / Http / Controllers. The ItensentradaController.php file is selected.
- Code Editor:** Displays the PHP code for the ItensentradaController.php file. The code includes methods for show, edit, update, and destroy.
- Bottom Status Bar:** Shows file statistics (Ln 35, Col 5, Espaços: 4, LF, PHP) and other icons.

```
public function show($id){
    if($id){
        $itensentrada = Itensentrada::where('id',$id)->get();
    }else{
        $itensentrada = Itensentrada::all();
    }
    return view('itensentradas.show', ['itensentradas'=>$itensentrada]); //passa objeto
}

public function edit($id){
    $itensentrada = Itensentrada::findorFail($id);
    return view('itensentradas.edit',['itensentrada'=>$itensentrada]);
}

public function update (Request $request){
    Itensentrada::find($request->id)->update($request->except('_token'));
    return redirect()->route('itensentradas.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Itensentrada::findorfail($id)->delete();
    return redirect()->route('itensentradas.index')->with('msg', 'Itens entrada apagados');
}
```

ItensvendaController.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php ItensentradaController.php ItensvendaController.php × CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_b ...

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Itensvenda;

class ItensvendaController extends Controller
{
    public function index(){
        $itensvendas = Itensvenda::all();
        return view('itensvendas.index', ['itensvendas'=>$itensvendas]);
    }

    public function create(){
        return view('itensvendas.create');
    }

    public function store(Request $request){
        $itensvenda = new Itensvenda();
        $itensvenda->quantidadeitens = $request->quantidadeitens;
        $itensvenda->valor = $request->valor;
        $itensvenda->desconto = $request->desconto;
        $itensvenda->venda_id = $request->venda_id;
        $itensvenda->produto_id = $request->produto_id;
        $itensvenda->save();
        return redirect()->route('itensvendas.index');
    }
}
```

LN 55, Col 89 Espaços: 4 UTF-8 LF PHP ⚙️ 🔍

ItensvendaController.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php ItensentradaController.php ItensvendaController.php × CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_b ...

SISTEM... app > Http > Controllers > ItensvendaController.php

```
33     public function show($id){  
34         if($id){  
35             $itensvenda = Itensvenda::where('id',$id)->get();  
36         }else{  
37             $itensvenda = Itensvenda::all();  
38         }  
39         return view('itensvendas.show', ['itensvendas'=>$itensvenda]); //passa objeto  
40     }  
41  
42     public function edit($id){  
43         $itensvenda = Itensvenda::findorFail($id);  
44         return view('itensvendas.edit',['itensvenda'=>$itensvenda]);  
45     }  
46  
47     public function update (Request $request){  
48         Itensvenda::find($request->id)->update($request->except('_token'));  
49         return redirect()->route('itensvendas.index')->with('msg', 'Alteração realizada com sucesso');  
50     }  
51  
52     public function destroy ($id){  
53         Itensvenda::findorfail($id)->delete();  
54         return redirect()->route('itensvendas.index')->with('msg', 'Itens venda apagados');  
55     }  
56 }  
57  
58  
59 }
```

ESTRUTURA DO CÓDIGO

Ln 55, Col 89 Espaços: 4 UTF-8 LF PHP ⚡ 0 0

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** MarcaController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Left Sidebar:** Icons for various applications like Firefox, Mail, File Explorer, and VS Code.
- File Explorer:** Shows the project structure under SISTEM... / app / Http / Controllers. The MarcaController.php file is selected.
- Code Editor:** Displays the PHP code for MarcaController.php. The code includes methods for index, create, store, and show.
- Bottom Status Bar:** Shows line 51, column 77, 4 spaces, UTF-8, LF, PHP, and other icons.

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Marca;

class MarcaController extends Controller
{
    public function index(){
        $marcas = Marca::all();
        return view('marcas.index', ['marcas'=>$marcas]);
    }

    public function create(){
        return view('marcas.create');
    }

    public function store(Request $request){
        $marca = new Marca();
        $marca->nomedamarca = $request->nomedamarca;
        $marca->save();
        return redirect()->route('marcas.index');
    }

    public function show($id){
        if($id){
            $marca = Marca::where('id',$id)->get();
        }
    }
}
```

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** MarcaController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Left Sidebar (Explorador):** Shows the project structure under 'SISTEM...'. The 'MarcaController.php' file is selected and highlighted with a blue bar.
- Central Area:** The code editor displays the PHP code for the MarcaController.php file. The code includes methods for show, edit, update, and destroy.
- Bottom Status Bar:** Shows file statistics (Ln 51, Col 77, 0 ▲ 0), encoding (Espaços: 4, UTF-8, LF), and language (PHP).

```
public function show($id){
    if($id){
        $marca = Marca::where('id',$id)->get();
    }else{
        $marca = Marca::all();
    }
    return view('marcas.show', ['marcas'=>$marca]); //passa objeto
}

public function edit($id){
    $marca = Marca::findorFail($id);
    return view('marcas.edit',['marca'=>$marca]);
}

public function update (Request $request){
    Marca::find($request->id)->update($request->except('token'));
    return redirect()->route('marcas.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Marca::findorfail($id)->delete();
    return redirect()->route('marcas.index')->with('msg', 'Marca apagada');
}
```

A screenshot of the Visual Studio Code interface. The title bar reads "PagamentoController.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar shows a file tree with a dark theme, displaying various PHP files like web.php, ClienteController.php, ItensentradaController.php, and others under the app directory. The main editor area contains the code for PagamentoController.php, which is a Laravel controller. The code includes imports for Illuminate\Http\Request and App\Models\Pagamento, and defines methods for index, create, store, and show actions. The status bar at the bottom shows "Ln 53, Col 77" and "Espaços: 4".

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Pagamento;

class PagamentoController extends Controller
{
    public function index(){
        $pagamentos = Pagamento::all();
        return view('pagamentos.index', ['pagamentos'=>$pagamentos]);
    }

    public function create(){
        return view('pagamentos.create');
    }

    public function store(Request $request){
        $pagamento = new Pagamento();
        $pagamento->valorpagamento = $request->valorpagamento;
        $pagamento->datapagamento = $request->datapagamento;
        $pagamento->numerosdeparcelas = $request->numerosdeparcelas;
        $pagamento->save();
        return redirect()->route('pagamentos.index');
    }

    public function show($id){
```

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** PagamentoController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Sidebar:** Shows a file tree with the following structure:
 - SISTEM...
 - app
 - Console
 - Exceptions
 - Http
 - Controllers
 - CategoriaController.php
 - ClienteController.php
 - ItensentradController.php
 - PagamentoController.php
 - CategoriaController.php
 - 2022_02_08_045458_create_enderecos_clientes_l...
 - EntradaController.php
 - Contato_FornecedorController.php
 - DevolucaoController.php
 - Endereco_ClienteController.php
 - EntradaController.php
 - Forma_de_PagamentoController.php
 - FornecedorController.php
 - ItensentradController.php
 - ItensvendaController.php
 - MarcaController.php
 - PagamentoController.php
 - ParcelaController.php
 - PrateleiraController.php
 - ProdutoController.php
 - UsuarioController.php
 - VendaController.php
 - Middleware
 - Kernel.php
 - Models
 - Code Editor:** Displays the PagamentoController.php code. The file contains methods for show, edit, update, and destroy payment records.
 - Status Bar:** ShowsLn 53, Col 77 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** ParcadaController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo, Editar, Seleção, Ver, Acessar, Executar, Terminal, Ajuda
- Sidebar:** Shows various icons for file operations like Open, Save, Find, and Delete.
- File Explorer:** Shows the project structure under 'SISTEM...'. The current file, ParcadaController.php, is selected.
- Code Editor:** Displays the PHP code for the ParcadaController class. The code includes imports for Illuminate\Http\Request and App\Models\Parcela, and defines methods for index, create, and store.
- Bottom Status Bar:** Shows file statistics (Ln 57, Col 81), code style settings (Espaços: 4, LF, PHP), and other icons.

```
ParcadaController.php
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6 use App\Models\Parcela;
7
8 class ParcadaController extends Controller
9 {
10     //
11
12     public function index(){
13         $parcelas = Parcela::all();
14
15         return view('parcelas.index', ['parcelas'=>$parcelas]);
16     }
17
18     public function create(){
19         return view('parcelas.create');
20     }
21
22     public function store(Request $request){
23         $parcela = new Parcela();
24         $parcela->numerodeparcelas = $request->numerodeparcelas;
25         $parcela->valorparcela = $request->valorparcela;
26         $parcela->status = $request->status;
27         $parcela->vencimento = $request->vencimento;
28         $parcela->valortotaldaparcela = $request->valortotaldaparcela;
29         $parcela->forma_de_pagamento_id = $request->forma_de_pagamento_id;
30         $parcela->pagamento_id = $request->pagamento_id;
31         $parcela->save();
32         return redirect()->route('parcelas.index');
```

The screenshot shows the Visual Studio Code interface with the title bar "ParcelaController.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various tools like browser, email, file explorer, and help. The main area displays the PHP code for the 'ParcelaController.php' file:

```
public function show($id){
    if($id){
        $parcela = Parcela::where('id',$id)->get();
    }else{
        $parcela = Parcela::all();
    }
    return view('parcelas.show', ['parcelas'=>$parcela]); //passa objeto
}

public function edit($id){
    $parcela = Parcela::findorFail($id);
    return view('parcelas.edit',['parcela'=>$parcela]);
}

public function update (Request $request){
    Parcela::find($request->id)->update($request->except('_token'));
    return redirect()->route('parcelas.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Parcela::findorfail($id)->delete();
    return redirect()->route('parcelas.index')->with('msg', 'Parcela apagada');
}
```

The status bar at the bottom shows "Ln 57, Col 81 Espaços: 4 UTF-8 LF PHP" and includes icons for search, file operations, and code navigation.

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** PrateleiraController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo, Editar, Seleção, Ver, Acessar, Executar, Terminal, Ajuda
- Sidebar:** Shows a file tree with the following structure:
 - SISTEM...
 - app
 - Console
 - Exceptions
 - Http
 - Controllers
 - CategoriaController...
 - ClienteController...
 - Contato_Cliente...
 - Contato_Fornecedor...
 - Controller.php
 - DevolucaoController...
 - Endereco_Cliente...
 - EntradaController...
 - Forma_de_Pagamento...
 - FornecedorController...
 - Itensentrad...
 - ItensvendaController...
 - MarcaController...
 - PagamentoController...
 - ParcelaController...
 - PrateleiraController...
 - ProdutoController...
 - UsuarioController...
 - VendaController...
 - Middleware
 - Kernel.php
 - Models
 - Code Editor:** The PrateleiraController.php file is open, showing PHP code for a Laravel controller. The code includes methods for index, create, store, and show actions, along with their respective logic using Illuminate\Http\Request and App\Models\Prateleira.
 - Status Bar:** Ln 53, Col 87 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** PrateleiraController.php - sistemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Left Sidebar:** Shows various icons for file operations like Open, Save, Find, and Paste.
- File Explorer:** Shows the project structure:
 - SISTEM... (selected)
 - app
 - Console
 - Exceptions
 - Http
 - Controllers
 - CategoriaController.php
 - ClienteController.php
 - ItensentradController.php
 - PrateleiraController.php (highlighted)
 - VendaController.php
 - Contato_ClienteController.php
 - Contato_FornecedorController.php
 - Forma_de_PagamentoController.php
 - FornecedorController.php
 - ItensentradController.php
 - ItensvendaController.php
 - MarcaController.php
 - PagamentoController.php
 - ParcelaController.php
 - PrateleiraController.php (highlighted again)
 - ProdutoController.php
 - UsuarioController.php
 - VendaController.php
 - Middleware
 - Kernel.php
 - Models
 - ESTRUTURA DO CÓDIGO
- Code Editor:** Displays the PHP code for the PrateleiraController.php file.

```
public function show($id){
    if($id){
        $prateleira = Prateleira::where('id',$id)->get();
    }else{
        $prateleira = Prateleira::all();
    }
    return view('prateleiras.show', ['prateleiras'=>$prateleira]); //passa objeto
}

public function edit($id){
    $prateleira = Prateleira::findorFail($id);
    return view('prateleiras.edit',['prateleira'=>$prateleira]);
}

public function update (Request $request){
    Prateleira::find($request->id)->update($request->except('_token'));
    return redirect()->route('prateleiras.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Prateleira::findorfail($id)->delete();
    return redirect()->route('prateleiras.index')->with('msg', 'Prateleira apagada');
}
```
- Bottom Status Bar:** Ln 53, Col 87 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** ProdutoController.php - sitemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Sidebar:** Shows various icons for different tools and files.
- Explorer:** Shows the project structure:
 - SISTEM...
 - app
 - Console
 - Exceptions
 - Http
 - Controllers
 - CategoriaController.php
 - ClienteController.php
 - ItensentradController.php
 - ProdutoController.php**
 - CategoriaController.php
 - 2022_02_08_045458_create_enderecos_clientes_table.php
 - Middleware
 - Models
- Code Editor:** Displays the PHP code for ProdutoController.php:

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Produto;

class ProdutoController extends Controller
{
    //
    public function index(){
        $produtos = Produto::all();
        return view('produtos.index', ['produtos'=>$produtos]);
    }
    public function create(){
        return view('produtos.create');
    }
    public function store(Request $request){
        $produto = new Produto();
        $produto->nomedoproduto = $request->nomedoproduto;
        $produto->icms = $request->icms;
        $produto->ipi = $request->ipi;
        $produto->frete = $request->frete;
        $produto->valornafabrica = $request->valornafabrica;
        $produto->valordecompra = $request->valordecompra;
        $produto->lucro = $request->lucro;
        $produto->valorvenda = $request->valorvenda;
        $produto->desconto = $request->desconto;
    }
}
```
- Bottom Status Bar:** Ln 63, Col 73 Espaços: 4 UTF-8 LF PHP

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** ProdutoController.php - sitemadevendas - Visual Studio Code [Superusuário]
- Menu Bar:** Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
- Sidebar:** Shows various icons for different tools and files.
- Explorer:** Shows the project structure:
 - SISTEM...
 - app
 - Console
 - Exceptions
 - Http
 - Controllers
 - CategoriaController.php
 - ClienteController.php
 - ItensentradController.php
 - ProdutoController.php**
 - CategoriaController.php
 - 2022_02_08_045458_create_enderecos_clientes_table.php
 - Middleware
 - Models
- Code Editor:** Displays the PHP code for ProdutoController.php:

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Produto;

class ProdutoController extends Controller
{
    //
    public function index(){
        $produtos = Produto::all();
        return view('produtos.index', ['produtos'=>$produtos]);
    }
    public function create(){
        return view('produtos.create');
    }
    public function store(Request $request){
        $produto = new Produto();
        $produto->nomedoproduto = $request->nomedoproduto;
        $produto->icms = $request->icms;
        $produto->ipi = $request->ipi;
        $produto->frete = $request->frete;
        $produto->valornafabrica = $request->valornafabrica;
        $produto->valordecompra = $request->valordecompra;
        $produto->lucro = $request->lucro;
        $produto->valorvenda = $request->valorvenda;
        $produto->desconto = $request->desconto;
    }
}
```
- Bottom Status Bar:** Ln 63, Col 73 Espaços: 4 UTF-8 LF PHP

UsuarioController.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php ItensentradaController.php UsuarioController.php ✘ CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table ...

SISTEM... app > Http > Controllers > UsuarioController.php

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Usuario;

class UsuarioController extends Controller
{
    public function index(){
        $usuarios = Usuario::all();
        return view('usuarios.index', ['usuarios'=>$usuarios]);
    }

    public function create(){
        return view('usuarios.create');
    }

    public function store(Request $request){
        $usuario = new Usuario();
        $usuario->nomeusuario = $request->nomeusuario;
        $usuario->login = $request->login;
        $usuario->senha = $request->senha;
        $usuario->cargo = $request->cargo;
        $usuario->adm = $request->adm;
        $usuario->save();
        return redirect()->route('usuarios.index');
    }
}
```

ESTRUTURA DO CÓDIGO

Ln 55, Col 73 Espaços: 4 UTF-8 LF PHP 🔍 ⚙️

A screenshot of the Visual Studio Code interface, showing the code editor with a dark theme. The title bar reads "UsuarioController.php - sistemadevendas - Visual Studio Code [Superusuário]". The menu bar includes Arquivo, Editar, Seleção, Ver, Acessar, Executar, Terminal, and Ajuda. The left sidebar shows a file tree with a folder icon expanded to show "app", "Http", and "Controllers", with "UserController.php" selected. The main editor area contains the following PHP code:

```
public function show($id){
    if($id){
        $usuario = Usuario::where('id',$id)->get();
    }else{
        $usuario = Usuario::all();
    }
    return view('usuarios.show', ['usuarios'=>$usuario]); //passa objeto
}

public function edit($id){
    $usuario = Usuario::findorFail($id);
    return view('usuarios.edit',['usuario'=>$usuario]);
}

public function update (Request $request){
    Usuario::find($request->id)->update($request->except('_token'));
    return redirect()->route('usuarios.index')->with('msg', 'Alteração realizada com sucesso');
}

public function destroy ($id){
    Usuario::findorfail($id)->delete();
    return redirect()->route('usuarios.index')->with('msg', 'Usuario apagado');
}
```

The status bar at the bottom shows "Ln 55, Col 73 Espaços: 4 UTF-8 LF PHP ⚡ 0 0 0".

VendaController.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... web.php ClienteController.php ItensentradaController.php VendaController.php X CategoriaController.php 2022_02_08_045458_create_enderecos_clientes_table. ESTRUTURA DO CÓDIGO

SISTEM... app > Http > Controllers > VendaController.php

```
<?php
namespace App\Http\Controllers;
use Illuminate\Http\Request;
use App\Models\Venda;

class VendaController extends Controller
{
    //
    public function index(){
        $vendas = Venda::all();

        return view('vendas.index', ['vendas'=>$vendas]);
    }

    public function create(){
        return view('vendas.create');
    }

    public function store(Request $request){
        $venda = new Venda();
        $venda->datavenda = $request->datavenda;
        $venda->descontototal = $request->descontototal;
        $venda->descontoacerto = $request->descontoacerto;
        $venda->valortotal = $request->valortotal;
        $venda->usuario_id = $request->usuario_id;
        $venda->cliente_id = $request->cliente_id;
        $venda->save();
        return redirect()->route('vendas.index');
    }
}
```

Ln 56, Col 77 Espaços: 4 UTF-8 LF PHP ⚡ 🔍


The screenshot shows the Visual Studio Code interface with the title bar "VendaController.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for a browser, terminal, file explorer, search, and help. The file explorer shows a project structure under "SISTEM...": app > Http > Controllers > VendaController.php. The code editor displays the following PHP code:

```
32     }
33 }
34
35 public function show($id){
36     if($id){
37         $venda = Venda::where('id',$id)->get();
38     }else{
39         $venda = Venda::all();
40     }
41     return view('vendas.show', ['vendas'=>$venda]); //passa objeto
42 }
43
44 public function edit($id){
45     $venda = Venda::findorFail($id);
46     return view('vendas.edit',[ 'venda'=>$venda]);
47 }
48
49 public function update (Request $request){
50     Venda::find($request->id)->update($request->except('_token'));
51     return redirect()->route('vendas.index')->with('msg', 'Alteração realizada com sucesso');
52 }
53
54 public function destroy ($id){
55     Venda::findorfail($id)->delete();
56     return redirect()->route('vendas.index')->with('msg', 'Venda apagada');
57 }
58 }
59 }
```

The status bar at the bottom indicates "Ln 56, Col 77 Espaços: 4 UTF-8 LF PHP" and has icons for file operations.


Views-> Exemplo de Create.blade.php;

pegando como exemplo a tabela categoria

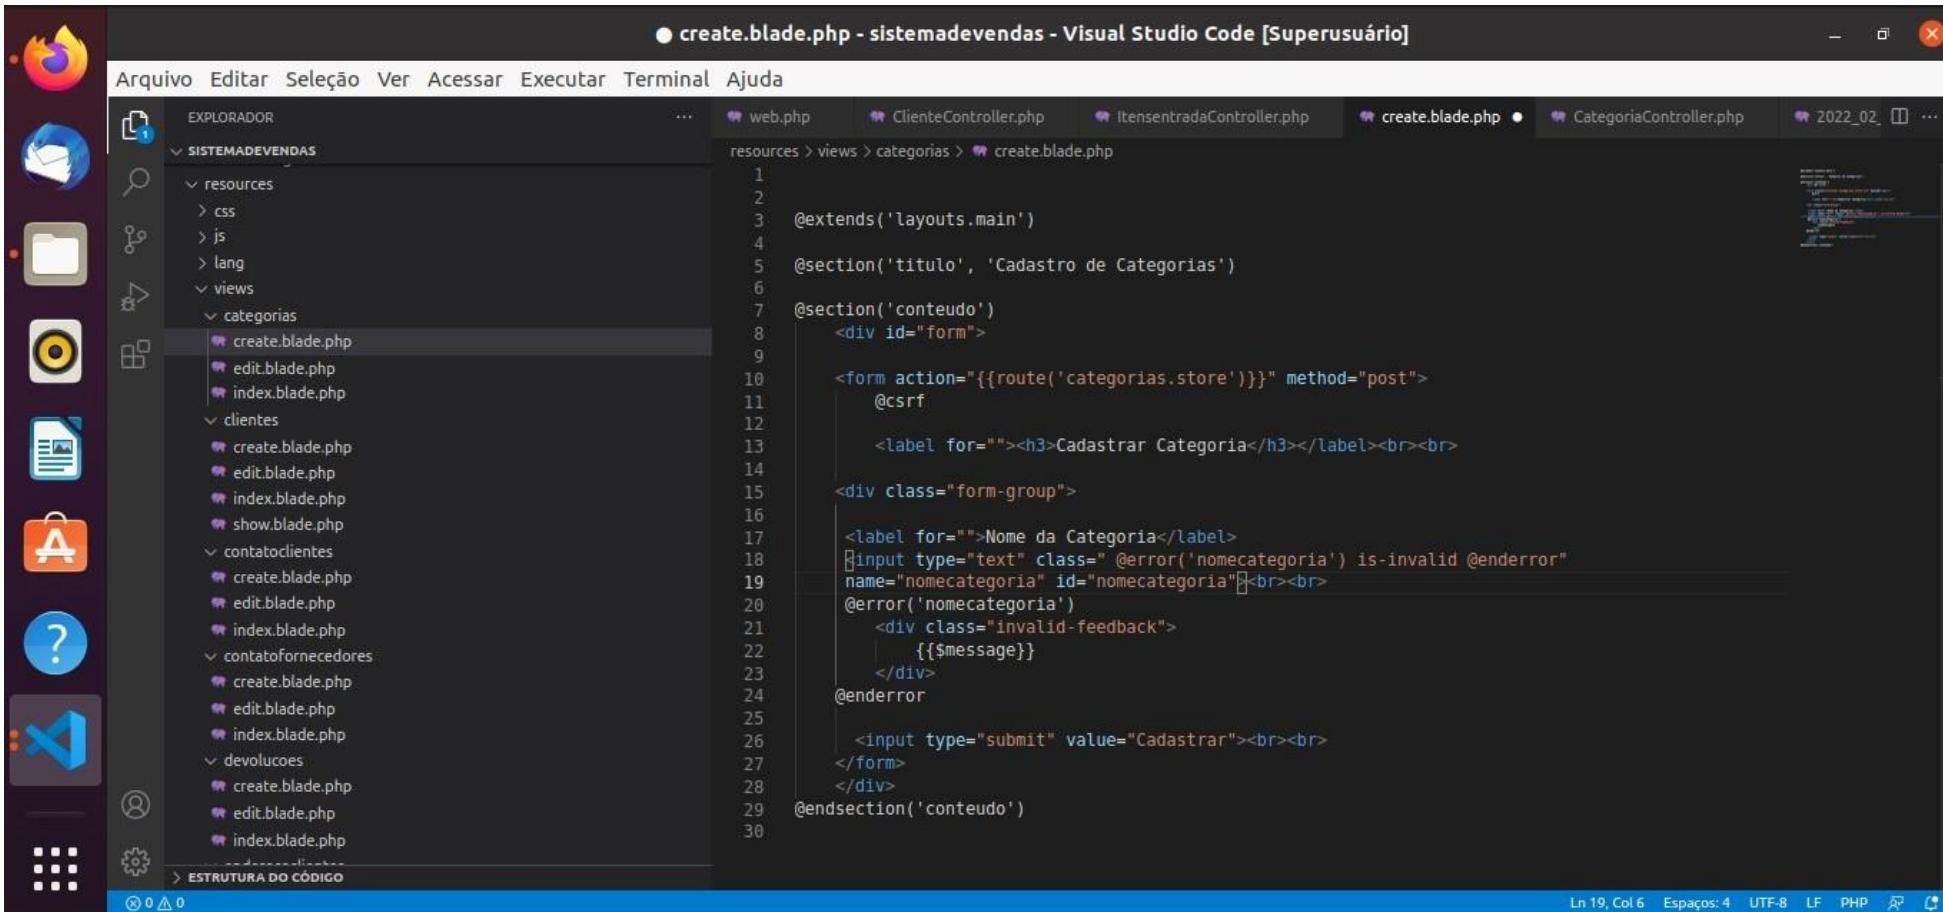

```
● create.blade.php - sistemadevendas - Visual Studio Code [Superusuário]
Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda
EXPLORADOR
SISTEMADEVENDAS
resources > views > categorias > create.blade.php
1
2
3 @extends('layouts.main')
4
5 @section('titulo', 'Cadastro de Categorias')
6
7 @section('conteudo')
8 <div id="form">
9
10 <form action="{{route('categorias.store')}}" method="post">
11   @csrf
12
13   <label for=""><h3>Cadastrar Categoria</h3><br><br>
14
15   <div class="form-group">
16
17     <label for="">Nome da Categoria</label>
18     <input type="text" class=" @error('nomecategoria') is-invalid @enderror" name="nomecategoria" id="nomecategoria" ><br><br>
19     @error('nomecategoria')
20       <div class="invalid-feedback">
21         {{$message}}
22       </div>
23     @enderror
24
25
26     <input type="submit" value="Cadastrar"><br><br>
27   </form>
28 </div>
29 @endsection('conteudo')
```

View -> Exemplo Edit.blade.php

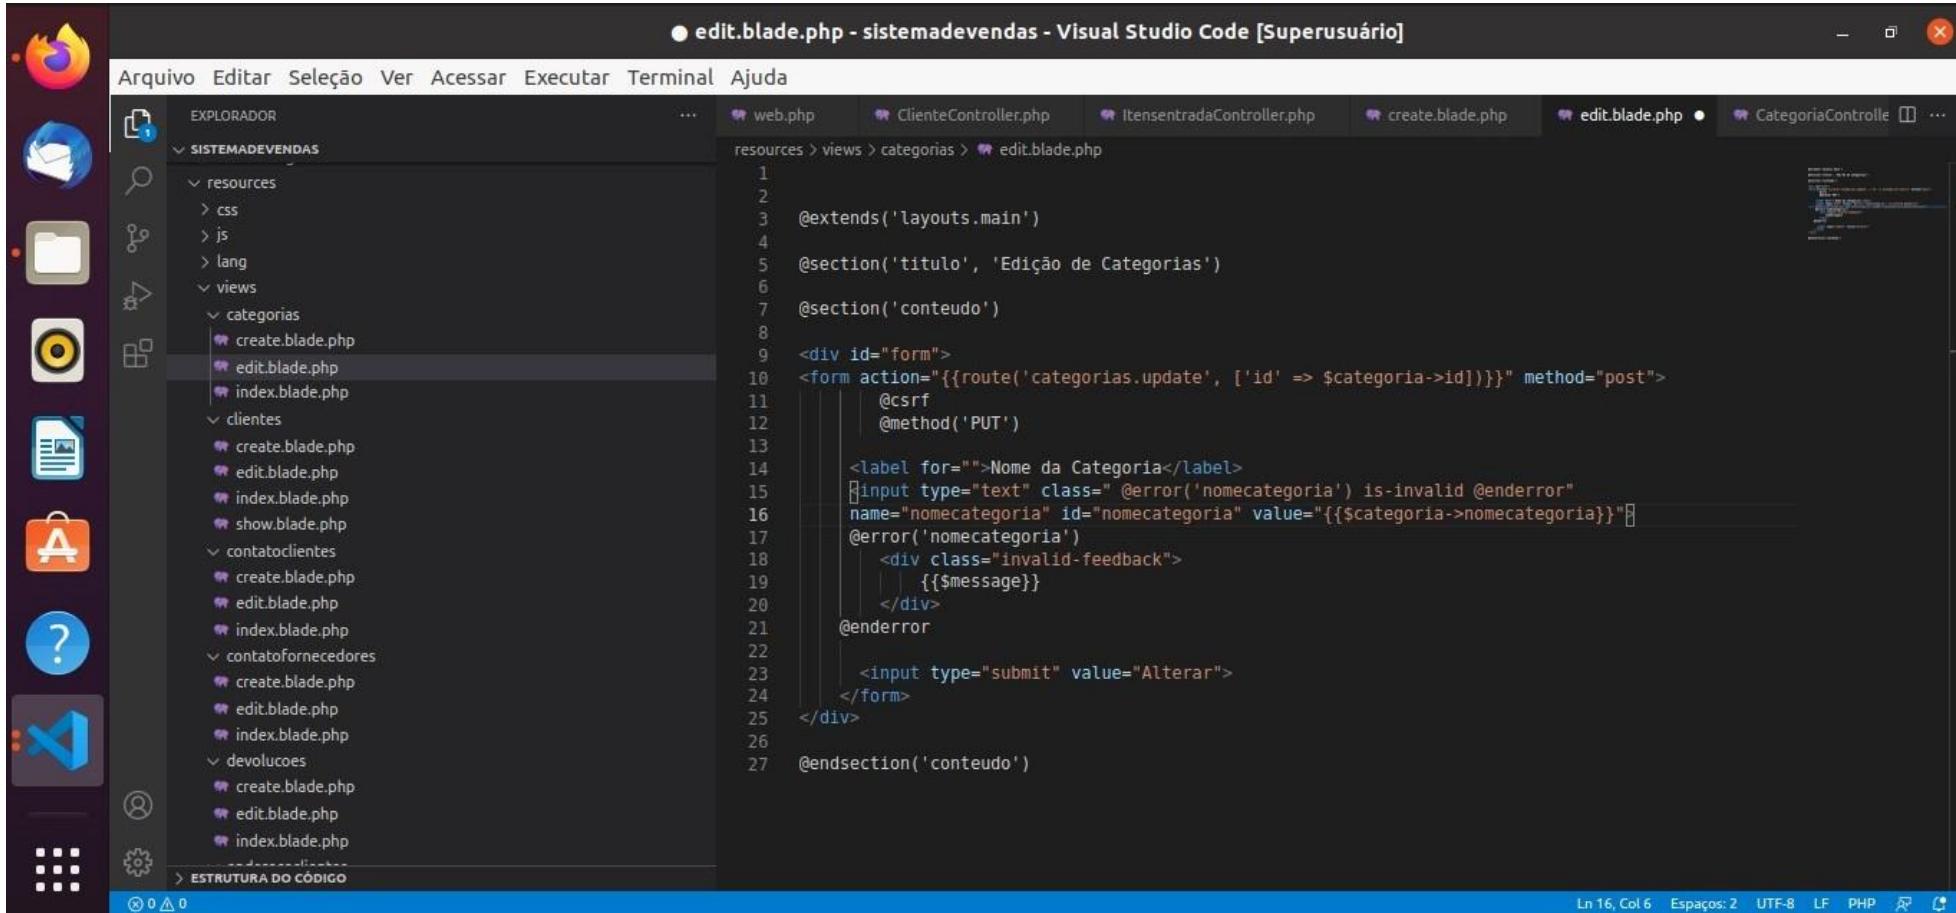

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR

SISTEMADEVENDAS


resources > views > categorias > edit.blade.php

```
1
2
3 @extends('layouts.main')
4
5 @section('titulo', 'Edição de Categorias')
6
7 @section('conteudo')
8
9 <div id="form">
10 <form action="{{route('categorias.update', ['id' => $categoria->id])}}" method="post">
11     @csrf
12     @method('PUT')
13
14     <label for="">Nome da Categoria</label>
15     <input type="text" class=" @error('nomecategoria') is-invalid @enderror" name="nomecategoria" id="nomecategoria" value="{{$categoria->nomecategoria}}">
16     @error('nomecategoria')
17         <div class="invalid-feedback">
18             {{$message}}
19         </div>
20     @enderror
21
22     <input type="submit" value="Alterar">
23 </form>
24
25 </div>
26
27 @endsection('conteudo')
```

ESTRUTURA DO CÓDIGO

Ln 16, Col 6 Espaços: 2 UTF-8 LF PHP 🔍

View -> Exemplo de index.blade.php

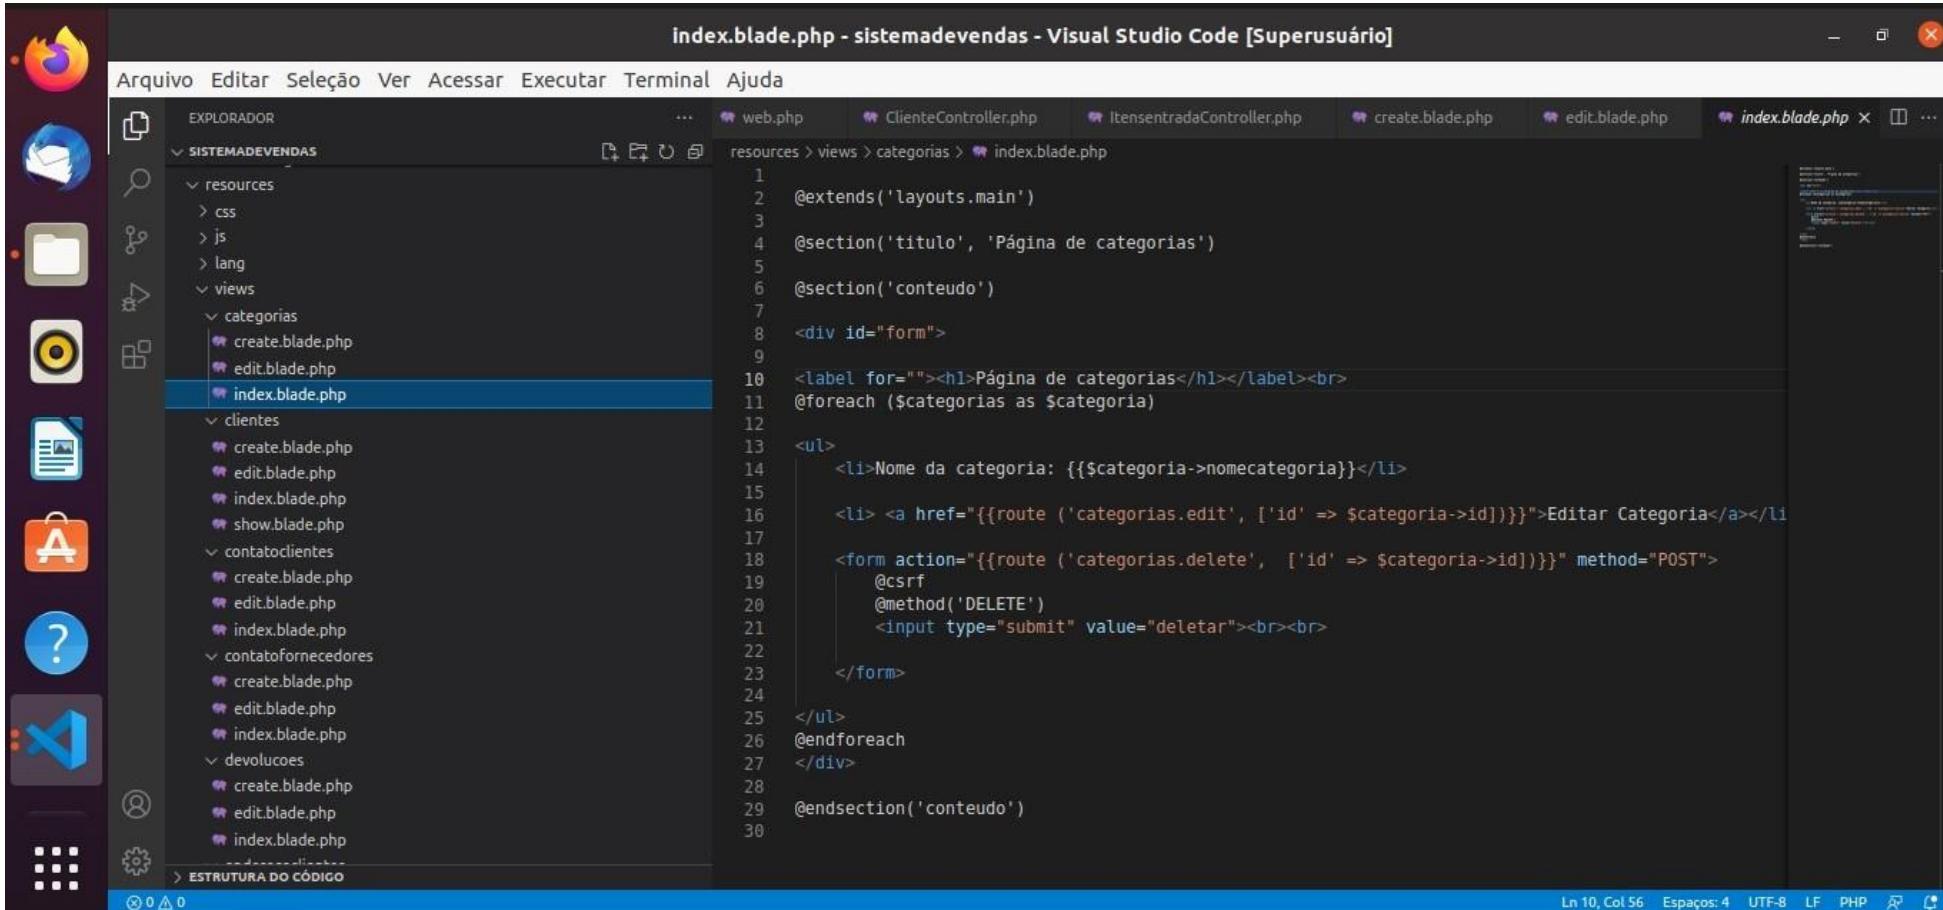

The screenshot shows the Visual Studio Code interface with the title bar "index.blade.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar displays a file tree for the "SISTEMADEVENDAS" project, with the "index.blade.php" file selected in the "views/categorias" folder. The main editor pane shows the Blade template code:

```
1 @extends('layouts.main')
2
3 @section('titulo', 'Página de categorias')
4
5 @section('conteudo')
6
7 <div id="form">
8   <label for=""><h1>Página de categorias</h1></label><br>
9   @foreach ($categorias as $categoria)
10     <ul>
11       <li>Nome da categoria: {{$categoria->nomecategoria}}</li>
12
13       <li> <a href="{{route ('categorias.edit', ['id' => $categoria->id])}}>Editar Categoria</a></li>
14
15     </ul>
16     <form action="{{route ('categorias.delete', ['id' => $categoria->id])}}" method="POST">
17       @csrf
18       @method('DELETE')
19       <input type="submit" value="deletar"><br><br>
20     </form>
21
22   </ul>
23   @endforeach
24
25 </div>
26
27 @endsection('conteudo')
```

The status bar at the bottom indicates "Ln 10, Col 56" and "Espaços: 4".

create.blade.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR

SISTEMADEVENDAS


- enderecoclientes
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- entradas
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- formadepagamentos
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- fornecedores
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- itensentradas
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- itensvendas
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- layouts
 - main.blade.php
- marcas

resources > views > enderecoclientes > create.blade.php

```
1 @extends('layouts.main')
2
3 @section('titulo', 'Cadastro de Endereço do cliente')
4
5 @section('conteúdo')
6     <div id="form">
7
8         <form action="{{route('enderecoclientes.store')}}" method="post">
9             @csrf
10
11             <label for=""><h3>Cadastrar Endereço do Cliente</h3><br><br>
12             <div class="form-group">
13
14                 <label for="">Rua</label>
15                 <input type="text" class=" @error('rua') is-invalid @enderror" name="rua" id="rua"><br><br>
16                 @error('rua')
17                     <div class="invalid-feedback">
18                         {{$message}}
19                     </div>
20                 @enderror
21
22             <label for="">Número</label>
23             <input type="text" class=" @error('numero') is-invalid @enderror" name="numero" id="numero"><b>
24                 @error('numero')
25                     <div class="invalid-feedback">
26                         {{$message}}
27                     </div>
28                 @enderror
29
30             <label for="">Bairro</label>
```

Ln 1, Col 1 Espaços: 4 UTF-8 LF PHP ⚡

Layouts.main

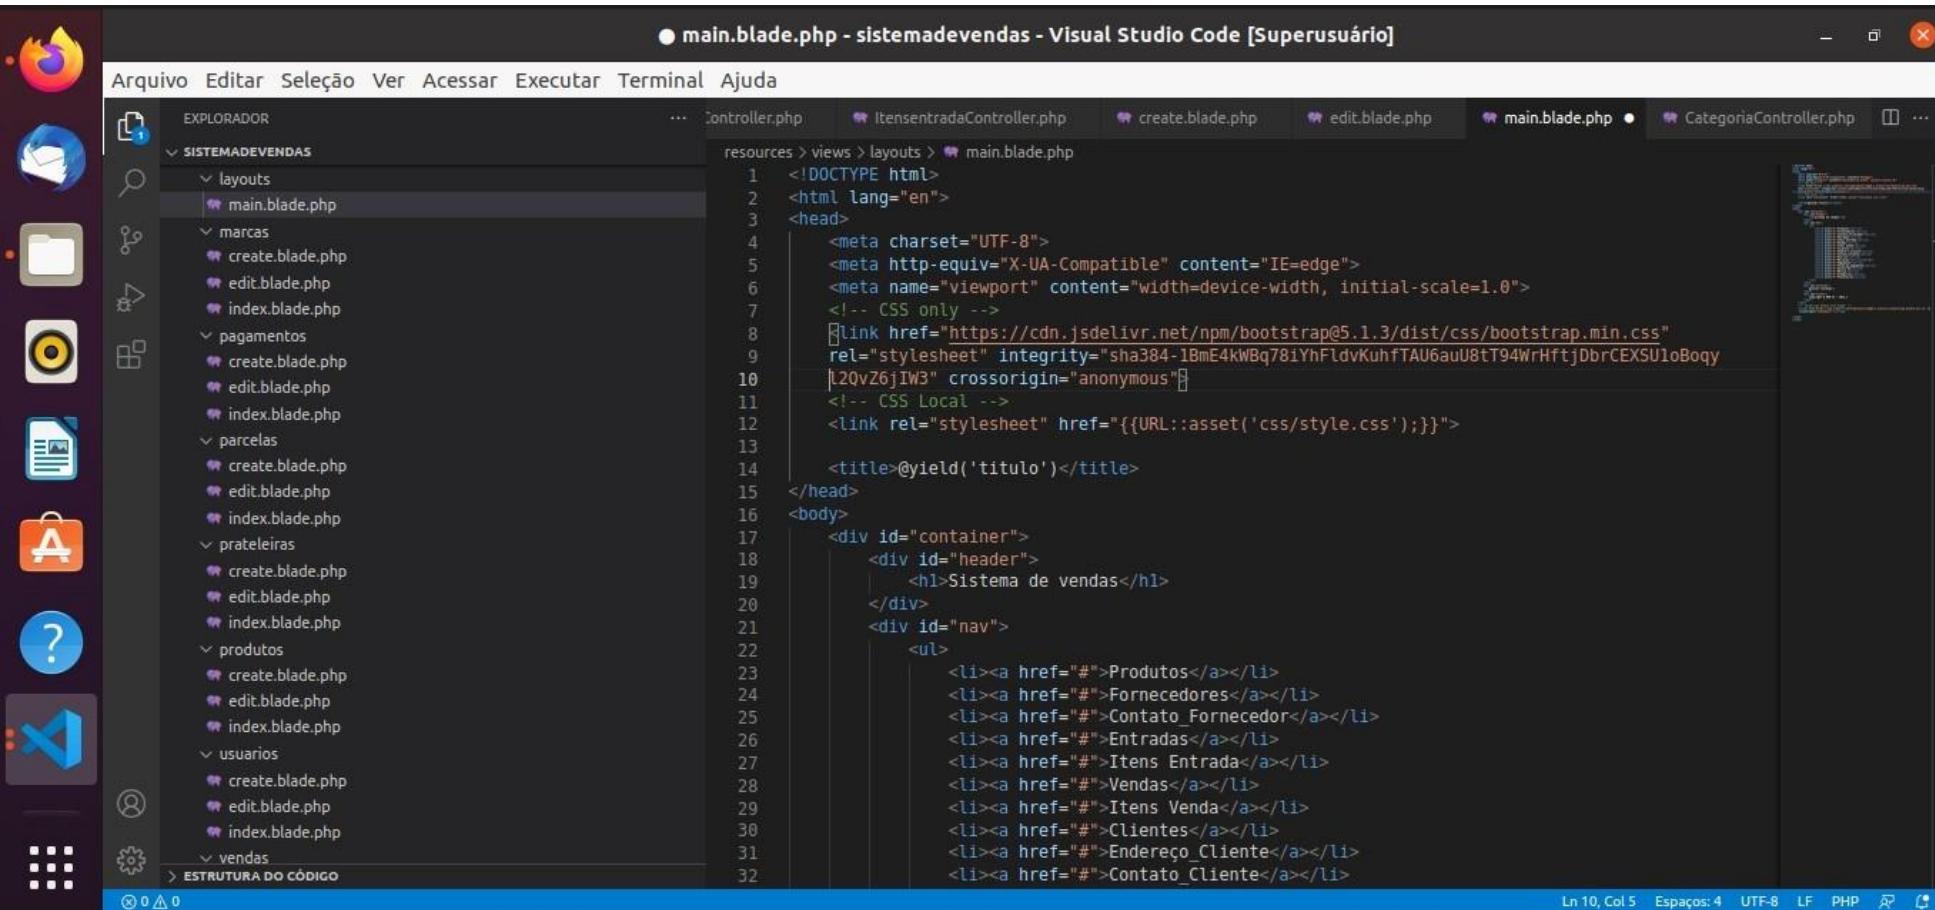

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** main.blade.php - sistemadevendas - Visual Studio Code [Superusuário]
- File Explorer (Left):** Shows the project structure under "SISTEMADEVENDAS". The "layouts" folder contains "main.blade.php". Other folders like "marcas", "pagamentos", "parcelas", "prateleiras", "produtos", "usuarios", and "vendas" also contain blade files.
- Code Editor (Center):** Displays the content of "main.blade.php". The code includes HTML, PHP, and CSS. It features a header section with meta tags and links to Bootstrap and a local stylesheet. The body section contains a header with the title "Sistema de vendas" and a navigation menu with links to various pages.
- Bottom Status Bar:** Shows file statistics (Ln 10, Col 5), code style settings (Espaços: 4, LF), and file type (PHP).

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <!-- CSS only -->
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-1BmE4kWBq78iYhFldvKuhfTAU6auU8tT94WrHftjDbrCEXSU1oBoqJL2Qz6jIW3" crossorigin="anonymous">
    <!-- CSS Local -->
    <link rel="stylesheet" href="{{URL::asset('css/style.css')}}">
<title>@yield('titulo')</title>
</head>
<body>
    <div id="container">
        <div id="header">
            <h1>Sistema de vendas</h1>
        </div>
        <div id="nav">
            <ul>
                <li><a href="#">Produtos</a></li>
                <li><a href="#">Fornecedores</a></li>
                <li><a href="#">Contato_Fornecedor</a></li>
                <li><a href="#">Entradas</a></li>
                <li><a href="#">Itens Entrada</a></li>
                <li><a href="#">Vendas</a></li>
                <li><a href="#">Itens Venda</a></li>
                <li><a href="#">Clientes</a></li>
                <li><a href="#">Endereço_Cliente</a></li>
                <li><a href="#">Contato_Cliente</a></li>
```

● main.blade.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR

SISTEMADEVENDAS

- layouts
 - main.blade.php
- marcas
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- pagamentos
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- parcelas
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- prateleiras
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- produtos
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- usuarios
 - create.blade.php
 - edit.blade.php
 - index.blade.php
- vendas


resources > views > layouts > main.blade.php

```
31 <li><a href="#">Endereço_Cliente</a></li>
32 <li><a href="#">Contato_Cliente</a></li>
33 <li><a href="#">Usuário</a></li>
34 <li><a href="#">Parcelas</a></li><br><br>
35 <li><a href="#">Pagamento</a></li>
36 <li><a href="#">Forma_de_pagamento</a></li>
37 <li><a href="#">Devolução</a></li>
38 <li><a href="#">Marcas</a></li>
39 <li><a href="#">Categorias</a></li>
40 <li><a href="#">Prateleiras</a></li>
41 </ul>
42 </div>
43 <div id="conteudo">
44 | @yield('conteudo')
45 | </div>
46 <div id="footer">
47 | Copyright @ WEB II - 2021.1
48 </div>
49 </div>
50 <!-- JavaScript Bundle with Popper -->
51 <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.js"
52 | integrity="sha384-ka75k0Gln4gmtz2MlQn1kT1wXgYs0g+0MhuP+IlRH9sENB00LRn5q+8nbTov4+1p"
53 | crossorigin="anonymous"></script>
54
55 </body>
56 </html>
```

ESTRUTURA DO CÓDIGO

Ln 52, Col 5 Espaços: 4 UTF-8 LF PHP ⚡ 🔍


Styles

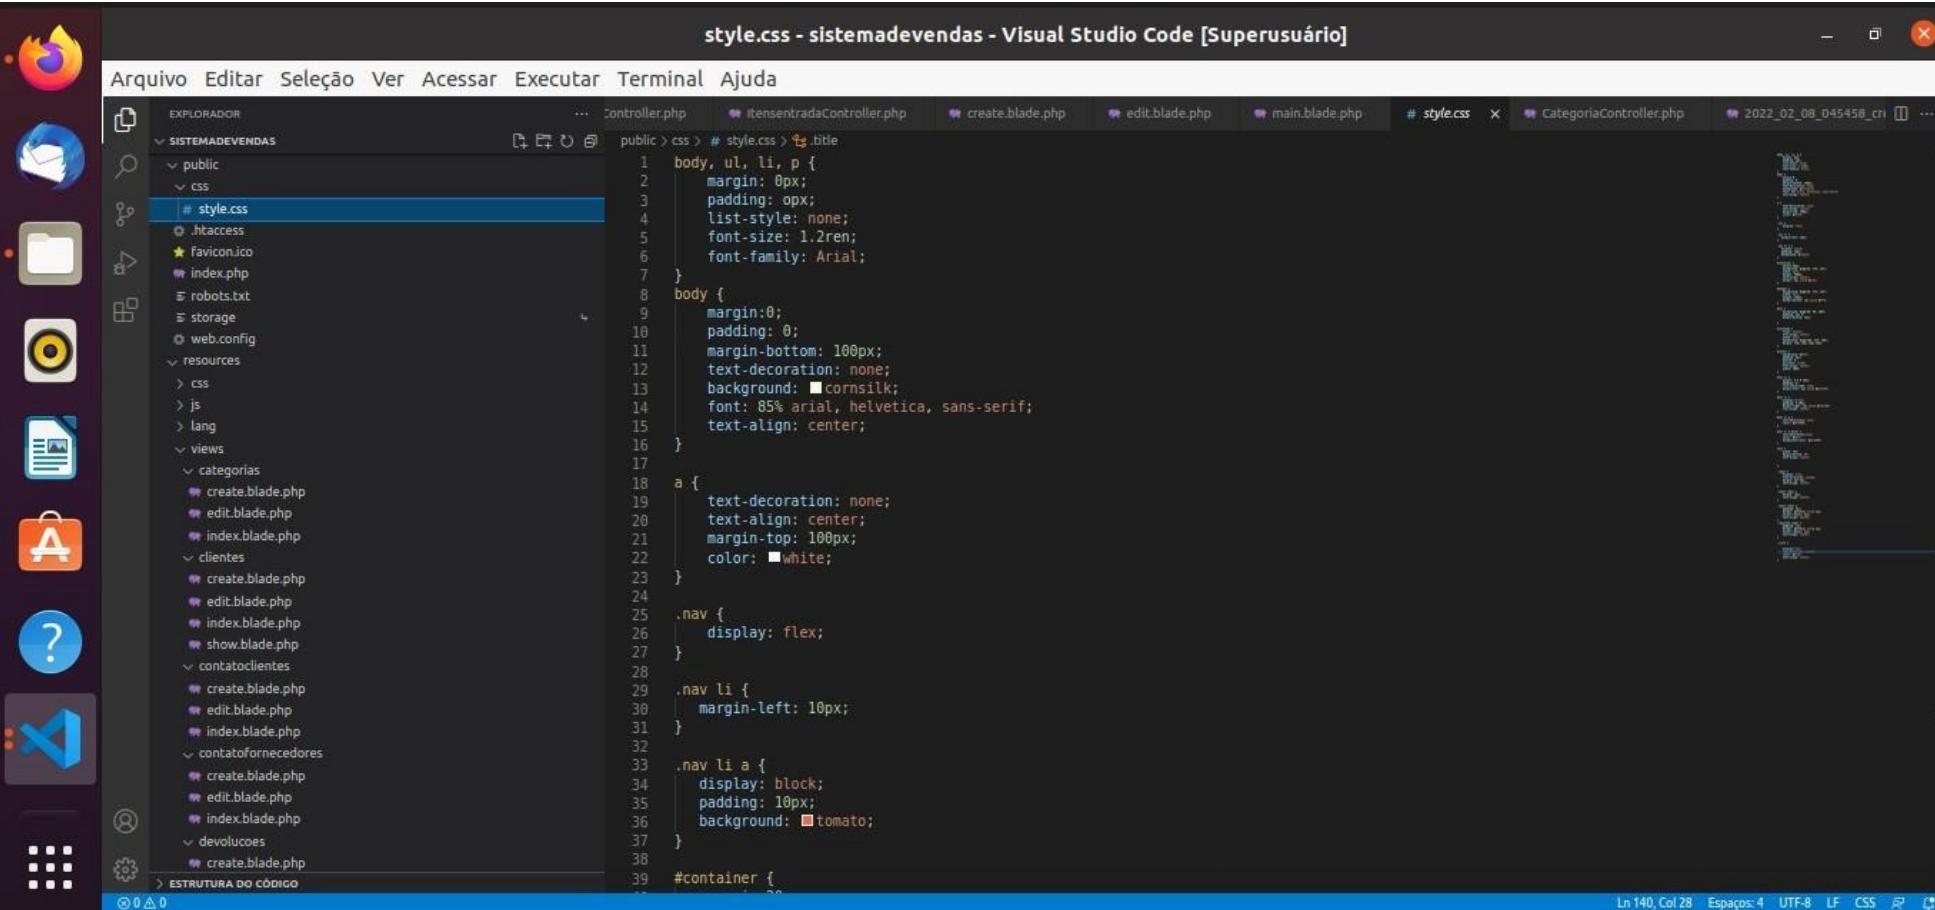

The screenshot shows the Visual Studio Code interface with the title bar "style.css - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar displays the project structure for "SISTEMADEVENDAS" with various PHP files and a CSS file named "# style.css". The main editor pane shows the CSS code:

```
public > css > # style.css > ↗ .title
1 body, ul, li, p {
2     margin: 0px;
3     padding: 0px;
4     list-style: none;
5     font-size: 1.2rem;
6     font-family: Arial;
7 }
8 body {
9     margin: 0;
10    padding: 0;
11    margin-bottom: 100px;
12    text-decoration: none;
13    background: #cornsilk;
14    font: 85% arial, helvetica, sans-serif;
15    text-align: center;
16 }
17 a {
18     text-decoration: none;
19     text-align: center;
20     margin-top: 100px;
21     color: #white;
22 }
23 .
24 .nav {
25     display: flex;
26 }
27 .
28 .nav li {
29     margin-left: 10px;
30 }
31 .
32 .nav li a {
33     display: block;
34     padding: 10px;
35     background: #tomato;
36 }
37 }
38 #
39 #container {
```

The status bar at the bottom indicates "Ln 140, Col 28 Espaços: 4 UTF-8 LF CSS" and shows icons for file operations.

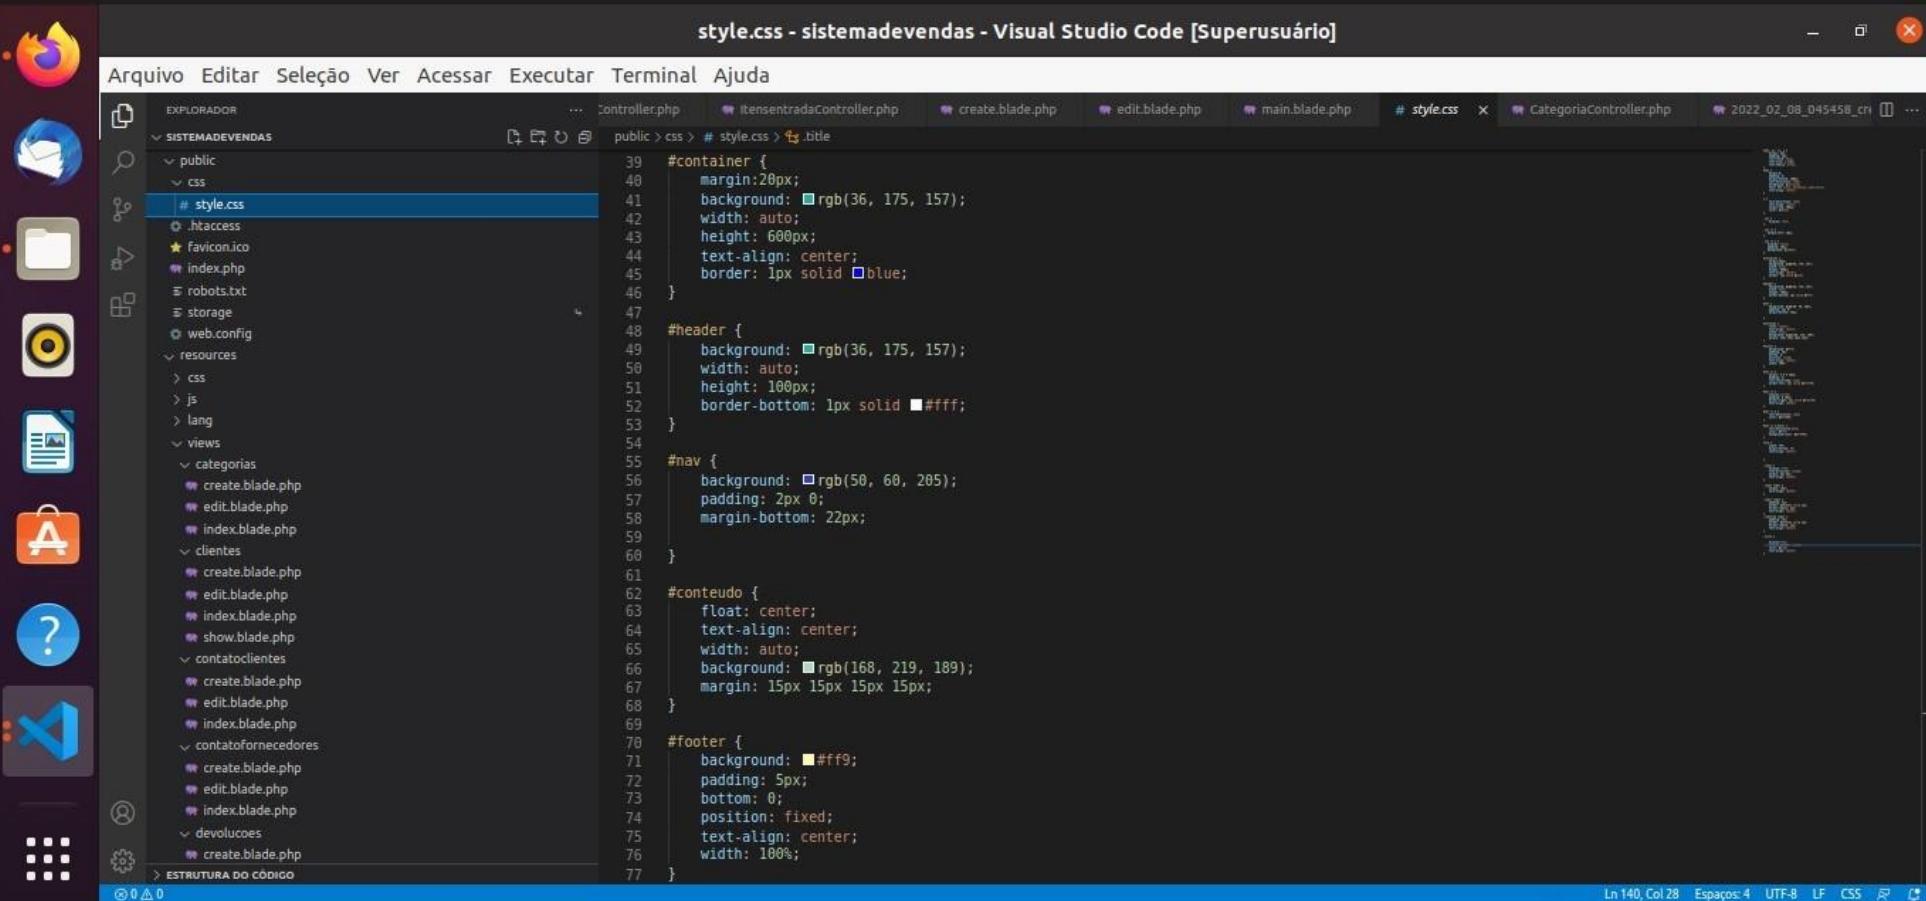

The screenshot shows a dark-themed instance of Visual Studio Code. The title bar reads "style.css - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various applications like Firefox, Mail, Finder, Terminal, and VS Code. The Explorer sidebar shows a project structure under "SISTEMADEVENDAS": public (css, # style.css, .htaccess, favicon.ico, index.php, robots.txt, storage, web.config), resources (css, js, lang), views (categorias, clientes, contatoclientes, contatofornecedores, devolucoes). The main editor pane displays the following CSS code:

```
39 #container {  
40     margin: 20px;  
41     background: #rgb(36, 175, 157);  
42     width: auto;  
43     height: 600px;  
44     text-align: center;  
45     border: 1px solid #blue;  
46 }  
47  
48 #header {  
49     background: #rgb(36, 175, 157);  
50     width: auto;  
51     height: 100px;  
52     border-bottom: 1px solid #ffff;  
53 }  
54  
55 #nav {  
56     background: #rgb(50, 60, 205);  
57     padding: 2px 0;  
58     margin-bottom: 22px;  
59 }  
60  
61 #conteudo {  
62     float: center;  
63     text-align: center;  
64     width: auto;  
65     background: #rgb(168, 219, 189);  
66     margin: 15px 15px 15px 15px;  
67 }  
68  
69 #footer {  
70     background: #ff9;  
71     padding: 5px;  
72     bottom: 0;  
73     position: fixed;  
74     text-align: center;  
75     width: 100%;  
76 }  
77 }
```

The status bar at the bottom indicates "Ln 140, Col 28" and "Espaços: 4".

The screenshot shows a Visual Studio Code interface with the following details:

- Title Bar:** style.css - sistemadevendas - Visual Studio Code [Superusuário]
- File Explorer:** Shows the project structure under "SISTEMADEVENDAS". The "style.css" file is selected in the "public/css" folder.
- Code Editor:** Displays the CSS code for "style.css".
- Status Bar:** Shows file statistics: Ln 140, Col 28, Espaços: 4, UTF-8, LF, CSS.

```
39 #container {  
40     margin: 20px;  
41     background: #rgb(36, 175, 157);  
42     width: auto;  
43     height: 600px;  
44     text-align: center;  
45     border: 1px solid #blue;  
46 }  
47  
48 #header {  
49     background: #rgb(36, 175, 157);  
50     width: auto;  
51     height: 100px;  
52     border-bottom: 1px solid #fff;  
53 }  
54  
55 #nav {  
56     background: #rgb(50, 60, 205);  
57     padding: 2px 0;  
58     margin-bottom: 22px;  
59 }  
60  
61 #conteudo {  
62     float: center;  
63     text-align: center;  
64     width: auto;  
65     background: #rgb(168, 219, 189);  
66     margin: 15px 15px 15px 15px;  
67 }  
68  
69  
70 #footer {  
71     background: #ff9;  
72     padding: 5px;  
73     bottom: 0;  
74     position: fixed;  
75     text-align: center;  
76     width: 100%;  
77 }
```

style.css - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR ... Controller.php ItensentradaController.php create.blade.php edit.blade.php main.blade.php # style.css x CategoriaController.php 2022_02_08_045458_cr ...

SISTEMADEVENDAS

public

css

style.css

.htaccess

Favicon.ico

index.php

robots.txt

storage

web.config

resources

> css

> js

> lang

views

> categorias

create.blade.php

edit.blade.php

index.blade.php

> clientes

create.blade.php

edit.blade.php

index.blade.php

show.blade.php

> contatoclientes

create.blade.php

edit.blade.php

index.blade.php

> contatofornecedores

create.blade.php

edit.blade.php

index.blade.php

> devolucoes


create.blade.php

119 .input label {
120 margin: 15px;
121 text-align: center;
122 }
123
124 .input input {
125 padding: 7px;
126 border: #8a8a8a solid 1px;
127 border-radius: 5px;
128 text-align: center;
129 }
130 .inputcad input {
131 padding: 7px;
132 border: #8a8a8a solid 1px;
133 border-radius: 1px;
134 text-align: center;
135 }
136
137 .title {
138 display:flex;
139 flex-direction: column;
140 color: blue;
141 text-align: center;
142 }
143 }

ESTRUTURA DO CÓDIGO

Ln 140, Col 28 Espaços: 4 UTF-8 LF CSS

Arquivos Web.php -> Rotas

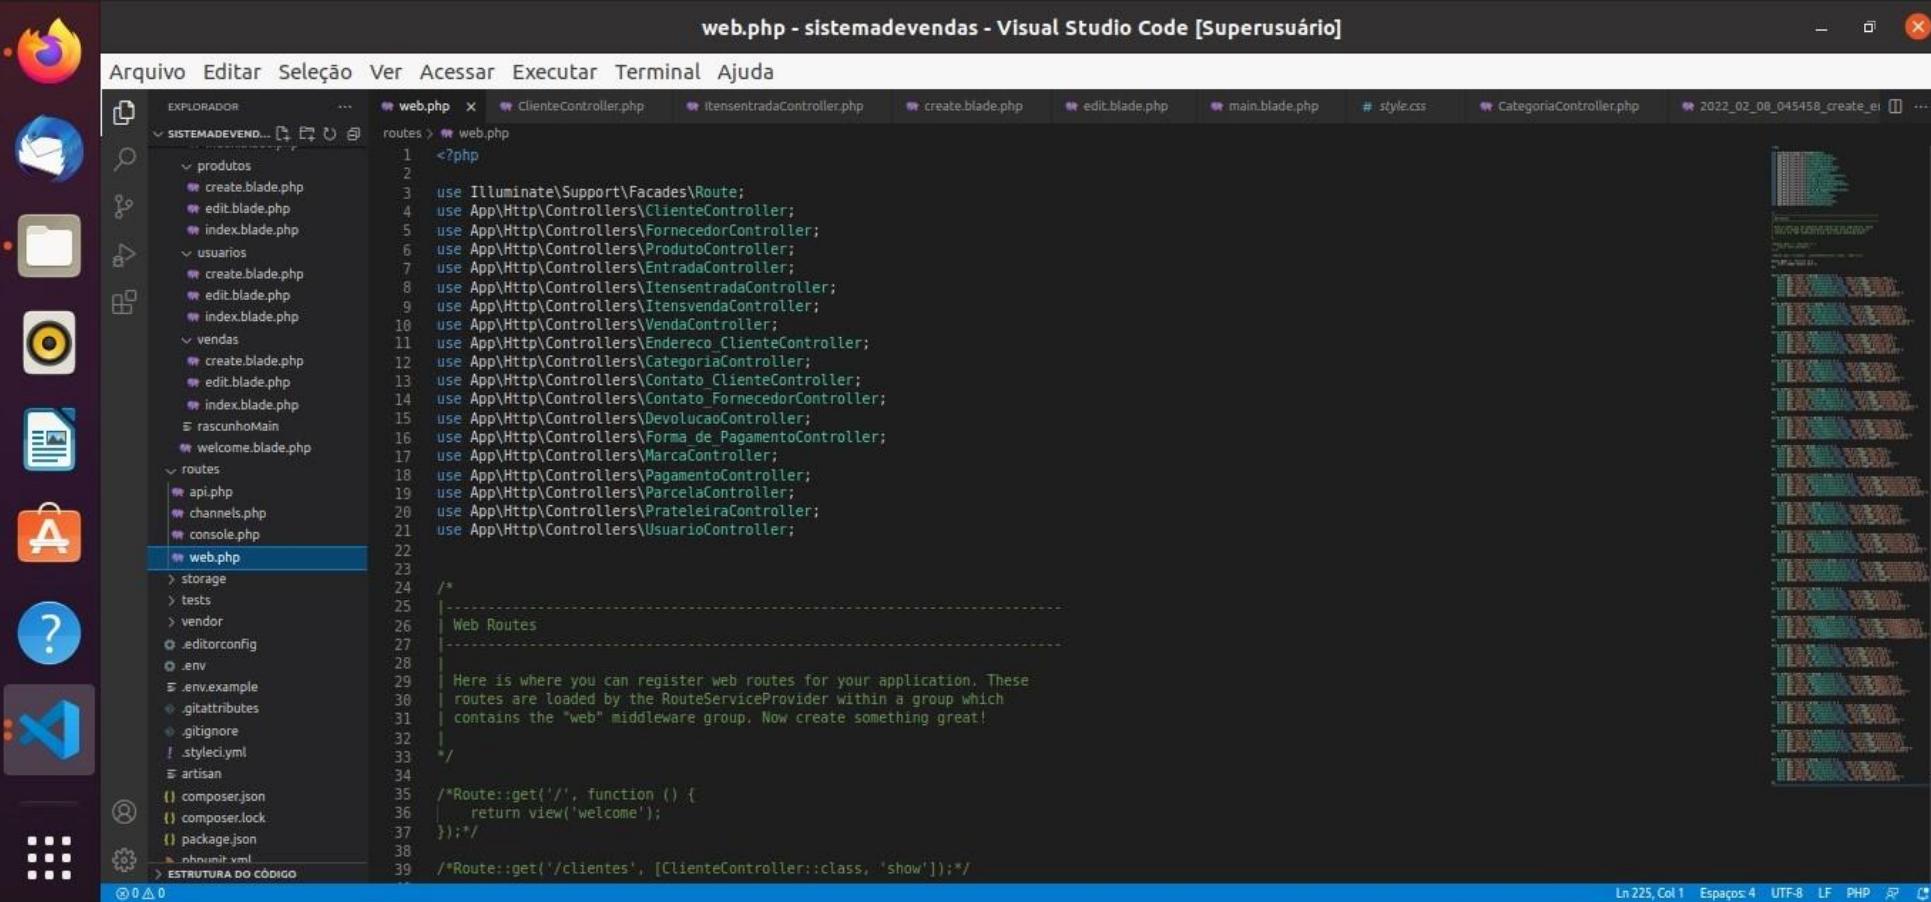

The screenshot shows the Visual Studio Code interface with the title bar "web.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar displays a file tree for a Laravel project named "SISTEMADEVENDAS". The "routes" folder contains several files: "produtos", "usuarios", "vendas", "rascunhoMain", "welcome.blade.php", and "routes". Inside the "routes" folder, there are "api.php", "channels.php", "console.php", and "web.php". The "web.php" file is currently selected and open in the main editor area. The code in "web.php" is as follows:

```
1 <?php
2
3 use Illuminate\Support\Facades\Route;
4 use App\Http\Controllers\ClienteController;
5 use App\Http\Controllers\FornecedorController;
6 use App\Http\Controllers\ProdutoController;
7 use App\Http\Controllers\EntradaController;
8 use App\Http\Controllers\ItensvendaController;
9 use App\Http\Controllers\VendaController;
10 use App\Http\Controllers\Endereco_ClienteController;
11 use App\Http\Controllers\CategoriaController;
12 use App\Http\Controllers\Contato_ClienteController;
13 use App\Http\Controllers\Contato_FornecedorController;
14 use App\Http\Controllers\DevolucaoController;
15 use App\Http\Controllers\Forma_de_PagamentoController;
16 use App\Http\Controllers\MarcaController;
17 use App\Http\Controllers\PagamentoController;
18 use App\Http\Controllers\ParcelaController;
19 use App\Http\Controllers\PrateleiraController;
20 use App\Http\Controllers\UsuarioController;
21
22 /*
23  * Web Routes
24  */
25
26 | Here is where you can register web routes for your application. These
27 | routes are loaded by the RouteServiceProvider within a group which
28 | contains the "web" middleware group. Now create something great!
29
30 /*
31  * Route::get('/', function () {
32  |     return view('welcome');
33  });
34
35 /*
36  * Route::get('/clientes', [ClienteController::class, 'show']);
37 */
38
39 /*Route::get('/produtos', [ProdutoController::class, 'index']);*/
```

The status bar at the bottom of the code editor shows "Ln 225, Col 1 Espaços: 4 UTF-8 LF PHP".

The screenshot shows the Visual Studio Code interface with the title bar "web.php - sistemadevendas - Visual Studio Code [Superusuário]". The left sidebar contains icons for various applications like Firefox, Mail, File Explorer, Terminal, and Help. The main area displays the code for the routes/web.php file:

```
Route::get('/', function () {
    return view('layouts.main');
});

Route::prefix('clientes')->group(function () {
    Route::get('/index',[ClienteController::class, 'index'])->name('clientes.index');
    Route::get('/create',[ClienteController::class, 'create'])->name('clientes.create');
    Route::post('/store',[ClienteController::class, 'store'])->name('clientes.store');
    Route::get('/show/{id}',[ClienteController::class, 'show'])->name('clientes.show');
    Route::get('/edit/{id}',[ClienteController::class, 'edit'])->name('clientes.edit');
    Route::put('/update/{id}',[ClienteController::class, 'update'])->name('clientes.update');
    Route::delete('/{id}',[ClienteController::class, 'destroy'])->name('clientes.delete');
});

Route::prefix('fornecedores')->group(function () {
    Route::get('/index',[FornecedorController::class, 'index'])->name('fornecedores.index');
    Route::get('/create',[FornecedorController::class, 'create'])->name('fornecedores.create');
    Route::post('/store',[FornecedorController::class, 'store'])->name('fornecedores.store');
    Route::get('/show/{id}',[FornecedorController::class, 'show'])->name('fornecedores.show');
    Route::get('/edit/{id}',[FornecedorController::class, 'edit'])->name('fornecedores.edit');
    Route::put('/update/{id}',[FornecedorController::class, 'update'])->name('fornecedores.update');
    Route::delete('/{id}',[FornecedorController::class, 'destroy'])->name('fornecedores.delete');
});

Route::prefix('produtos')->group(function () {
    Route::get('/index',[ProdutoController::class, 'index'])->name('produtos.index');
    Route::get('/create',[ProdutoController::class, 'create'])->name('produtos.create');
    Route::post('/store',[ProdutoController::class, 'store'])->name('produtos.store');
    Route::get('/show/{id}',[ProdutoController::class, 'show'])->name('produtos.show');
    Route::get('/edit/{id}',[ProdutoController::class, 'edit'])->name('produtos.edit');
    Route::put('/update/{id}',[ProdutoController::class, 'update'])->name('produtos.update');
    Route::delete('/{id}',[ProdutoController::class, 'destroy'])->name('produtos.delete');
});

Route::prefix('entradas')->group(function () {
    Route::get('/index',[EntradaController::class, 'index'])->name('entradas.index');
    Route::get('/create',[EntradaController::class, 'create'])->name('entradas.create');
});
```

The status bar at the bottom indicates "Ln 225, Col 1 Espaços: 4 UTF-8 LF PHP" and shows a file icon.

web.php - sistemadevendas - Visual Studio Code [Superusuário]

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR routes > web.php

```
76 Route::prefix('entradas')->group( function () {
77     Route::get('/index',[EntradaController::class, 'index'])->name('entradas.index');
78     Route::get('/create',[EntradaController::class, 'create'])->name('entradas.create');
79     Route::post('/store',[EntradaController::class, 'store'])->name('entradas.store');
80     Route::get('/show/{id}',[EntradaController::class, 'show'])->name('entradas.show');
81     Route::get('/edit/{id}',[EntradaController::class, 'edit'])->name('entradas.edit');
82     Route::put('/update/{id}',[EntradaController::class, 'update'])->name('entradas.update');
83     Route::delete('/{id}',[EntradaController::class, 'destroy'])->name('entradas.delete');
84 });
85
86 Route::prefix('itensentradas')->group( function () {
87     Route::get('/index',[ItensentraController::class, 'index'])->name('itensentradas.index');
88     Route::get('/create',[ItensentraController::class, 'create'])->name('itensentradas.create');
89     Route::post('/store',[ItensentraController::class, 'store'])->name('itensentradas.store');
90     Route::get('/show/{id}',[ItensentraController::class, 'show'])->name('itensentradas.show');
91     Route::get('/edit/{id}',[ItensentraController::class, 'edit'])->name('itensentradas.edit');
92     Route::put('/update/{id}',[ItensentraController::class, 'update'])->name('itensentradas.update');
93     Route::delete('/{id}',[ItensentraController::class, 'destroy'])->name('itensentradas.delete');
94 });
95
96 Route::prefix('itensvendas')->group( function () {
97     Route::get('/index',[ItensvendaController::class, 'index'])->name('itensvendas.index');
98     Route::get('/create',[ItensvendaController::class, 'create'])->name('itensvendas.create');
99     Route::post('/store',[ItensvendaController::class, 'store'])->name('itensvendas.store');
100    Route::get('/show/{id}',[ItensvendaController::class, 'show'])->name('itensvendas.show');
101    Route::get('/edit/{id}',[ItensvendaController::class, 'edit'])->name('itensvendas.edit');
102    Route::put('/update/{id}',[ItensvendaController::class, 'update'])->name('itensvendas.update');
103    Route::delete('/{id}',[ItensvendaController::class, 'destroy'])->name('itensvendas.delete');
104 });
105
106 Route::prefix('vendas')->group( function () {
107     Route::get('/index',[VendaController::class, 'index'])->name('vendas.index');
108     Route::get('/create',[VendaController::class, 'create'])->name('vendas.create');
109     Route::post('/store',[VendaController::class, 'store'])->name('vendas.store');
110     Route::get('/show/{id}',[VendaController::class, 'show'])->name('vendas.show');
111     Route::get('/edit/{id}',[VendaController::class, 'edit'])->name('vendas.edit');
112     Route::put('/update/{id}',[VendaController::class, 'update'])->name('vendas.update');
113     Route::delete('/{id}',[VendaController::class, 'destroy'])->name('vendas.delete');
114 });

```

ESTRUTURA DO CÓDIGO

Ln 225, Col 1 Espaços: 4 UTF-8 LF PHP ⚡

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR routes > web.php

```
116 Route::prefix('enderecos_clientes')->group( function () {
117     Route::get('/index',[EnderecoClienteController::class, 'index'])->name('enderecosclientes.index');
118     Route::get('/create',[EnderecoClienteController::class, 'create'])->name('enderecosclientes.create');
119     Route::post('/store',[EnderecoClienteController::class, 'store'])->name('enderecosclientes.store');
120     Route::get('/show/{id}',[EnderecoClienteController::class, 'show'])->name('enderecosclientes.show');
121     Route::get('/edit/{id}',[EnderecoClienteController::class, 'edit'])->name('enderecosclientes.edit');
122     Route::put('/update/{id}',[EnderecoClienteController::class, 'update'])->name('enderecosclientes.update');
123     Route::delete('/{id}',[EnderecoClienteController::class, 'destroy'])->name('enderecosclientes.delete');
124 });
125
126 Route::prefix('categorias')->group( function () {
127     Route::get('/index',[CategoriaController::class, 'index'])->name('categorias.index');
128     Route::get('/create',[CategoriaController::class, 'create'])->name('categorias.create');
129     Route::post('/store',[CategoriaController::class, 'store'])->name('categorias.store');
130     Route::get('/show/{id}',[CategoriaController::class, 'show'])->name('categorias.show');
131     Route::get('/edit/{id}',[CategoriaController::class, 'edit'])->name('categorias.edit');
132     Route::put('/update/{id}',[CategoriaController::class, 'update'])->name('categorias.update');
133     Route::delete('/{id}',[CategoriaController::class, 'destroy'])->name('categorias.delete');
134 });
135
136 Route::prefix('contatos_clientes')->group( function () {
137     Route::get('/index',[EnderecoClienteController::class, 'index'])->name('contatosclientes.index');
138     Route::get('/create',[EnderecoClienteController::class, 'create'])->name('contatosclientes.create');
139     Route::post('/store',[EnderecoClienteController::class, 'store'])->name('contatosclientes.store');
140     Route::get('/show/{id}',[EnderecoClienteController::class, 'show'])->name('contatosclientes.show');
141     Route::get('/edit/{id}',[EnderecoClienteController::class, 'edit'])->name('contatosclientes.edit');
142     Route::put('/update/{id}',[EnderecoClienteController::class, 'update'])->name('contatosclientes.update');
143     Route::delete('/{id}',[EnderecoClienteController::class, 'destroy'])->name('contatosclientes.delete');
144 });
145
146 Route::prefix('contatos_fornecedores')->group( function () {
147     Route::get('/index',[ContatoFornecedorController::class, 'index'])->name('contatosfornecedores.index');
148     Route::get('/create',[ContatoFornecedorController::class, 'create'])->name('contatosfornecedores.create');
149     Route::post('/store',[ContatoFornecedorController::class, 'store'])->name('contatosfornecedores.store');
150     Route::get('/show/{id}',[ContatoFornecedorController::class, 'show'])->name('contatosfornecedores.show');
151     Route::get('/edit/{id}',[ContatoFornecedorController::class, 'edit'])->name('contatosfornecedores.edit');
152     Route::put('/update/{id}',[ContatoFornecedorController::class, 'update'])->name('contatosfornecedores.update');
153     Route::delete('/{id}',[ContatoFornecedorController::class, 'destroy'])->name('contatosfornecedores.delete');
154 });
```

Ln 225, Col 1 Espaços: 4 UTF-8 LF PHP ⚙


Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR routes > web.php

```
155 Route::prefix('devolucoes')->group( function () {
156     Route::get('/index',[DevolucaoController::class, 'index'])->name('devolucoes.index');
157     Route::get('/create',[DevolucaoController::class, 'create'])->name('devolucoes.create');
158     Route::post('/store',[DevolucaoController::class, 'store'])->name('devolucoes.store');
159     Route::get('/show/{id}',[DevolucaoController::class, 'show'])->name('devolucoes.show');
160     Route::get('/edit/{id}',[DevolucaoController::class, 'edit'])->name('devolucoes.edit');
161     Route::put('/update/{id}',[DevolucaoController::class, 'update'])->name('devolucoes.update');
162     Route::delete('/{id}',[DevolucaoController::class, 'destroy'])->name('devolucoes.delete');
163 });
164 );
165
166 Route::prefix('formas_de_pagamentos')->group( function () {
167     Route::get('/index',[FormadepagamentoController::class, 'index'])->name('formasdepagamentos.index');
168     Route::get('/create',[FormadepagamentoController::class, 'create'])->name('formasdepagamentos.create');
169     Route::post('/store',[FormadepagamentoController::class, 'store'])->name('formasdepagamentos.store');
170     Route::get('/show/{id}',[FormadepagamentoController::class, 'show'])->name('formasdepagamentos.show');
171     Route::get('/edit/{id}',[FormadepagamentoController::class, 'edit'])->name('formasdepagamentos.edit');
172     Route::put('/update/{id}',[FormadepagamentoController::class, 'update'])->name('formasdepagamentos.update');
173     Route::delete('/{id}',[FormadepagamentoController::class, 'destroy'])->name('formasdepagamentos.delete');
174 });
175
176 Route::prefix('marcas')->group( function () {
177     Route::get('/index',[MarcaController::class, 'index'])->name('marcas.index');
178     Route::get('/create',[MarcaController::class, 'create'])->name('marcas.create');
179     Route::post('/store',[MarcaController::class, 'store'])->name('marcas.store');
180     Route::get('/show/{id}',[MarcaController::class, 'show'])->name('marcas.show');
181     Route::get('/edit/{id}',[MarcaController::class, 'edit'])->name('marcas.edit');
182     Route::put('/update/{id}',[MarcaController::class, 'update'])->name('marcas.update');
183     Route::delete('/{id}',[MarcaController::class, 'destroy'])->name('marcas.delete');
184 });
185
186 Route::prefix('pagamentos')->group( function () {
187     Route::get('/index',[PagamentoController::class, 'index'])->name('pagamentos.index');
188     Route::get('/create',[PagamentoController::class, 'create'])->name('pagamentos.create');
189     Route::post('/store',[PagamentoController::class, 'store'])->name('pagamentos.store');
190     Route::get('/show/{id}',[PagamentoController::class, 'show'])->name('pagamentos.show');
191     Route::get('/edit/{id}',[PagamentoController::class, 'edit'])->name('pagamentos.edit');
192     Route::put('/update/{id}',[PagamentoController::class, 'update'])->name('pagamentos.update');
193     Route::delete('/{id}',[PagamentoController::class, 'destroy'])->name('pagamentos.delete');
194 });
```

ESTRUTURA DO CÓDIGO

Ln 225, Col 1 Espaços: 4 UTF-8 LF PHP

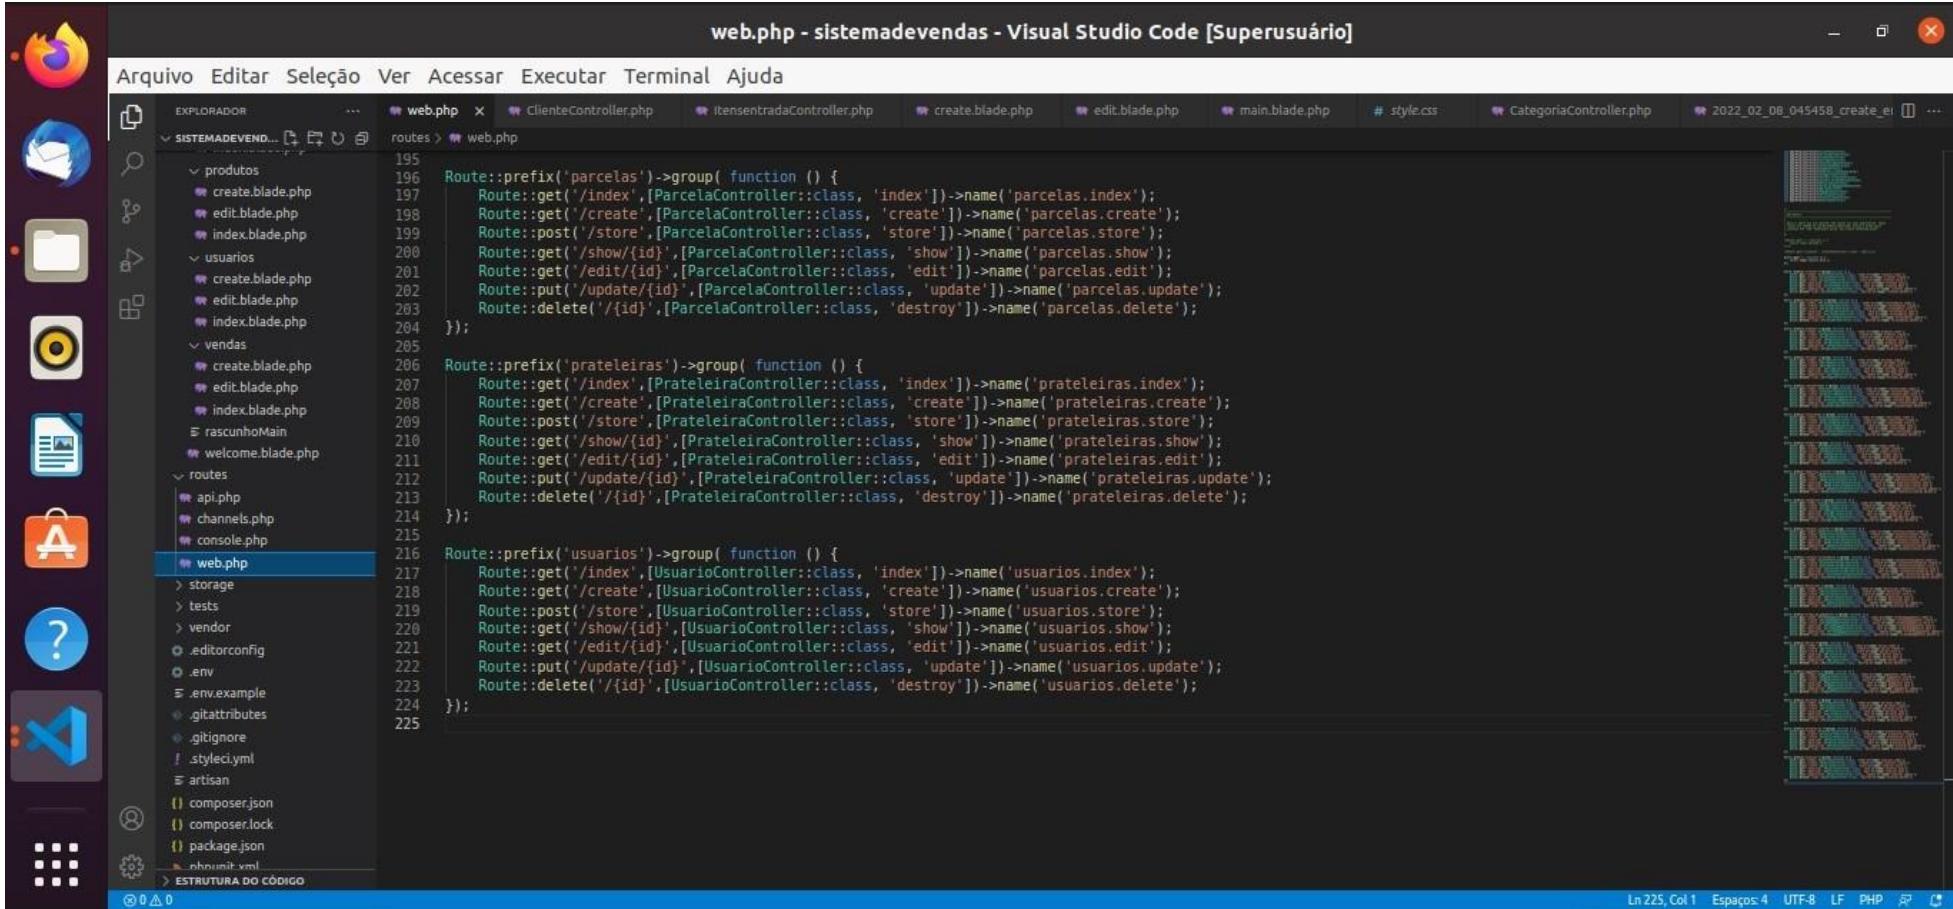

Arquivo Editar Seleção Ver Acessar Executar Terminal Ajuda

EXPLORADOR routes > web.php

```
195 Route::prefix('parcelas')->group( function () {
196     Route::get('/index',[ParcelaController::class, 'index'])->name('parcelas.index');
197     Route::get('/create',[ParcelaController::class, 'create'])->name('parcelas.create');
198     Route::post('/store',[ParcelaController::class, 'store'])->name('parcelas.store');
199     Route::get('/show/{id}',[ParcelaController::class, 'show'])->name('parcelas.show');
200     Route::get('/edit/{id}',[ParcelaController::class, 'edit'])->name('parcelas.edit');
201     Route::put('/update/{id}',[ParcelaController::class, 'update'])->name('parcelas.update');
202     Route::delete('/{id}',[ParcelaController::class, 'destroy'])->name('parcelas.delete');
203 });
204 });

205 Route::prefix('prateleiras')->group( function () {
206     Route::get('/index',[PrateleiraController::class, 'index'])->name('prateleiras.index');
207     Route::get('/create',[PrateleiraController::class, 'create'])->name('prateleiras.create');
208     Route::post('/store',[PrateleiraController::class, 'store'])->name('prateleiras.store');
209     Route::get('/show/{id}',[PrateleiraController::class, 'show'])->name('prateleiras.show');
210     Route::get('/edit/{id}',[PrateleiraController::class, 'edit'])->name('prateleiras.edit');
211     Route::put('/update/{id}',[PrateleiraController::class, 'update'])->name('prateleiras.update');
212     Route::delete('/{id}',[PrateleiraController::class, 'destroy'])->name('prateleiras.delete');
213 });

214 });

215 Route::prefix('usuarios')->group( function () {
216     Route::get('/index',[UsuarioController::class, 'index'])->name('usuarios.index');
217     Route::get('/create',[UsuarioController::class, 'create'])->name('usuarios.create');
218     Route::post('/store',[UsuarioController::class, 'store'])->name('usuarios.store');
219     Route::get('/show/{id}',[UsuarioController::class, 'show'])->name('usuarios.show');
220     Route::get('/edit/{id}',[UsuarioController::class, 'edit'])->name('usuarios.edit');
221     Route::put('/update/{id}',[UsuarioController::class, 'update'])->name('usuarios.update');
222     Route::delete('/{id}',[UsuarioController::class, 'destroy'])->name('usuarios.delete');
223 });

224 });

225 
```

ESTRUTURA DO CÓDIGO

Ln 225, Col 1 Espaços: 4 UTF-8 LF PHP R